


Snubber FKP Capacitors for High Pulse Applications with Metal Foil Electrodes and Metallized Internal Series Connection. Capacitances from 0.01 μF to 3.3 μF . Rated Voltages from 630 VDC to 4000 VDC.

Special Features

- High pulse duty
- Self-healing
- Particularly reliable contact-configurations: 4-pin versions and screwable plate connections
- Internal series connection
- Very low dissipation factor
- Negative capacitance change versus temperature
- AEC-Q200 qualified 
- According to RoHS 2015/863/EU

Typical Applications

For high pulse and high frequency applications requiring extremely reliable contacts e.g.

- IGBT-applications

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Aluminium foil and single-sided metallized plastic film

Internal construction:

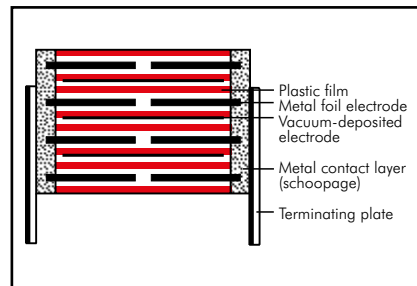

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire or plates.

Marking:

Colour: Red. Marking: Black.

Electrical Data

Capacitance range: 0.01 μF to 3.3 μF

Rated voltages: 630 VDC, 1000 VDC, 1250 VDC, 1600 VDC, 2000 VDC, 3000 VDC, 4000 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$ (other tolerances are available subject to special enquiry)

Operating temperature range:

-55°C to $+105^\circ\text{C}$

Insulation resistance at $+20^\circ\text{C}$:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

$C > 0.33 \mu\text{F}$: $\geq 30000 \text{ sec (M}\Omega \times \mu\text{F)}$

Measuring voltage: 100 V/1 min.

Test voltage: 2 sec

L	$\leq 2000 \text{ VDC}$	$\geq 3000 \text{ VDC}$
< 41.5	$1.6 U_r$	$1.2 U_r$
41.5	$1.4 U_r$	$1.2 U_r$
56	$1.2 U_r$	$1.2 U_r$

Dissipation factors at $+20^\circ\text{C}$: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 5 \times 10^{-4}$	$\leq 5 \times 10^{-4}$	$\leq 5 \times 10^{-4}$
10 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	—
100 kHz	$\leq 10 \times 10^{-4}$	—	—

* other box sizes see page 10.

Maximum pulse rise time:

Capacitance μF	max. pulse rise time V/ μsec at $T_A < 40^\circ\text{C}$						
	630VDC	1000VDC	1250VDC	1600VDC	2000VDC	3000VDC	4000VDC
0.01 ... 0.022	—	11000	11000	11000	11000	11000	11000
0.033 ... 0.068	9000	9000	9000	9000	9000	9000	9000
0.1 ... 0.22	9000	9000	9000	9000	9000	9000	9000
0.33 ... 0.68	5000	5000	5000	5000	5000	5000	5000
1.0 ... 3.3	1600	2000	2000	2000	—	—	—

Mounting Recommendation

Excessive mechanical strain, e.g. pressure or shock onto the capacitor body, is to be avoided during mounting and usage of the capacitors. When fixing the plates the screw torque is to be limited to max. 5 Nm.

For further details and graphs please refer to Technical Information.

Packing

Packing units at the end of the catalogue.

Packing quantities may vary depending on the plate version.

Continuation

General Data

Capacitance	630 VDC/400 VAC*				1000 VDC/600 VAC*			
	W	H	L	Part number	W	H	L	Part number
0.022 µF					11	22	41.5	SNFPO122207B_____
0.033 "					11	22	41.5	SNFPO123307B_____
0.047 "	11	22	41.5	SNFPJ024707B_____	11	22	41.5	SNFPO124707B_____
0.068 "	11	22	41.5	SNFPJ026807B_____	11	22	41.5	SNFPO126807B_____
0.1 µF	11	22	41.5	SNFPJ031007B_____	11	22	41.5	SNFPO131007B_____
0.15 "	11	22	41.5	SNFPJ031507B_____	15	26	41.5	SNFPO131507D_____
0.22 "	13	24	41.5	SNFPJ032207C_____	17	29	41.5	SNFPO132207E_____
0.33 "	15	26	41.5	SNFPJ033307D_____	19	32	41.5	SNFPO133307F_____
0.47 "	17	29	41.5	SNFPJ034707E_____	20	39.5	41.5	SNFPO134707G_____
0.68 "	19	32	41.5	SNFPJ036807F_____	24	45.5	41.5	SNFPO136807H_____
					23	34	56	SNFPO136808E_____
1.0 µF	20	39.5	41.5	SNFPJ041007G_____	31	46	41.5	SNFPO141007I_____
					27	37.5	56	SNFPO141008H_____
1.5 "	24	45.5	41.5	SNFPJ041507H_____	35	50	41.5	SNFPO141507J_____
					33	48	56	SNFPO141508J_____
2.2 "	31	46	41.5	SNFPJ042207I_____	37	54	56	SNFPO142208L_____
	27	37.5	56	SNFPJ042208H_____				
2.5 "	35	50	41.5	SNFPJ042507J_____				
	33	48	56	SNFPJ042508J_____				
3.0 "	37	54	56	SNFPJ043008L_____				
3.3 "	37	54	56	SNFPJ043308L_____				

Capacitance	1250 VDC/600 VAC*				1600 VDC/650 VAC*			
	W	H	L	Part number	W	H	L	Part number
0.01 µF					11	22	41.5	SNFPT021007B_____
0.015 "					11	22	41.5	SNFPT021507B_____
0.022 "	11	22	41.5	SNFPRO22207B_____	11	22	41.5	SNFPT022207B_____
0.033 "	11	22	41.5	SNFPRO23307B_____	11	22	41.5	SNFPT023307B_____
0.047 "	11	22	41.5	SNFPRO24707B_____	11	22	41.5	SNFPT024707B_____
0.068 "	11	22	41.5	SNFPRO26807B_____	15	26	41.5	SNFPT026807D_____
0.1 µF	11	22	41.5	SNFPRO31007B_____	17	29	41.5	SNFPT031007E_____
0.15 "	15	26	41.5	SNFPRO31507D_____	19	32	41.5	SNFPT031507F_____
0.22 "	17	29	41.5	SNFPRO32207E_____	20	39.5	41.5	SNFPT032207G_____
0.33 "	19	32	41.5	SNFPRO33307F_____	24	45.5	41.5	SNFPT033307H_____
0.47 "	20	39.5	41.5	SNFPRO34707G_____	31	46	41.5	SNFPT034707I_____
					27	37.5	56	SNFPT034708H_____
0.68 "	24	45.5	41.5	SNFPRO36807H_____	35	50	41.5	SNFPT036807J_____
	23	34	56	SNFPRO36808E_____	27	37.5	56	SNFPT036808H_____
1.0 µF	31	46	41.5	SNFPRO41007I_____	33	48	56	SNFPT041008J_____
	27	37.5	56	SNFPRO41008H_____				
1.5 "	33	48	56	SNFPRO41508J_____	37	54	56	SNFPT041508L_____
2.2 "	37	54	56	SNFPRO42208L_____				

* AC voltages: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Versions and dimensional drawings see page 114.

Rights reserved to amend design data without prior notification.

Part number completion:

Version codes see page 116.

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

none = 00 (for plate versions)

Continuation page 112

Continuation

General Data

Capacitance	2000 VDC/700 VAC*				3000 VDC/700 VAC*				4000 VDC/700 VAC*			
	W	H	L	Part number	W	H	L	Part number	W	H	L	Part number
0.01 μF	11	22	41.5	SNFPU021007B	11	22	41.5	SNFPW021007B	11	22	41.5	SNFPX021007B
0.015 "	11	22	41.5	SNFPU021507B	11	22	41.5	SNFPW021507B	11	22	41.5	SNFPX021507B
0.022 "	11	22	41.5	SNFPU022207B	11	22	41.5	SNFPW022207B	13	24	41.5	SNFPX022207C
0.033 "	13	24	41.5	SNFPU023307C	13	24	41.5	SNFPW023307C	15	26	41.5	SNFPX023307D
0.047 "	15	26	41.5	SNFPU024707D	15	26	41.5	SNFPW024707D	17	29	41.5	SNFPX024707E
0.068 "	17	29	41.5	SNFPU026807E	17	29	41.5	SNFPW026807E	19	32	41.5	SNFPX026807F
0.1 μF	17	29	41.5	SNFPU031007E	19	32	41.5	SNFPW031007F	20	39.5	41.5	SNFPX031007G
0.15 "	20	39.5	41.5	SNFPU031507G	20	39.5	41.5	SNFPW031507G	24	45.5	41.5	SNFPX031507H
0.22 "	24	45.5	41.5	SNFPU032207H	24	45.5	41.5	SNFPW032207H	31	46	41.5	SNFPX032207I
									27	37.5	56	SNFPX032208H
0.33 "	31	46	41.5	SNFPU033307I	31	46	41.5	SNFPW033307I	33	48	56	SNFPX033308J
	27	37.5	56	SNFPU033308H	27	37.5	56	SNFPW033308H				
0.47 "	31	46	41.5	SNFPU034707I	33	48	56	SNFPW034708J	37	54	56	SNFPX034708L
	27	37.5	56	SNFPU034708H								
0.68 "	33	48	56	SNFPU036808J								

* AC voltages: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Versions and dimensional drawings see page 114.

Part number completion:

Version codes see page 116.

Tolerance: 20 % = M

10 % = K

5 % = J



Packing: bulk = S

Pin length: 6-2 = SD

none = 00 (for plate versions)


Rights reserved to amend design data without prior notification.

Impedance change with frequency (general guide) (examples).

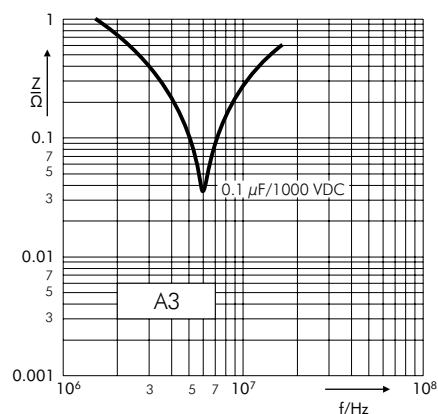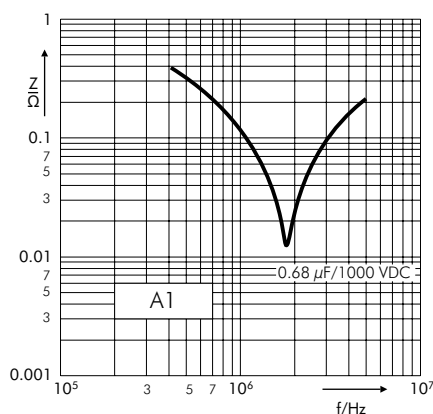


Continuation


Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

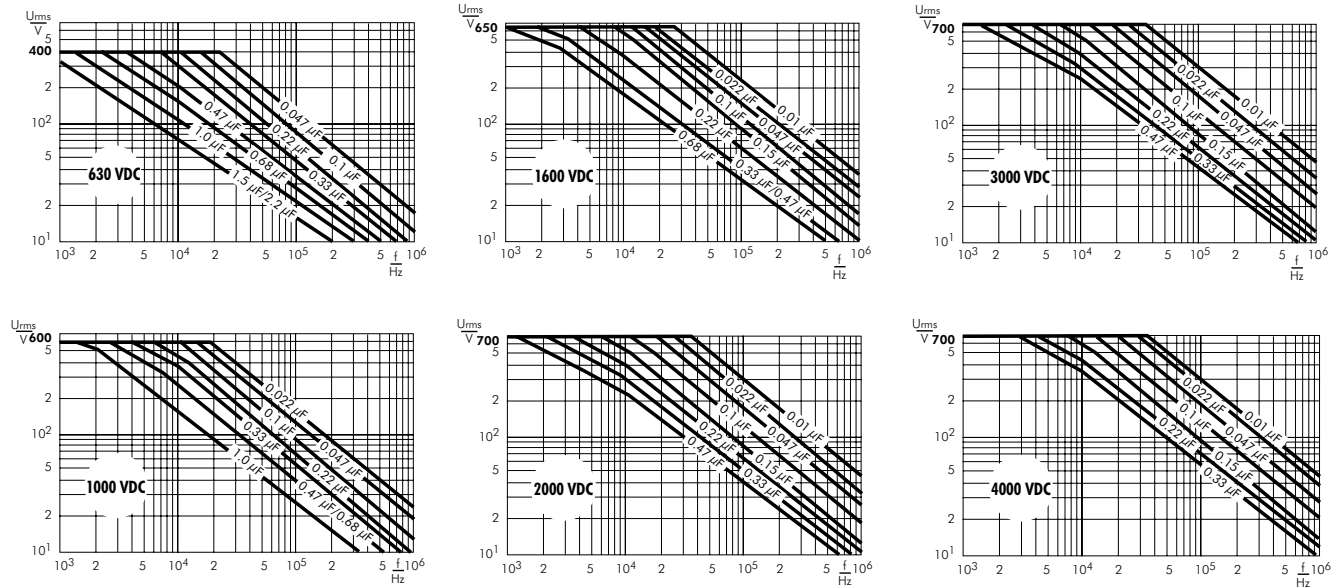


Versions of WIMA Snubber-Capacitors

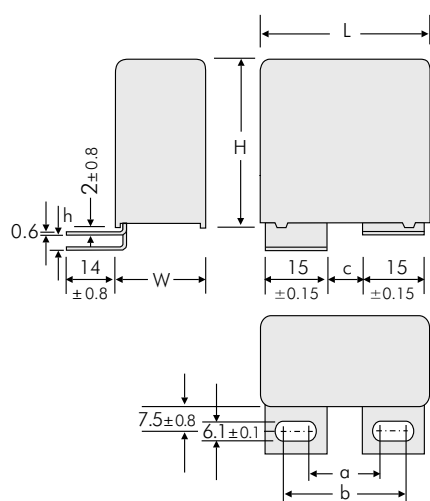


Version	L	a ±0.5	b ±0.5	c ±0.5	h ±0.8
A1	41.5	17.5	28	7.5	0
A1.5	41.5	17.5	28	7.5	3.5
A1	56	20	30	10	0
A1.1.1	56	28	38	18	0
A1.4.1	56	28	38	18	3.5

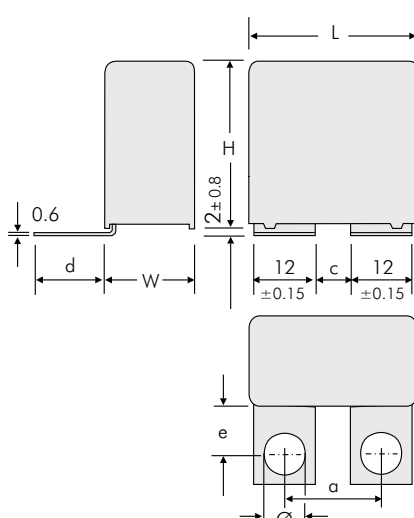


Version	L	a ±0.5	c ±0.5	d ±0.8	e ±0.8	Ø ±0.1
A1.6	41.5	18	6	21.5	16	7
A1.6.1	41.5	22	10	18.5	13	7
A1.6.2	41.5	23	10	18.5	13	8
A1.6	56	29	17	21.5	16	7

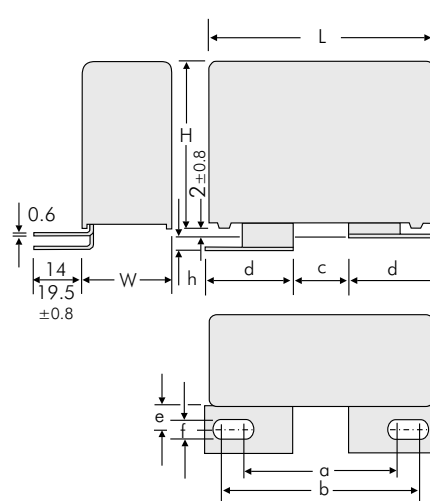


Version	L	a ±0.5	b ±0.5	c ±0.5	d ±0.15	e ±0.8	f ±0.1	h ±0.8
A2	41.5	36	46.5	14.5	22	7.5	8.4	0
A2.4.1	41.5	33.5	39.5	7.5	22	13	8.4	0
A2.6.1	41.5	31.5	41.5	14	22	13	6.1	3.5
A2.6.2	41.5	31.5	41.5	14	22	13	6.1	0
A2.8	41.5	36	46.5	14.5	22	7.5	8.4	3.5
A2.1	56	39.5	45.5	13.5	22	7.5	8.4	0
A2.1.2	56	36	45.5	14.5	21.5	7.5	8.4	0

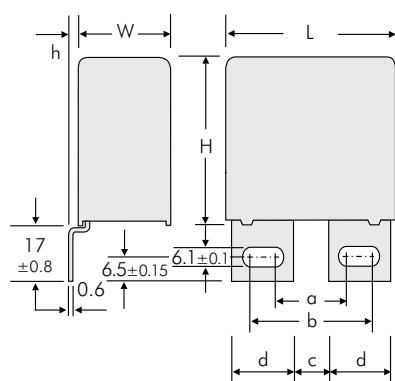

Version	L	a ±0.5	b ±0.5	c ±0.5	d ±0.15	h ±0.8
A3	41.5	17.5	27.5	7.5	15	0
A3.5	41.5	17.5	27.5	7.5	15	3
A3.12	41.5	17.5	30	7.5	16.5	0
A3	56	20	30	10	15	0
A3.1	56	28	38	18	15	0
A3.5	56	20	30	10	15	3
A3.10	56	28	38	18	15	3

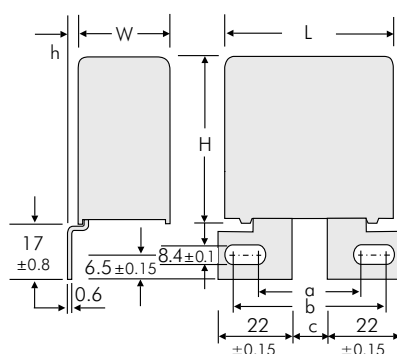


Version	L	a ±0.5	b ±0.5	c ±0.5	h ±0.8
A3.9	41.5	36	46.5	14.5	0
A3.11	41.5	36	46.5	14.5	3
A3.2	56	36	46.5	14.5	0
A3.3	56	36	46.5	14.5	3

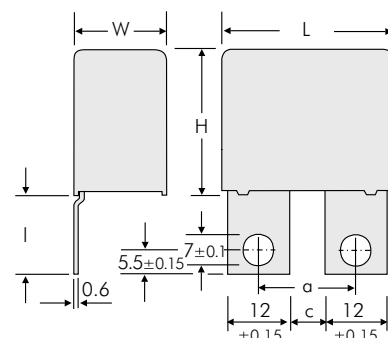


Version	L	a ±0.5	c ±0.5	l ±0.8
A3.8	41.5	18	6	23
A3.8.1	41.5	22	10	17.5
A3.8.2	41.5	22	10	23

Versions of WIMA Snubber-Capacitors

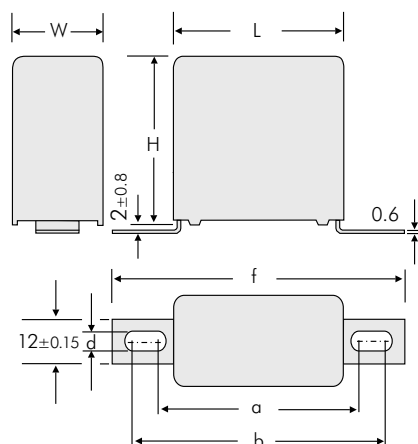


Version	L	a ±0.8	b ±0.8	f ±0.8	d ±0.1
A4.9	31.5 W ≥ 15	44	47	57	4.5
A4.10	31.5 W ≥ 15	43	59	69	6.1
A4.2	41.5 W ≥ 15	54	57	67	4.5
A4	41.5 W ≥ 15	53	69	79	6.1
A4.7	56	65	68	78	4.5
A4	56	64	80	90	6.1

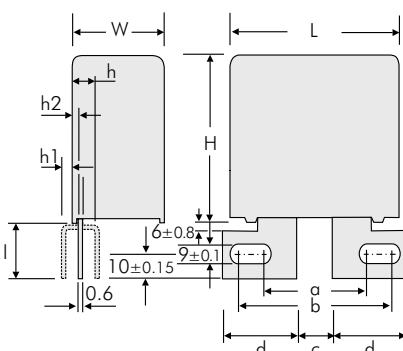

Version	W	a ±0.5	b ±0.5	c ±0.5	d ±0.15	h ±0.8	h1 ±0.8	h2 ±0.8	l ±0.8
A6	≥ 23	41.5	45.5	15.5	24.15	7	-	-	26
A6.3	≥ 19	35	39	18	19	-	5	3	25
A6.4	≥ 23	42.8	44.8	21	21.5	-	-	6.4	26


2-pin version



PCM	d
27.5	0.8
38.5	1.2
49.5	1.2


Dims. in mm

4-pin version

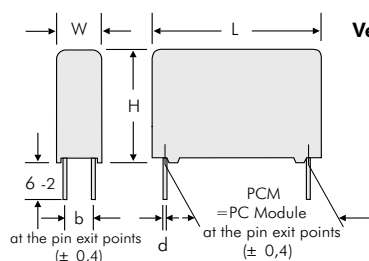

W	H	L	PCM	b	d
11	21	31.5	27.5	5	0.8
13	24	31.5	27.5	7.5	0.8
15	26	31.5	27.5	7.5	0.8
17	29	31.5	27.5	10	0.8
19	30	31.5	27.5	10	0.8
17	34.5	31.5	27.5	10	0.8
20	39.5	31.5	27.5	12.5	0.8
22	43.5	31.5	27.5	12.5	0.8
11	22	41.5	37.5	5	1
13	24	41.5	37.5	7.5	1
15	26	41.5	37.5	7.5	1
17	29	41.5	37.5	10	1
19	32	41.5	37.5	10	1
20	39.5	41.5	37.5	12.5	1
24	45.5	41.5	37.5	12.5	1
31	46	41.5	37.5	20	1
35	50	41.5	37.5	20	1
40	55	41.5	37.5	20	1
19	31	56	48.5	12.5	1
23	34	56	48.5	15	1
27	37.5	56	48.5	15	1
33	48	56	48.5	20	1
37	54	56	48.5	20	1

Version B



L	PCM	b ±0.15
31.5	28.5	8
41.5	38.5	8
56	49.5	8

Additional special versions can be realized. Please contact us with your specific needs.

Versions of WIMA Snubber-Capacitors

Version code		D2	D4	B8	1A	1B	1G	1H	1I	1J	1S	2A	2B	2Q	2F	2J	2K	2M	3A	3C	3D	3E	3G	3K	3L	3M	3N	3O	3P	3Q	4A	4C	4J	4L	4M	6A	6B	6C	
W x H x L	Size code	2-pin	4-pin	B8	A1	A1.1.1	A1.4.1	A1.5	A1.6	A1.6.1	A1.6.2	A2	A2.1	A2.1.2	A2.4.1	A2.6.1	A2.6.2	A2.8	A3	A3.1	A3.2	A3.3	A3.5	A3.8	A3.8.1	A3.8.2	A3.9	A3.10	A3.11	A3.12	A4	A4.2	A4.7	A4.9	A4.10	A6	A6.3	A6.4	
11 x 21 x 31.5	6B																																						
13 x 24 x 31.5	6D																																						
15 x 26 x 31.5	6F																																						
17 x 29 x 31.5	6G																																						
17 x 34.5 x 31.5	6I																																						
11 x 22 x 41.5	7B																																						
13 x 24 x 41.5	7C																																						
15 x 26 x 41.5	7D																																						
17 x 29 x 41.5	7E																																						
19 x 32 x 41.5	7F																																						
20 x 39.5 x 41.5	7G																																						
24 x 45.5 x 41.5	7H																																						
31 x 46 x 41.5	7I																																						
35 x 50 x 41.5	7J																																						
40 x 55 x 41.5	7K																																						
19 x 31 x 56	8D																																						
23 x 34 x 56	8E																																						
27 x 37.5 x 56	8H																																						
33 x 48 x 56	8J																																						
37 x 54 x 56	8L																																						

Possible connecting respective plate versions - depending on box size.

■ 4-pin versions on request.

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $t < 5\text{ sec}$


Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\sum t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

Wave soldering

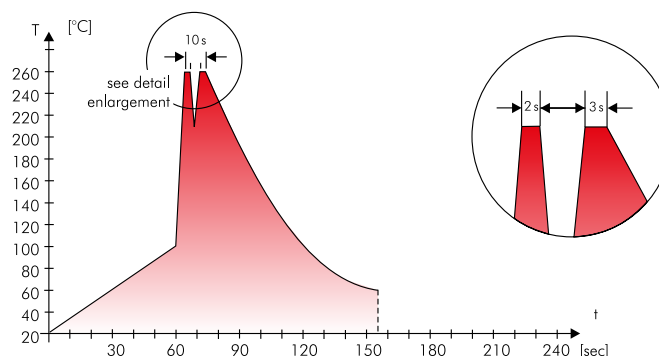

Typical temperature/time graph for double wave soldering

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2015/863/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has re-frained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2015/863/EU

WIMA capacitors are lead free in accordance with RoHS 2015/863/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

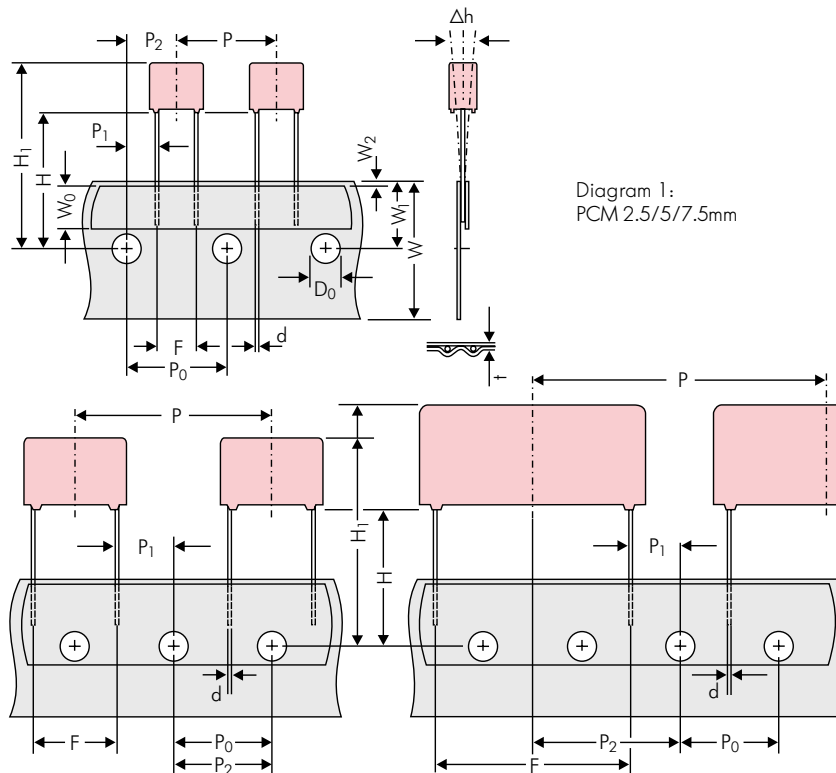


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	*38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H ▲	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 152)	▲	ROLL/AMMO			AMMO			
		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 depending on comp. dimensions		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL Ø 500 max. Ø 25 ±1	B 54 ±2 60 ±2 or 68 ±2 depending on PCM and component dimensions
Unit		see details page 153.						

▲ When ordering please specify dimension H and required packaging type.

Dims in mm.

• Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

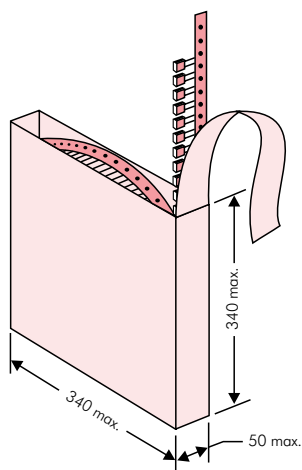

■ AMMO Packaging

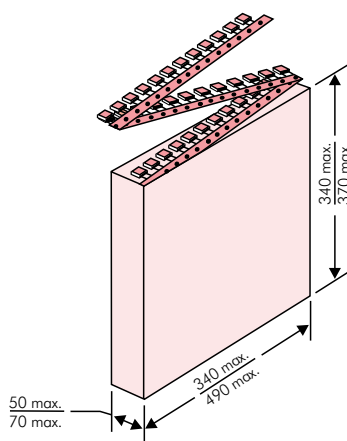

■ REEL Packaging

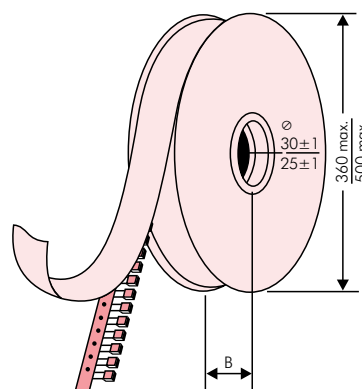


BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumeric Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

WIMA Best Capacitors Made in Germany	
Werk Aurich	
Supplier-ID: LIEF.NR.	Date Code: 20210419
	
Purchase Order No. (P/O): Bestellung xyz	P/O line: 100
	
Customer Part No.: KUNDENTEILENUMMER	
	
WIMA Part No.: MKP1F041006B00KSSD	Quantity: 459
	
WIMA Confirmation No.: 0001105072000100	
	
Customer No.: 0000100002	RoHS 2011/65/EU
Gross Weight [g]: 4557	COO: DE
	
WIMA - MKP 10 WIMA Part No.: MKP1F041006B00KSSD	
MKP 10 1.0 µF 250 VDC 11x21x31.5 RM27.5	
Standard 10%	Loss - Standard
Vorlage Debitor Inland	Drahte 6-2
	0001105072000100
1002021443	QTY: 459 Week 19/2021

BARCODE PDF417
BARCODE 2D Datamatrix

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 27.5 mm



PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	Ø 360	Ø 500	H16.5	H18.5	340 x 340	490 x 370	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000	2200		2500		–		2800		–	
	3	7.5	4.6	0C	5000	2000		2300		–		2300		–	
	3.8	8.5	4.6	0D	5000	1500		1800		–		1800		–	
	4.6	9	4.6	0E	5000	1200		1500		–		1500		–	
	5.5	10	4.6	0F	5000	900		1200		–		1200		–	
5 mm	2.5	6.5	7.2	1A	5000	2200		2500		–		2800		–	
	3	7.5	7.2	1B	5000	2000		2300		–		2300		–	
	3.5	8.5	7.2	1C	5000	1600		2000		–		2000		–	
	4.5	6	7.2	1D	6000	1300		1500		–		1500		–	
	4.5	9.5	7.2	1E	4000	1300		1500		–		1500		–	
	5	10	7.2	1F	3500	1100		1400		–		1400		–	
	5.5	7	7.2	1G	4000	1000		1200		–		1200		–	
	5.5	11.5	7.2	1H	2500	1000		1200		–		1200		–	
	6.5	8	7.2	1I	2500	800		1000		–		1000		–	
	7.2	8.5	7.2	1J	2500	700		1000		–		1000		–	
	7.2	13	7.2	1K	2000	700		950		–		1000		–	
	8.5	10	7.2	1L	2000	600		800		–		800		–	
	8.5	14	7.2	1M	1500	600		800		–		800		–	
	11	16	7.2	1N	1000	500		600		–		640		–	
7.5 mm	2.5	7	10	2A	5000	–		2500		4400		2500		–	
	3	8.5	10	2B	5000	–		2200		4300		2300		4150	
	4	9	10	2C	4000	–		1700		3200		1700		3000	
	4.5	9.5	10.3	2D	3500	–		1500		2900		1400		2700	
	5	10.5	10.3	2E	3000	–		1300		2500		1300		–	
	5.7	12.5	10.3	2F	2000	–		1000		2200		1100		–	
	7.2	12.5	10.3	2G	1500	–		900		1800		1000		–	
10 mm	3	9	13	3A	3000	–		1100		2200		–		1900	
	4	9	13	3C	3000	–		900		1600		–		1450	
	4	9.5	13	3D	3000	–		900		1600		–		1400	
	5	11	13	3F	3000	–		700		1300		–		1100	
	6	12	13	3G	2400	–		550		1100		–		1000	
	6	12.5	13	3H	2400	–		550		1100		–		1000	
	8	12	13	3I	2000	–		400		800		–		740	
15 mm	5	11	18	4B	2400	–		600		1200		–		1150	
	6	12.5	18	4C	2000	–		500		1000		–		1000	
	7	14	18	4D	1600	–		450		900		–		850	
	8	15	18	4F	1200	–		400		800		–		740	
	9	14	18	4H	1200	–		350		700		–		650	
	9	16	18	4J	900	–		350		700		–		650	
	11	14	18	4M	1000	–		300		600		–		540	
22.5 mm	5	14	26.5	5A	1200	–		–		800		–		770	
	6	15	26.5	5B	1000	–		–		700		–		640	
	7	16.5	26.5	5D	760	–		–		600		–		550	
	8.5	18.5	26.5	5F	500	–		–		480		–		450	
	10.5	19	26.5	5G	594*	–		–		400		–		360	
	10.5	20.5	26.5	5H	594*	–		–		400		–		360	
	11	21	26.5	5I	561*	–		–		380		–		350	
27.5 mm	9	19	31.5	6A	567*	–		–		460/340*		–		–	
	11	21	31.5	6B	459*	–		–		380/280*		–		–	
	13	24	31.5	6D	378*	–		–		300		–		–	
	15	26	31.5	6F	324*	–		–		270		–		–	
	17	29	31.5	6G	198*	–		–		–		–		–	
	17	34.5	31.5	6I	198*	–		–		–		–		–	
	20	39.5	31.5	6J	162*	–		–		–		–		–	

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.



Packing Quantities for Capacitors with Radial Pins in PCM 37.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		REEL				AMMO			
						H16.5	H18.5	Ø 360		Ø 500		340 x 340		490 x 370	
	W	H	L	Codes				H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
37.5 mm**	9	19	41.5	7A	441*	—	—	—	—	—	—	—	—	—	—
	11	22	41.5	7B	357*	—	—	—	—	—	—	—	—	—	—
	13	24	41.5	7C	294*	—	—	—	—	—	—	—	—	—	—
	15	26	41.5	7D	252*	—	—	—	—	—	—	—	—	—	—
	17	29	41.5	7E	154*	—	—	—	—	—	—	—	—	—	—
	19	32	41.5	7F	140*	—	—	—	—	—	—	—	—	—	—
	20	39.5	41.5	7G	126*	—	—	—	—	—	—	—	—	—	—
	24	45.5	41.5	7H	112*	—	—	—	—	—	—	—	—	—	—
	28	38	41.5	7L	84*	—	—	—	—	—	—	—	—	—	—
	31	46	41.5	7I	84*	—	—	—	—	—	—	—	—	—	—
	35	50	41.5	7J	35*	—	—	—	—	—	—	—	—	—	—
	40	55	41.5	7K	28*	—	—	—	—	—	—	—	—	—	—
48.5 mm**	19	31	56	8D	120*	—	—	—	—	—	—	—	—	—	—
	23	34	56	8E	80*	—	—	—	—	—	—	—	—	—	—
	27	37.5	56	8H	84*	—	—	—	—	—	—	—	—	—	—
	33	48	56	8J	25*	—	—	—	—	—	—	—	—	—	—
	37	54	56	8L	25*	—	—	—	—	—	—	—	—	—	—
52.5 mm	25	45	57	9D	70*	—	—	—	—	—	—	—	—	—	—
	30	45	57	9E	60*	—	—	—	—	—	—	—	—	—	—
	35	50	57	9F	25*	—	—	—	—	—	—	—	—	—	—
	45	55	57	9H	20*	—	—	—	—	—	—	—	—	—	—
	45	65	57	9J	20*	—	—	—	—	—	—	—	—	—	—

* TPS (Tray-Packing-System). Plate versions may have different packing units.

**For Snubber capacitors in 2-pin version the PCM is changing to 38.5 respective 49.5 mm.

Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF				2.5x6.5x7.2		-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:				Size:				Tolerance:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022				4.8x3.3x3 Size 1812 = KA				±20% = M			
SMD-PPS = SMDI				63 VDC = C0		47 pF = 0047				4.8x3.3x4 Size 1812 = KB				±10% = K			
FKP 02 = FKP0				100 VDC = D0		100 pF = 0100				5.7x5.1x3.5 Size 2220 = QA				±5% = J			
MKS 02 = MKS0				250 VDC = F0		150 pF = 0150				5.7x5.1x4.5 Size 2220 = QB				±2.5% = H			
FKS 2 = FKS2				400 VDC = G0		220 pF = 0220				7.2x6.1x3 Size 2824 = TA				±1% = E			
FKP 2 = FKP2				450 VDC = H0		330 pF = 0330				7.2x6.1x5 Size 2824 = TB				...			
FKS 3 = FKS3				520 VDC = H2		470 pF = 0470				10.2x7.6x5 Size 4030 = VA							
FKP 3 = FKP 3				600 VDC = I0		680 pF = 0680				12.7x10.2x6 Size 5040 = XA							
MKS 2 = MKS2				630 VDC = J0		1000 pF = 1100				15.3x13.7x7 Size 6054 = YA							
MKP 2 = MKP2				700 VDC = K0		1500 pF = 1150				2.5x7x4.6 PCM2.5 = 0B				Packing:			
MKS 4 = MKS4				800 VDC = L0		2200 pF = 1220				3x7.5x4.6 PCM2.5 = 0C				AMMO H16.5 340x340 = A			
MKP 4 = MKP4				850 VDC = M0		3300 pF = 1330				2.5x6.5x7.2 PCM5 = 1A				AMMO H16.5 490x370 = B			
MKP 10 = MKP1				900 VDC = N0		4700 pF = 1470				3x7.5x7.2 PCM5 = 1B				AMMO H18.5 340x340 = C			
FKP 4 = FKP4				1000 VDC = O1		6800 pF = 1680				2.5x7x10 PCM7.5 = 2A				AMMO H18.5 490x370 = D			
FKP 1 = FKP1				1100 VDC = P0		0.01 µF = 2100				3x8.5x10 PCM7.5 = 2B				REEL H16.5 360 = F			
MKP-X2 = MKX2				1200 VDC = Q0		0.022 µF = 2220				3x9x13 PCM10 = 3A				REEL H16.5 500 = H			
MKP-X1 R = MKX1				1250 VDC = R0		0.047 µF = 2470				4x9x13 PCM10 = 3C				REEL H18.5 360 = I			
MKP-Y2 = MKY2				1500 VDC = S0		0.1 µF = 3100				5x11x18 PCM15 = 4B				REEL H18.5 500 = J			
MKP 4F = MKPF				1600 VDC = T0		0.22 µF = 3220				6x12.5x18 PCM15 = 4C				ROLL H16.5 = N			
Snubber MKP = SNMP				1700 VDC = TA		0.47 µF = 3470				6x14x26.5 PCM22.5 = 5A				ROLL H18.5 = O			
Snubber FKP = SNFP				2000 VDC = U0		1 µF = 4100				6x15x26.5 PCM22.5 = 5B				BLISTER W12 180 = P			
GTO MKP = GTOM				2500 VDC = V0		2.2 µF = 4220				9x19x31.5 PCM27.5 = 6A				BLISTER W12 330 = Q			
DC-LINK MKP 4 = DCP4				3000 VDC = W0		4.7 µF = 4470				11x21x31.5 PCM27.5 = 6B				BLISTER W16 330 = R			
DC-LINK MKP 6 = DCP6				4000 VDC = X0		10 µF = 5100				9x19x41.5 PCM37.5 = 7A				BLISTER W24 330 = T			
DC-LINK HC = DCHC				6000 VDC = Y0		22 µF = 5220				11x22x41.5 PCM37.5 = 7B				Bulk/TPS Standard = S			
				230 VAC = 3Y		47 µF = 5470				19x31x56 PCM 48.5 = 8D				...			
				275 VAC = 1W		100 µF = 6100				25x45x57 PCM 52.5 = 9D							
				300 VAC = 2W		220 µF = 6220				...							
				305 VAC = AW		1000 µF = 7100											
				350 VAC = BW		1500 µF = 7150											
				440 VAC = 4W		...											
				...													
								Version code:				Pin length (untaped)					
								Standard = 00				3.5 ±0.5 = C9					
								Version A1 = 1A				6 -2 = SD					
								Version A1.1.1 = 1B				16 ±1 = P1					
								Version A2 = 2A				...					
								...				Pin length (taped)					
												none = 00					

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[WIMA:](#)

SNFPX02100S9B8KS00	SNFPJ034707E1AJS00	SNFPJ042208K1AJS00	SNFPO131007B1AJS00
SNFPO141008K1AJS00	SNFPT024707B1AJS00	SNFPT034708K1AJS00	SNFPU022207B1AJS00
SNFPU031007E1AJS00	SNFPU034708K1AJS00	SNFPX033308J1AKS00	SNFPW02470SID2JY00
SNFPX023307D4AKS00	SNFPW02150S9D2JY00	SNFPO14100SQ1AMY00	SNFPU021505ID2JSSD
SNFPU021505IB5JS00	SNFPW02220SAD2JY00	SNFPW02330SHD2JY00	SNFPJ031505IB5JS00
SNFPX024707ED4KSSD	SNFPU034708H1AJS00	SNFPO141008H1BKS00	SNFPX031007G4AKS00
SNFPT032207G1AMS00	SNFPW033308HD4KSSD	SNFPU033308H1GKS00	SNFPU034708H1GKS00
SNFPT032207G2JKS00	SNFPT036808H1AMS00	SNFPU031007E3AMS00	SNFPT031007E1AJS00
SNFPT031007E3AMS00	SNFPJ041007G3GMS00	SNFPX022207C1AJS00	SNFPT024707B1AKS00
SNFPO131007B3GJS00	SNFPX032208HD4KSSD	SNFPJ041007G1AJS00	SNFPW032207HD2KSSD
SNFPX022207C1JJS00	SNFPT023306BD2MSSD	SNFPU021505IB5KS00	SNFPO131507DD4KSSD
SNFPX024707E1AKS00	SNFPO136808E1BKS00	SNFPO132207EB8JS00	SNFPX031507H1JJS00
SNFPX024707E1JJS00	SNFPJ041507HD4KSSD	SNFPO134707G1AKS00	SNFPO132207E1AKS00
SNFPO134707G1AJS00	SNFPO141008H1AJS00	SNFPT024707BD4KSSD	SNFPT031007E1AMS00
SNFPX021507B1AJS00	SNFPW032207HD2JSSD	SNFPO141008H1GKS00	SNFPU026807E4AJS00
SNFPO136808E1AKS00	SNFPO131507D3GJS00	SNFPW031507GD4JSSD	SNFPT032207G3GMS00
SNFPX032208HB8KS00	SNFPT022205HD2KSSD	SNFPW031507GD4KSSD	SNFPU034708H1FKS00
SNFPU034708H1BKS00	SNFPT032207G4AJS00	SNFPX032208HB8JS00	SNFPJ041007G1AKS00
SNFPO132207EB8MS00	SNFPW024707DD2JSSD	SNFPJ041007G3AMS00	SNFPO134707GB8KS00
SNFPX02150SG1AJY00	SNFPO131007B3AMS00	SNFPT021005DB5JS00	SNFPJ041507H1IJS00
SNFPO123305FD2MSSD	SNFPJ041007G1IJS00	SNFPO134707GB8MS00	SNFPO131507D4CMS00
SNFPO133307FB8MS00	SNFPX032208HD2KSSD	SNFPX032208H5AKS00	SNFPU031007E3NJS00
SNFPX032208H4AMS00	SNFPT033307H1AMS00	SNFPJ042207I1AJS00	SNFPJ042208H1AJS00
SNFPO134707G2CMS00	SNFPO134707G2DJS00	SNFPO134707G2DKS00	SNFPO134707G2DMS00
SNFPO134707G2CJS00	SNFPO134707G2EKS00	SNFPO134707G2AMS00	SNFPO134707G2FJS00