

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 857039

Radial Lead Type

Series: **KS** Type : **A**

- **Features** Endurance:85°C 1000 h
5 mm height
RoHS directive compliant

■ **Specifications**

Category temp. range	-40 to +85°C								
Rated W.V. Range	4 to 50 V .DC								
Nominal Cap. Range	0.1 to 330 μ F								
Capacitance Tolerance	±20 % (120Hz/+20°C)								
DC Leakage Current	I ≤ 0.01 CV or 3(μ A) after 2 minutes (Whichever is greater)								
tan δ	Please see the attached standard products list.								
Characteristics at Low Temperature	W.V. (V)	4	6.3	10	16	25	35	50	(Impedance ratio at 120 Hz)
	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	15	8	6	4	4	3	3	
Endurance	After applying rated working voltage for 1000 hours at +85°C and then being stabilized at +20°C, capacitors shall meet the following limits.								
	Capacitance change	± 20% of initial measured value (4V. : ±30%)							
	tan δ	≤200 % of initial specified value							
	DC leakage current	≤initial specified value							
Shelf Life	After storage for 1000 hours at +85±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance(With voltage treatment)								

Low profile

KS
5mm height

KA
7mm height


M

Country of Origin

Japan
Malaysia



■ **Dimensions in mm (not to scale)**

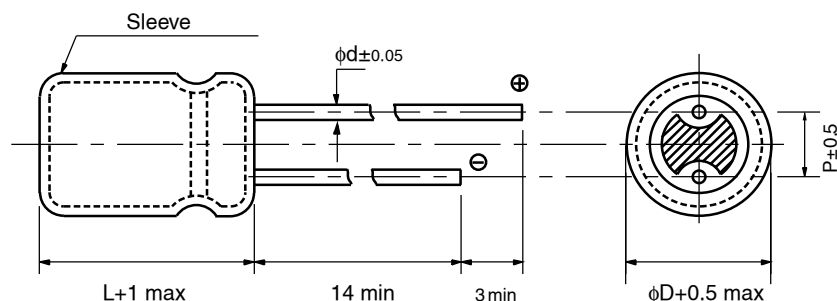

(mm)

Body Dia.φD	3	4	5	6.3	8
Lead Dia.φd	0.4	0.45	0.45	0.45	0.45
Lead Space P	1.0	1.5	2.0	2.5	2.5

■ Standard Products

W.V. (V)	Cap. (±20%) (μF)	Case size		Specification		Lead Length				Part No.	Min.Packaging Q'ty	
		Dia.	Length	Ripple current (120Hz) (+85°C) (mA)	tan δ (120Hz) (+20°C)	Lead Dia. (mm)	Lead Space				Straight Leas (pcs)	Taping (pcs)
							Straight (mm)	Taping ※B (mm)	Taping ※i (mm)			
4	22	3	5	19	0.35	0.40	1.0	5.0	2.5	ECEA0GKK220()	200	2000
	33	4	5	26	0.35	0.45	1.5	5.0	2.5	ECEA0GKS330()	200	2000
	47	4	5	34	0.35	0.45	1.5	5.0	2.5	ECEA0GKS470()	200	2000
	100	5	5	61	0.35	0.45	2.0	5.0	2.5	ECEA0GKS101()	200	2000
	220	6.3	5	82	0.35	0.45	2.5	5.0	2.5	ECEA0GKS221()	200	2000
6.3	22	4	5	29	0.24	0.45	1.5	5.0	2.5	ECEA0JKS220()	200	2000
	33	5	5	38	0.24	0.45	2.0	5.0	2.5	ECEA0JKS330()	200	2000
	47	5	5	46	0.24	0.45	2.0	5.0	2.5	ECEA0JKS470()	200	2000
	100	6.3	5	71	0.24	0.45	2.5	5.0	2.5	ECEA0JKS101()	200	2000
	330	8	5	130	0.24	0.45	2.5		2.5	ECEA0JKS331()	200	1000
		8	5	130	0.24	0.45		5.0		ECEA0JKS331Q		1000
10	22	5	5	35	0.20	0.45	2.0	5.0	2.5	ECEA1AKS220()	200	2000
	33	5	5	43	0.20	0.45	2.0	5.0	2.5	ECEA1AKS330()	200	2000
	47	6.3	5	65	0.20	0.45	2.5	5.0	2.5	ECEA1AKS470()	200	2000
	100	6.3	5	80	0.20	0.45	2.5	5.0	2.5	ECEA1AKS101()	200	2000
	220	8	5	120	0.20	0.45	2.5		2.5	ECEA1AKS221()	200	1000
		8	5	120	0.20	0.45		5.0		ECEA1AKS221Q		1000
16	10	3	5	20	0.16	0.40	1.0	5.0	2.5	ECEA1CKK100()	200	2000
		4	5	28	0.16	0.45	1.5	5.0	2.5	ECEA1CKS100()	200	2000
	22	5	5	39	0.16	0.45	2.0	5.0	2.5	ECEA1CKS220()	200	2000
	33	6.3	5	60	0.16	0.45	2.5	5.0	2.5	ECEA1CKS330()	200	2000
	47	6.3	5	70	0.16	0.45	2.5	5.0	2.5	ECEA1CKS470()	200	2000
	100	8	5	91	0.16	0.45	2.5		2.5	ECEA1CKS101()	200	1000
		8	5	91	0.16	0.45		5.0		ECEA1CKS101Q		1000
25	2.2	3	5	8	0.14	0.40	1.0	5.0	2.5	ECEA1EKK2R2()	200	2000
	3.3	3	5	10	0.14	0.40	1.0	5.0	2.5	ECEA1EKK3R3()	200	2000
	4.7	3	5	12	0.14	0.40	1.0	5.0	2.5	ECEA1EKK4R7()	200	2000
		4	5	22	0.14	0.45	1.5	5.0	2.5	ECEA1EKS4R7()	200	2000
	10	5	5	28	0.14	0.45	2.0	5.0	2.5	ECEA1EKS100()	200	2000
	22	6.3	5	55	0.14	0.45	2.5	5.0	2.5	ECEA1EKS220()	200	2000
	33	6.3	5	65	0.14	0.45	2.5	5.0	2.5	ECEA1EKS330()	200	2000
	100	8	5	85	0.14	0.45	2.5		2.5	ECEA1EKS101()	200	1000
		8	5	85	0.14	0.45		5.0		ECEA1EKS101Q		1000
35	3.3	4	5	16	0.12	0.45	1.5	5.0	2.5	ECEA1VKS3R3()	200	2000
	4.7	4	5	22	0.12	0.45	1.5	5.0	2.5	ECEA1VKS4R7()	200	2000
	10	5	5	30	0.12	0.45	2.0	5.0	2.5	ECEA1VKS100()	200	2000
	22	6.3	5	60	0.12	0.45	2.5	5.0	2.5	ECEA1VKS220()	200	2000
	33	8	5	65	0.12	0.45	2.5		2.5	ECEA1VKS330()	200	1000
		8	5	65	0.12	0.45		5.0		ECEA1VKS330Q		1000
	47	8	5	85	0.12	0.45	2.5		2.5	ECEA1VKS470()	200	1000
		8	5	85	0.12	0.45		5.0		ECEA1VKS470Q		1000
50	0.1	3	5	1	0.10	0.40	1.0	5.0	2.5	ECEA1HKK0R1()	200	2000
		4	5	1	0.10	0.45	1.5	5.0	2.5	ECEA1HKS0R1()	200	2000

When requesting taped product, please put the letter "B" or "i" between the "()". Lead wire pitch B=5mm, i=2.5mm.
 The taping dimensions are explained on p.196 of our Catalog. Please use it as a reference guide.
 Endurance : 85°C 1000h

Design, and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and / or use. Should a safety concern arise regarding this product, please be sure to contact us immediately. Mar.2006

■ Standard Products

W.V.	Cap. (±20%)	Case size		Specification		Lead Length				Part No.	Min.Packaging Q'ty	
		Dia.	Length	Ripple current (120Hz) (+85°C) (mA)	tan δ (120Hz) (+20°C)	Lead Dia.	Lead Space				Straight Leads	Taping
							Straight	Taping *B (mm)	Taping *i (mm)			
(V)	(μF)	(mm)	(mm)			(mm)	(mm)	(mm)	(mm)		(pcs)	(pcs)
50	0.22	3	5	2	0.10	0.40	1.0	5.0	2.5	ECEA1HKKR22()	200	2000
		4	5	2	0.10	0.45	1.5	5.0	2.5	ECEA1HKSR22()	200	2000
	0.33	3	5	3	0.10	0.40	1.0	5.0	2.5	ECEA1HKKR33()	200	2000
		4	5	3	0.10	0.45	1.5	5.0	2.5	ECEA1HKSR33()	200	2000
	0.47	3	5	5	0.10	0.40	1.0	5.0	2.5	ECEA1HKKR47()	200	2000
		4	5	5	0.10	0.45	1.5	5.0	2.5	ECEA1HKSR47()	200	2000
	1	3	5	8	0.10	0.40	1.0	5.0	2.5	ECEA1HKK010()	200	2000
		4	5	10	0.10	0.45	1.5	5.0	2.5	ECEA1HKS010()	200	2000
	2.2	4	5	16	0.10	0.45	1.5	5.0	2.5	ECEA1HKS2R2()	200	2000
	3.3	4	5	16	0.10	0.45	1.5	5.0	2.5	ECEA1HKS3R3()	200	2000
	4.7	5	5	23	0.10	0.45	2.0	5.0	2.5	ECEA1HKS4R7()	200	2000
	10	6.3	5	35	0.10	0.45	2.5	5.0	2.5	ECEA1HKS100()	200	2000
	22	8	5	60	0.10	0.45	2.5		2.5	ECEA1HKS220()	200	1000
		8	5	60	0.10	0.45		5.0		ECEA1HKS220Q		1000

When requesting taped product, please put the letter "B" or "i" between the "()". Lead wire pitch B=5mm, i=2.5mm.
The taping dimensions are explained on p.196 of our Catalog. Please use it as a reference guide.
Endurance : 85°C 1000h