

WR-OEF-PG16

Order No.: 1853638

The illustration shows version WR-OEF-PG 21

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1853638>

Opener for corrugated tube, to disassemble corrugated tube screw connection, size Pg16

Commercial data

| | |
|--------------------------|--------------------|
| GTIN (EAN) | 4017918134310 |
| Note | Made-to-order |
| sales group | D290 |
| Pack | 5 pcs. |
| Customs tariff | 82055990 |
| Weight/Piece | 0.0065 KG |
| Catalog page information | Page 557 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
01/01/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data

General data

| | |
|---------------------|----|
| Pg screw connection | 16 |
| Material | PA |

Diagrams/Drawings

Dimensioned drawing

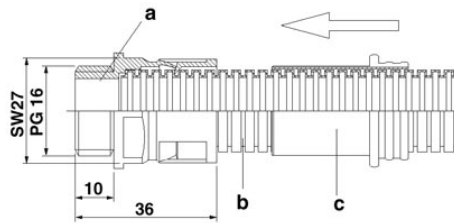

Assembly instructions for Pg16 corrugated pipe

a = Corrugated screw connection

B = Corrugated pipe

c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;