


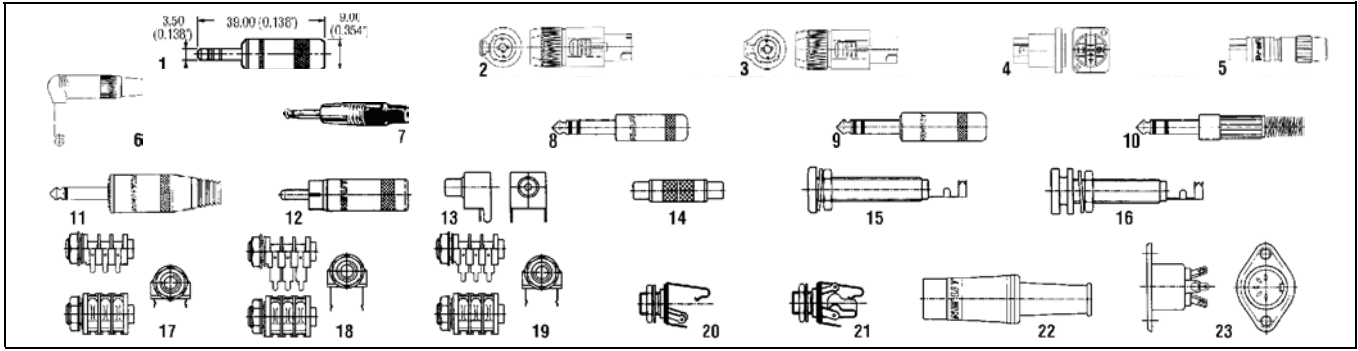

3.5 mm Plugs

— NEW —

3.5 mm stereo plugs feature heavy duty cable clamp for superior strain relief, knurled surface on handle provides a sure grip, oversized solder terminal for ease of assembly.

Stock No.	Mfr.'s Type	Fig.	No. of Contacts	Handle Plugs	EACH		
					1-9	10-24	25-99
514-8000	NYS231	1	3	Nickel/Nickel	.75	.65	.55
514-8001	NYS231AU	1	3	Nickel/Gold	1.20	1.00	.90
514-8002	NYS231B	1	3	Black/Gold	1.20	1.00	.90
514-8003	NYS231-BAG	1	3	Black/Gold	.90	.85	.70

PowerCon® — 3 Pole Equipment (AC) Connector

Stock No.	Mfr.'s Type	Fig.	Description	EACH		
				1-9	10-24	25-99
514-8666	NAC3FCA*	2	Cable connector, quick lock with securing lever, blue	5.77	5.14	4.69
514-8668	NAC3FCB†	3	Cable connector, quick lock with securing lever, grey with blue bushing	5.77	5.14	4.69
514-8670	NAC3MPA*	4	Chassis connector, air tight, blue	2.89	2.58	2.35
514-8672	NAC3MPB†	4	Chassis connector, air tight, grey	2.89	2.58	2.35

*Power inlet. †Power outlet.

ProFi® — Professional “RCA” Connector

- All Metal Design, Machined Brass, Black Coated Shell
- Easy Assembly and Soldering (Large Soldering Area, Rapid-Flow Plating)
- High-Grade Plastic Insulator with High Creep Resistance
- Spring Loaded Ground Contact: Retractable Element with Separate Wedge Contacts Which Keep the Shell in the Front Position When Engaged

Contacts for line, neutral, and premating safety grounds and are designed to prevent damage from arcing when disconnected while under load. Rated at 20 A/250 VAC. Different keying avoids intermating errors. POWERCON IS NOT DESIGNED TO BE A “MAINS” CONNECTOR.

Stock No.	Mfr.'s Type	Fig.	Description	EACH		
				1-9	10-24	25-99
514-8674	NF2C-B/2	5	Two plugs with red/black colored sleeves and two strain relief chucks for small or large cable diameters	16.55	15.18	13.87

1/4" Professional Phone Plugs

Nickel plated brass plugs. Accept 0.10"-0.28" diameter cable. Standard or right angle; right angle also available in “slim” version with solderless ground contact.

Stock No.	Mfr.'s Type	Fig.	No. of Contacts	Shell	EACH		
					1-9	10-24	25-99
514-1074	NP2RC	—	2	Nickel	5.51	4.37	4.08
514-1078	NP2RCS*	6	2	Nickel	3.27	2.89	2.61
514-1101	NP3RC	—	3	Nickel	6.39	6.23	4.92
514-8664	NP3RCS*	6	3	Nickel	5.42	4.63	4.41
514-1072	NP2C	7	2	Nickel	3.19	2.43	2.27
514-1073	NP3C	7	3	Nickel	4.47	3.50	3.29
514-1075	NP2C-BAG	7	2	Black	3.29	2.78	2.58
514-1076	NP3C-BAG	7	3	Black	4.72	3.76	3.45

*New slim line right angle plug.

1/4" Economical Phone Plugs

- AWG: 14 AWG — 224L; 18 AWG — 201, 202, 203, 204, 224, 228
- 500 Vrms

Stock No.	Mfr.'s Type	Fig.	Description	EACH		
				1-9	10-24	25-99
514-8614	NYS 201	8	2 pole short barrel	1.23	1.07	.97
514-8616	NYS 202	8	3 pole short barrel	1.73	1.49	1.36
514-8618	NYS 224	9	2 pole long barrel shielded handle	1.27	1.10	1.00
514-8620	NYS 224L	9	2 pole long barrel shielded large handle	1.34	1.16	1.05
514-8622	NYS 228	9	3 pole long barrel shielded handle	2.31	2.04	1.85
514-8624	NYS 203	10	2 pole plastic shell with plastic strain relief	1.17	1.01	.92
514-8626	NYS 204	10	3 pole plastic shell with plastic strain relief	1.27	1.10	1.00
514-8700	NYS 225	11	2 pole large barrel shielded handle*	2.44	2.15	1.96
514-8702	NYS 225B	11	2 pole large barrel shielded handle, black*	2.44	2.15	1.96

*Cable dia. range up to 0.355".

Economical “RCA” Phono Connectors

- 500 Vrms

Stock No.	Mfr.'s Type	Fig.	Description	EACH		
				1-9	10-24	25-99
514-8628	NYS 352	12	2 pole long barrel large shielded handle, cable dia. range up to 0.25	.89	.77	.70
514-8704	NYS 352G	12	2 pole long barrel shielded handle, cable dia. range up to 0.25, gold contact	1.31	1.14	1.04
514-8630	NYS 354	13	2 pole right angle PCB phono jack	.54	.46	.43
514-8632	NYS 355	14	2 pole phono to phono female adapter	2.58	2.24	2.04

1/4" Economical Phone Jacks — Solder and P.C.

- 500 Vrms

Stock No.	Mfr.'s Type	Fig.	Description	EACH		
				1-9	10-24	25-99
514-8634	NYS 220	15	2 pole solder lugs with strain relief clamp	2.06	1.78	1.61
514-8636	NYS 221	16	3 pole solder lugs with strain relief clamp	2.14	1.86	1.68
514-8637	NYS 212*	—	3 pole solder tab	.65	.57	.51
514-8638	NYS 215*	17	3 pole right angle washer and chrome nut, 0.322"	.80	.70	.63
514-8640	NYS 216*	17	3 pole right angle nut and washer, 0.322"	.65	.57	.51
514-8642	NYS 218*	18	3 pole right angle nut and washer, 0.492"	.63	.55	.49
514-8644	NYS 219*	19	3 pole right angle nut and washer, 0.590"	.65	.57	.51
514-8646	NYS 229	20	2 pole solder lug insulated washer, 0.0375" mounting hole	.93	.81	.73
514-8650	NYS 230	21	3 pole solder lug insulated washer, 0.0375" mounting hole	1.04	.90	.82

*Mono version is available as a special order by adding /2 to the part no.

Circular DIN Connectors — Cable and Panel

- 500 Vrms

Stock No.	Mfr.'s Type	Fig.	Description	EACH		
				1-9	10-24	25-99
514-8652	NYS 321	22	3 pin 180° male	1.21	1.05	.95
514-8654	NYS 322	22	5 pin 180° male	1.25	1.09	.99
514-8656	NYS 323	22	7 pin 270° male	3.12	2.32	2.15
514-8658	NYS 324	23	3 contact 180° female	.50	.43	.39
514-8660	NYS 325	23	5 contact 180° female	.56	.48	.44
514-8662	NYS 326	23	7 contact 270° female	.63	.55	.49