

# 18-Bit, 1Msps, Pseudo-Differential Unipolar SAR ADC with 97dB SNR

## FEATURES

- **1Msps Throughput Rate**
- **±2.5LSB INL (Max)**
- **Guaranteed 18-Bit No Missing Codes**
- **Low Power: 13.5mW at 1Msps, 13.5μW at 1ksps**
- **97dB SNR (Typ) at  $f_{IN} = 2\text{kHz}$**
- **−120dB THD (Typ) at  $f_{IN} = 2\text{kHz}$**
- **Guaranteed Operation to 125°C**
- **2.5V Supply**
- **Pseudo-Differential Unipolar Input Range: 0V to  $V_{REF}$**
- **$V_{REF}$  Input Range from 2.5V to 5.1V**
- **No Pipeline Delay, No Cycle Latency**
- **1.8V to 5V I/O Voltages**
- **SPI-Compatible Serial I/O with Daisy-Chain Mode**
- **Internal Conversion Clock**
- **16-Lead MSOP and 4mm × 3mm DFN Packages**

## APPLICATIONS

- Medical Imaging
- High Speed Data Acquisition
- Portable or Compact Instrumentation
- Industrial Process Control
- Low Power Battery-Operated Instrumentation
- ATE



## DESCRIPTION

The LTC®2368-18 is a low noise, low power, high speed 18-bit successive approximation register (SAR) ADC. Operating from a 2.5V supply, the LTC2368-18 has a 0V to  $V_{REF}$  pseudo-differential unipolar input range with  $V_{REF}$  ranging from 2.5V to 5.1V. The LTC2368-18 consumes only 13.5mW and achieves  $\pm 2.5$ LSB INL maximum, no missing codes at 18 bits with 97dB SNR.

The LTC2368-18 has a high speed SPI-compatible serial interface that supports 1.8V, 2.5V, 3.3V and 5V logic while also featuring a daisy-chain mode. The fast 1Mps throughput with no cycle latency makes the LTC2368-18 ideally suited for a wide variety of high speed applications. An internal oscillator sets the conversion time, easing external timing considerations. The LTC2368-18 automatically powers down between conversions, leading to reduced power dissipation that scales with the sampling rate.

LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks and SoftSpan is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners. Protected by U.S. Patents, including 7705765.

## TYPICAL APPLICATION

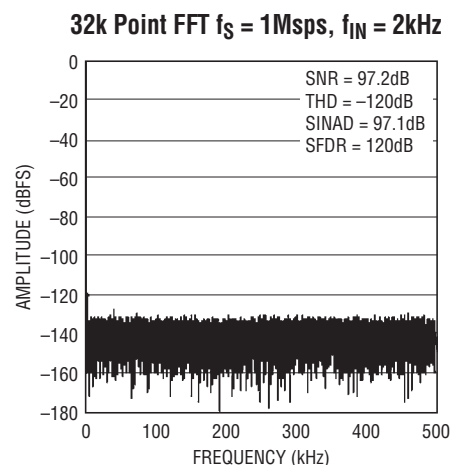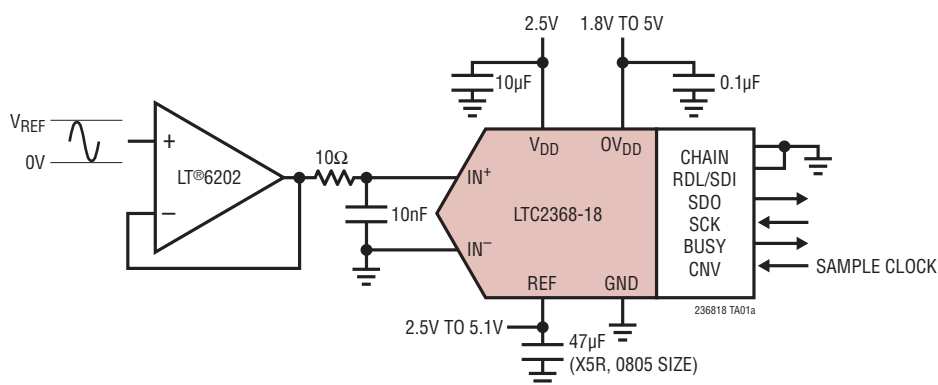

# LTC2368-18

## ABSOLUTE MAXIMUM RATINGS (Notes 1, 2)

|                                   |                                     |                             |                |
|-----------------------------------|-------------------------------------|-----------------------------|----------------|
| Supply Voltage ( $V_{DD}$ )       | 2.8V                                | Power Dissipation           | 500mW          |
| Supply Voltage ( $OV_{DD}$ )      | 6V                                  | Operating Temperature Range |                |
| Reference Input (REF)             | 6V                                  | LTC2368C                    | 0°C to 70°C    |
| Analog Input Voltage (Note 3)     |                                     | LTC2368I                    | -40°C to 85°C  |
| IN <sup>+</sup> , IN <sup>-</sup> | (GND - 0.3V) to (REF + 0.3V)        | LTC2368H                    | -40°C to 125°C |
| Digital Input Voltage             |                                     | Storage Temperature Range   | -65°C to 150°C |
| (Note 3)                          | (GND - 0.3V) to ( $OV_{DD}$ + 0.3V) |                             |                |
| Digital Output Voltage            |                                     |                             |                |
| (Note 3)                          | (GND - 0.3V) to ( $OV_{DD}$ + 0.3V) |                             |                |

## PIN CONFIGURATION

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>TOP VIEW</p> <p>CHAIN 1<br/><math>V_{DD}</math> 2<br/>GND 3<br/>IN<sup>+</sup> 4<br/>IN<sup>-</sup> 5<br/>GND 6<br/>REF 7<br/>REF 8</p> <p>16 GND<br/>15 <math>OV_{DD}</math><br/>14 SDO<br/>13 SCK<br/>12 RDL/SDI<br/>11 BUSY<br/>10 GND<br/>9 CNV</p> <p>DE PACKAGE<br/>16-LEAD (4mm × 3mm) PLASTIC DFN<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 40^{\circ}\text{C/W}</math><br/>EXPOSED PAD (PIN 17) IS GND, MUST BE SOLDERED TO PCB</p> | <p>TOP VIEW</p> <p>CHAIN 1<br/><math>V_{DD}</math> 2<br/>GND 3<br/>IN<sup>+</sup> 4<br/>IN<sup>-</sup> 5<br/>GND 6<br/>REF 7<br/>REF 8</p> <p>16 GND<br/>15 <math>OV_{DD}</math><br/>14 SDO<br/>13 SCK<br/>12 RDL/SDI<br/>11 BUSY<br/>10 GND<br/>9 CNV</p> <p>MS PACKAGE<br/>16-LEAD PLASTIC MSOP<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 110^{\circ}\text{C/W}</math></p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## ORDER INFORMATION

| LEAD FREE FINISH  | TAPE AND REEL       | PART MARKING* | PACKAGE DESCRIPTION             | TEMPERATURE RANGE |
|-------------------|---------------------|---------------|---------------------------------|-------------------|
| LTC2368CMS-18#PBF | LTC2368CMS-18#TRPBF | 236818        | 16-Lead Plastic MSOP            | 0°C to 70°C       |
| LTC2368IMS-18#PBF | LTC2368IMS-18#TRPBF | 236818        | 16-Lead Plastic MSOP            | -40°C to 85°C     |
| LTC2368HMS-18#PBF | LTC2368HMS-18#TRPBF | 236818        | 16-Lead Plastic MSOP            | -40°C to 125°C    |
| LTC2368CDE-18#PBF | LTC2368CDE-18#TRPBF | 23688         | 16-Lead (4mm × 3mm) Plastic DFN | 0°C to 70°C       |
| LTC2368IDE-18#PBF | LTC2368IDE-18#TRPBF | 23688         | 16-Lead (4mm × 3mm) Plastic DFN | -40°C to 85°C     |

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandree/>

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL              | PARAMETER                         | CONDITIONS                     | MIN  | TYP     | MAX             | UNITS         |
|---------------------|-----------------------------------|--------------------------------|------|---------|-----------------|---------------|
| $V_{IN+}$           | Absolute Input Range ( $IN^+$ )   | (Note 5) ●                     | -0.1 |         | $V_{REF} + 0.1$ | V             |
| $V_{IN-}$           | Absolute Input Range ( $IN^-$ )   | (Note 5) ●                     | -0.1 |         | 0.1             | V             |
| $V_{IN+} - V_{IN-}$ | Input Differential Voltage Range  | $V_{IN} = V_{IN+} - V_{IN-}$ ● | 0    |         | $V_{REF}$       | V             |
| $I_{IN}$            | Analog Input Leakage Current      | ●                              |      |         | $\pm 1$         | $\mu\text{A}$ |
| $C_{IN}$            | Analog Input Capacitance          | Sample Mode<br>Hold Mode       |      | 45<br>5 |                 | pF<br>pF      |
| CMRR                | Input Common Mode Rejection Ratio | $f_{IN} = 500\text{kHz}$       |      | 80      |                 | dB            |

## CONVERTER CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL | PARAMETER                    | CONDITIONS | MIN  | TYP        | MAX | UNITS                       |
|--------|------------------------------|------------|------|------------|-----|-----------------------------|
|        | Resolution                   | ●          | 18   |            |     | Bits                        |
|        | No Missing Codes             | ●          | 18   |            |     | Bits                        |
|        | Transition Noise             |            |      | 1.3        |     | $\text{LSB}_{\text{RMS}}$   |
| INL    | Integral Linearity Error     | (Note 6) ● | -2.5 | $\pm 0.5$  | 2.5 | LSB                         |
| DNL    | Differential Linearity Error | ●          | -0.5 | $\pm 0.1$  | 0.5 | LSB                         |
| ZSE    | Zero-Scale Error             | (Note 7) ● | -11  | 0          | 11  | LSB                         |
|        | Zero-Scale Error Drift       |            |      | 0.02       |     | $\text{LSB}/^\circ\text{C}$ |
| FSE    | Full-Scale Error             | (Note 7) ● | -50  | $\pm 7$    | 50  | LSB                         |
|        | Full-Scale Error Drift       |            |      | $\pm 0.15$ |     | $\text{ppm}/^\circ\text{C}$ |

## DYNAMIC ACCURACY

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$  and  $A_{IN} = -1\text{dBFS}$ . (Notes 4, 8)

| SYMBOL | PARAMETER                            | CONDITIONS                                                     | MIN  | TYP  | MAX  | UNITS |
|--------|--------------------------------------|----------------------------------------------------------------|------|------|------|-------|
| SINAD  | Signal-to-(Noise + Distortion) Ratio | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 5\text{V}$ ●               | 93.8 | 97   |      | dB    |
|        |                                      | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 5\text{V}$ , (H-Grade) ●   | 93.3 | 97   |      | dB    |
| SNR    | Signal-to-Noise Ratio                | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 5\text{V}$ ●               | 94.3 | 97   |      | dB    |
|        |                                      | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 2.5\text{V}$ ●             | 88.5 | 91.5 |      | dB    |
|        |                                      | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 5\text{V}$ , (H-Grade) ●   | 93.8 | 97   |      | dB    |
|        |                                      | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 2.5\text{V}$ , (H-Grade) ● | 88   | 91.5 |      | dB    |
| THD    | Total Harmonic Distortion            | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 5\text{V}$ ●               |      | -120 | -103 | dB    |
|        |                                      | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 2.5\text{V}$ ●             |      | -116 | -103 | dB    |
| SFDR   | Spurious Free Dynamic Range          | $f_{IN} = 2\text{kHz}$ , $V_{REF} = 5\text{V}$ ●               | 104  | 120  |      | dB    |
|        | -3dB Input Bandwidth                 |                                                                |      | 34   |      | MHz   |
|        | Aperture Delay                       |                                                                |      | 500  |      | ps    |
|        | Aperture Jitter                      |                                                                |      | 4    |      | ps    |
|        | Transient Response                   | Full-Scale Step                                                |      | 460  |      | ns    |

## REFERENCE INPUT

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL    | PARAMETER               | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------|-------------------------|------------|-----|-----|-----|-------|
| $V_{REF}$ | Reference Voltage       | (Note 5) ● | 2.5 |     | 5.1 | V     |
| $I_{REF}$ | Reference Input Current | (Note 9) ● |     | 0.5 | 0.7 | mA    |

## DIGITAL INPUTS AND DIGITAL OUTPUTS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL       | PARAMETER                   | CONDITIONS                    | MIN                 | TYP | MAX                 | UNITS         |
|--------------|-----------------------------|-------------------------------|---------------------|-----|---------------------|---------------|
| $V_{IH}$     | High Level Input Voltage    | ●                             | $0.8 \cdot OV_{DD}$ |     |                     | V             |
| $V_{IL}$     | Low Level Input Voltage     | ●                             |                     |     | $0.2 \cdot OV_{DD}$ | V             |
| $I_{IN}$     | Digital Input Current       | $V_{IN} = 0V$ to $OV_{DD}$ ●  | -10                 |     | 10                  | $\mu\text{A}$ |
| $C_{IN}$     | Digital Input Capacitance   |                               |                     | 5   |                     | pF            |
| $V_{OH}$     | High Level Output Voltage   | $I_O = -500\mu\text{A}$ ●     | $OV_{DD} - 0.2$     |     |                     | V             |
| $V_{OL}$     | Low Level Output Voltage    | $I_O = 500\mu\text{A}$ ●      |                     |     | 0.2                 | V             |
| $I_{OZ}$     | Hi-Z Output Leakage Current | $V_{OUT} = 0V$ to $OV_{DD}$ ● | -10                 |     | 10                  | $\mu\text{A}$ |
| $I_{SOURCE}$ | Output Source Current       | $V_{OUT} = 0V$                |                     | -10 |                     | mA            |
| $I_{SINK}$   | Output Sink Current         | $V_{OUT} = OV_{DD}$           |                     | 10  |                     | mA            |

## POWER REQUIREMENTS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL     | PARAMETER         | CONDITIONS                                                                     | MIN   | TYP  | MAX   | UNITS         |
|------------|-------------------|--------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_{DD}$   | Supply Voltage    | ●                                                                              | 2.375 | 2.5  | 2.625 | V             |
| $OV_{DD}$  | Supply Voltage    | ●                                                                              | 1.71  |      | 5.25  | V             |
| $I_{VDD}$  | Supply Current    | 1Msps Sample Rate ●                                                            |       | 5.4  | 6.3   | mA            |
| $I_{OVDD}$ | Supply Current    | 1Msps Sample Rate ( $C_L = 20\text{pF}$ ) ●                                    |       | 0.7  |       | mA            |
| $I_{PD}$   | Power Down Mode   | Conversion Done ( $I_{VDD} + I_{OVDD} + I_{REF}$ , $V_{REF} > 2V$ ) ●          |       | 0.9  | 90    | $\mu\text{A}$ |
| $I_{PD}$   | Power Down Mode   | Conversion Done ( $I_{VDD} + I_{OVDD} + I_{REF}$ , $V_{REF} > 2V$ , H-Grade) ● |       | 0.9  | 140   | $\mu\text{A}$ |
| $P_D$      | Power Dissipation | 1Msps Sample Rate ●                                                            |       | 13.5 | 15.8  | mW            |
|            | Power Down Mode   | Conversion Done ( $I_{VDD} + I_{OVDD} + I_{REF}$ , $V_{REF} > 2V$ ) ●          |       | 2.25 | 225   | $\mu\text{W}$ |
|            | Power Down Mode   | Conversion Done ( $I_{VDD} + I_{OVDD} + I_{REF}$ , $V_{REF} > 2V$ , H-Grade) ● |       | 2.25 | 315   | $\mu\text{W}$ |

## ADC TIMING CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL              | PARAMETER                          | CONDITIONS                                                     | MIN | TYP | MAX | UNITS         |
|---------------------|------------------------------------|----------------------------------------------------------------|-----|-----|-----|---------------|
| $f_{SAMPL}$         | Maximum Sampling Frequency         | ●                                                              |     |     | 1   | Msps          |
| $t_{CONV}$          | Conversion Time                    | ●                                                              | 460 |     | 527 | ns            |
| $t_{ACQ}$           | Acquisition Time                   | $t_{ACQ} = t_{CYC} - t_{CONV} - t_{BUSY\text{LH}}$ (Note 10) ● | 460 |     |     | ns            |
| $t_{CYC}$           | Time Between Conversions           | ●                                                              | 1   |     |     | $\mu\text{s}$ |
| $t_{CNVH}$          | CNV High Time                      | ●                                                              | 20  |     |     | ns            |
| $t_{BUSY\text{LH}}$ | CNV $\uparrow$ to BUSY Delay       | $C_L = 20\text{pF}$ ●                                          |     |     | 13  | ns            |
| $t_{CNVL}$          | Minimum Low Time for CNV           | (Note 11) ●                                                    | 20  |     |     | ns            |
| $t_{QUIET}$         | SCK Quiet Time from CNV $\uparrow$ | (Note 10) ●                                                    | 20  |     |     | ns            |
| $t_{SCK}$           | SCK Period                         | (Notes 11, 12) ●                                               | 10  |     |     | ns            |
| $t_{SCKH}$          | SCK High Time                      | ●                                                              | 4   |     |     | ns            |

## ADC TIMING CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL                 | PARAMETER                                        | CONDITIONS                                                            | MIN  | TYP | MAX | UNITS |
|------------------------|--------------------------------------------------|-----------------------------------------------------------------------|------|-----|-----|-------|
| $t_{\text{SCKL}}$      | SCK Low Time                                     | ●                                                                     | 4    |     |     | ns    |
| $t_{\text{SSDISCK}}$   | SDI Setup Time From SCK $\uparrow$               | (Note 11) ●                                                           | 4    |     |     | ns    |
| $t_{\text{HSDISCK}}$   | SDI Hold Time From SCK $\uparrow$                | (Note 11) ●                                                           | 1    |     |     | ns    |
| $t_{\text{SCKCH}}$     | SCK Period in Chain Mode                         | $t_{\text{SCKCH}} = t_{\text{SSDISCK}} + t_{\text{DSDO}}$ (Note 11) ● | 13.5 |     |     | ns    |
| $t_{\text{DSDO}}$      | SDO Data Valid Delay from SCK $\uparrow$         | $C_L = 20\text{pF}$ (Note 11) ●                                       |      |     | 9.5 | ns    |
| $t_{\text{HSDO}}$      | SDO Data Remains Valid Delay from SCK $\uparrow$ | $C_L = 20\text{pF}$ (Note 10) ●                                       | 1    |     |     | ns    |
| $t_{\text{DSDOBUSYL}}$ | SDO Data Valid Delay from BUSY $\downarrow$      | $C_L = 20\text{pF}$ (Note 10) ●                                       |      |     | 5   | ns    |
| $t_{\text{EN}}$        | Bus Enable Time After RDL $\downarrow$           | (Note 11) ●                                                           |      |     | 16  | ns    |
| $t_{\text{DIS}}$       | Bus Relinquish Time After RDL $\uparrow$         | (Note 11) ●                                                           |      |     | 13  | ns    |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may effect device reliability and lifetime.

**Note 2:** All voltage values are with respect to ground.

**Note 3:** When these pin voltages are taken below ground or above  $\text{REF}$  or  $\text{OV}_{\text{DD}}$ , they will be clamped by internal diodes. This product can handle input currents up to 100mA below ground or above  $\text{REF}$  or  $\text{OV}_{\text{DD}}$  without latch-up.

**Note 4:**  $V_{\text{DD}} = 2.5\text{V}$ ,  $\text{OV}_{\text{DD}} = 2.5\text{V}$ ,  $\text{REF} = 5\text{V}$ ,  $f_{\text{SMPL}} = 1\text{MHz}$ .

**Note 5:** Recommended operating conditions.

**Note 6:** Integral nonlinearity is defined as the deviation of a code from a straight line passing through the actual endpoints of the transfer curve. The deviation is measured from the center of the quantization band.

**Note 7:** Zero-scale error is the offset voltage measured from 0.5LSB when the output code flickers between 00 0000 0000 0000 and 00 0000 0000 0001. Full-scale error is the deviation of the last code transition from ideal and includes the effect of offset error.

**Note 8:** All specifications in dB are referred to a full-scale 5V input with a 5V reference voltage.

**Note 9:**  $f_{\text{SMPL}} = 1\text{MHz}$ ,  $I_{\text{REF}}$  varies proportionately with sample rate.

**Note 10:** Guaranteed by design, not subject to test.

**Note 11:** Parameter tested and guaranteed at  $\text{OV}_{\text{DD}} = 1.71\text{V}$ ,  $\text{OV}_{\text{DD}} = 2.5\text{V}$  and  $\text{OV}_{\text{DD}} = 5.25\text{V}$ .

**Note 12:**  $t_{\text{SCK}}$  of 10ns maximum allows a shift clock frequency up to 100MHz for rising capture.










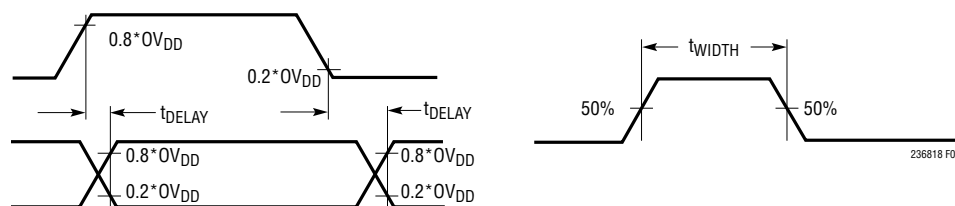


Figure 1. Voltage Levels for Timing Specifications

## TYPICAL PERFORMANCE CHARACTERISTICS

$f_{\text{SAMPL}} = 1\text{Mps}$ , unless otherwise noted.

$T_A = 25^\circ\text{C}$ ,  $V_{\text{DD}} = 2.5\text{V}$ ,  $0V_{\text{DD}} = 2.5\text{V}$ ,  $\text{REF} = 5\text{V}$ ,

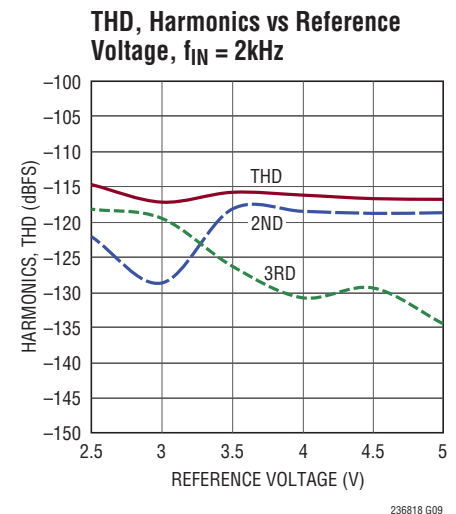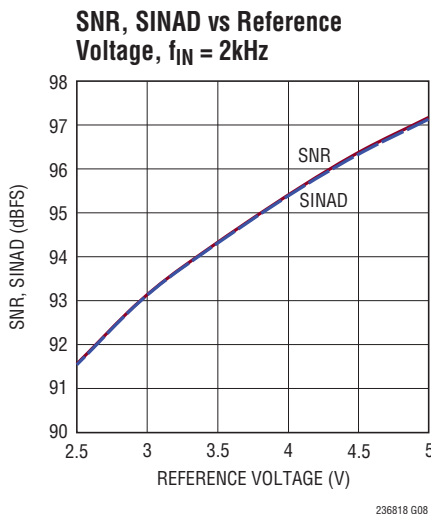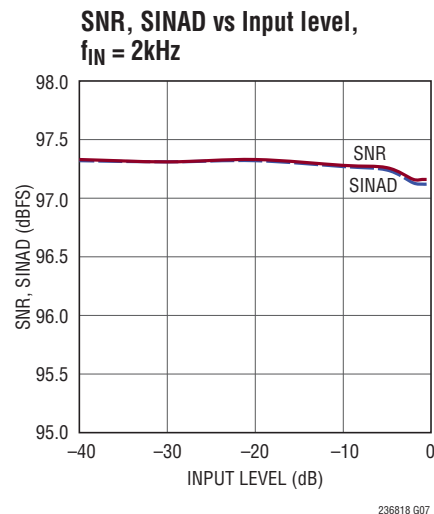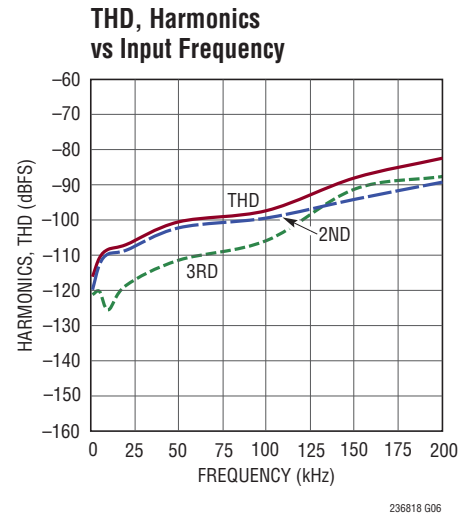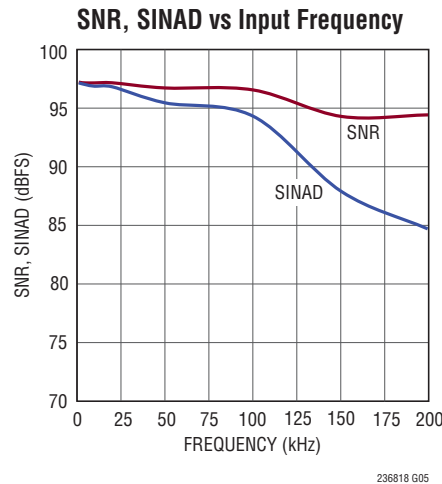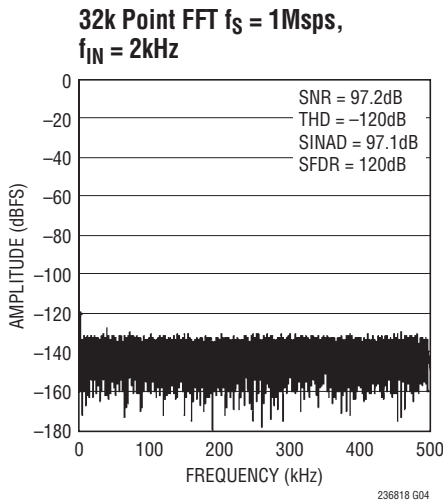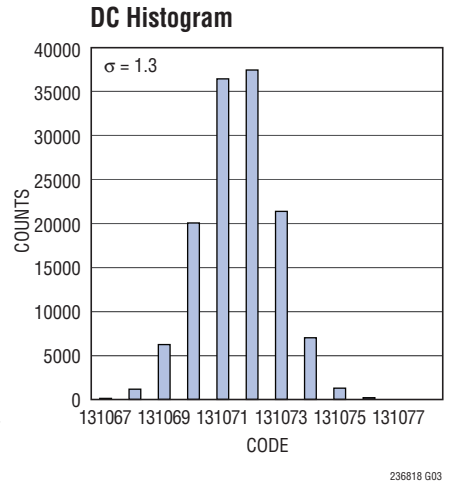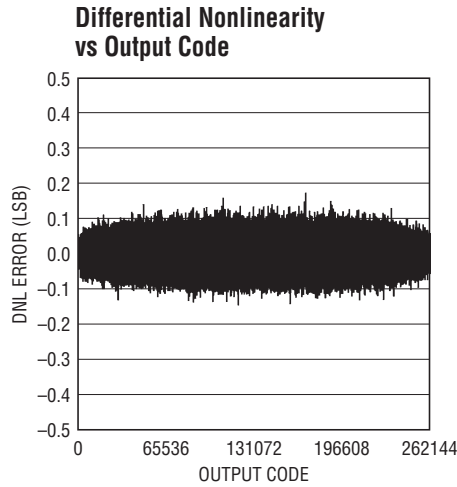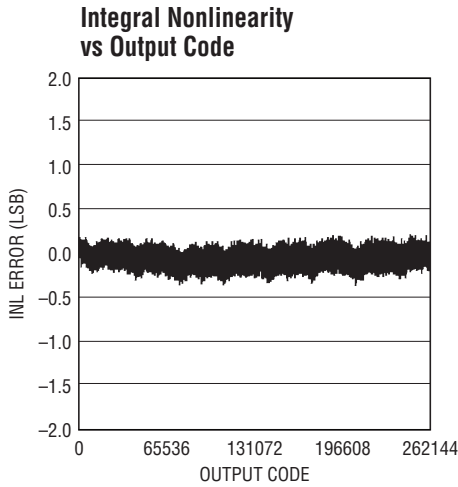


# TYPICAL PERFORMANCE CHARACTERISTICS


$f_{\text{SAMPL}} = 1\text{Msps}$ , unless otherwise noted.

$T_A = 25^\circ\text{C}$ ,  $V_{\text{DD}} = 2.5\text{V}$ ,  $\text{OV}_{\text{DD}} = 2.5\text{V}$ ,  $\text{REF} = 5\text{V}$ ,


**SNR, SINAD vs Temperature,**  
 $f_{\text{IN}} = 2\text{kHz}$

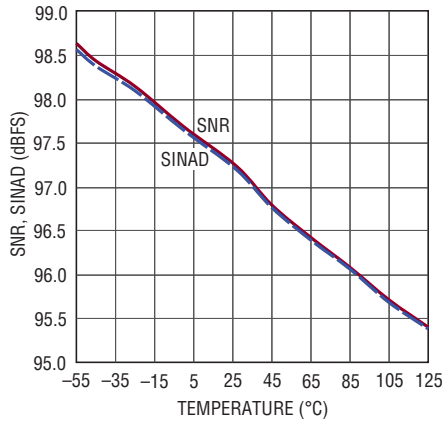


**THD, Harmonics vs Temperature,**  
 $f_{\text{IN}} = 2\text{kHz}$

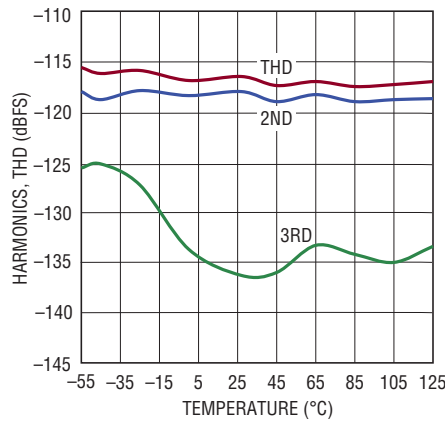


**INL/DNL vs Temperature**

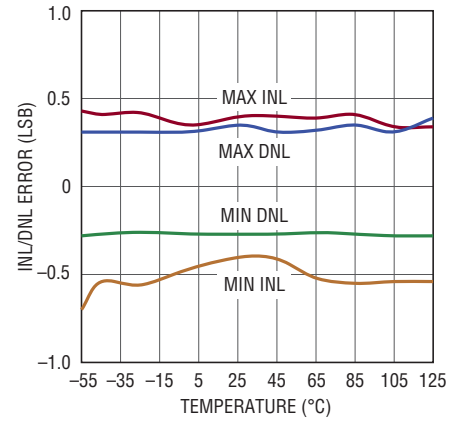


**Full-Scale Error vs Temperature**

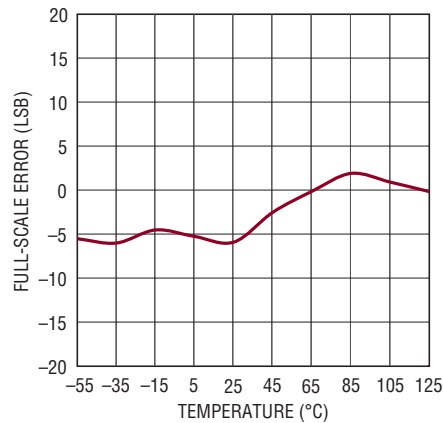


**Offset Error vs Temperature**

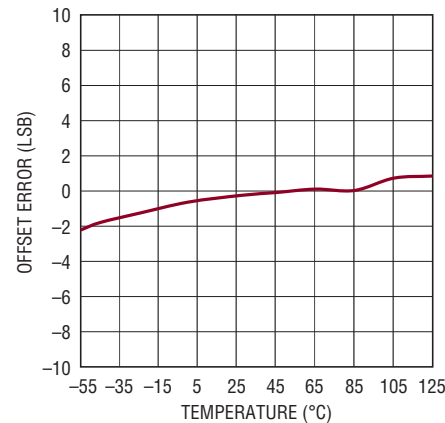


**Supply Current vs Temperature**

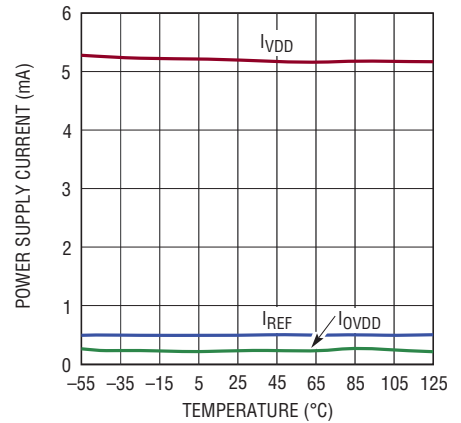


**Shutdown Current vs Temperature**

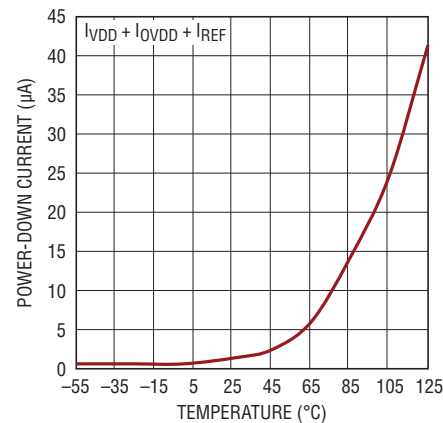

**CMRR vs Input Frequency**

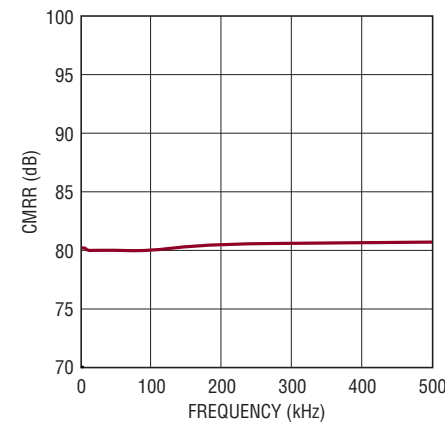

**Reference Current vs Reference Voltage**

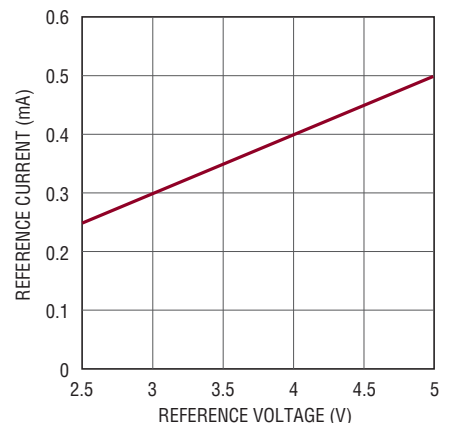

## PIN FUNCTIONS

**CHAIN (Pin 1):** Chain Mode Selector Pin. When low, the LTC2368-18 operates in normal mode and the RDL/SDI input pin functions to enable or disable SDO. When high, the LTC2368-18 operates in chain mode and the RDL/SDI pin functions as SDI, the daisy-chain serial data input. Logic levels are determined by  $OV_{DD}$ .

**$V_{DD}$  (Pin 2):** 2.5V Power Supply. The range of  $V_{DD}$  is 2.375V to 2.625V. Bypass  $V_{DD}$  to GND with a 10 $\mu$ F ceramic capacitor.

**GND (Pins 3, 6, 10 and 16):** Ground.

**$IN^+$  (Pin 4):** Analog Input.  $IN^+$  operates differential with respect to  $IN^-$  with an  $IN^+ - IN^-$  range of 0V to  $V_{REF}$ .

**$IN^-$  (Pin 5):** Analog Ground Sense.  $IN^-$  has an input range of  $\pm 100$ mV with respect to GND and must be tied to the ground plane or a remote ground sense.

**REF (Pins 7, 8):** Reference Inputs. The range of REF is 2.5V to 5.1V. This pin is referred to the GND pin and should be decoupled closely to the pin with a 47 $\mu$ F ceramic capacitor (X5R, 0805 size).

**CNV (Pin 9):** Convert Input. A rising edge on this input powers up the part and initiates a new conversion. Logic levels are determined by  $OV_{DD}$ .

**BUSY (Pin 11):** BUSY Indicator. Goes high at the start of a new conversion and returns low when the conversion has finished. Logic levels are determined by  $OV_{DD}$ .

**RDL/SDI (Pin 12):** When CHAIN is low, the part is in normal mode and the pin is treated as a bus enabling input. When CHAIN is high, the part is in chain mode and the pin is treated as a serial data input pin where data from another ADC in the daisy chain is input. Logic levels are determined by  $OV_{DD}$ .


**SCK (Pin 13):** Serial Data Clock Input. When SDO is enabled, the conversion result or daisy-chain data from another ADC is shifted out on the rising edges of this clock MSB first. Logic levels are determined by  $OV_{DD}$ .

**SDO (Pin 14):** Serial Data Output. The conversion result or daisy-chain data is output on this pin on each rising edge of SCK MSB first. The output data is in straight binary format. Logic levels are determined by  $OV_{DD}$ .

**$OV_{DD}$  (Pin 15):** I/O Interface Digital Power. The range of  $OV_{DD}$  is 1.71V to 5.25V. This supply is nominally set to the same supply as the host interface (1.8V, 2.5V, 3.3V, or 5V). Bypass  $OV_{DD}$  to GND with a 0.1 $\mu$ F capacitor.


**GND (Exposed Pad Pin 17, DFN Package Only):** Ground. Exposed pad must be soldered directly to the ground plane.

## FUNCTIONAL BLOCK DIAGRAM

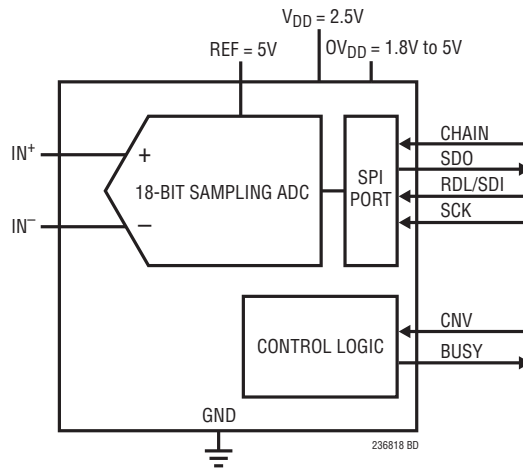

## TIMING DIAGRAM

### Conversion Timing Using the Serial Interface

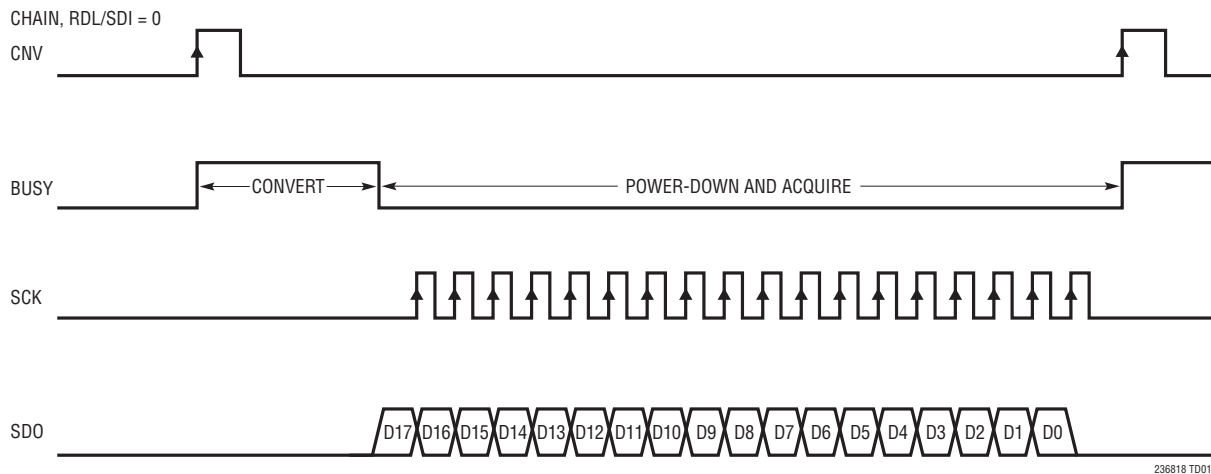

## APPLICATIONS INFORMATION

### OVERVIEW

The LTC2368-18 is a low noise, low power, high speed 18-bit successive approximation register (SAR) ADC. Operating from a single 2.5V supply, the LTC2368-18 supports a 0V to  $V_{REF}$  pseudo-differential unipolar input range with  $V_{REF}$  ranging from 2.5V to 5.1V, making it ideal for high performance applications which require a wide dynamic range. The LTC2368-18 achieves  $\pm 2.5$ LSB INL max, no missing codes at 18 bits and 97dB SNR.

Fast 1Msps throughput with no cycle latency makes the LTC2368-18 ideally suited for a wide variety of high speed applications. An internal oscillator sets the conversion time, easing external timing considerations. The LTC2368-18 dissipates only 13.5mW at 1Msps, while an auto power-down feature is provided to further reduce power dissipation during inactive periods.

### CONVERTER OPERATION

The LTC2368-18 operates in two phases. During the acquisition phase, the charge redistribution capacitor D/A converter (CDAC) is connected to the  $IN^+$  and  $IN^-$  pins to sample the pseudo-differential analog input voltage. A rising edge on the CNV pin initiates a conversion. During the conversion phase, the 18-bit CDAC is sequenced through a successive approximation algorithm, effectively comparing the sampled input with binary-weighted fractions of the reference voltage (e.g.  $V_{REF}/2$ ,  $V_{REF}/4$  ...  $V_{REF}/262144$ ) using the differential comparator. At the end of conversion, the CDAC output approximates the sampled analog input. The ADC control logic then prepares the 18-bit digital output code for serial transfer.

### TRANSFER FUNCTION

The LTC2368-18 digitizes the full-scale voltage of REF into  $2^{18}$  levels, resulting in an LSB size of 19 $\mu$ V with REF = 5V. The ideal transfer function is shown in Figure 2. The output data is in straight binary format.

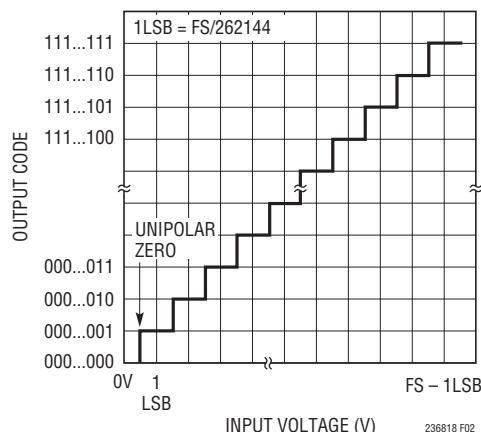


Figure 2. LTC2368-18 Transfer Function

### ANALOG INPUT

The analog inputs of the LTC2368-18 are pseudo-differential in order to reduce any unwanted signal that is common to both inputs. The analog inputs can be modeled by the equivalent circuit shown in Figure 3. The diodes at the input provide ESD protection. In the acquisition phase, each input sees approximately 45pF ( $C_{IN}$ ) from the sampling CDAC in series with 40 $\Omega$  ( $R_{ON}$ ) from the on-resistance of the sampling switch. The  $IN^+$  input draws a current spike while charging the  $C_{IN}$  capacitor during acquisition. During conversion, the analog inputs draw only a small leakage current.

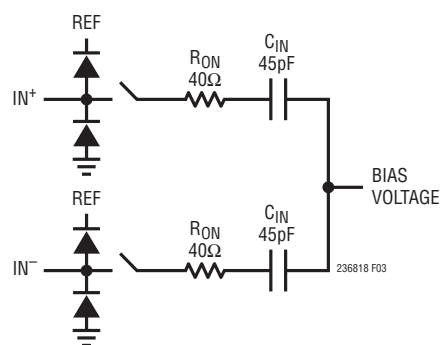


Figure 3. The Equivalent Circuit for the Differential Analog Input of the LTC2368-18

## APPLICATIONS INFORMATION

### INPUT DRIVE CIRCUITS

A low impedance source can directly drive the high impedance input of the LTC2368-18 without gain error. A high impedance source should be buffered to minimize settling time during acquisition and to optimize the distortion performance of the ADC. Minimizing settling time is important even for DC inputs, because the ADC input draws a current spike when entering acquisition.

For best performance, a buffer amplifier should be used to drive the analog input of the LTC2368-18. The amplifier provides low output impedance, which produces fast settling of the analog signal during the acquisition phase. It also provides isolation between the signal source and the current spike the ADC input draws.

### Input Filtering

The noise and distortion of the buffer amplifier and signal source must be considered since they add to the ADC noise and distortion. Noisy input signals should be filtered prior to the buffer amplifier input with an appropriate filter to minimize noise. The simple 1-pole RC lowpass filter (LPF1) shown in Figure 4 is sufficient for many applications.

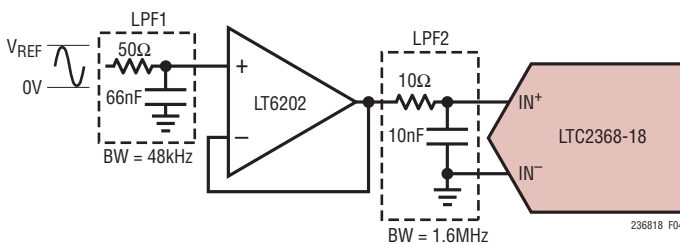


Figure 4. Input Signal Chain

Another filter network consisting of LPF2 should be used between the buffer and ADC input to both minimize the noise contribution of the buffer and to help minimize disturbances reflected into the buffer from sampling transients. Long RC time constants at the analog inputs will slow down the settling of the analog inputs. Therefore, LPF2 requires a wider bandwidth than LPF1. A buffer amplifier with a low noise density must be selected to minimize degradation of the SNR.

High quality capacitors and resistors should be used in the RC filters since these components can add distortion. NPO and silver mica type dielectric capacitors have excellent linearity. Carbon surface mount resistors can generate distortion from self heating and from damage that may occur during soldering. Metal film surface mount resistors are much less susceptible to both problems.


### Pseudo-Differential Unipolar Inputs

For most applications, we recommend the low power LT6202 ADC driver to drive the LTC2368-18. With a low noise density of  $1.9\text{nV}/\sqrt{\text{Hz}}$  and a low supply current of 3mA, the LT6202 is flexible and may be configured to convert signals of various amplitudes to the 0V to 5V input range of the LTC2368-18.


To achieve the full distortion performance of the LTC2368-18, a low distortion single-ended signal source driven through the LT6202 configured as a unity-gain buffer as shown in Figure 4 can be used to get the full data sheet THD specification of  $-120\text{dB}$ .

The LT6202 can also be used to buffer and convert large true bipolar signals which swing below ground to the 0V to 5V input range of the LTC2368-18. Figure 5a shows the LT6202 being used to convert a  $\pm 10\text{V}$  true bipolar signal for use by the LTC2368-18. In this case, the LT6202 is configured as an inverting amplifier stage, which acts to attenuate and level shift the input signal to the 0V to 5V input range of the LTC2368-18. In the inverting configuration, the single-ended input signal source no longer directly drives a high impedance input. The input impedance is instead set by resistor  $R_{IN}$ .  $R_{IN}$  must be chosen carefully based on the source impedance of the signal source. Higher values of  $R_{IN}$  tend to degrade both the noise and distortion of the LT6202 and LTC2368-18 as a system. Table 1 shows the resulting SNR and THD for several values of  $R_{IN}$ ,  $R_1$ ,  $R_2$ ,  $R_3$  and  $R_4$  in this configuration. Figure 5b shows the resulting FFT when using the LT6202 as shown in Figure 5a.

# APPLICATIONS INFORMATION

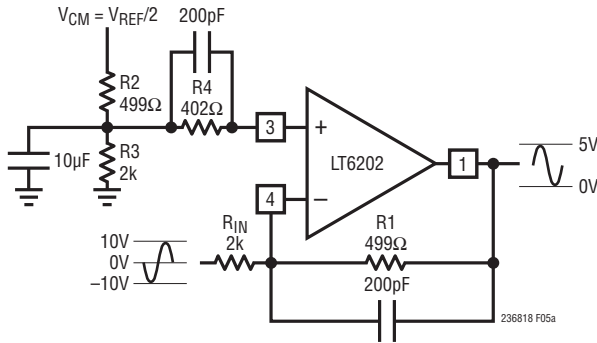

**Figure 5a. LT6202 Converting a  $\pm 10\text{V}$  Bipolar Signal to a 0V to 5V Input Signal**

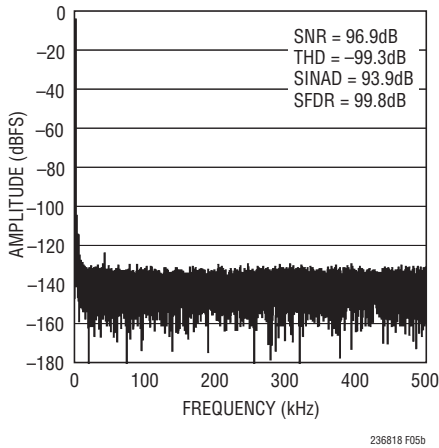

**Figure 5b. 32k Point FFT Plot with  $f_{IN} = 2\text{kHz}$  for Circuit Shown in Figure 5a**

**Table 1. SNR, THD vs  $R_{IN}$  for  $\pm 10\text{V}$  Input Signal**


| $R_{IN}$<br>( $\Omega$ ) | $R_1$<br>( $\Omega$ ) | $R_2$<br>( $\Omega$ ) | $R_3$<br>( $\Omega$ ) | $R_4$<br>( $\Omega$ ) | SNR<br>(dB) | THD<br>(dB) |
|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-------------|-------------|
| 2k                       | 499                   | 499                   | 2k                    | 402                   | 96.9        | -99.3       |
| 10k                      | 2.49k                 | 2.49k                 | 10k                   | 2k                    | 96.8        | -94         |
| 100k                     | 24.9k                 | 24.9k                 | 100k                  | 20k                   | 94.8        | -93.8       |

## ADC REFERENCE

The LTC2368-18 requires an external reference to define its input range. A low noise, low temperature drift reference is critical to achieving the full datasheet performance of the ADC. Linear Technology offers a portfolio of high performance references designed to meet the needs of many applications. With its small size, low power and high accuracy, the LTC6655-5 is particularly well suited for use with the LTC2368-18. The LTC6655-5 offers 0.025% (max) initial accuracy and 2ppm/°C (max) temperature coefficient for high precision applications. The LTC6655-5 is fully specified over the H-grade temperature range and complements the extended temperature operation of the LTC2368-18 up to 125°C. We recommend bypassing the LTC6655-5 with a 47 $\mu\text{F}$  ceramic capacitor (X5R, 0805 size) close to the REF pin.

The REF pin of the LTC2368-18 draws charge ( $Q_{CONV}$ ) from the 47 $\mu\text{F}$  bypass capacitor during each conversion cycle. The reference replenishes this charge with a DC current,  $I_{REF} = Q_{CONV}/t_{CYC}$ . The DC current draw of the REF pin,  $I_{REF}$ , depends on the sampling rate and output code. If the LTC2368-18 is used to continuously sample a signal at a constant rate, the LTC6655-5 will keep the deviation of the reference voltage over the entire code span to less than 0.5LSBs.

When idling, the REF pin on the LTC2368-18 draws only a small leakage current ( $< 1\mu\text{A}$ ). In applications where a burst of samples is taken after idling for long periods as shown in Figure 6,  $I_{REF}$  quickly goes from approximately 0 $\mu\text{A}$  to a maximum of 0.7mA at 1Msps. This step in DC current draw triggers a transient response in the reference that must be considered since any deviation in the reference output voltage will affect the accuracy of the output

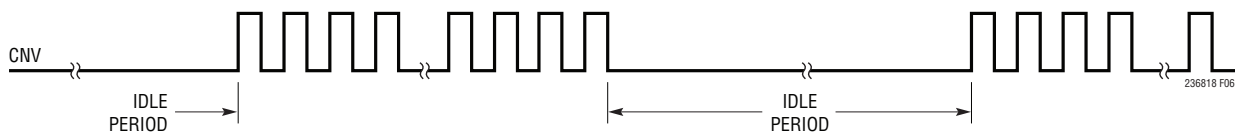


**Figure 6. CNV Waveform Showing Burst Sampling**

## APPLICATIONS INFORMATION

code. In applications where the transient response of the reference is important, the fast settling LTC6655-5 reference is also recommended.

In applications where power management is critical and the external reference may be powered down, it is recommended that REF is kept greater than 2V in order to guarantee a maximum shutdown current of 140μA. In such applications, a Schottky diode can be placed between REF and V<sub>DD</sub>, as shown in Figure 7.



**Figure 7. A Schottky Diode Between REF and V<sub>DD</sub> Maintains REF > 2V for Applications Where the Reference May Be Powered Down**

## DYNAMIC PERFORMANCE


Fast Fourier Transform (FFT) techniques are used to test the ADC's frequency response, distortion and noise at the rated throughput. By applying a low distortion sine wave and analyzing the digital output using an FFT algorithm, the ADC's spectral content can be examined for frequencies outside the fundamental. The LTC2368-18 provides guaranteed tested limits for both AC distortion and noise measurements.

### Signal-to-Noise and Distortion Ratio (SINAD)

The signal-to-noise and distortion ratio (SINAD) is the ratio between the RMS amplitude of the fundamental input frequency and the RMS amplitude of all other frequency components at the A/D output. The output is band-limited to frequencies from above DC and below half the sampling frequency. Figure 8 shows that the LTC2368-18 achieves a typical SINAD of 97.1dB at a 1MHz sampling rate with a 2kHz input.

### Signal-to-Noise Ratio (SNR)

The signal-to-noise ratio (SNR) is the ratio between the RMS amplitude of the fundamental input frequency and

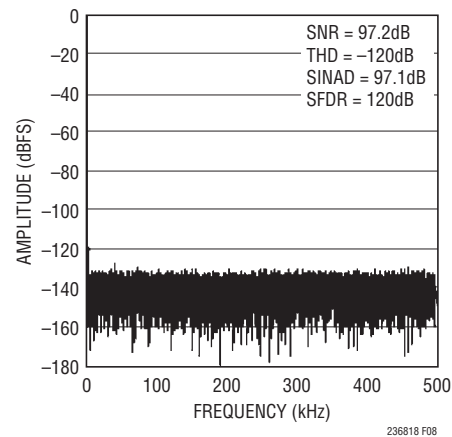

**Figure 8. 32k Point FFT with f<sub>IN</sub> = 2kHz of the LTC2368-18**

the RMS amplitude of all other frequency components except the first five harmonics and DC. Figure 8 shows that the LTC2368-18 achieves a typical SNR of 97.2dB at a 1MHz sampling rate with a 2kHz input.

### Total Harmonic Distortion (THD)

Total Harmonic Distortion (THD) is the ratio of the RMS sum of all harmonics of the input signal to the fundamental itself. The out-of-band harmonics alias into the frequency band between DC and half the sampling frequency (f<sub>SAMPL</sub>/2). THD is expressed as:

$$THD = 20 \log \frac{\sqrt{V_2^2 + V_3^2 + V_4^2 + \dots + V_N^2}}{V_1}$$

where V<sub>1</sub> is the RMS amplitude of the fundamental frequency and V<sub>2</sub> through V<sub>N</sub> are the amplitudes of the second through Nth harmonics.

## POWER CONSIDERATIONS

The LTC2368-18 provides two power supply pins: the 2.5V power supply (V<sub>DD</sub>), and the digital input/output interface power supply (OV<sub>DD</sub>). The flexible OV<sub>DD</sub> supply allows the LTC2368-18 to communicate with any digital logic operating between 1.8V and 5V, including 2.5V and 3.3V systems.

## APPLICATIONS INFORMATION

### Power Supply Sequencing

The LTC2368-18 does not have any specific power supply sequencing requirements. Care should be taken to adhere to the maximum voltage relationships described in the Absolute Maximum Ratings section. The LTC2368-18 has a power-on-reset (POR) circuit that will reset the LTC2368-18 at initial power-up or whenever the power supply voltage drops below 1V. Once the supply voltage re-enters the nominal supply voltage range, the POR will reinitialize the ADC. No conversions should be initiated until 20 $\mu$ s after a POR event to ensure the reinitialization period has ended. Any conversions initiated before this time will produce invalid results.

### TIMING AND CONTROL

#### CNV Timing

The LTC2368-18 conversion is controlled by CNV. A rising edge on CNV will start a conversion and power up the LTC2368-18. Once a conversion has been initiated, it cannot be restarted until the conversion is complete. For optimum performance, CNV should be driven by a clean low jitter signal. Converter status is indicated by the BUSY output which remains high while the conversion is in progress. To ensure that no errors occur in the digitized results, any additional transitions on CNV should occur within 40ns from the start of the conversion or after the conversion has been completed. Once the conversion has completed, the LTC2368-18 powers down and begins acquiring the input signal.

#### Internal Conversion Clock

The LTC2368-18 has an internal clock that is trimmed to achieve a maximum conversion time of 527ns. With a minimum acquisition time of 460ns, throughput performance of 1MSPS is guaranteed without any external adjustments.

#### Auto Power-Down

The LTC2368-18 automatically powers down after a conversion has been completed and powers up once a new conversion is initiated on the rising edge of CNV. During power down, data from the last conversion can be clocked out. To minimize power dissipation during

power down, disable SDO and turn off SCK. The auto power-down feature will reduce the power dissipation of the LTC2368-18 as the sampling frequency is reduced. Since power is consumed only during a conversion, the LTC2368-18 remains powered down for a larger fraction of the conversion cycle ( $t_{CYC}$ ) at lower sample rates, thereby reducing the average power dissipation which scales with the sampling rate as shown in Figure 9.

### DIGITAL INTERFACE

The LTC2368-18 has a serial digital interface. The flexible  $OV_{DD}$  supply allows the LTC2368-18 to communicate with any digital logic operating between 1.8V and 5V, including 2.5V and 3.3V systems.

The serial output data is clocked out on the SDO pin when an external clock is applied to the SCK pin if SDO is enabled. Clocking out the data after the conversion will yield the best performance. With a shift clock frequency of at least 100MHz, a 1MSPS throughput is still achieved. The serial output data changes state on the rising edge of SCK and can be captured on the falling edge or next rising edge of SCK. D17 remains valid till the first rising edge of SCK.

The serial interface on the LTC2368-18 is simple and straightforward to use. The following sections describe the operation of the LTC2368-18. Several modes are provided depending on whether a single or multiple ADCs share the SPI bus or are daisy chained.

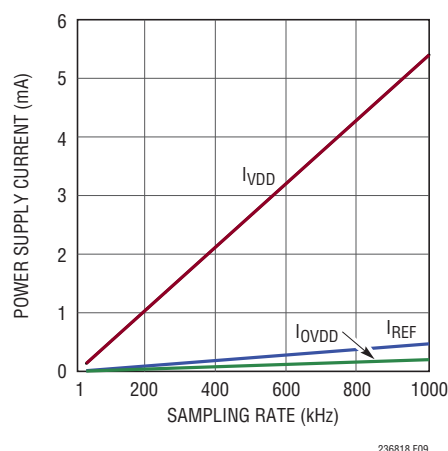


Figure 9. Power Supply Current of the LTC2368-18 Versus Sampling Rate

## TIMING DIAGRAMS

### Normal Mode, Single Device

When CHAIN = 0, the LTC2368-18 operates in normal mode. In normal mode, RDL/SDI enables or disables the serial data output pin SDO. If RDL/SDI is high, SDO is in high impedance. If RDL/SDI is low, SDO is driven.

Figure 10 shows a single LTC2368-18 operated in normal mode with CHAIN and RDL/SDI tied to ground. With RDL/SDI grounded, SDO is enabled and the MSB(D17) of the new conversion data is available at the falling edge of BUSY. This is the simplest way to operate the LTC2368-18.

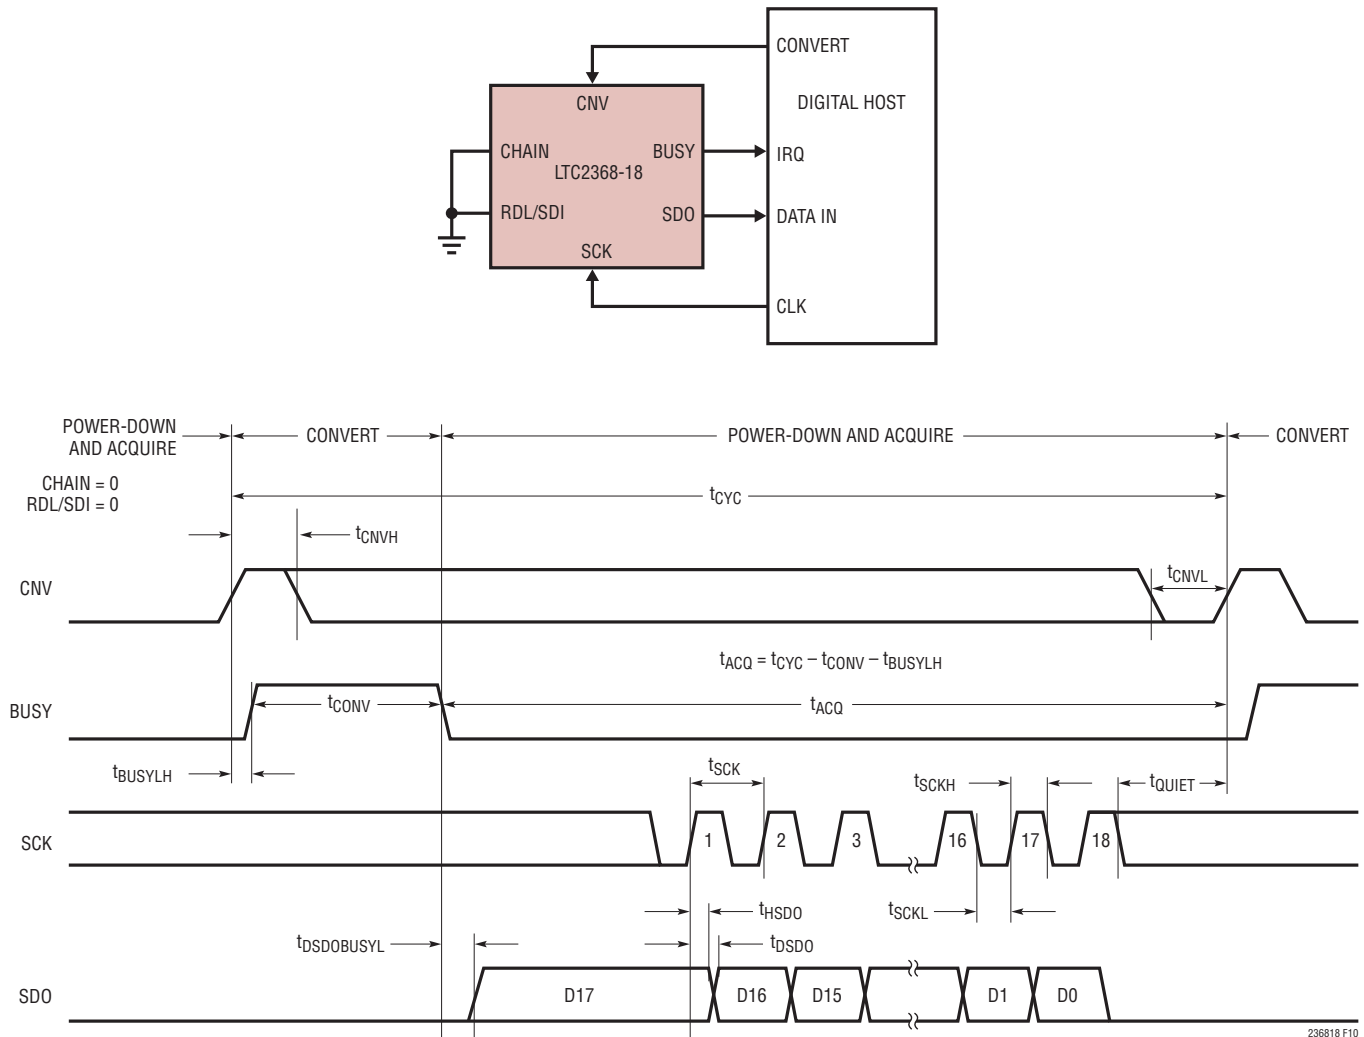


Figure 10. Using a Single LTC2368-18 in Normal Mode

## TIMING DIAGRAMS

### Normal Mode, Multiple Devices

Figure 11 shows multiple LTC2368-18 devices operating in normal mode (CHAIN = 0) sharing CNV, SCK and SDO. By sharing CNV, SCK and SDO, the number of required signals to operate multiple ADCs in parallel is reduced. Since SDO is shared, the RDL/SDI input of each ADC must

be used to allow only one LTC2368-18 to drive SDO at a time in order to avoid bus conflicts. As shown in Figure 11, the RDL/SDI inputs idle high and are individually brought low to read data out of each device between conversions. When RDL/SDI is brought low, the MSB of the selected device is output onto SDO.

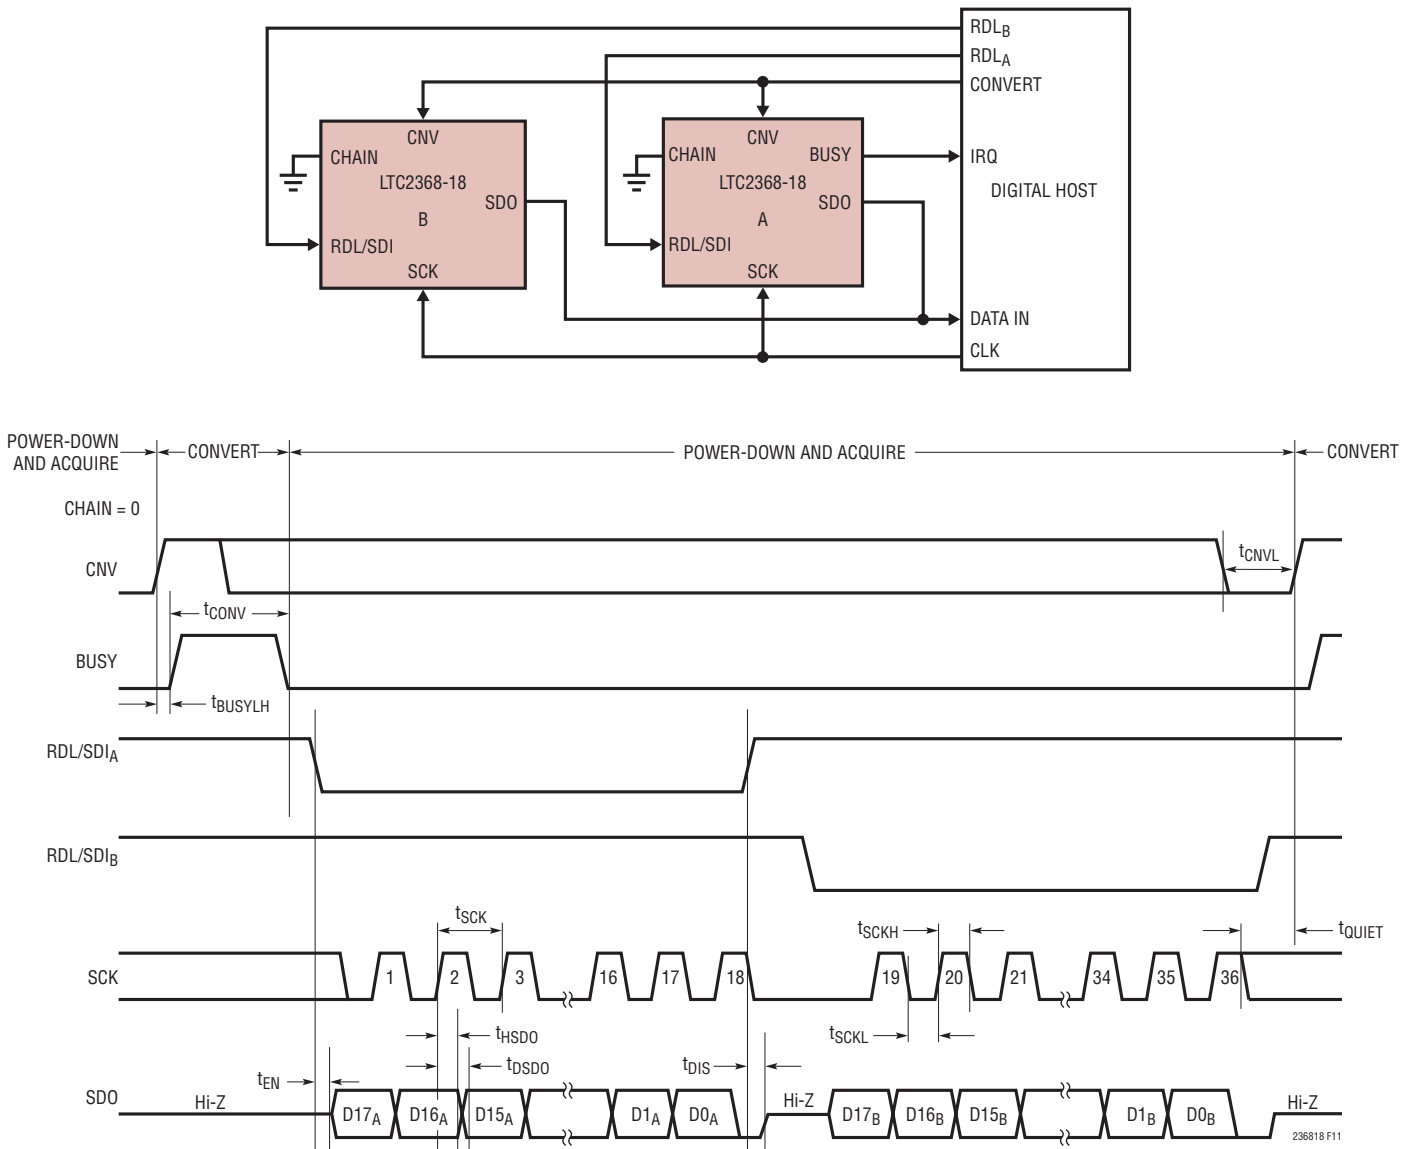


Figure 11. Normal Mode With Multiple Devices Sharing CNV, SCK and SDO

## TIMING DIAGRAMS

### Chain Mode, Multiple Devices

When  $CHAIN = OV_{DD}$ , the LTC2368-18 operates in chain mode. In chain mode, SDO is always enabled and RDL/SDI serves as the serial data input pin (SDI) where daisy-chain data output from another ADC can be input.

This is useful for applications where hardware constraints may limit the number of lines needed to interface to a large

number of converters. Figure 12 shows an example with two daisy-chained devices. The MSB of converter A will appear at SDO of converter B after 18 SCK cycles. The MSB of converter A is clocked in at the SDI/RDL pin of converter B on the rising edge of the first SCK.

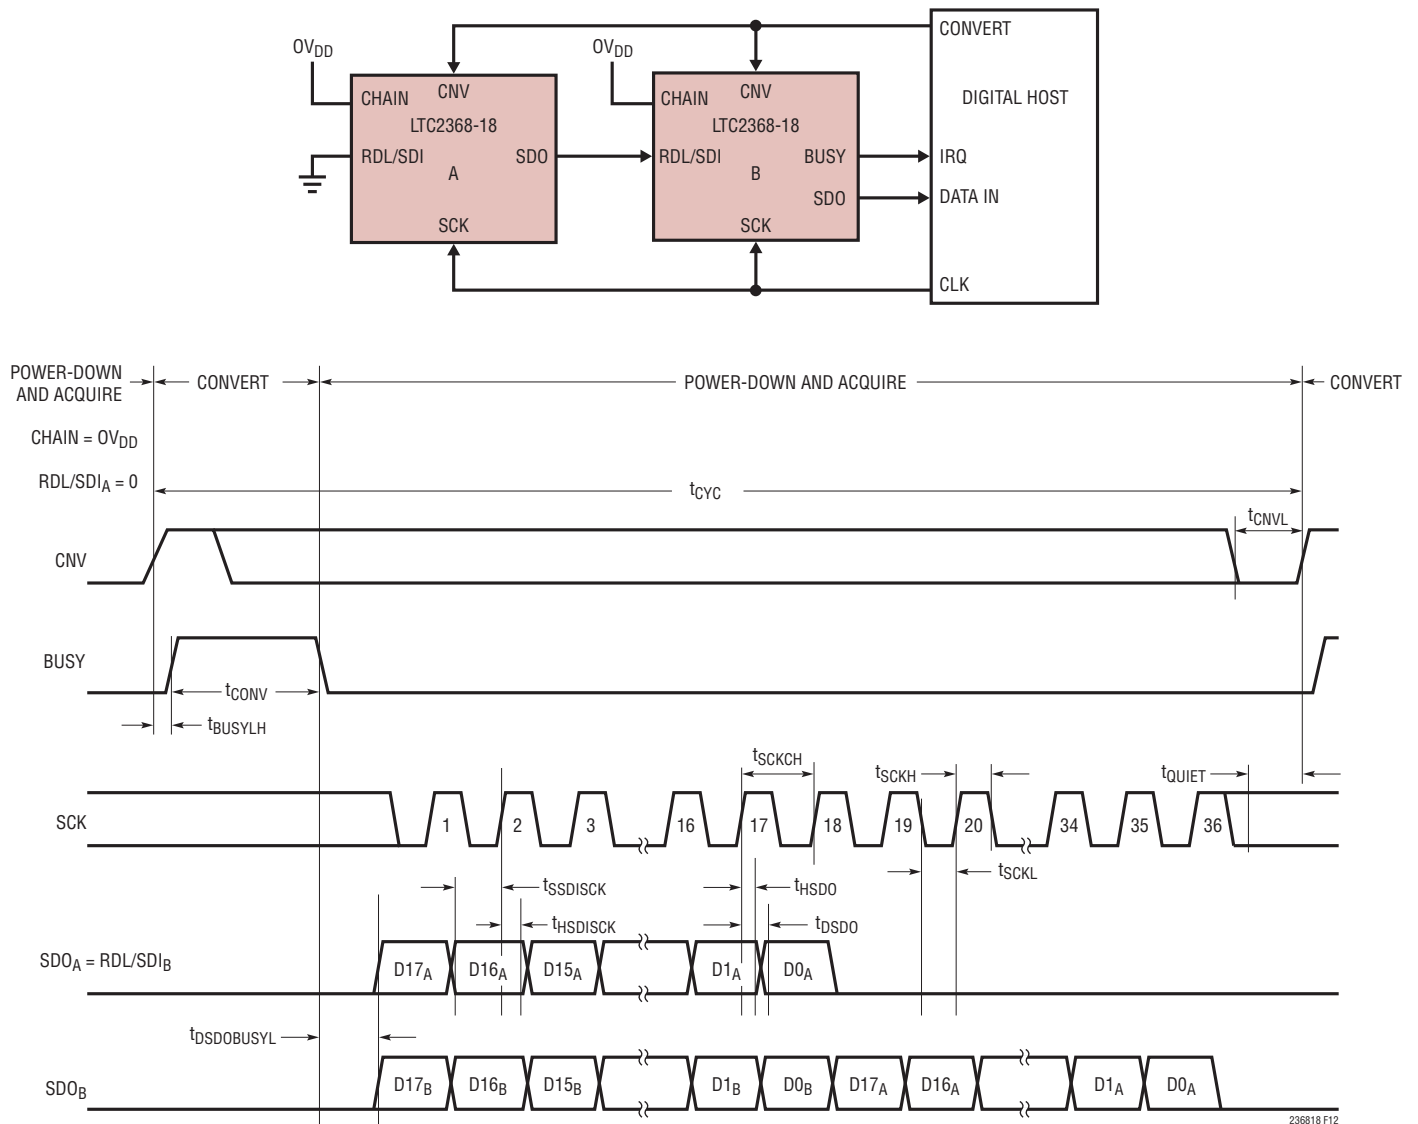


Figure 12. Chain Mode Timing Diagram


## BOARD LAYOUT

To obtain the best performance from the LTC2368-18 a printed circuit board is recommended. Layout for the printed circuit board (PCB) should ensure the digital and analog signal lines are separated as much as possible. In particular, care should be taken not to run any digital clocks or signals alongside analog signals or underneath the ADC.

### Recommended Layout


The following is an example of a recommended PCB layout. A single solid ground plane is used. Bypass capacitors to the supplies are placed as close as possible to the supply pins. Low impedance common returns for these bypass capacitors are essential to the low noise operation of the ADC. The analog input traces are screened by ground. For more details and information refer to DC1813A, the evaluation kit for the LTC2368-18.

Partial Top Silkscreen

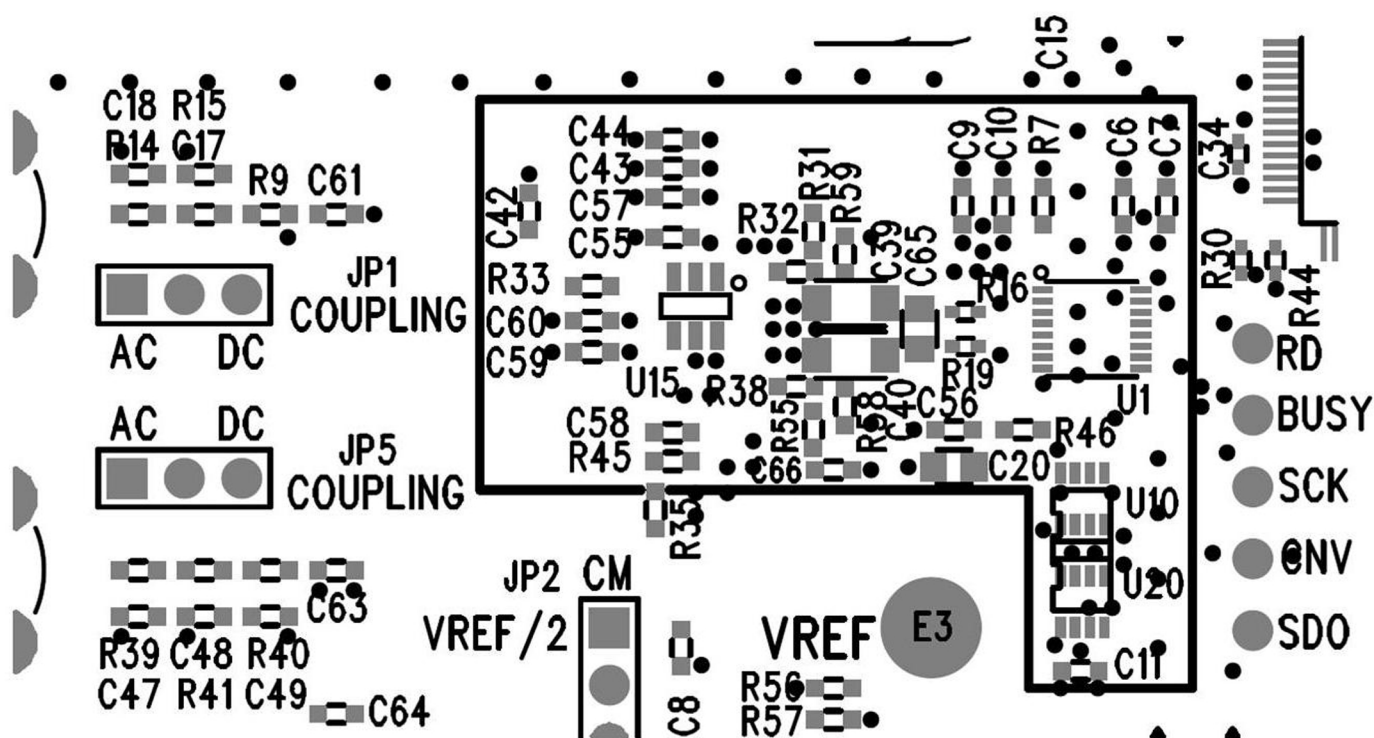


## BOARD LAYOUT

Partial Layer 1 Component Side

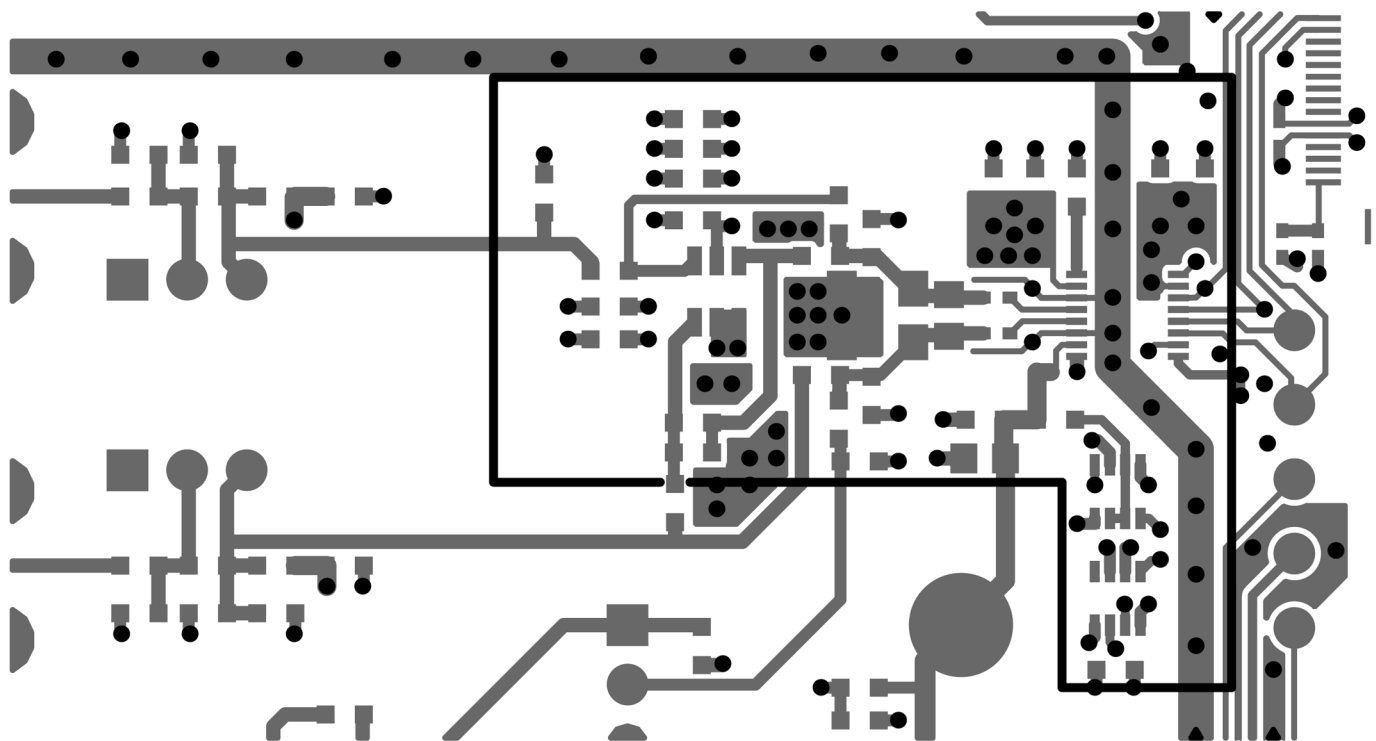


Partial Layer 2 Ground Plane

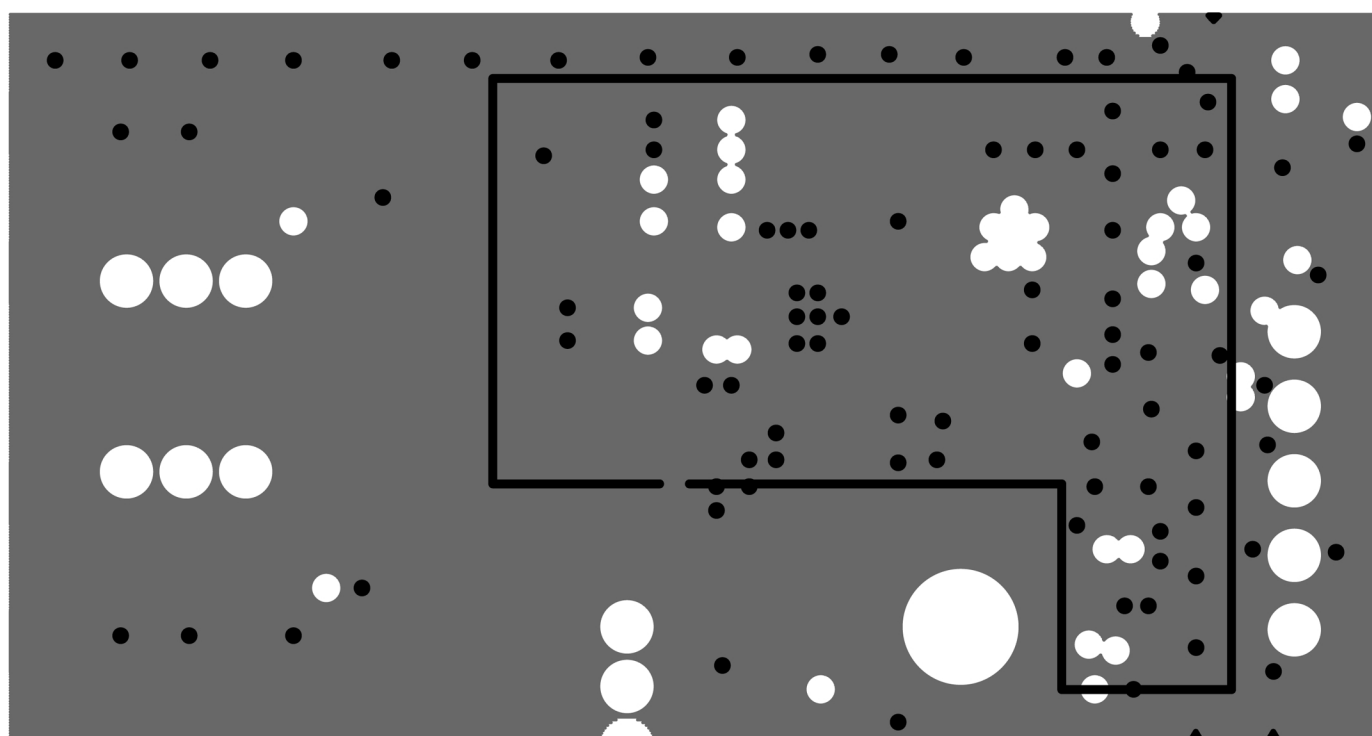


236818f

BOARD LAYOUT

Partial Layer 3 PWR Plane

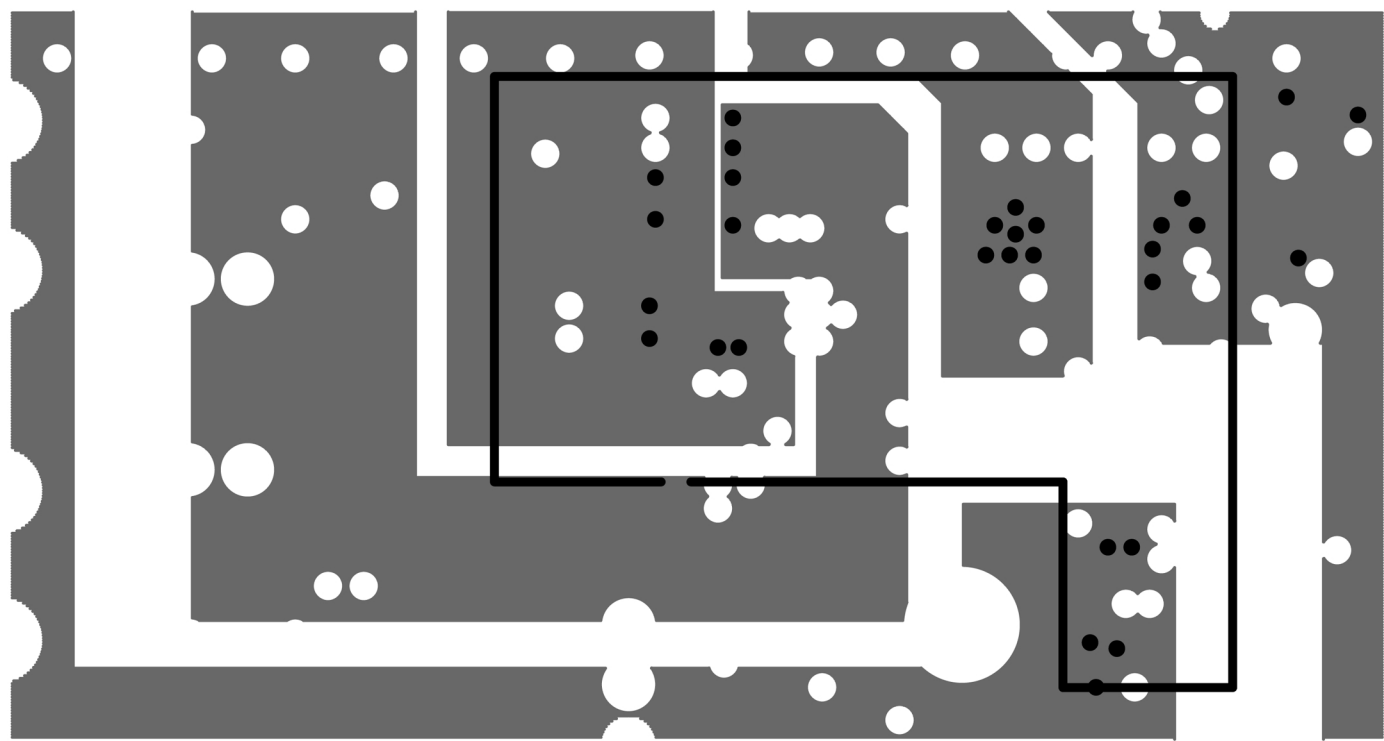

Partial Layer 4 Bottom Layer

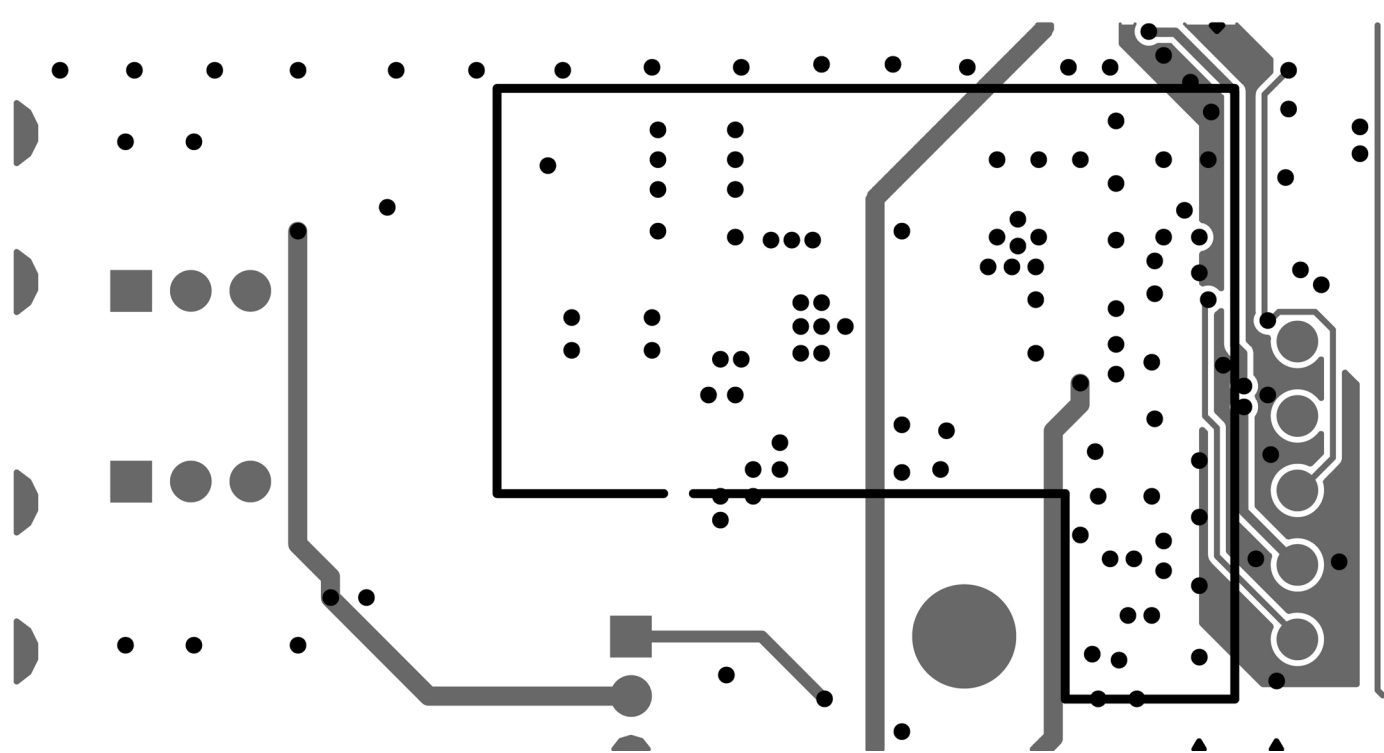






## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

**DE Package**  
**16-Lead Plastic DFN (4mm × 3mm)**  
 (Reference LTC DWG # 05-08-1732 Rev 0)

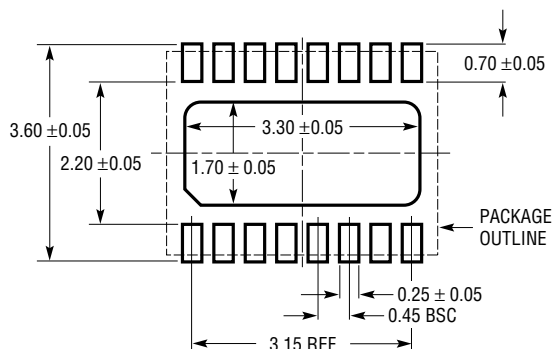

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS  
 APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

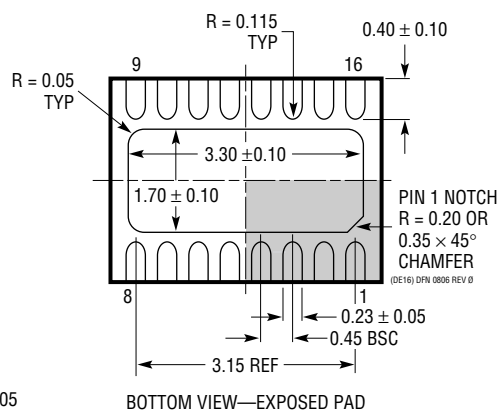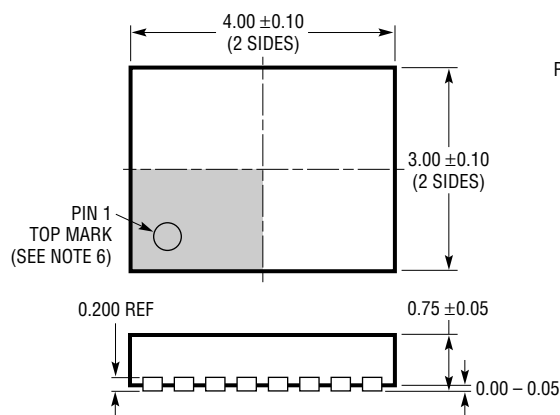

### NOTE:


1. DRAWING PROPOSED TO BE MADE VARIATION OF VERSION (WGED-3) IN JEDEC PACKAGE OUTLINE MO-229
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

### MS Package 16-Lead Plastic MSOP


(Reference LTC DWG # 05-08-1669 Rev 0)

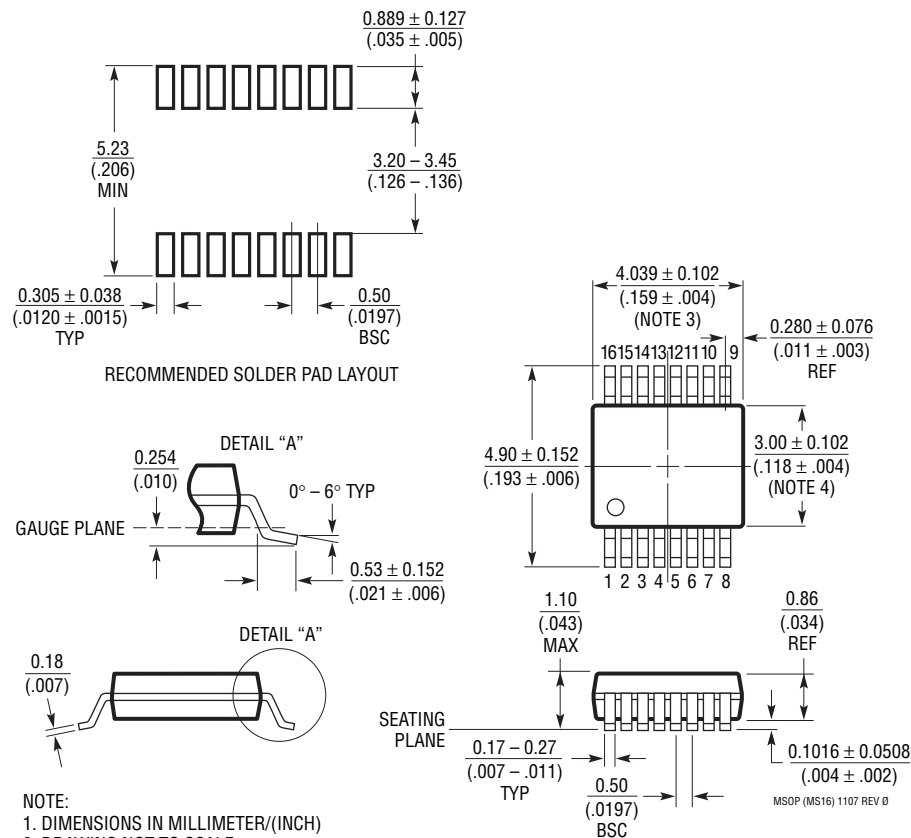

#### NOTE:

1. DIMENSIONS IN MILLIMETER/(INCH)
2. DRAWING NOT TO SCALE
3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.  
INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX

## TYPICAL APPLICATION

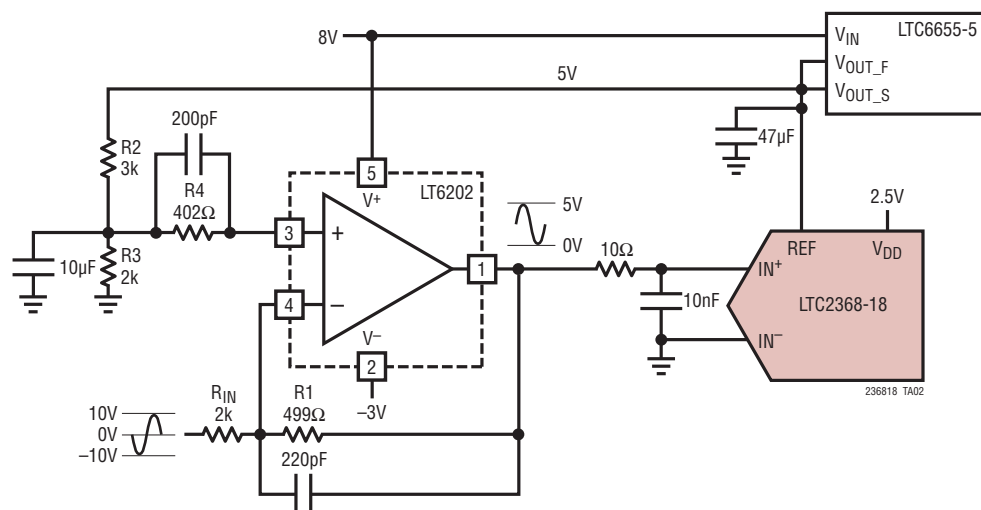LT6202 Converting a  $\pm 10\text{V}$  Bipolar Signal to a 0V to 5V Input Signal Into the LTC2368-18

## RELATED PARTS

| PART NUMBER                                    | DESCRIPTION                                                             | COMMENTS                                                                                                                                                            |
|------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ADCs</b>                                    |                                                                         |                                                                                                                                                                     |
| LTC2379-18/LTC2378-18<br>LTC2377-18/LTC2376-18 | 18-Bit, 1.6Msps/1Msps/500ksps/250ksps Serial, Low Power ADC             | 2.5V Supply, Differential Input, 101.2dB SNR, $\pm 5\text{V}$ Input Range, DGC, Pin-Compatible Family in MSOP-16 and $4\text{mm} \times 3\text{mm}$ DFN-16 Packages |
| LTC2380-16/LTC2378-16<br>LTC2377-16/LTC2376-16 | 16-Bit, 2Msps/1Msps/500ksps/250ksps Serial, Low Power ADC               | 2.5V Supply, Differential Input, 96.2dB SNR, $\pm 5\text{V}$ Input Range, DGC, Pin-Compatible Family in MSOP-16 and $4\text{mm} \times 3\text{mm}$ DFN-16 Packages  |
| LTC2383-16/LTC2382-16/<br>LTC2381-16           | 16-Bit, 1Msps/500ksps/250ksps Serial, Low Power ADC                     | 2.5V Supply, Differential Input, 92dB SNR, $\pm 2.5\text{V}$ Input Range, Pin-Compatible Family in MSOP-16 and $4\text{mm} \times 3\text{mm}$ DFN-16 Packages       |
| LTC2393-16/LTC2392-16/<br>LTC2391-16           | 16-Bit, 1Msps/500ksps/250ksps Parallel/Serial ADC                       | 5V Supply, Differential Input, 94dB SNR, $\pm 4.096\text{V}$ Input Range, Pin-Compatible Family in $7\text{mm} \times 7\text{mm}$ LQFP-48 and QFN-48 Packages       |
| LTC2365                                        | 12-Bit, 1Msps Serial ADC                                                | 2.35V to 3.6V Supply, 6- and 8-Lead TSOT-23 Packages                                                                                                                |
| LTC2355-14/LTC2356-14                          | 14-Bit, 3.5Msps Serial ADC                                              | 3.3V Supply, 1-Channel, Unipolar/Bipolar, 18mW, MSOP-10 Package                                                                                                     |
| <b>DACS</b>                                    |                                                                         |                                                                                                                                                                     |
| LTC2757                                        | 18-Bit, Single Parallel $I_{\text{OUT}}$ SoftSpan™ DAC                  | $\pm 1\text{LSB}$ INL/DNL, Software-Selectable Ranges, $7\text{mm} \times 7\text{mm}$ LQFP-48 Package                                                               |
| LTC2641                                        | 16-Bit/14-Bit/12-Bit Single Serial $V_{\text{OUT}}$ DACs                | $\pm 1\text{LSB}$ INL/DNL, MSOP-8 Package, 0V to 5V Output                                                                                                          |
| LTC2630                                        | 12-Bit/10-Bit/8-Bit Single $V_{\text{OUT}}$ DACs                        | SC70 6-Pin Package, Internal Reference, $\pm 1\text{LSB}$ INL (12 Bits)                                                                                             |
| <b>References</b>                              |                                                                         |                                                                                                                                                                     |
| LTC6655                                        | Precision Low Drift Low Noise Buffered Reference                        | 5V/2.5V, 5ppm/°C, 0.25ppm Peak-to-Peak Noise, MSOP-8 Package                                                                                                        |
| LTC6652                                        | Precision Low Drift Low Noise Buffered Reference                        | 5V/2.5V, 5ppm/°C, 2.1ppm Peak-to-Peak Noise, MSOP-8 Package                                                                                                         |
| <b>Amplifiers</b>                              |                                                                         |                                                                                                                                                                     |
| LT6202/LT6203                                  | Single/Dual 100MHz Rail-to-Rail Input/Output Noise Low Power Amplifiers | $1.9\text{nV}/\sqrt{\text{Hz}}$ , 3mA Maximum, 100MHz Gain Bandwidth                                                                                                |
| LT6200/LT6200-5/<br>LT6200-10                  | 165MHz/800MHz/1.6GHz Op Amp with Unity Gain/ $A_V = 5/A_V = 10$         | Low Noise Voltage: $0.95\text{nV}/\sqrt{\text{Hz}}$ (100kHz), Low Distortion: $-80\text{dB}$ at 1MHz, TSOT23-6 Package                                              |