


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	A	Redrawn in Autocad	JAP	12/11/91				
1199	B	Redrawn and Renamed..was CMS-TV-****	JWM	11/14/01	JC	11/20/01	JC	11/20/01

NOTES:

1. Material: Electro-tin plated Copper Vinyl (PVC)
2. Operating Temp: -40°F to 221°F (-40°C ~ 105°C)
3. Voltage Rating: 600 V
4. Flammability: UL94V-0

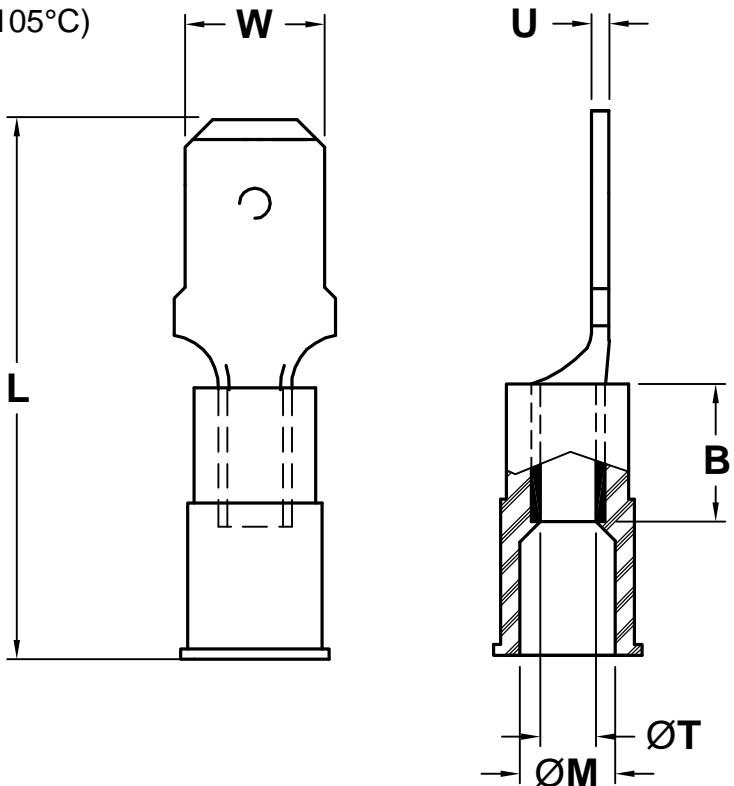

OSHA
Acceptable

PART NUMBER	WIRE RANGE (AWG)	MALE TAB WIDTH (W) X THICKNESS	L	B	T	M	U	COLOR
CMS-TV-1025	12 – 10	.250 x .032	1.05	.25	.150	.250	.032	YELLOW
CMS-TV-1418	16 – 14	.187 x .020	.85	.24	.080	.145	.016	BLUE
CMS-TV-1425	16 – 14	.250 x .032	.93	.25	.085	.170	.032	BLUE
CMS-TV-1818	22 – 18	.187 x .020	.85	.24	.080	.145	.016	RED
CMS-TV-1825	22 – 18	.250 x .032	.93	.25	.065	.145	.032	RED

SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

DRAWING TITLE:
Vinyl Insulated Butted Seam Male Disconnects

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-452	TA-452.dwg	B
SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1

Tolerances: Unless
Otherwise Specified:
.X = ±.015
.XX = ±.010
.XXX = ±.005

DRAWN BY:
JC
DATE:
3/11/91
CHECKED BY:
DATE:
12/12/91
APPROVED BY:
DATE:
12/12/91