


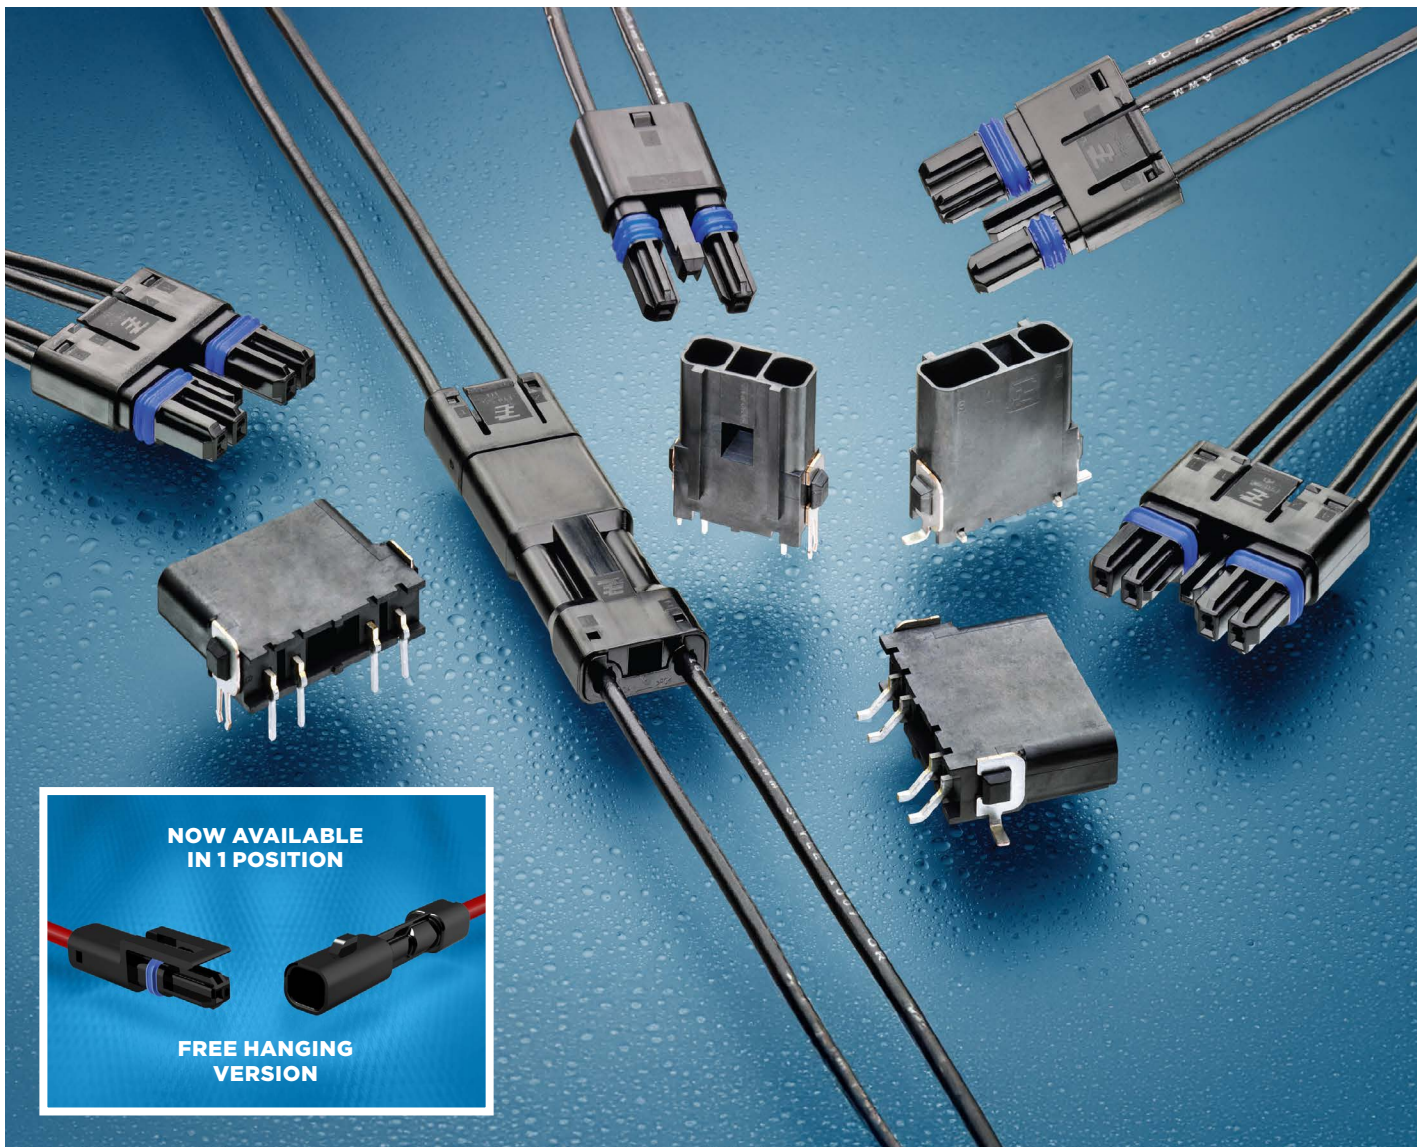

SLIMSEAL SSL CONNECTOR

The SlimSeal SSL connectors are low profile, single row connectors developed for indoor and outdoor LED lighting applications. These connectors provide low power, sealed solutions for free hanging, wire-to-wire interconnects and for robust, stable electrical and mechanical wire-to-board connections used in solid state lighting.

SLIMSEAL SSL CONNECTOR

LIGHTING APPLICATIONS

TE Connectivity (TE)'s LUMAWISE Endurance N dimming receptacle assembly is for outdoor commercial and utility lighting. TE LUMAWISE Endurance N dimming receptacle is compliant with ANSI C136.41 standard and is available with two or four dimming contacts to support either 0-10 VDC dimming methods or Digital Addressable Lighting Interface (DALI), while providing a reliable power interconnect with three robust twist lock contacts.

KEY FEATURES

- Available in 1, 2, 3 & 4 positions for use in various lighting and control applications
- 1 position designed for daisy chain adjacent LED modules in a single fixture
- Surface-mount technology (SMT) and thru-hole versions permit assembly to SMT metal clad & FR4 thru-hole printed circuit board (PCB)
- Polarized connections help decrease the possibility of mis-mating connectors
- Positive integral latching helps prevent inadvertent unmating of connectors
- Pre-assembled seals & wire guides help reduce assembly time
- IP67 seal rating for outdoor and commercial refrigeration lighting applications

ELECTRICAL

- Operating Current : 5 AMPS (18-20 AWG) & 3.5 AMPS (22-24 AWG) 1 position designed for daisy chain adjacent LED modules in a single fixture
- Maximum Operating Voltage : 400VAC / 400VDC
- Dielectric Withstanding Voltage : 1800 VAC

MECHANICAL

- Number of positions : 1, 2, 3 and 4
- Operating Temperature : -40°C to 105°C
- Seal Rating : IP67
- Durability : 30 mating cycles

MATERIALS

- Housings : UL 94 V0 rated high temperature resistant thermoplastic
- Receptacle Contacts : Tin Plated Copper Alloy
- Tab Contacts : Tin Plated Brass
- Integral Seals : Silicone Rubber

STANDARDS AND SPECIFICATIONS

- UL 1977, CSA C22.2 No. 182.3
- TE Application Specification : [114-13261](#)
- TE Product Specification : [108-2391](#)
- Exposure : UL 746C F1 (suitable for outdoor use, wire-to-wire only)

APPLICATION TOOLING

18-20 AWG Tab and Receptacle Terminals

PART NUMBER	DESCRIPTION
2063957-1	Hand Tool
2151651-1	Ocean 2.0 Applicator

22-24 AWG Tab and Receptacle Terminals

PART NUMBER	DESCRIPTION
2063957-1	SDE Commercial Tool & Die
2266019-1	Ocean 2.0 Applicator
2266019-2	Ocean 2.0 Applicator

APPLICATIONS


- Channel/Sign
- Emergency
- Digital Signage
- Architectural
- Street & Stadium
- Commercial Refrigeration

PRODUCT DIMENSIONS cont.



FREE HANGING PLUG ASSEMBLY


EXPLODED VIEW

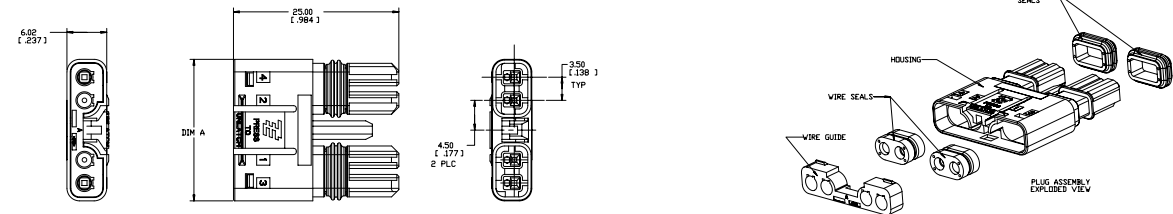

PART NUMBER	POSITION SIZE	DESCRIPTION	DIM "A"
2154854-1	1	Plug Assembly	6.52 [.257]
2106135-2	2	Plug Assembly	14.40 [.567]
2106135-3	3	Plug Assembly	17.90 [.705]
2106135-4	4	Plug Assembly	21.40 [.843]


FREE HANGING PLUG ASSEMBLY

EXPLODED VIEW

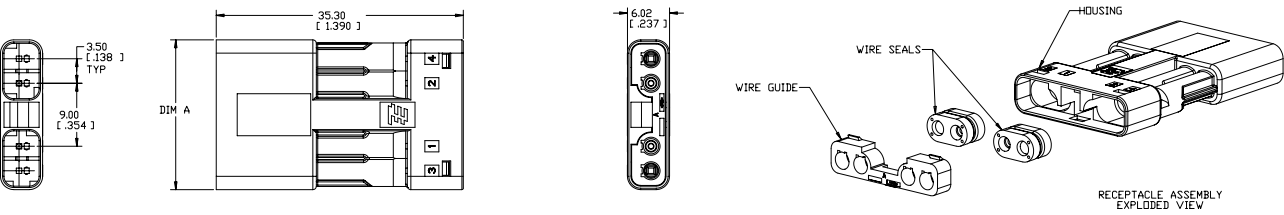


PART NUMBER	POSITION SIZE	DESCRIPTION	DIM "A"
2154852-1	1	Receptacle Assembly	6.52 [.257]
2106136-2	2	Receptacle Assembly	14.40 [.567]
2106136-3	3	Receptacle Assembly	17.90 [.705]
2106136-4	4	Receptacle Assembly	21.40 [.843]

RECEPTACLE CONTACT



PART NUMBER	DESCRIPTION
2106123-1	18-20 AWG Receptacle Terminal
2106123-2	18-20 AWG Receptacle Terminal (Loose Piece)
1-2106123-1	22-24 AWG Receptacle Terminal
1-2106123-2	22-24 AWG Receptacle Terminal (Loose Piece)

TAB CONTACT



PART NUMBER	DESCRIPTION
2106124-2	18-20 AWG Tab Terminal
2106124-9	18-20 AWG Tab Terminal (Loose Piece)
2-2106124-2	22-24 AWG Tab Terminal
2-2106124-7	22-24 AWG Tab Terminal (Loose Piece)

A close-up photograph of industrial Ethernet connectors. On the left, a black RJ45 connector with two blue strain relief bands is shown. To its right, another black connector is partially visible. On the right side of the image, a different type of industrial connector, possibly a D-sub or similar, is shown. The background is a vibrant blue surface covered with numerous small, clear water droplets, creating a textured, high-tech aesthetic.

The technical drawing shows two views of the 6000 series ball bearing housing:

- Front View (Top):** Shows the outer dimensions of the housing. The overall width is labeled DIM D. The overall length is labeled DIM C. The height from the base to the top edge is 17.50 [699]. There are four mounting holes along the top edge, each with a diameter of 4.50 [177] P4.
- Side View (Bottom):** Shows the profile of the housing. The total width is 6.02 [237]. The distance from the left face to the center of the bore is 4.50 [177] P4. The bore diameter is 3.50 [138] 1P. The distance from the center of the bore to the right face is 3.62 [143]. The thickness of the housing at the right end is 0.66 [26]. The total height of the housing is 4.33 [170].

[illegible]

Technical drawing of the 2500 series terminal block, showing top and front views with dimensions in millimeters (mm) and inches (in).


Top View Dimensions:

- Overall width: DIM C
- Overall height: 20.57 (0.810)
- Mounting hole diameter: $\varnothing 6.4$ (0.250)
- Mounting hole pitch: 1.96
- Terminal pitch: 4.50 (0.177)
- Terminal width: 3.50 (0.138)
- Terminal hole diameter: $\varnothing 4.6$ (0.181)
- Terminal hole pitch: 1.32 (0.052)
- Terminal hole offset: 2 PL


Front View Dimensions:

- Overall width: DIM D
- Terminal pitch: 4.50 (0.177)
- Terminal width: 3.50 (0.138)
- Terminal hole diameter: $\varnothing 4.6$ (0.181)
- Terminal hole pitch: 1.32 (0.052)
- Terminal hole offset: 2 PL


PRODUCT DIMENSIONS cont.

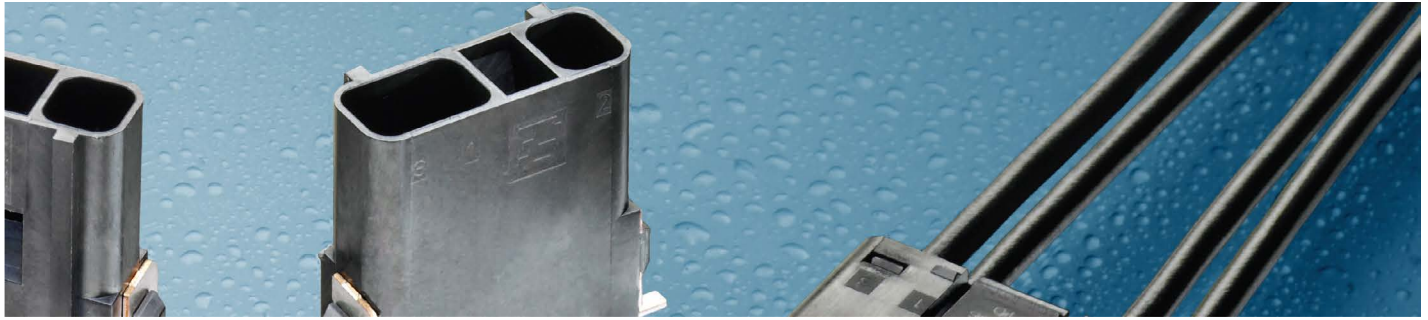

VERTICAL THRU HOLE HEADER

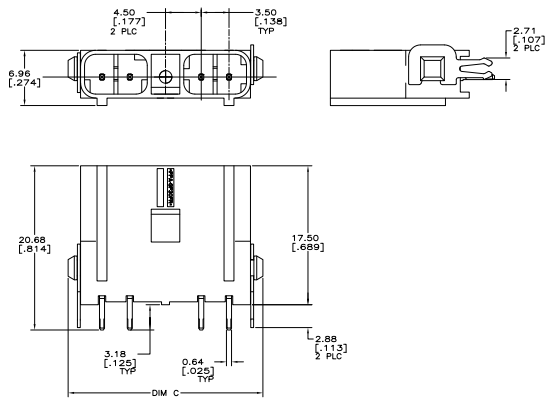


RECOMMENDED PCB LAYOUT

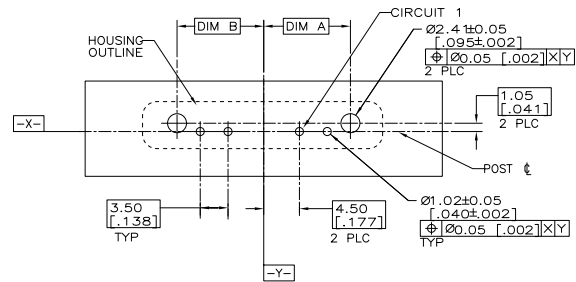


PART NUMBER	POSITION SIZE	DESCRIPTION	DIM "A"	DIM "B"	DIM "C"
2106112-2	2	Vertical Thru Hole Header	7.42 [0.292]	7.42 [0.292]	17.54 [0.691]
2106112-4	3	Vertical Thru Hole Header	10.92 [0.430]	7.42 [0.292]	21.04 [0.828]
2106112-6	4	Vertical Thru Hole Header	10.92 [0.430]	10.92 [0.430]	24.54 [0.966]

RIGHT ANGLE THRU HOLE HEADER

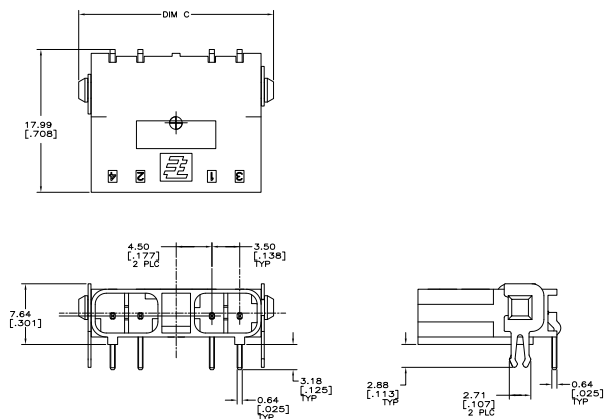

RECOMMENDED PCB LAYOUT

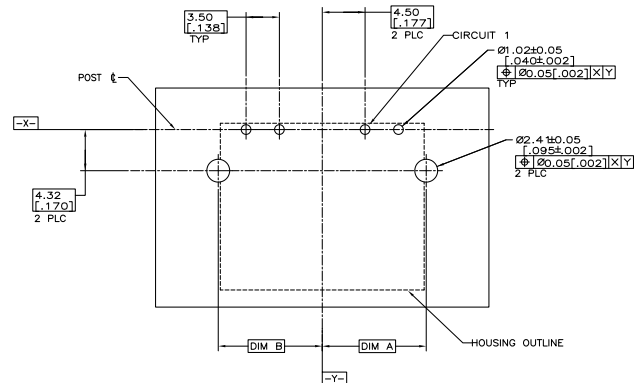

PART NUMBER	POSITION SIZE	DESCRIPTION	DIM "A"	DIM "B"	DIM "C"
2106111-2	2	Right Angle Thru Hole Header	7.42 [.292]	7.42 [.292]	17.54 [.691]
2106111-4	3	Right Angle Thru Hole Header	10.92 [.430]	7.42 [.292]	21.04 [.828]
2106111-6	4	Right Angle Thru Hole Header	10.92 [.430]	10.92 [.430]	24.54 [.966]

QUESTIONS TO ASK AT DESIGN IN

What wire gauge and insulation type will you be using?

The connectors accept 18 -20 AWG and 22 – 24 AWG stranded wire with a wire varying maximum insulation outside diameters per wire gauge.

What special retention mechanisms are available to ensure stability on the printed circuit board?

The vertical and right angle SMT headers have surface mount hold downs whereas the vertical and right angle thru-hole headers have board locks to help provide stability during mating and un-mating.

What helps prevent the connectors from being disconnected unintentionally?

The connectors are snag resistant and have an integral, flush mounted, actuated latch that helps prevent inadvertent un-mating of the connectors.

Is your manufacturing process automated?

The SMT headers are manufactured in high temperature material for reflow processing and tape and reel packaged for high speed SMT processing.

What application tooling options are available?

Hand tools are available for product evaluation and/or low volume production using loose piece terminals. Applicators are available for mid to high volume production terminals on reel using bench top semi-automatic presses or fully automated lead makers.

What mechanical and electrical testing have the connectors been subjected to?

The TE Product Specification 108-2391 provides a summary of the test groups, sequences and results that the product was subjected to during product qualification testing.

What version of the header assemblies, vertical or right angle, is more widely accepted?

Right angle surface mount headers are more often chosen because they provide a more robust, low profile connection to the printed circuit board. Vertical headers are chosen if limited space is available to mate the plug connection in the final assembly.

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need.
Visit te.com/support to chat with a Product Information Specialist.

te.com/slim-seal-connectors

SlimSeal, LUMAWISE, TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2025 TE Connectivity. All Rights Reserved.

03-25