REV.	DATE	DESCRIPTION
D	04/11/97	ADD ø15.75 BODY DIMENSION
E	01/19/98	CHANGE TO ø15.57 BODY DIMENSION
F	03/19/05	UPDATE DRAWING FORMAT/ CHANGE STRIPPING DIMS
G	02/08/06	UPDATE ITEM (5) TO FLAT WASHER.
H	03/20/07	REVISE PLATING TO NEXCOTE

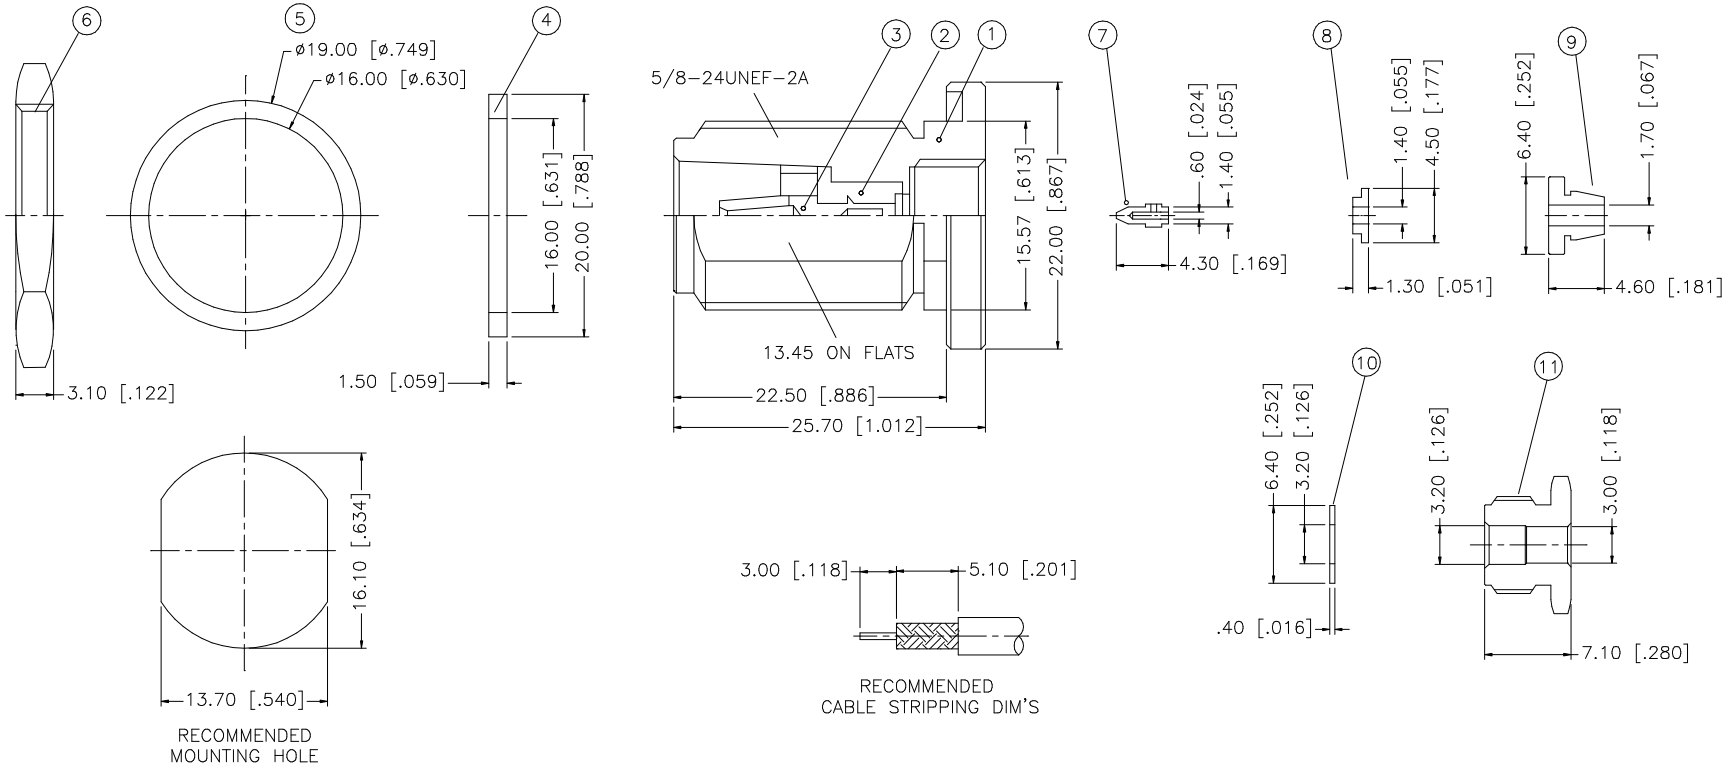

NOTE:

1. CONTACT PIN TO SOLDER
2. MAX. PANEL THICKNESS =6.5mm

	DESCRIPTION	MATERIAL	FINISH	QTY
12				
11	HEX NUT	BRASS	NEXCOTE	1
10	WASHER	BRASS	NEXCOTE	1
9	TOP HAT	BRASS	NEXCOTE	1
8	INSULATOR	TEFLON	NATURAL	1
7	CONTACT PIN	BRASS	GOLD	1
6	HEX NUT	BRASS	NEXCOTE	1
5	FLAT WASHER	BRASS	NEXCOTE	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NEXCOTE	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	03/20/07
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/172/172143.DWG	

Amphenol Connex

PART DESCRIPTION

N BULKHEAD CLAMP JACK
(FOR RG-174/U,188A/U,316/U)

PART NO. 172143

DWG. NO.	REV.	SIZE	SCALE
172143.DWG	H	A	NA