

Earth Bonding System

Overview



The Glenair Earth Bonding system is a revolutionary method of creating an electrical bond between structures and equipment for the secure passage of high intensity current in case of electrical short circuit.

System Benefits

- Suitable for use with steel, stainless steel and aluminium*
 - Suitable for plate thickness 1.5 mm and above+
 - Bond installed from one side
 - Can be installed into a blind hole
 - Permanent electrical connection providing low electrical resistance
 - May be removed and replaced in case of damage
 - Suitable for use on uneven surfaces
 - Manufactured from non-corroding materials
 - Cost effective as repeatable connections require limited tooling
 - One person operation
 - Extensive independent testing
 - Recommended for use by major OEM's in RMT, Marine and Military Markets
- ⇒ * Other materials under evaluation
- ⇒ + Subject to further tests on plates less than 1.5 mm thick




How Does it Work?

The earth bond comprises two components:

1. A conical dowel having a male thread
2. A cylindrical flanged bush

A tensile force is applied to the dowel using a hand hydraulic tool with a pre-determined pulling force. As the dowel is pulled through the bush, the bush remains fixed in the structure and expands within the hole making electrical contact. The tool completes its cycle resulting in a permanent electrical connection.

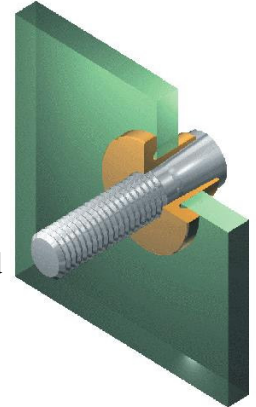

How do you Install it?

1. Drill a hole in the mounting plate to a pre-determined diameter depending on the plate material, plate thickness and stud size selected
2. Screw the bond into the nose of the hydraulic setting tool
3. Insert the bond into the hole so that the flange is flush with the plate
4. Pump the handle of the tool until an audible click is heard and release the tool from the stud
5. Attach termination and tighten to required torque value

Connection is complete



40 Lower Oakham Way, Oakham Business Park, Mansfield, Notts., NG18 5BY
Tel: +44 1623 638 100 ■ Fax: +44 1623 638 111 ■ E-mail: sales@glenair.co.uk


United States ■ United Kingdom ■ Germany ■ France ■ Nordic ■ Italy ■ Spain ■ Benelux
www.glenair.com

Earth Bonding System

Typical Performance Values



Principle of the Earth Bond

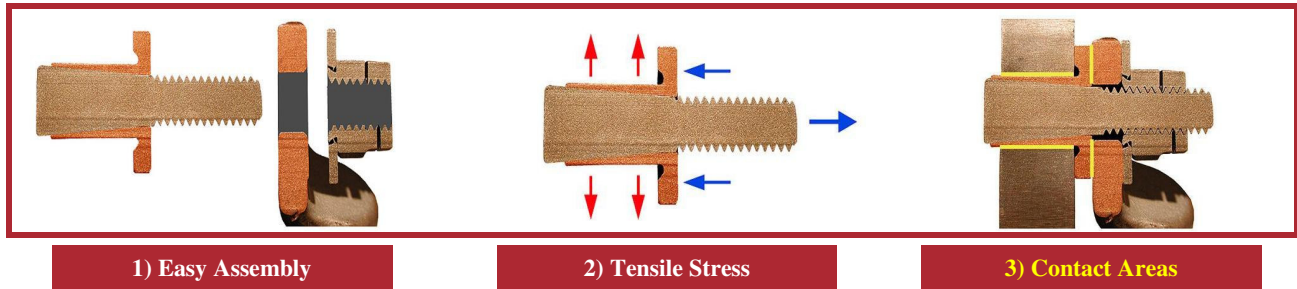

Electrical Performance: Aluminium Plate

Part Number	80958 – M6	80959 – M10	80960 – M6	80961-M10
Electrical resistance measured at a point between the terminal lug (copper tin plated) and the aluminium plate	60 micro ohms T = 2 mm	50 micro ohms T = 2 mm	60 micro ohms T = 4 mm	20 micro ohms T = 4 mm
Withstand short circuit test – 3 passes of high intensity current with no degradation of the connection	10 Ka	20 Ka	10 Ka	20 Ka
Corrosion Test: 500 hours	90 micro ohms T = 2 mm	50 micro ohms T = 4 mm	-	-

T = Plate Thickness

Mechanical Performance: Aluminium Plate

Part Number	80958-M6	80959-M10	80960-M6	80961-M10
Tensile force applied to the dowel or threaded stud to remove earth bond from the plate	250 daN T = 2 mm	200 daN T = 2 mm	300 daN T = 4 mm	500 daN T = 4 mm
Bending moment (IEC60068-2-21). Force applied at a point 5 mm from the end of the thread	34 daN T = 1.5 mm	100 daN T = 2 mm	200 daN T = 4 mm	300 daN T = 4 mm
Pressure Seal: Pressure applied to both sides of bond for 2 hours with no leak between bush and plate	6 Bar	6 Bar	6 Bar	6 Bar

T = Plate Thickness

Mechanical Performance: Steel + Stainless Steel Plate

Part Number	80923-M6	80924-M10	80925-M6	80926-M10
Electrical resistance measured at a point between the terminal lug (copper tin plated) and the steel plate	25 micro ohms T = 2 mm	20 micro ohms T = 2 mm	25 micro ohms T = 4 mm	20 micro ohms T = 4 mm
Electrical resistance measured at a point between the terminal lug (copper tin plated) and the stainless steel plate	120 micro ohms T = 2 mm	70 micro ohms T = 2 mm	75 micro ohms T = 4 mm	60 micro ohms T = 4 mm
With stand short circuit test-3 passes of high intensity current with no degradation of the connection.	10 Ka	15 Ka	10 Ka	20 Ka
Corrosion test: 500 hours: 2 mm steel plate	30 micro ohms	25 micro ohms	-	-
On 2 mm stainless steel plate	150 micro ohms	90 micro ohms	-	-

T = Plate Thickness

Mechanical Performance: Steel + Stainless Steel Plate

Part Number	80923-M6	80924-M10	80925-M6	80926-M10
Tensile force applied to the dowel or threaded stud to remove earth bond from the plate	400 daN = 2 mm	500 daN T = 2 mm	500 daN T = 4 mm	800 daN T = 4 mm
Bending moment (IEC60068-2-21). Force applied at a point 5 mm from the end of the thread	100 daN T = 1.5 mm	190 daN T = 2 mm	200 daN T = 4 mm	330 daN T = 4 mm
Pressure seal: Pressure applied to both sides of bond for 2 hours with no leak between bond and plate	6 Bar	6 Bar	6 Bar	6 Bar

T = Plate Thickness



40 Lower Oakham Way, Oakham Business Park, Mansfield, Notts., NG18 5BY
Tel: +44 1623 638 100 ■ Fax: +44 1623 638 111 ■ E-mail: sales@glenair.co.uk

United States ■ United Kingdom ■ Germany ■ France ■ Nordic ■ Italy ■ Spain ■ Benelux
www.glenair.com

Details of Tests Performed by DERA

The earth bonding system has been independently tested by the 'Defence Evaluation and Research Agency' (DERA).

The Earth Bonding system has Lloyds Register Type Approval: Certificate number 02/00022 issued 27 March 2002. Application ENV1, ENV2, ENV5.

Destructive Testing

Test	Specification	Test Level	Comments
Tensile/Compression	IEC60068-2-21	Test to point of failure	Destructive
Torsion	IEC60068-2-21	Test to point of failure	Destructive
Bending Moment	IEC60068-2-21	Test to point of failure	Destructive
Withstand Short Circuit		M6 -3 x 5 Ka M10 -3 x 10 Ka	Destructive

Sequential Testing

Test	Specification	Test Level	Comments
Electrical Continuity	IEC60512-2b	Measure results	Initial & after test
Pressure Seal	IEC6006802017 Test Qa	20 PSI	Record results
Vibration	IEC60068-2-6	10-500 Hz @ 0.75 mm/4 gn	Sinusoidal
Shock	IEC60068-2-27	300g, 3 ms, half sine	
Rapid Change of Temperature	IEC60068-14	Temperature range -25C + 70C	16 cycles
Endurance	IEC60068-2-52		10 cycles
Salt Mist	IEC60068-2-52		500 hours continuous – Marine environment solution

The Earth Bonding system has been approved for use by the Ministry of Defence, Warship Support Agency and is NATO codified. The system has been endorsed by the following companies for Railway Mass Transit, Marine, Military and Industrial applications: Bombardier Transportation Projects, Alston, CAF, Siemens, General Dynamics, BAE Systems, Network Rail, London Underground Ltd, Stolt Off Shore – Sub Sea Applications.

Peter C Nutkins
pnutkins@glenair.com
Glenair UK Ltd
27 January 2004
26 March 2007 - Up issue



40 Lower Oakham Way, Oakham Business Park, Mansfield, Notts., NG18 5BY
Tel: +44 1623 638 100 ■ Fax: +44 1623 638 111 ■ E-mail: sales@glenair.co.uk

United States ■ United Kingdom ■ Germany ■ France ■ Nordic ■ Italy ■ Spain ■ Benelux
www.glenair.com