


# CGA5L2X7R1E225K160AA(TDK item description : CGA5L2X7R1E225KT\*\*\*\*)

Applications  Automotive Grade

Feature  General (Up to 50V)

 AEC-Q200

Series CGA5(3216) [EIA CC1206]

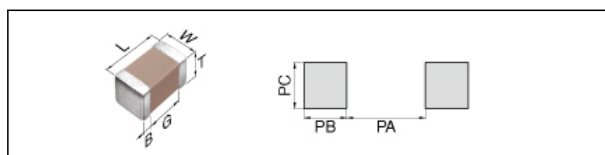


Size	
Length(L)	3.20mm +0.30/-0.10mm
Width(W)	1.60mm +0.30/-0.10mm
Thickness(T)	1.60mm +0.30/-0.10mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	1.00mm Min.
Recommended Land Pattern(PA)	2.10 to 2.50mm (Flow Soldering) 2.00 to 2.40mm (Reflow Soldering)
Recommended Land Pattern(PB)	1.10 to 1.30mm (Flow Soldering) 1.00 to 1.20mm (Reflow Soldering)
Recommended Land Pattern(PC)	1.00 to 1.30mm (Flow Soldering) 1.10 to 1.60mm (Reflow Soldering)
Recommended Slit Pattern(SD)	

Electrical Characteristics	
Capacitance	2.2uF +/-10%
Rated Voltage	25Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	3% Max.
Insulation Resistance	227MΩ Min.


Other	
Soldering Method	Reflow, Flow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000Pcs Min.

# CGA5L2X7R1E225K160AA


## Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

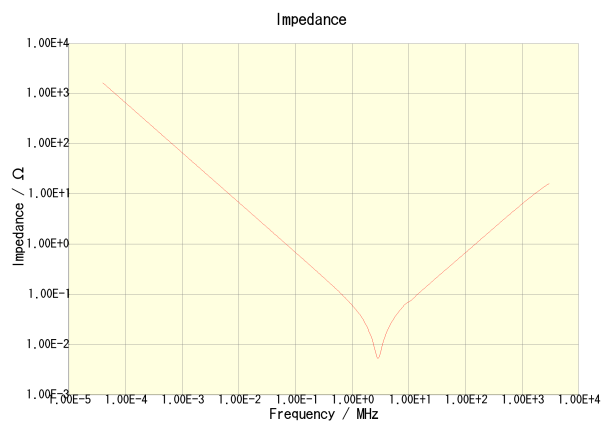


CGA5L2X7R1E225K160AA

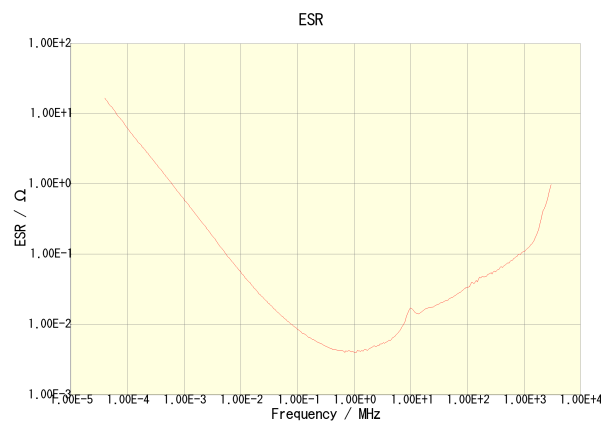


CGA5L2X7R1E225K160AA

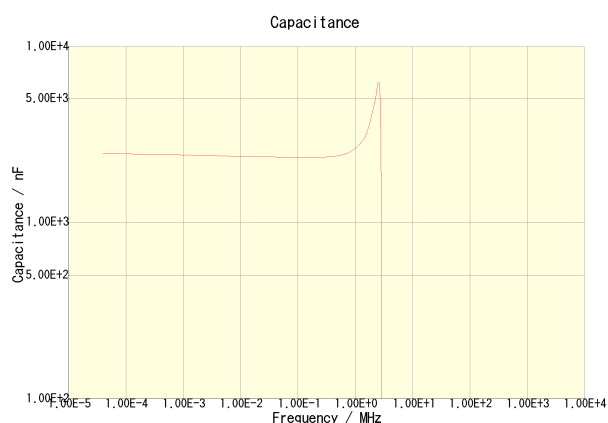


CGA5L2X7R1E225K160AA

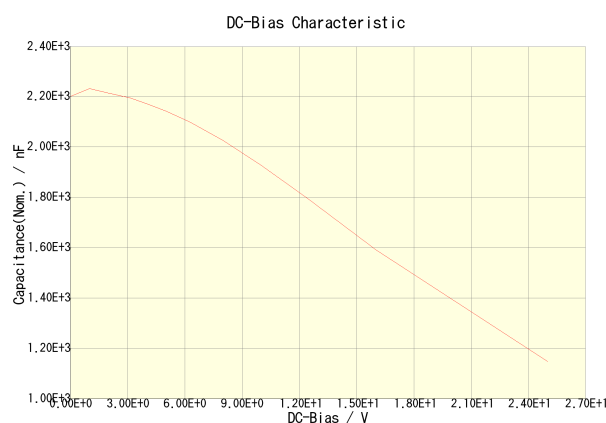

CGA5L2X7R1E225K160AA

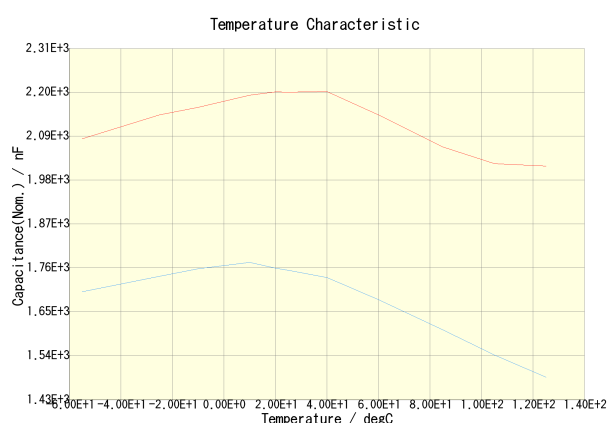

CGA5L2X7R1E225K160AA(DC Bias = 0V) CGA5L2X7R1E225K160AA(DC Bias = 12.5V)

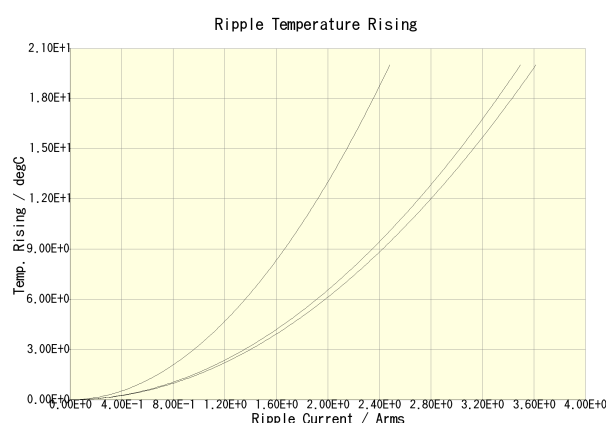

CGA5L2X7R1E225K160AA(100kHz) CGA5L2X7R1E225K160AA(500kHz)  
CGA5L2X7R1E225K160AA(1MHz)