



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	WIRE RANGE		REEL QTY.	COLOR (DIN)	MAX. WIRE INSUL. DIA.	WIRE CLASS	DIMENSIONS – in [mm]				CP-881 INSERTS	CA10 DIE SET
	AWG	[mm ²]					L	P	OD (REF.)	ID		
* FSD75-8-5K10	22-20	[0,50]	5000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]	WHITE INSERTS	CD10-1
* FSD75-8-3K10	22-20	[0,50]	3000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]		
FSD76-8-5K8	18	[0,75]	5000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]	GRAY INSERTS	
FSD76-8-3K8	18	[0,75]	3000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]		
FSD77-8-5K2	–	[1,0]	5000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]	RED INSERTS	CD10-2
FSD77-8-3K2	–	[1,0]	3000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]		
FSD78-8-5K0	16	[1,5]	5000	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]	BLACK INSERTS	
FSD78-8-2KD0	16	[1,5]	2500	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]		
FSD80-8-3K6	14	[2,5]	3000	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]	BLUE INSERTS	CD10-3
FSD80-8-KD6	14	[2,5]	1500	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]		

* UL LISTED WITH 20 AWG ONLY, UL486F SCOPE IS 20 - 1/0 AWG. WHITE IS DIN COLOR FOR 20 AWG [0,5]

NOTES:

1. USED FOR:
 - A. UL LISTED WITH STRANDED COPPER WIRE ONLY
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
2. INSTALLATION TOOLS PANDUIT APPROVED:
 - A. CP-871 WITH CA10 APPLICATOR
 - B. CP-881
3. WIRE STRIP LENGTH: 13/32" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [10,0 $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]
4. MATERIAL:
 - A. STAMPING: COPPER, TIN PLATED
 - B. HOUSING: POLYPROPYLENE, COLOR CODED
 - C. COLOR CODE CONFORMS TO DIN STANDARD
5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
6. FOR TOLERANCING REFER TO DIN 46228 PART 4

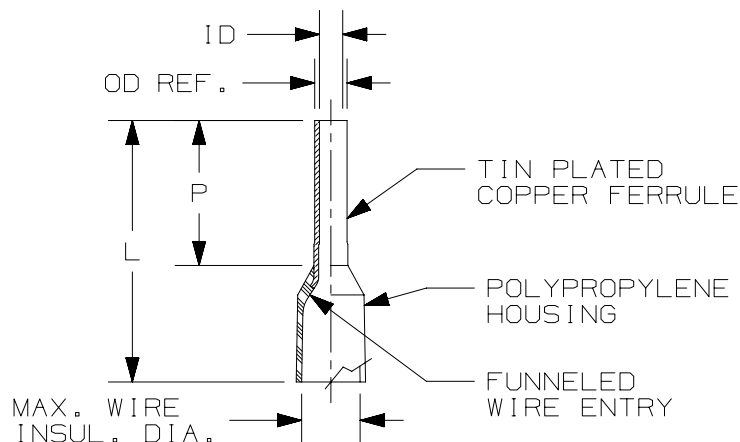

TITLE						FERRULES WITH SLEEVES ON CONTINUOUS REEL (DIN)	
						CUSTOMER DRAWING	
ITEM REVISION NAME				N41737BA/09		PANDUIT	
DATASET FILE NAME				N41737BA_DC/09			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]						MATERIAL:	
.X ± .XXX ± .XX ± ANGLES ±						SEE NOTES	
						DRAWING NUMBER:	
						A41737	
DRAWN BY	DATE	CHK	SCALE			SIZE	
DAW	1/07	LCA	N.T.S.			SHT 1 OF 1	A

D10100DA/16