




REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
E2		REV. ECO-17-011267	05SEP2017	HC

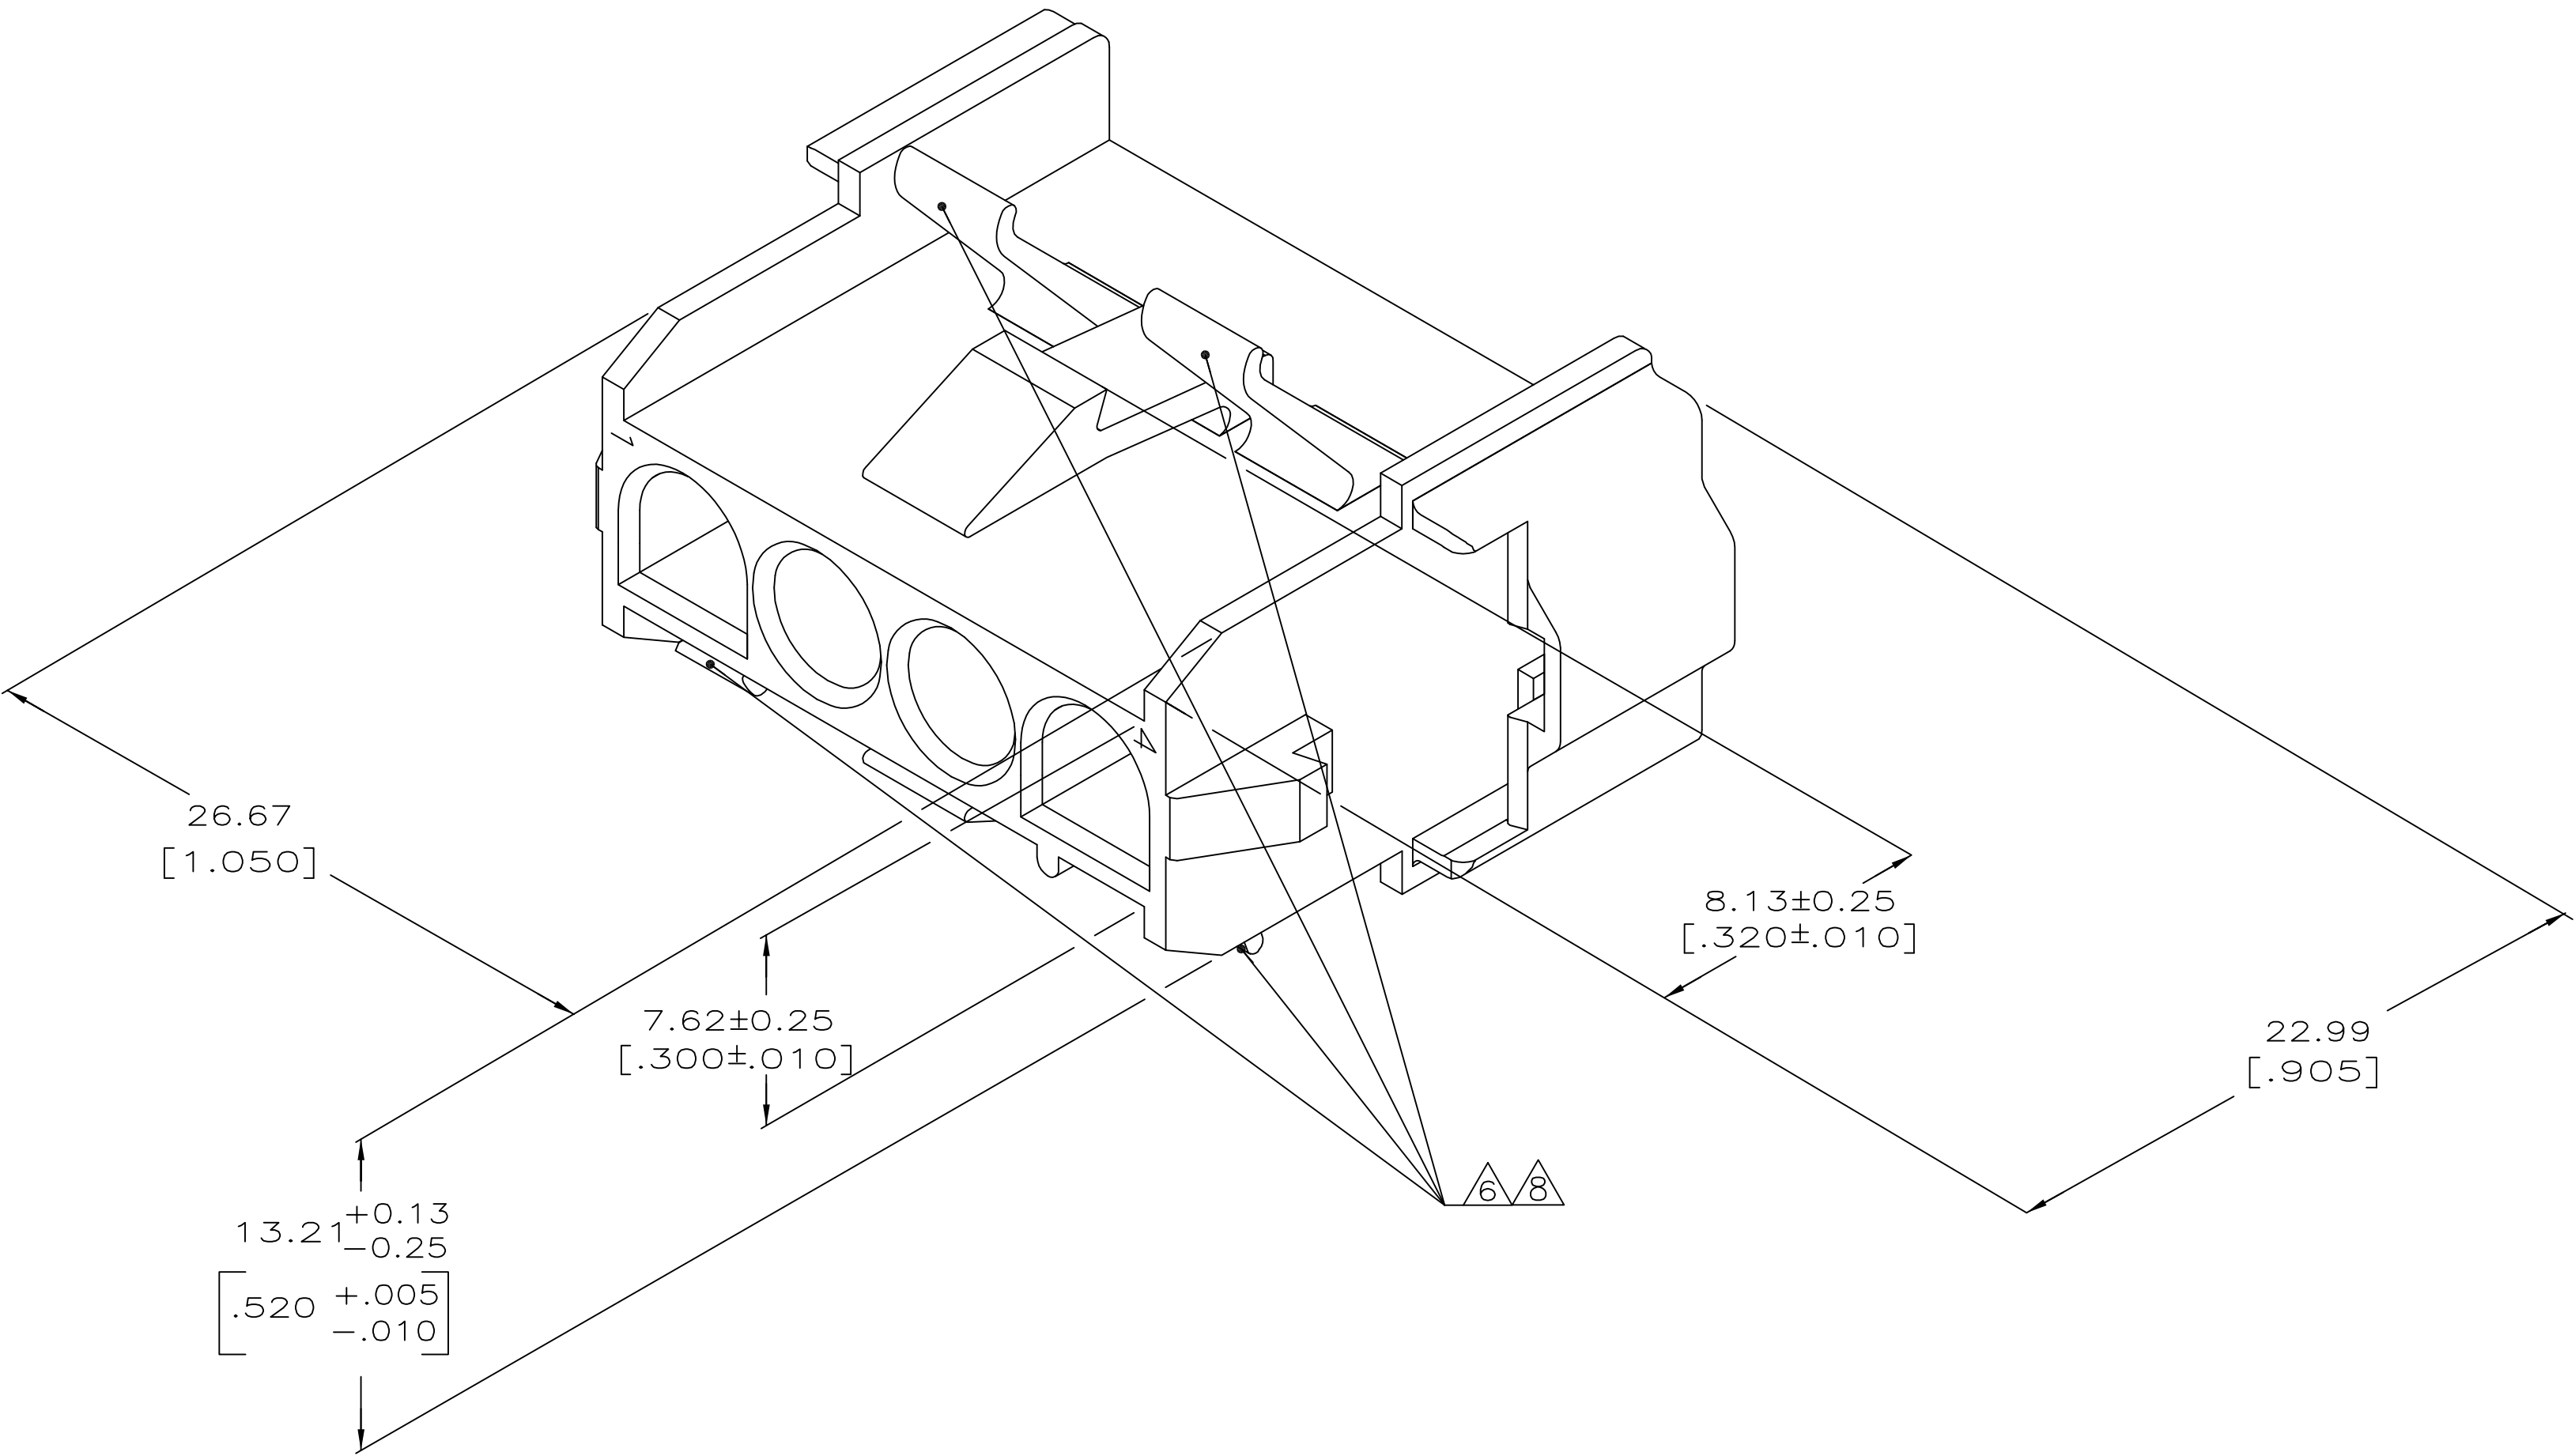

1. MUST BE ASSEMBLED WITH CAP REAR P/N 770050-1 BEFORE MATING. KIT P/N IS 770026-1.
2. RECOMMENDED PANEL THICKNESS 0.76-2.29 [.030-.090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. AMP LOGO LOCATED ONCE ON ANY INDICATED SURFACE FARSIDE.
7. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
8. CSA LOGO LOCATED ONCE ON ANY INDICATED SURFACE

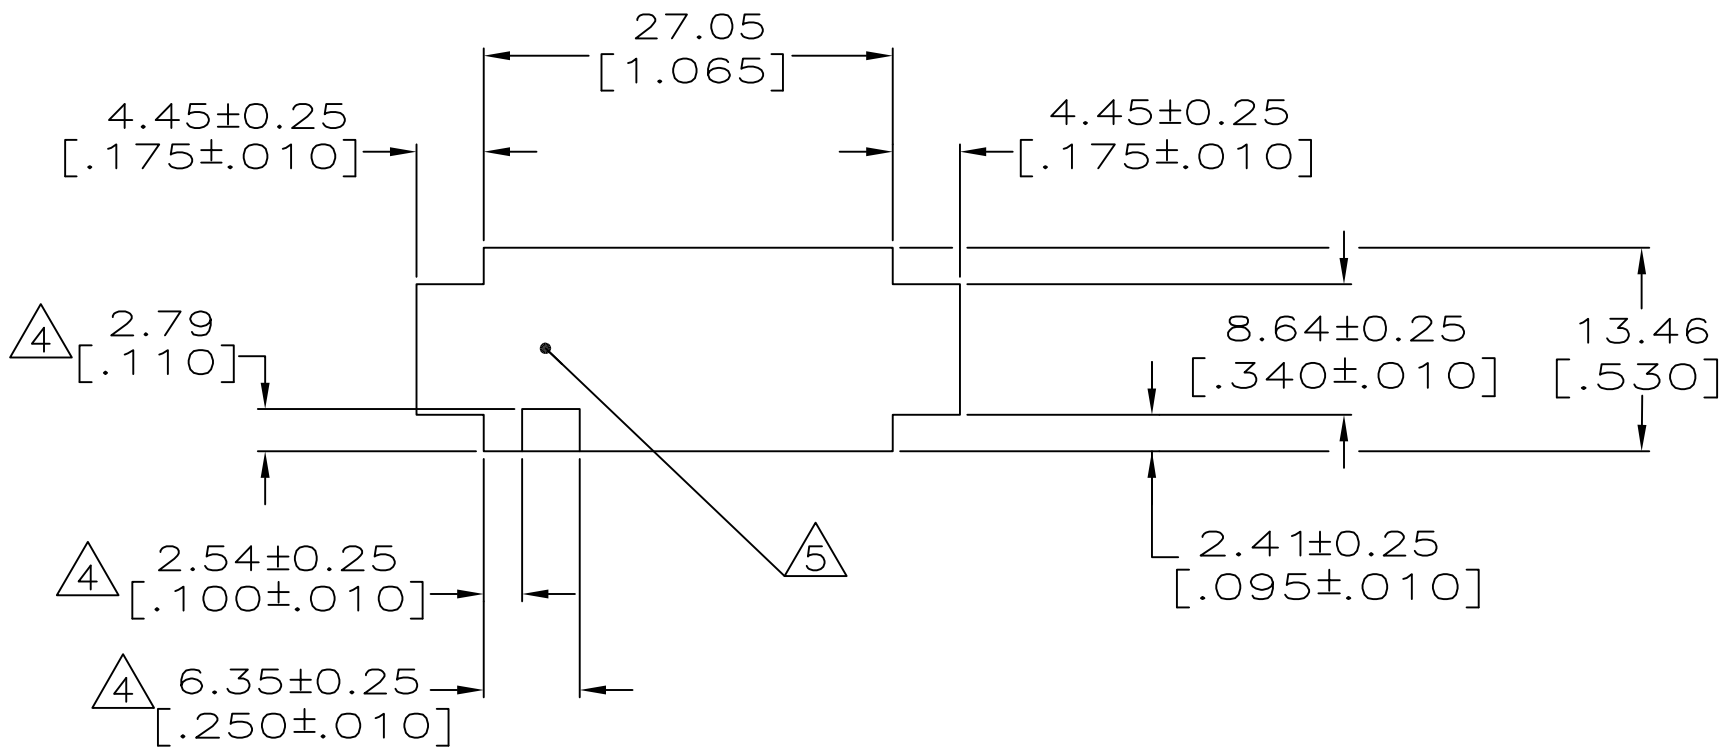

RECOMMENDED PANEL CUTOUT
(HOUSING ENTRY SIDE)
SCALE 2:1

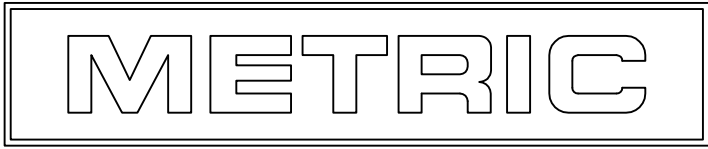

770049-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN K. SALMON	1-15-92	TE Connectivity	
		CHK R. SWING	1-15-92		
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME	CAP FRONT, 4 CIRCUIT, UNIVERSAL MATE-N-LOK	
		PRODUCT SPEC			
		APPLICATION SPEC			
		WEIGHT	0.000000		
MATERIAL: NYLON,UL94V-0,	FINISH -	CUSTOMER DRAWING	SCALE 5:1	SHEET 1	REV E2