

# TLV320x 40ns, microPOWER, Push-Pull Output Comparators

## 1 Features

- Low Propagation Delay: 40ns
- Low Quiescent Current: 40µA per Channel
- Input Common-Mode Range Extends 200mV Beyond Either Rail
- Low Input Offset Voltage: 1mV
- Push-Pull Outputs
- Supply Range: 2.7V to 5.5V
- Industrial Temperature Range: –40°C to 125°C
- Small Packages: 5-Pin SC70, 5-Pin SOT-23, 8-Pin SOIC, 8-Pin VSSOP

## 2 Applications

- Inspection Equipment
- Test and Measurement
- High-Speed Sampling Systems
- Telecom
- Portable Communications

## 3 Description

The TLV3201 and TLV3202 are single- and dual-channel comparators that offer the ultimate combination of high speed (40ns) and low-power consumption (40µA), all in extremely small packages with features such as rail-to-rail inputs, low offset voltage (1mV ), and large output drive current. The devices are also very easy to implement in a wide variety of applications where response time is critical.


The TLV320x family is available in single (TLV3201) and dual (TLV3202) channel versions, both with push-pull outputs. The TLV3201 is available in 5-pin SOT-23 and 5-pin SC70 packages. The TLV3202 is available in 8-pin SOIC and 8-pin VSSOP packages. All devices are specified for operation across the expanded industrial temperature range of –40°C to 125°C.

### Device Information

| PART NUMBER | PACKAGE <sup>(1)</sup> | BODY SIZE (NOM) <sup>(2)</sup> |
|-------------|------------------------|--------------------------------|
| TLV3201     | SOT-23 (5)             | 2.90mm × 1.60mm                |
|             | SC70 (5)               | 2.00mm × 1.25mm                |
| TLV3202     | VSSOP (8)              | 3.00mm × 3.00mm                |
|             | SOIC (8)               | 4.90mm × 3.91mm                |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

(2) The package size (length × width) is a nominal value and includes pins, where applicable

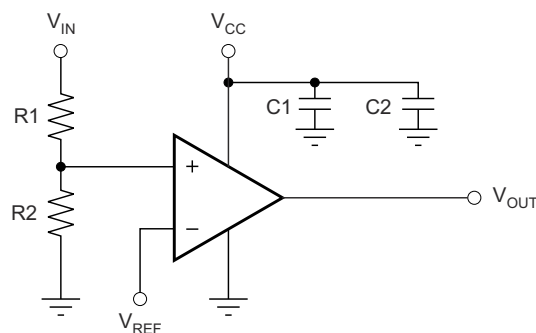

Copyright © 2016, Texas Instruments Incorporated

### Threshold Detector



## Table of Contents

|                                                       |           |                                                                  |           |
|-------------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                               | <b>1</b>  | 7.2 Functional Block Diagram.....                                | <b>11</b> |
| <b>2 Applications</b> .....                           | <b>1</b>  | 7.3 Feature Description.....                                     | <b>11</b> |
| <b>3 Description</b> .....                            | <b>1</b>  | 7.4 Device Functional Modes.....                                 | <b>11</b> |
| <b>4 Device Comparison Table</b> .....                | <b>3</b>  | <b>8 Application and Implementation</b> .....                    | <b>12</b> |
| <b>5 Pin Configuration and Functions</b> .....        | <b>3</b>  | 8.1 Application Information.....                                 | <b>12</b> |
| Pin Functions: TLV3201.....                           | <b>3</b>  | 8.2 Typical Applications.....                                    | <b>16</b> |
| Pin Functions: TLV3202.....                           | <b>3</b>  | 8.3 Power Supply Recommendations.....                            | <b>18</b> |
| <b>6 Specifications</b> .....                         | <b>4</b>  | 8.4 Layout.....                                                  | <b>18</b> |
| 6.1 Absolute Maximum Ratings.....                     | <b>4</b>  | <b>9 Device and Documentation Support</b> .....                  | <b>20</b> |
| 6.2 ESD Ratings.....                                  | <b>4</b>  | 9.1 Device Support.....                                          | <b>20</b> |
| 6.3 Recommended Operating Conditions.....             | <b>4</b>  | 9.2 Documentation Support.....                                   | <b>20</b> |
| 6.4 Thermal Information.....                          | <b>4</b>  | 9.3 Receiving Notification of Documentation Updates.....         | <b>21</b> |
| 6.5 Electrical Characteristics: $V_{CC} = 5V$ .....   | <b>5</b>  | 9.4 Support Resources.....                                       | <b>21</b> |
| 6.6 Switching Characteristics: $V_{CC} = 5V$ .....    | <b>5</b>  | 9.5 Trademarks.....                                              | <b>21</b> |
| 6.7 Electrical Characteristics: $V_{CC} = 2.7V$ ..... | <b>6</b>  | 9.6 Electrostatic Discharge Caution.....                         | <b>21</b> |
| 6.8 Switching Characteristics: $V_{CC} = 2.7V$ .....  | <b>6</b>  | 9.7 Glossary.....                                                | <b>21</b> |
| 6.9 Typical Characteristics.....                      | <b>7</b>  | <b>10 Revision History</b> .....                                 | <b>22</b> |
| <b>7 Detailed Description</b> .....                   | <b>11</b> | <b>11 Mechanical, Packaging, and Orderable Information</b> ..... | <b>22</b> |
| 7.1 Overview.....                                     | <b>11</b> |                                                                  |           |

## 4 Device Comparison Table

| DEVICE                  | DESCRIPTION                                                                                                    |
|-------------------------|----------------------------------------------------------------------------------------------------------------|
| <a href="#">TLV3011</a> | 5µA (maximum) open-drain, 1.8V to 5.5V with integrated voltage reference in 1.5mm × 1.5mm micro-sized packages |
| <a href="#">TLV3012</a> | 5µA (maximum) push-pull, 1.8V to 5.5V with integrated voltage reference in micro-sized packages                |
| <a href="#">TLV3501</a> | 4.5ns, rail-to-rail, push-pull comparator in micro-sized packages                                              |
| <a href="#">LMV7235</a> | 75ns, 65µA, 2.7V to 5.5V, rail-to-rail input comparator with open-drain output                                 |
| <a href="#">REF3333</a> | 30ppm/°C drift, 3.9µA, SOT23-3, SC70-3 voltage reference                                                       |

## 5 Pin Configuration and Functions




Figure 5-1. TLV3201 DCK and DBV Packages 5-Pin SC70-5 and SOT-23 Top View

### Pin Functions: TLV3201

| PIN             |     | I/O | DESCRIPTION             |
|-----------------|-----|-----|-------------------------|
| NAME            | NO. |     |                         |
| GND             | 2   | —   | Negative supply, ground |
| IN–             | 4   | I   | Negative input          |
| IN+             | 3   | I   | Positive input          |
| OUT             | 1   | O   | Output                  |
| V <sub>CC</sub> | 5   | —   | Positive supply         |

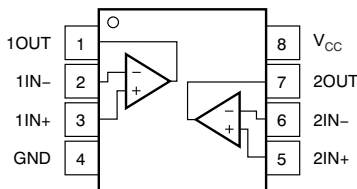


Figure 5-2. TLV3202 D and DGK Packages 8-Pin SOIC and VSSOP Top View

### Pin Functions: TLV3202

| PIN             |     | I/O | DESCRIPTION                  |
|-----------------|-----|-----|------------------------------|
| NAME            | NO. |     |                              |
| 1IN–            | 2   | I   | Negative input, comparator 1 |
| 1IN+            | 3   | I   | Positive input, comparator 1 |
| 1OUT            | 1   | O   | Output, comparator 1         |
| 2IN–            | 6   | I   | Negative input, comparator 2 |
| 2IN+            | 5   | I   | Positive input, comparator 2 |
| 2OUT            | 7   | O   | Output, comparator 2         |
| GND             | 4   | —   | Negative supply, ground      |
| V <sub>CC</sub> | 8   | —   | Positive supply              |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|             |                                     | MIN  | MAX                      | UNIT |
|-------------|-------------------------------------|------|--------------------------|------|
| Voltage     | Supply voltage                      |      | 7                        | V    |
|             | Signal input pins <sup>(2)</sup>    | –0.5 | (V <sub>CC</sub> ) + 0.5 |      |
| Current     | Signal input pins <sup>(2)</sup>    | –10  | 10                       | mA   |
|             | Output short circuit <sup>(3)</sup> |      | 100                      |      |
| Temperature | Operating                           | –55  | 125                      | °C   |
|             | Junction, T <sub>J</sub>            |      | 150                      |      |
|             | Storage, T <sub>stg</sub>           | –65  | 150                      |      |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under [Section 6.3](#). Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input pins are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails must be current limited to 10 mA or less.
- (3) Short-circuit to ground.

### 6.2 ESD Ratings

|                                            |                                                                                   |         | VALUE | UNIT |
|--------------------------------------------|-----------------------------------------------------------------------------------|---------|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>                 |         | ±2000 | V    |
|                                            | Charged-device model (CDM),<br>per JEDEC specification JESD22-C101 <sup>(2)</sup> | TLV3201 | ±2000 |      |
|                                            |                                                                                   | TLV3202 | ±1000 |      |

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                |                                                                          | MIN         | MAX         | UNIT |
|----------------|--------------------------------------------------------------------------|-------------|-------------|------|
| V <sub>S</sub> | Supply voltage, V <sub>S</sub> = (V <sub>S+</sub> ) – (V <sub>S–</sub> ) | 2.7 (±1.35) | 5.5 (±2.75) | V    |
|                | Specified temperature                                                    | –40         | 125         | °C   |

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TLV3201         |               | TLV3202     |                | UNIT |
|-------------------------------|----------------------------------------------|-----------------|---------------|-------------|----------------|------|
|                               |                                              | DBV<br>(SOT-23) | DCK<br>(SC70) | D<br>(SOIC) | DGK<br>(VSSOP) |      |
|                               |                                              | 5 PINS          | 5 PINS        | 8 PINS      | 8 PINS         |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 237.8           | 281.9         | 143.6       | 201.9          | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 108.7           | 97.6          | 97.2        | 92.5           | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 64.1            | 68.3          | 84.2        | 123.3          | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 12.1            | 2.6           | 45.5        | 23.0           | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 63.3            | 67.3          | 83.7        | 212.6          | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics: $V_{CC} = 5V$

at  $T_A = 25^\circ C$  and  $V_{CC} = 5V$  (unless otherwise noted)

| PARAMETER               |                                        | TEST CONDITIONS                                                       | MIN                             | TYP                   | MAX                      | UNIT   |  |
|-------------------------|----------------------------------------|-----------------------------------------------------------------------|---------------------------------|-----------------------|--------------------------|--------|--|
| OFFSET VOLTAGE          |                                        |                                                                       |                                 |                       |                          |        |  |
| V <sub>IO-TLV3201</sub> | Input offset voltage TLV3201           | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                                 | 1                     | 3                        | mV     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                                 |                       | 4                        |        |  |
| V <sub>IO-TLV3202</sub> | Input offset voltage TLV3202           | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                                 | 1                     | 5                        | mV     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                                 |                       | 6                        |        |  |
| dV <sub>OS</sub> /dT    | Input offset voltage drift             | T <sub>A</sub> = −40°C to 125°C                                       |                                 | 1                     | 10                       | μV/°C  |  |
| PSRR                    | Power-supply rejection ratio           | V <sub>CM</sub> = V <sub>CC</sub> / 2, V <sub>CC</sub> = 2.5V to 5.5V | 65                              | 85                    |                          | dB     |  |
|                         | Input hysteresis                       |                                                                       |                                 | 1.2                   |                          | mV     |  |
| INPUT BIAS CURRENT      |                                        |                                                                       |                                 |                       |                          |        |  |
| I <sub>IB</sub>         | Input bias current                     | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                                 | 1                     | 50                       | pA     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                                 |                       | 5                        | nA     |  |
| I <sub>IO</sub>         | Input offset current                   | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                                 | 1                     | 50                       | pA     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                                 |                       | 2.5                      | nA     |  |
| INPUT VOLTAGE RANGE     |                                        |                                                                       |                                 |                       |                          |        |  |
| V <sub>CM</sub>         | Common-mode voltage                    | T <sub>A</sub> = −40°C to 125°C                                       | (V <sub>EE</sub> ) − 0.2        |                       | (V <sub>CC</sub> ) + 0.2 | V      |  |
| CMRR                    | Common-mode rejection ratio            | −0.2V < V <sub>CM</sub> < 5.2V                                        | 60                              | 70                    |                          | dB     |  |
| INPUT IMPEDANCE         |                                        |                                                                       |                                 |                       |                          |        |  |
|                         | Common mode                            |                                                                       |                                 | 10 <sup>13</sup>    2 |                          | Ω   pF |  |
|                         | Differential                           |                                                                       |                                 | 10 <sup>13</sup>    4 |                          | Ω   pF |  |
| OUTPUT                  |                                        |                                                                       |                                 |                       |                          |        |  |
| V <sub>OL</sub>         | Voltage output swing from lower rail   | I <sub>SINK</sub> = 4mA                                               |                                 | 175                   | 190                      | mV     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                                 |                       | 225                      |        |  |
| V <sub>OH</sub>         | Voltage output swing from upper rail   | I <sub>SOURCE</sub> = 4mA                                             |                                 | 120                   | 140                      | mV     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                                 |                       | 170                      |        |  |
| I <sub>SC</sub>         | Short-circuit current (per comparator) | I <sub>SC</sub> sinking                                               | 40                              | 48                    |                          | mA     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       | See <a href="#">Figure 6-14</a> |                       |                          |        |  |
|                         |                                        | I <sub>SC</sub> sourcing                                              | 52                              | 60                    |                          |        |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       | See <a href="#">Figure 6-14</a> |                       |                          |        |  |
| POWER SUPPLY            |                                        |                                                                       |                                 |                       |                          |        |  |
| V <sub>CC</sub>         | Specified voltage                      |                                                                       | 2.7                             |                       | 5.5                      | V      |  |
| I <sub>Q</sub>          | Quiescent current                      | T <sub>A</sub> = 25°C                                                 |                                 | 40                    | 50                       | μA     |  |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                                 |                       | 65                       |        |  |

## 6.6 Switching Characteristics: $V_{CC} = 5V$

over operating free-air temperature range (unless otherwise noted)

| PARAMETER |                        | TEST CONDITIONS                      | MIN                                   | TYP | MAX | UNIT |
|-----------|------------------------|--------------------------------------|---------------------------------------|-----|-----|------|
| $t_{PD}$  | Propagation delay time | Low to high                          | Input overdrive = 20mV, $C_L = 15pF$  |     | 47  | ns   |
|           |                        |                                      | Input overdrive = 100mV, $C_L = 15pF$ |     | 43  |      |
|           |                        |                                      | $T_A = -40^\circ C$ to $125^\circ C$  |     | 55  |      |
|           |                        | High to low                          | Input overdrive = 20mV, $C_L = 15pF$  |     | 45  |      |
|           |                        |                                      | Input overdrive = 100mV, $C_L = 15pF$ |     | 42  |      |
|           |                        |                                      | $T_A = -40^\circ C$ to $125^\circ C$  |     | 55  |      |
|           | Propagation delay skew | Input overdrive = 20mV, $C_L = 15pF$ |                                       | 2   |     | ns   |
| $t_R$     | Rise time              | 10% to 90%                           |                                       | 2.9 |     | ns   |
| $t_F$     | Fall time              | 10% to 90%                           |                                       | 3.7 |     | ns   |

## 6.7 Electrical Characteristics: $V_{CC} = 2.7V$

at  $T_A = 25^\circ C$  and  $V_{CC} = 2.7V$  (unless otherwise noted)

| PARAMETER               |                                        | TEST CONDITIONS                                                       | MIN                      | TYP                   | MAX                      | UNIT   |
|-------------------------|----------------------------------------|-----------------------------------------------------------------------|--------------------------|-----------------------|--------------------------|--------|
| OFFSET VOLTAGE          |                                        |                                                                       |                          |                       |                          |        |
| V <sub>IO-TLV3201</sub> | Input offset voltage TLV3201           | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                          | 1                     | 3                        | mV     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          |                       | 4                        |        |
| V <sub>IO-TLV3202</sub> | Input offset voltage TLV3202           | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                          | 1                     | 5                        | mV     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          |                       | 6                        |        |
| dV <sub>OS</sub> /dT    | Input offset voltage drift             | T <sub>A</sub> = −40°C to 125°C                                       |                          | 1                     | 10                       | μV/°C  |
| PSRR                    | Power-supply rejection ratio           | V <sub>CM</sub> = V <sub>CC</sub> / 2, V <sub>CC</sub> = 2.5V to 5.5V | 65                       | 85                    |                          | dB     |
|                         | Input hysteresis                       |                                                                       |                          | 1.2                   |                          | mV     |
| INPUT BIAS CURRENT      |                                        |                                                                       |                          |                       |                          |        |
| I <sub>IB</sub>         | Input bias current                     | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                          | 1                     | 50                       | pA     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          |                       | 5                        | nA     |
| I <sub>IO</sub>         | Input offset current                   | V <sub>CM</sub> = V <sub>CC</sub> / 2                                 |                          | 1                     | 50                       | pA     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          |                       | 2.5                      | nA     |
| INPUT VOLTAGE RANGE     |                                        |                                                                       |                          |                       |                          |        |
| V <sub>CM</sub>         | Common-mode voltage                    | T <sub>A</sub> = −40°C to 125°C                                       | (V <sub>EE</sub> ) − 0.2 |                       | (V <sub>CC</sub> ) + 0.2 | V      |
| CMRR                    | Common-mode rejection ratio            | −0.2V < V <sub>CM</sub> < 2.9V                                        | 56                       | 68                    |                          | dB     |
| INPUT IMPEDANCE         |                                        |                                                                       |                          |                       |                          |        |
|                         | Common mode                            |                                                                       |                          | 10 <sup>13</sup>    2 |                          | Ω   pF |
|                         | Differential                           |                                                                       |                          | 10 <sup>13</sup>    4 |                          | Ω   pF |
| OUTPUT                  |                                        |                                                                       |                          |                       |                          |        |
| V <sub>OL</sub>         | Voltage output swing from lower rail   | I <sub>SINK</sub> = 4mA                                               |                          | 230                   | 260                      | mV     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          |                       | 325                      |        |
| V <sub>OH</sub>         | Voltage output swing from upper rail   | I <sub>SOURCE</sub> = 4mA                                             |                          | 210                   | 250                      | mV     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          |                       | 350                      |        |
| I <sub>SC</sub>         | Short-circuit current (per comparator) | I <sub>SC</sub> sinking                                               | 13                       | 19                    |                          | mA     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          | See Figure 6-14       |                          |        |
|                         |                                        | I <sub>SC</sub> sourcing                                              | 15                       | 21                    |                          |        |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          | See Figure 6-14       |                          |        |
| POWER SUPPLY            |                                        |                                                                       |                          |                       |                          |        |
| V <sub>CC</sub>         | Specified voltage                      |                                                                       | 2.7                      |                       | 5.5                      | V      |
| I <sub>Q</sub>          | Quiescent current                      | T <sub>A</sub> = 25°C                                                 |                          | 36                    | 46                       | μA     |
|                         |                                        | T <sub>A</sub> = −40°C to 125°C                                       |                          |                       | 60                       |        |


## 6.8 Switching Characteristics: $V_{CC} = 2.7V$

over operating free-air temperature range (unless otherwise noted)


| PARAMETER |                        | TEST CONDITIONS                      | MIN | TYP | MAX | UNIT |
|-----------|------------------------|--------------------------------------|-----|-----|-----|------|
| $t_{PD}$  | Propagation delay time | Low to high                          |     | 47  | 50  | ns   |
|           |                        |                                      |     | 42  | 50  |      |
|           |                        |                                      |     |     | 55  |      |
|           |                        | High to low                          |     | 40  | 50  |      |
|           |                        |                                      |     | 38  | 50  |      |
|           |                        |                                      |     |     | 55  |      |
|           | Propagation delay skew | Input overdrive = 20mV, $C_L = 15pF$ |     | 2   |     | ns   |
| $t_R$     | Rise time              | 10% to 90%                           |     | 4.8 |     | ns   |
| $t_F$     | Fall time              | 10% to 90%                           |     | 5.2 |     | ns   |

## 6.9 Typical Characteristics


at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{V}$ , and input overdrive ( $V_{OD}$ ) = 20mV (unless otherwise noted)

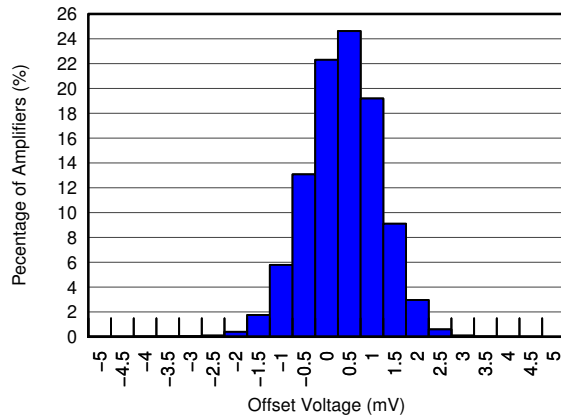


**Figure 6-1. Offset Voltage Distribution**

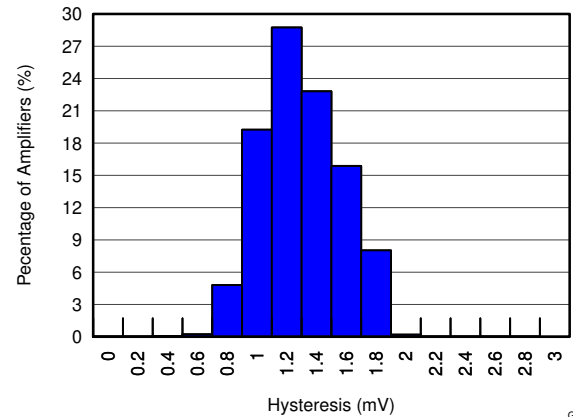


**Figure 6-2. Hysteresis Distribution**

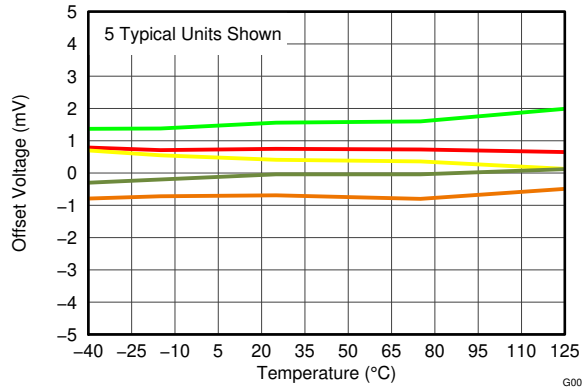


**Figure 6-3. Offset Voltage vs Temperature**

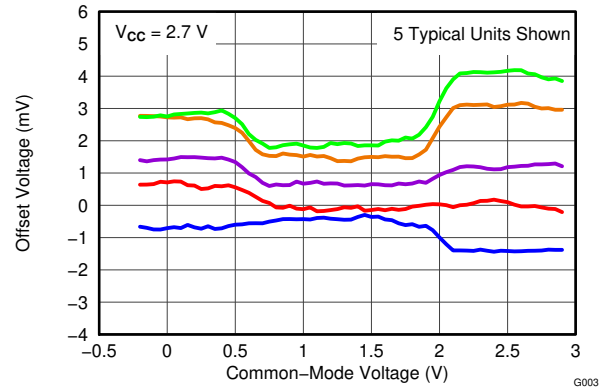

**Figure 6-4. Offset Voltage vs Common-Mode Voltage**

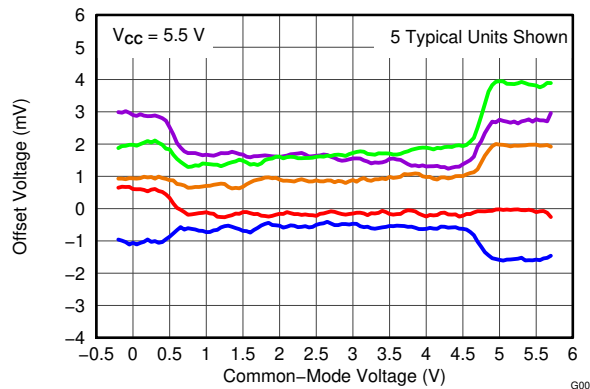


**Figure 6-5. Offset Voltage vs Common-Mode Voltage**

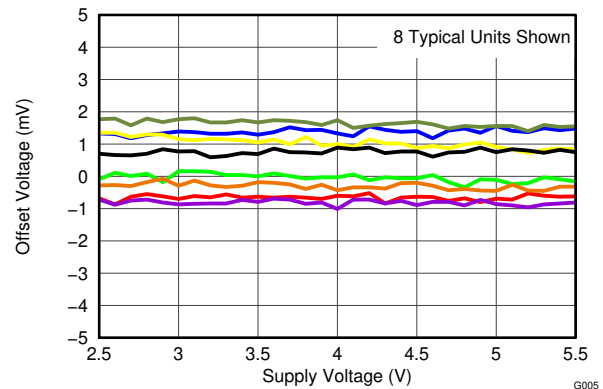


**Figure 6-6. Offset Voltage vs Power Supply**

## 6.9 Typical Characteristics (continued)


at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{V}$ , and input overdrive ( $V_{OD}$ ) = 20mV (unless otherwise noted)

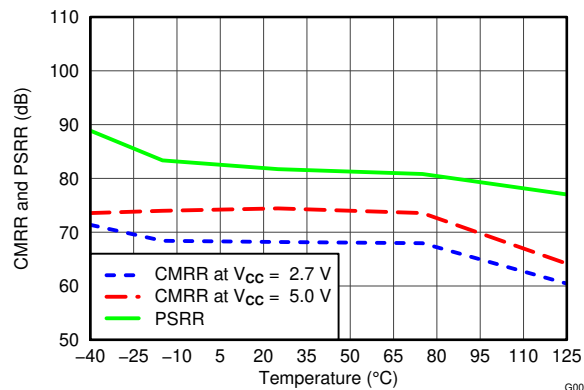


**Figure 6-7. Common-Mode Rejection Ratio and Power-Supply Rejection Ratio vs Temperature**

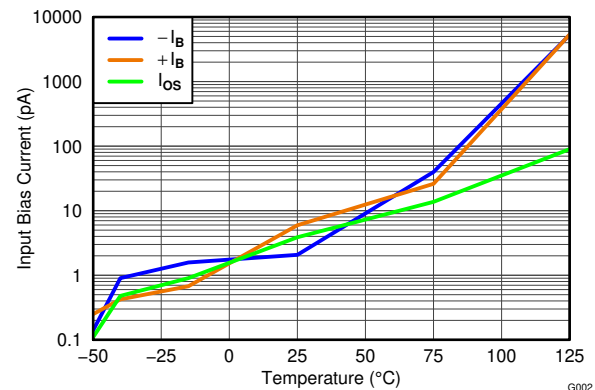


**Figure 6-8. Input Bias Current and Input Offset Current vs Temperature**

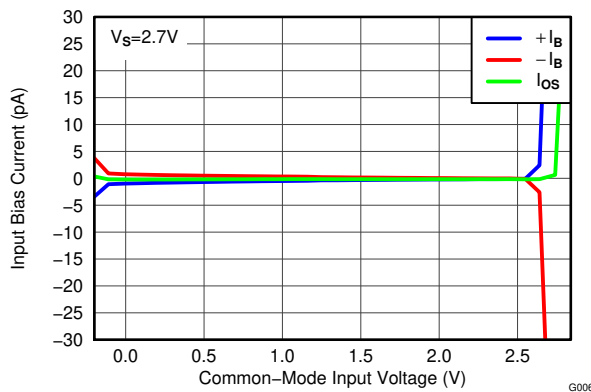


**Figure 6-9. Input Bias Current and Input Offset Current vs Common-Mode Input Voltage**

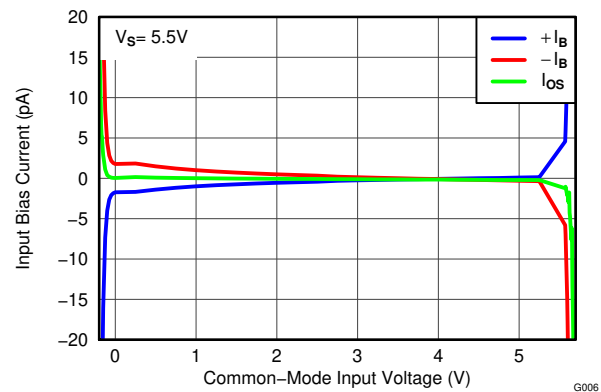

**Figure 6-10. Input Bias Current and Input Offset Current vs Common-Mode Input Voltage**

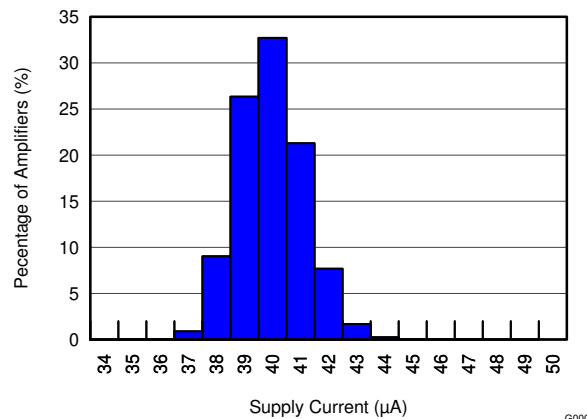


**Figure 6-11. Quiescent Current Distribution**

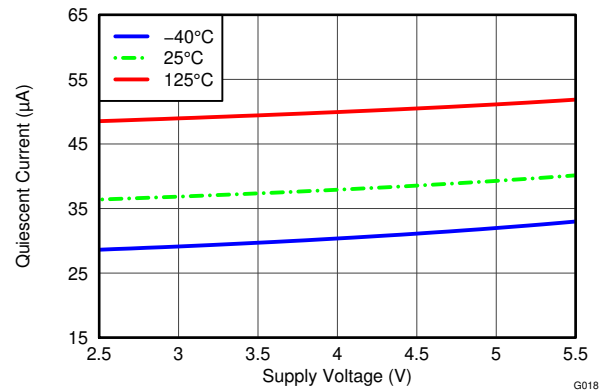


**Figure 6-12. Quiescent Current vs Supply Voltage**

## 6.9 Typical Characteristics (continued)


at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{V}$ , and input overdrive ( $V_{OD}$ ) = 20mV (unless otherwise noted)

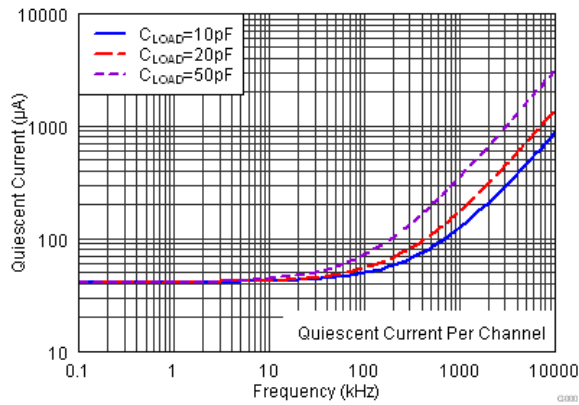


**Figure 6-13. Quiescent Current vs Switching Frequency**

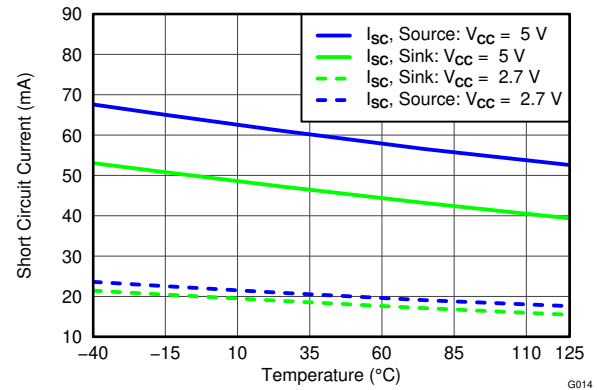


**Figure 6-14. Short-Circuit Current vs Temperature**

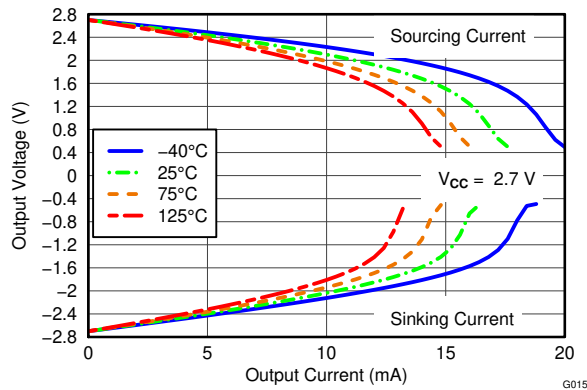


**Figure 6-15. Output Voltage vs Output Current**

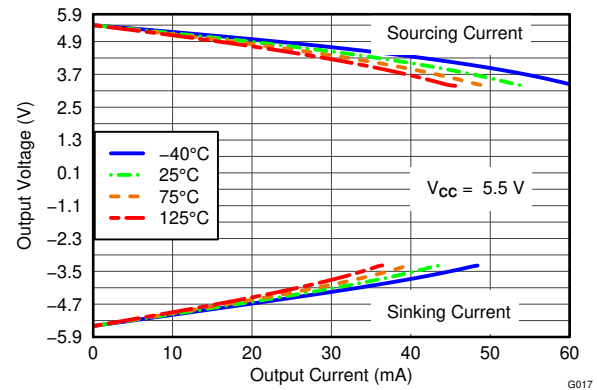

**Figure 6-16. Output Voltage vs Output Current**

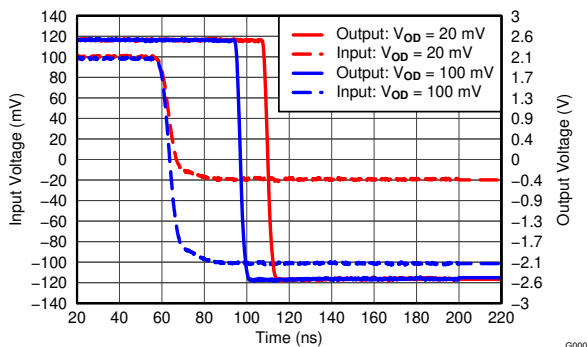

**Figure 6-17. Propagation Delay Falling Edge**

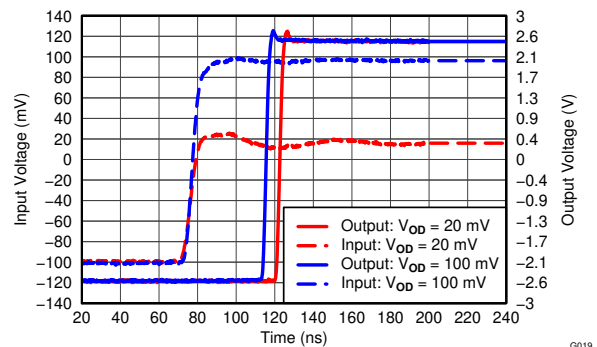

**Figure 6-18. Propagation Delay Rising Edge**

## 6.9 Typical Characteristics (continued)

at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{V}$ , and input overdrive ( $V_{OD}$ ) = 20mV (unless otherwise noted)

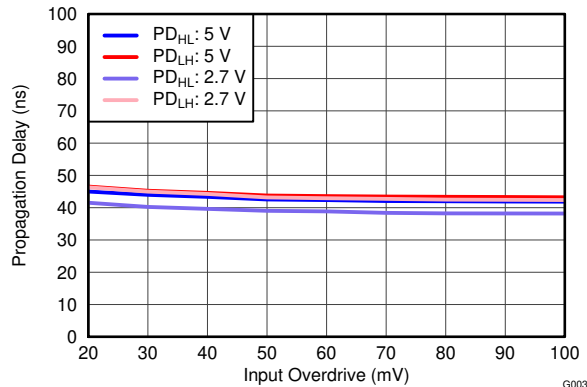


Figure 6-19. Propagation Delay vs Input Overdrive

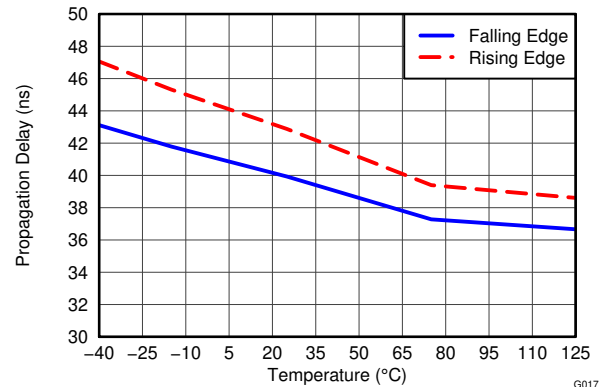


Figure 6-20. Propagation Delay vs Temperature

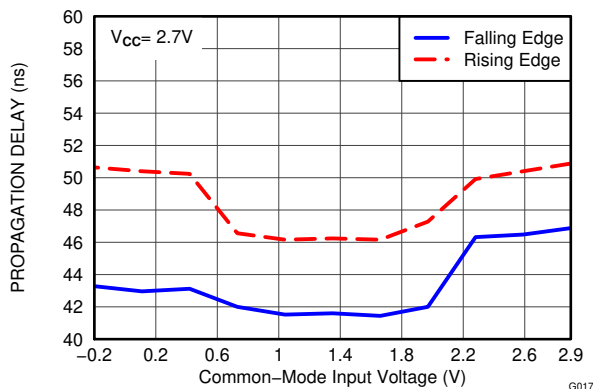


Figure 6-21. Propagation Delay vs Common-Mode Voltage

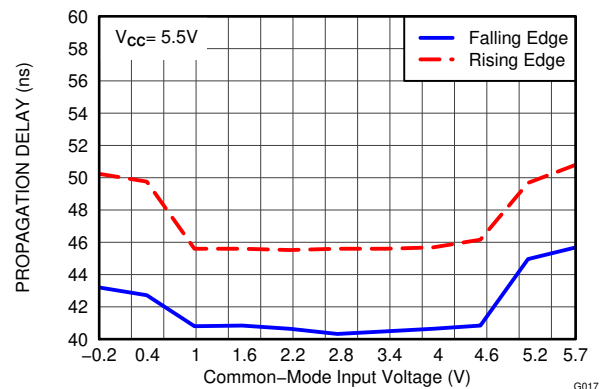


Figure 6-22. Propagation Delay vs Common-Mode Voltage

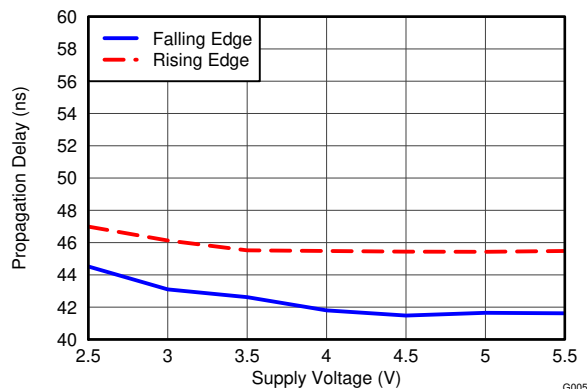


Figure 6-23. Propagation Delay vs Supply Voltage

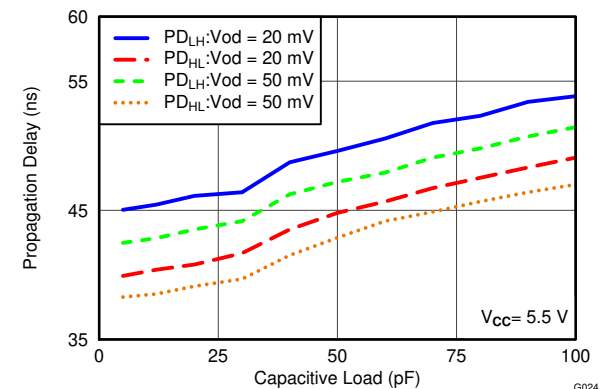



Figure 6-24. Propagation Delay vs Capacitive Load

## 7 Detailed Description

### 7.1 Overview

The TLV3201 and TLV3202 devices feature 40ns response time, and include 1.2mV of internal hysteresis for improved noise immunity with an input common-mode range that extends 0.2V beyond the power-supply rails.

### 7.2 Functional Block Diagram



Copyright © 2016, Texas Instruments Incorporated

### 7.3 Feature Description

#### 7.3.1 Operating Voltage

The TLV3201 and TLV3202 comparators are specified for use on a single supply from 2.7V to 5.5V (or a dual supply from  $\pm 1.35\text{V}$  to  $\pm 2.75\text{V}$ ) over a temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The device continues to function below this range, but performance is not specified.

#### 7.3.2 Input Overvoltage Protection

The device inputs are protected by electrostatic discharge (ESD) diodes that conduct if the input voltages exceed the power supplies by more than approximately 300mV. Momentary voltages greater than 300mV beyond the power supply can be tolerated if the input current is limited to 10mA. This limiting is easily accomplished with a small input resistor in series with the input to the comparator.

### 7.4 Device Functional Modes

The device is fully functional when powered by rail-to-rail supply voltage greater than 2.7V. The device is off at any voltages below 2.7V.

## 8 Application and Implementation

### Note


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The TLV3201 and TLV3202 are single- and dual-supply (respectively), push-pull comparators featuring 40ns of propagation delay on only 40µA of supply current. This combination of fast response time and minimal power consumption make the TLV3201 and TLV3202 excellent comparators for portable, battery-powered applications as well as fast-switching threshold detection such as pulse-width modulation (PWM) output monitors and zero-cross detection.


#### 8.1.1 Comparator Inputs

The TLV3201 and TLV3202 are rail-to-rail input comparators, with an input common-mode range that exceeds the supply rails by 200mV for both positive and negative supplies. The devices are specified from 2.7V to 5.5V, with room temperature operation from 2.5V to 5.5V. The TLV3201 and TLV3202 are designed to prevent phase inversion when the input pins exceed the supply voltage. Figure 8-1 shows the TLV320x response when input voltages exceed the supply, resulting in no phase inversion.

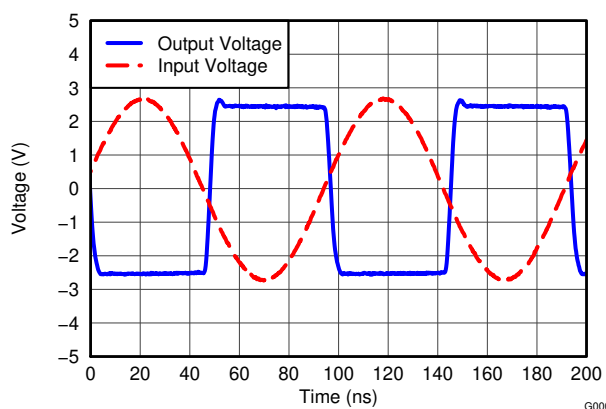

**Figure 8-1. No Phase Inversion: Comparator Response to Input Voltage (Propagation Delay Included)**

The electrostatic discharge (ESD) protection input structure of two back-to-back diodes and 1kΩ series resistors are used to limit the differential input voltage applied to the precision input of the comparator by clamping input voltages that exceed  $V_{CC}$  beyond the specified operating conditions. If potential overvoltage conditions that exceed absolute maximum ratings are present, the addition of external bypass diodes and resistors is recommended, as shown in Figure 8-2. Large differential voltages greater than the supply voltage must be avoided to prevent damage to the input stage.

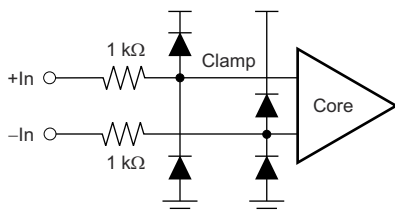


Copyright © 2016, Texas Instruments Incorporated

**Figure 8-2. TLV3201 Equivalent Input structure**

### 8.1.2 External Hysteresis

The TLV3201 and TLV3202 have a hysteresis transfer curve (shown in [Figure 8-3](#)) that is a function of three components:  $V_{TH}$ ,  $V_{OS}$ , and  $V_{HYST}$ .

- $V_{TH}$ : the actual set voltage or threshold trip voltage
- $V_{OS}$ : the internal offset voltage between  $V_{IN+}$  and  $V_{IN-}$ . This voltage is added to  $V_{TH}$  to form the actual trip point at which the comparator must respond to change output states.
- $V_{HYST}$ : internal hysteresis (or trip window) that is designed to reduce comparator sensitivity to noise.

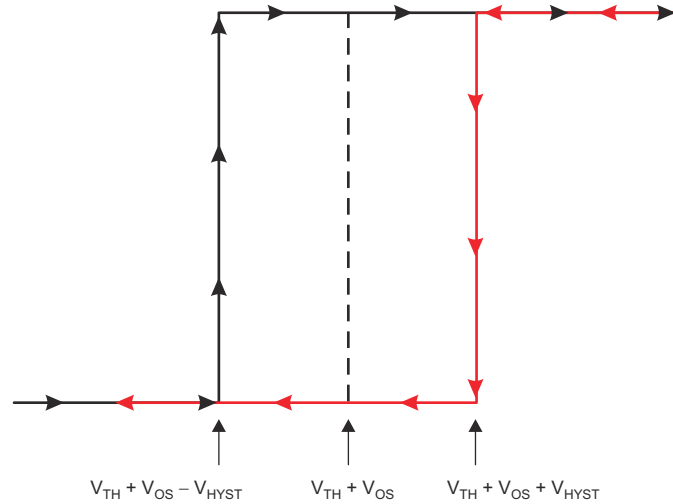

**Figure 8-3. TLV320x Hysteresis Transfer Curve**

#### 8.1.2.1 Inverting Comparator with Hysteresis

The inverting comparator with hysteresis requires a three-resistor network that is referenced to the comparator supply voltage ( $V_{CC}$ ), as shown in [Figure 8-4](#). When  $V_{IN}$  at the inverting input is less than  $V_A$ , the output voltage is high (for simplicity, assume  $V_O$  switches as high as  $V_{CC}$ ). The three network resistors can be represented as  $R1 \parallel R3$  in series with  $R2$ . The lower input trip voltage ( $V_{A1}$ ) is defined by [Equation 1](#).


$$V_{A1} = V_{CC} \times \frac{R2}{(R1 \parallel R3) + R2} \quad (1)$$

When  $V_{IN}$  is greater than  $[V_A \times (V_{IN} > V_A)]$ , the output voltage is low, very close to ground. In this case, the three network resistors can be presented as  $R2 \parallel R3$  in series with  $R1$ . The upper trip voltage ( $V_{A2}$ ) is defined by [Equation 2](#).

$$V_{A2} = V_{CC} \times \frac{R2 \parallel R3}{R1 + (R2 \parallel R3)} \quad (2)$$

The total hysteresis provided by the network is defined by [Equation 3](#).

$$\Delta V_A = V_{A1} - V_{A2} \quad (3)$$

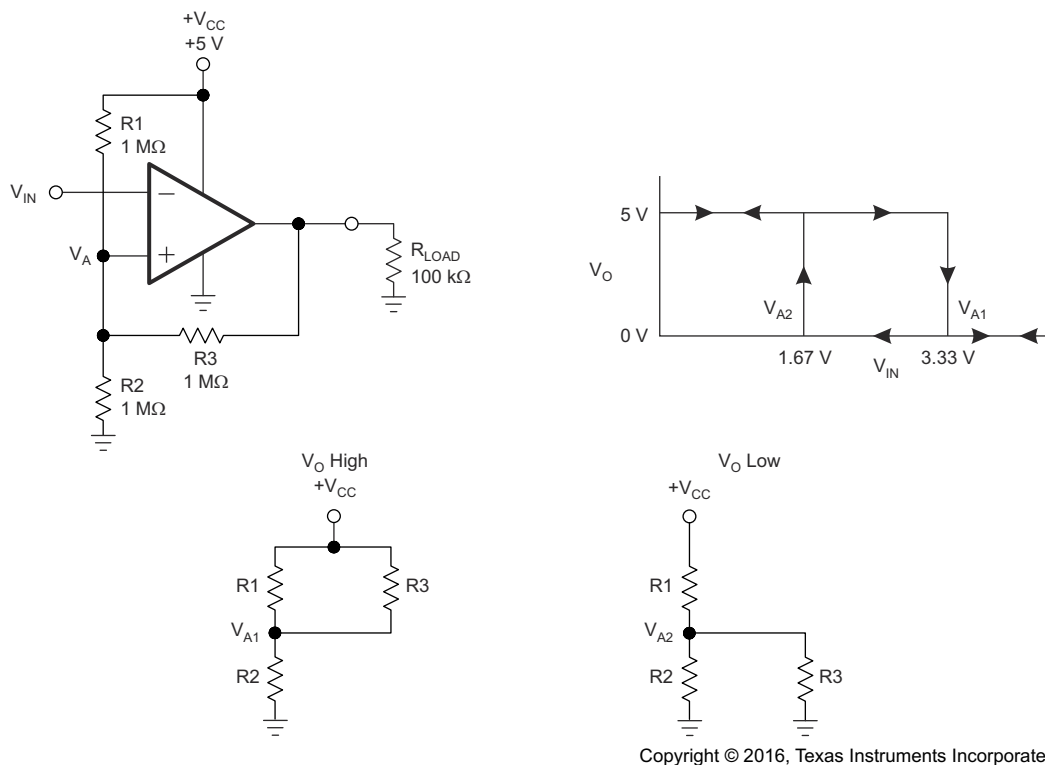

Copyright © 2016, Texas Instruments Incorporated

**Figure 8-4. TLV3201 in Inverting Configuration With Hysteresis****8.1.2.2 Noninverting Comparator With Hysteresis**

A noninverting comparator with hysteresis requires a two-resistor network, as shown in [Figure 8-5](#), and a voltage reference (V<sub>REF</sub>) at the inverting input. When V<sub>IN</sub> is low, the output is also low. For the output to switch from low to high, V<sub>IN</sub> must rise up to V<sub>IN1</sub>. V<sub>IN1</sub> is calculated by [Equation 4](#).


$$V_{IN1} = R1 \times \frac{V_{REF}}{R2} \times V_{REF} \quad (4)$$

When V<sub>IN</sub> is high, the output is also high. In order for the comparator to switch back to a low state, V<sub>IN</sub> must equal V<sub>REF</sub> before V<sub>A</sub> is again equal to V<sub>REF</sub>. V<sub>IN</sub> can be calculated by [Equation 5](#).

$$V_{IN2} = \frac{V_{REF} (R1 + R2) - V_{CC} \times R1}{R2} \quad (5)$$

The hysteresis of this circuit is the difference between V<sub>IN1</sub> and V<sub>IN2</sub>, as defined by [Equation 6](#).

$$\Delta V_{IN} = V_{CC} \times \frac{R1}{R2} \quad (6)$$

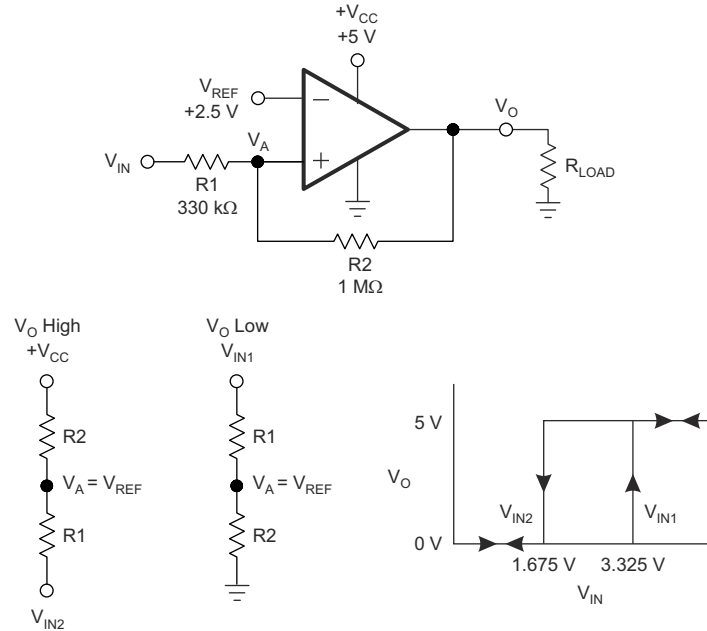

Copyright © 2016, Texas Instruments Incorporated

**Figure 8-5. TLV3201 in Noninverting Configuration With Hysteresis**


### 8.1.3 Capacitive Loads

The TLV3201 and TLV3202 feature a push-pull output. When the output switches, there is a direct path between  $V_{CC}$  and ground, causing increased output sinking or sourcing current during the transition. Following the transition the output current decreases and supply current returns to 40 $\mu$ A, thus maintaining low power consumption. Under reasonable capacitive loads, the TLV3201 and TLV3202 maintain specified propagation delay (see [Section 6.9](#)), but excessive capacitive loading under high switching frequencies may increase supply current, propagation delay, or induce decreased slew rate.

## 8.2 Typical Applications

### 8.2.1 TLV3201 Configured as an AC-Coupled Comparator

One of the benefits of AC coupling a single-supply comparator circuit is that it can block dc offsets induced by ground-loop offsets that could potentially produce either a false trip or a common-mode input violation. Figure 8-6 shows the TLV3201 configured as an ac-coupled comparator.

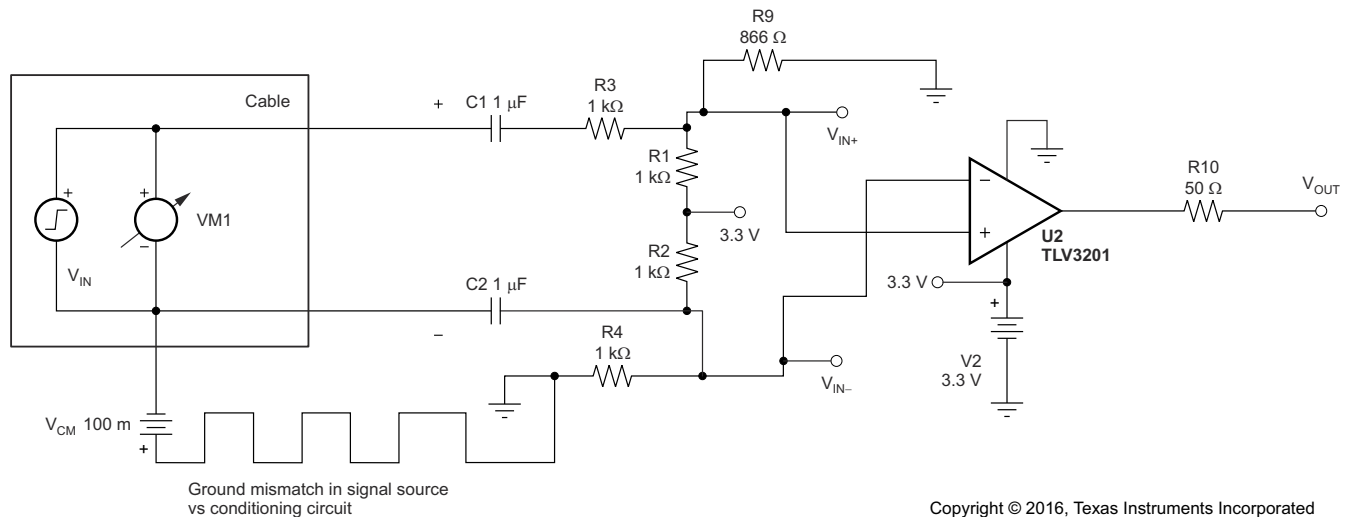

Copyright © 2016, Texas Instruments Incorporated

**Figure 8-6. TLV3201 Configured as an AC-Coupled Comparator (Schematic)**

#### 8.2.1.1 Design Requirements

Design requirements include:


- Ability to tolerate up to  $\pm 100\text{mV}$  of common-mode signal.
- Trigger only on AC signals (such as zero-cross detection).

#### 8.2.1.2 Detailed Design Procedure

Design analysis:

- AC-coupled, high-pass frequency
  - Large capacitors require longer start-up time from device power on
  - Use  $1\mu\text{F}$  capacitor to achieve high-pass frequency of approximately  $159\text{Hz}$
  - For high-pass equivalent, use  $C_{\text{IN}} = 0.5\mu\text{F}$ ,  $R_{\text{IN}} = 2\text{k}\Omega$
1. Set up input dividers initially for one-half supply (to be in center of acceptable common-mode range).
  2. Adjust either divider slightly upwards or downwards as desired to establish quiescent output condition.
  3. Select coupling capacitors based on lowest expected frequency.


### 8.2.1.3 Application Curve

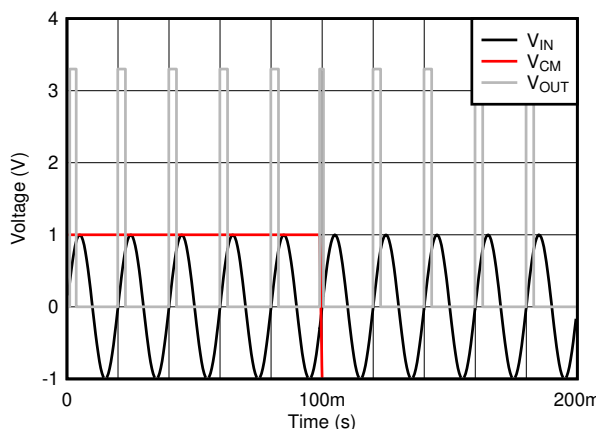

**Figure 8-7. AC-Coupled Comparator Results**

### 8.2.2 TLV3201 and OPA320 Configured as a Fast-Response Output Current Monitor

Figure 8-8 shows a single-supply current monitor configured as a difference amplifier with a gain of 50. The OPA320 was chosen for this circuit because of its gain bandwidth (20 MHz), which allows higher speed triggering and monitoring of the current across the shunt resistor followed by the fast response of the TLV3201.

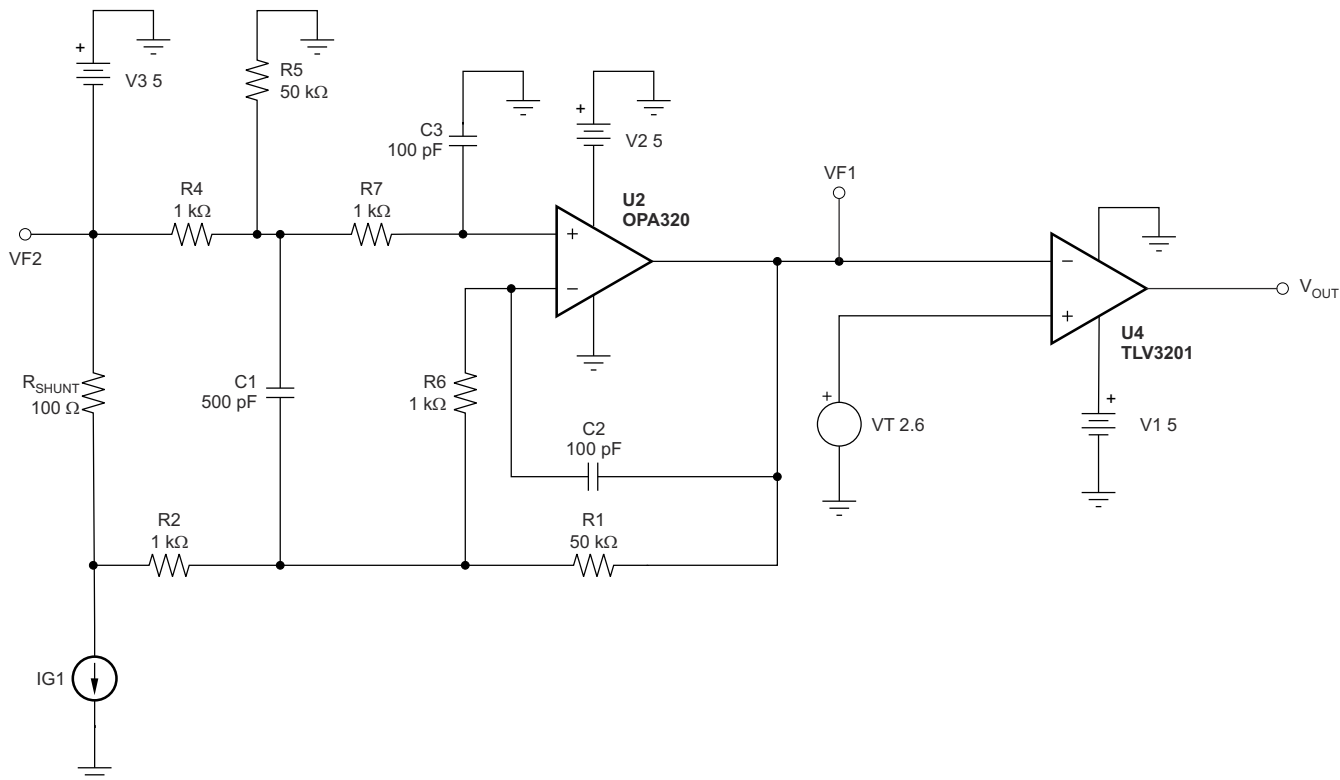


Copyright © 2016, Texas Instruments Incorporated

**Figure 8-8. TLV3201 and OPA320 Configured as a Fast-Response Output Current Monitor**

### 8.2.3 TLV3201 and TMP20 Configured as a Precision Analog Temperature Switch

Figure 8-9 shows the TMP20 and TLV3201 designed as a high-speed temperature switch. The TMP20 is an analog output temperature sensor where output voltage decreases with temperature. The comparator output is tripped when the output reaches a critical trip threshold.

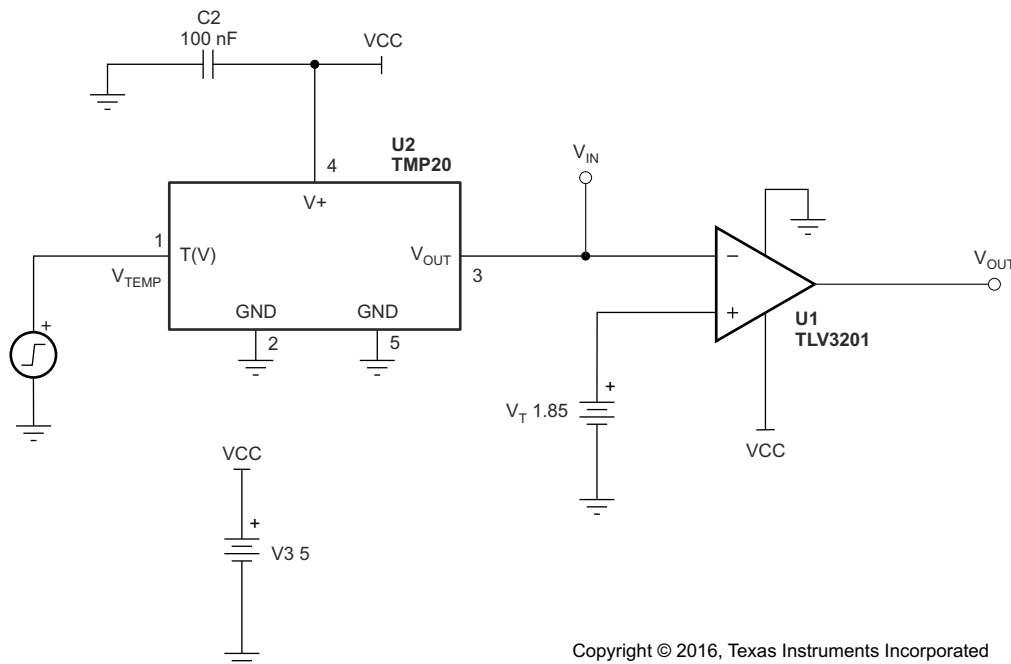

Copyright © 2016, Texas Instruments Incorporated

Figure 8-9. TLV3201 and TMP20 Configured as a Precision Analog Temperature Switch

## 8.3 Power Supply Recommendations

The TLV3201 and TLV3202 comparators are specified for use on a single supply from 2.7V to 5.5V (or a dual supply from  $\pm 1.35\text{V}$  to  $\pm 2.75\text{V}$ ) over a temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The device continues to function below this range, but performance is not specified. Place bypass capacitors close to the power-supply pins to reduce noise coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see [Section 8.4.1](#).

## 8.4 Layout

### 8.4.1 Layout Guidelines

The TLV3201 and TLV3202 are fast-switching, high-speed comparators and require high-speed layout considerations. For best results, maintain the following layout guidelines.

- Use a printed-circuit board (PCB) with a good, unbroken low-inductance ground plane.
- Place a decoupling capacitor (0.1  $\mu\text{F}$  ceramic, surface-mount capacitor) as close as possible to  $V_{CC}$ .
- On the inputs and the output, keep lead lengths as short as possible to avoid unwanted parasitic feedback around the comparator. Keep inputs away from the output.
- Solder the device directly to the PCB rather than using a socket.
- For slow-moving input signals, take care to prevent parasitic feedback. A small capacitor (1000pF or less) placed between the inputs can help eliminate oscillations in the transition region. This capacitor causes some degradation to propagation delay when the impedance is low. The topside ground plane runs between the output and inputs.
- The ground pin ground trace runs under the device up to the bypass capacitor, shielding the inputs from the outputs.

### 8.4.2 Layout Example

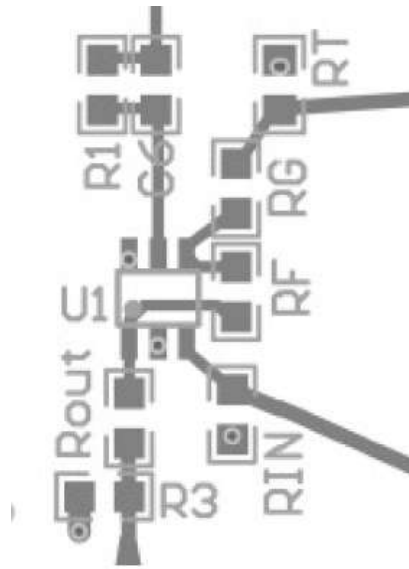


Figure 8-10. TLV320x Board Layout Example

## 9 Device and Documentation Support

### 9.1 Device Support

#### 9.1.1 Development Support

##### 9.1.1.1 TINA-TI™ (Free Software Download)

TINA-TI™ is a simple, powerful, and easy-to-use circuit simulation program based on a SPICE engine. TINA-TI is a free, fully-functional version of the TINA software, preloaded with a library of macro models in addition to a range of both passive and active models. TINA-TI provides all the conventional dc, transient, and frequency domain analysis of SPICE, as well as additional design capabilities.

Available as a [free download](#) from the Analog eLab Design Center, TINA-TI offers extensive post-processing capability that allows users to format results in a variety of ways. Virtual instruments offer the ability to select input waveforms and probe circuit nodes, voltages, and waveforms, creating a dynamic quick-start tool.

---

#### Note

These files require that either the TINA software (from DesignSoft™) or TINA-TI software be installed. Download the free TINA-TI software from the [TINA-TI folder](#).

---

##### 9.1.1.2 Universal Op Amp EVM

The [Universal Op Amp EVM](#) is a series of general-purpose, blank circuit boards that simplify prototyping circuits for a variety of IC package types. The evaluation module board design allows many different circuits to be constructed easily and quickly. Five models are offered, with each model intended for a specific package type. PDIP, SOIC, MSOP, TSSOP and SOT23 packages are all supported.

---

#### Note

These boards are unpopulated, so users must provide their own ICs. TI recommends requesting several op amp device samples when ordering the Universal Op Amp EVM.

---

##### 9.1.1.3 TI Precision Designs

TI Precision Designs are analog solutions created by TI's precision analog applications experts and offer the theory of operation, component selection, simulation, complete PCB schematic and layout, bill of materials, and measured performance of many useful circuits. TI Precision Designs are available online at <http://www.ti.com/ww/en/analog/precision-designs/>.

##### 9.1.1.4 WEBENCH® Filter Designer

[WEBENCH® Filter Designer](#) is a simple, powerful, and easy-to-use active filter design program. The WEBENCH Filter Designer lets you create optimized filter designs using a selection of TI operational amplifiers and passive components from TI's vendor partners.

Available as a web-based tool from the WEBENCH® Design Center, [WEBENCH® Filter Designer](#) allows you to design, optimize, and simulate complete multistage active filter solutions within minutes.

### 9.2 Documentation Support

#### 9.2.1 Related Documentation

The following documents are relevant to using the TLV320x, and recommended for reference. All are available for download at [www.ti.com](http://www.ti.com) unless otherwise noted.

- [Frequency Dithering With the UCC28950 and TLV3201](#) (SLUA646)
- [Frequency Dithering with the UCC28180 and TLV3201](#) (SLUA704)
- [Comparator with Hysteresis Reference Design](#) (TIDU020)

### 9.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.4 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 9.5 Trademarks

TINA-TI™ is a trademark of Texas Instruments and DesignSoft, Inc..

DesignSoft™ is a trademark of DesignSoft, Inc.

TI E2E™ is a trademark of Texas Instruments.

WEBENCH® is a registered trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 9.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 9.7 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| <b>Changes from Revision B (December 2016) to Revision C (June 2022)</b>             | <b>Page</b> |
|--------------------------------------------------------------------------------------|-------------|
| • Corrected transposed TLV3202 D and DGK columns in Thermal Metric table.....        | 4           |
| • Corrected typo in DGK Tja from 146.3 to 143.6 for DGK in Thermal Metric table..... | 4           |
| • Added Input Offset Voltage for TLV3201 for 5V.....                                 | 5           |
| • Added 5V Switching Specifications table.....                                       | 5           |
| • Added Input Offset Voltage for TLV3201 for 2.7V.....                               | 6           |

| <b>Changes from Revision A (June 2012) to Revision B (December 2016)</b>                                                                                                                                                                                                                                                                             | <b>Page</b> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • Added <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section ..... | 1           |
| • Deleted <i>Ordering Information</i> table; see <i>Package Option Addendum</i> at the end of the data sheet.....                                                                                                                                                                                                                                    | 1           |

| <b>Changes from Revision * (March 2012) to Revision A (June 2012)</b> | <b>Page</b> |
|-----------------------------------------------------------------------|-------------|
| • Changed product status from Production Data to Mixed Status.....    | 1           |
| • Added dual channel device.....                                      | 1           |

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TLV3201AIDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | RAI                 |
| TLV3201AIDBVR.B               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | RAI                 |
| <a href="#">TLV3201AIDBVT</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | RAI                 |
| TLV3201AIDBVT.B               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | RAI                 |
| <a href="#">TLV3201AIDCKR</a> | Active        | Production           | SC70 (DCK)   5   | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-2-260C-1 YEAR               | -40 to 125   | SDP                 |
| TLV3201AIDCKR.B               | Active        | Production           | SC70 (DCK)   5   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SDP                 |
| TLV3201AIDCKRG4               | Active        | Production           | SC70 (DCK)   5   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SDP                 |
| TLV3201AIDCKRG4.B             | Active        | Production           | SC70 (DCK)   5   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SDP                 |
| <a href="#">TLV3201AIDCKT</a> | Active        | Production           | SC70 (DCK)   5   | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-2-260C-1 YEAR               | -40 to 125   | SDP                 |
| TLV3201AIDCKT.B               | Active        | Production           | SC70 (DCK)   5   | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SDP                 |
| <a href="#">TLV3202AID</a>    | Active        | Production           | SOIC (D)   8     | 50   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL3202              |
| TLV3202AID.B                  | Active        | Production           | SOIC (D)   8     | 50   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL3202              |
| <a href="#">TLV3202AIDGK</a>  | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | VUDC                |
| TLV3202AIDGK.B                | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | VUDC                |
| <a href="#">TLV3202AIDGKR</a> | Active        | Production           | VSSOP (DGK)   8  | 2500   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | VUDC                |
| TLV3202AIDGKR.B               | Active        | Production           | VSSOP (DGK)   8  | 2500   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | VUDC                |
| <a href="#">TLV3202AIDR</a>   | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL3202              |
| TLV3202AIDR.B                 | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL3202              |
| TLV3202AIDRG4                 | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL3202              |
| TLV3202AIDRG4.B               | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL3202              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLV3201, TLV3202 :**

- Automotive : [TLV3201-Q1](#), [TLV3202-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV3201AIDBVR   | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV3201AIDBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV3201AIDCKR   | SC70         | DCK             | 5    | 3000 | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV3201AIDCKR   | SC70         | DCK             | 5    | 3000 | 180.0              | 8.4                | 2.3     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV3201AIDCKRG4 | SC70         | DCK             | 5    | 3000 | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV3201AIDCKT   | SC70         | DCK             | 5    | 250  | 178.0              | 8.4                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV3201AIDCKT   | SC70         | DCK             | 5    | 250  | 180.0              | 8.4                | 2.3     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV3202AIDGKR   | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| TLV3202AIDR     | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV3202AIDRG4   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV3201AIDBVR   | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV3201AIDBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TLV3201AIDCKR   | SC70         | DCK             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TLV3201AIDCKR   | SC70         | DCK             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV3201AIDCKRG4 | SC70         | DCK             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TLV3201AIDCKT   | SC70         | DCK             | 5    | 250  | 190.0       | 190.0      | 30.0        |
| TLV3201AIDCKT   | SC70         | DCK             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TLV3202AIDGKR   | VSSOP        | DGK             | 8    | 2500 | 364.0       | 364.0      | 27.0        |
| TLV3202AIDR     | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| TLV3202AIDRG4   | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |

## TUBE



\*All dimensions are nominal

| Device         | Package Name | Package Type | Pins | SPQ  | L (mm) | W (mm) | T (μm) | B (mm) |
|----------------|--------------|--------------|------|------|--------|--------|--------|--------|
| TLV3202AID     | D            | SOIC         | 8    | 50   | 506.6  | 8      | 3940   | 4.32   |
| TLV3202AID     | D            | SOIC         | 8    | 50   | 507    | 8      | 3940   | 4.32   |
| TLV3202AID.B   | D            | SOIC         | 8    | 50   | 506.6  | 8      | 3940   | 4.32   |
| TLV3202AID.B   | D            | SOIC         | 8    | 50   | 507    | 8      | 3940   | 4.32   |
| TLV3202AIDGK   | DGK          | VSSOP        | 8    | 80   | 330    | 6.55   | 500    | 2.88   |
| TLV3202AIDGK.B | DGK          | VSSOP        | 8    | 80   | 330    | 6.55   | 500    | 2.88   |
| TLV3202AIDR    | D            | SOIC         | 8    | 2500 | 507    | 8      | 3940   | 4.32   |
| TLV3202AIDR.B  | D            | SOIC         | 8    | 2500 | 507    | 8      | 3940   | 4.32   |



### SOT - 1.1 max height

Technical drawing of a mechanical part showing three views: front, side, and top.

**Front View Dimensions:**

- Overall width: 2.4 (1.8)
- Overall height: 2.15 (1.85)
- Horizontal hole positions: 1.4 (1.1)
- Vertical hole positions: 1.3 (1.3)
- Hole diameters: (0.15), (0.1)
- Feature **NOTE 4** is indicated.
- Hatched area labeled **PIN 1 INDEX AREA**.

**Side View Dimensions:**

- Width: 1.1 MAX
- Thickness: 0.1
- Angle: 4X 0° -12°

**Top View Dimensions:**

- Width: 0.46 TYP
- Height: 0.22 TYP
- Angle: 4X 4° -15°
- Feature **NOTE 5** is indicated.


**Feature Control Frames:**

- Top View:**  $\phi$  0.1 M C A B
- Side View:** 0.1 C


**Other Labels:**

- GAGE PLANE** (indicated on the top view)
- SEATING PLANE** (indicated on the top view)

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-203.
4. Support pin may differ or may not be present.
5. Lead width does not comply with JEDEC.
6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side

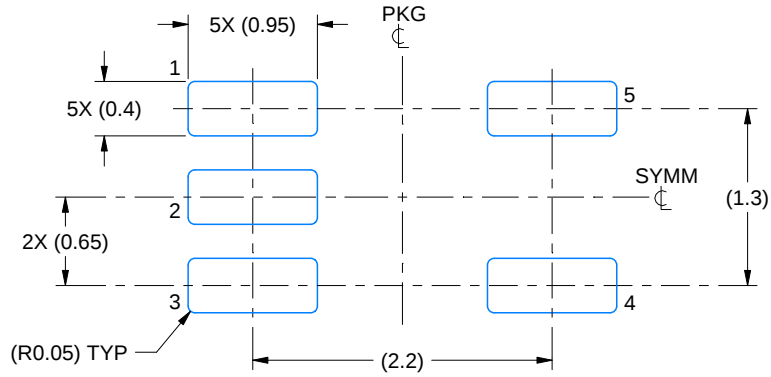

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:18X

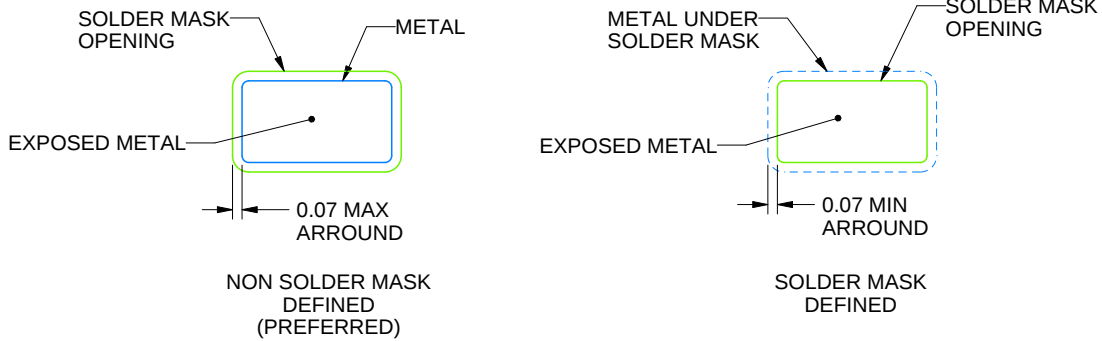


SOLDER MASK DETAILS

4214834/G 11/2024

NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.
8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

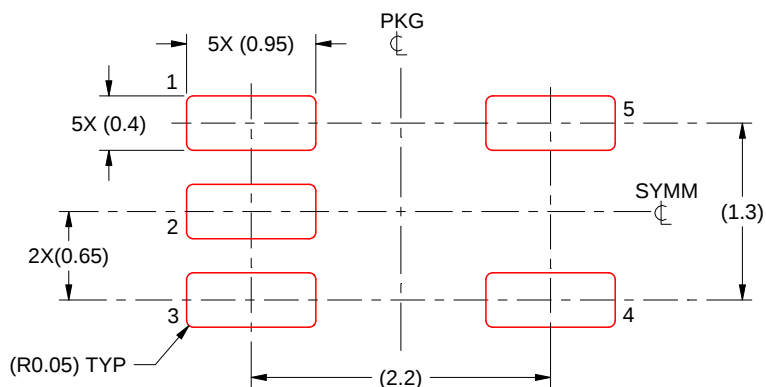

SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:18X

4214834/G 11/2024

NOTES: (continued)

9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
10. Board assembly site may have different recommendations for stencil design.




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

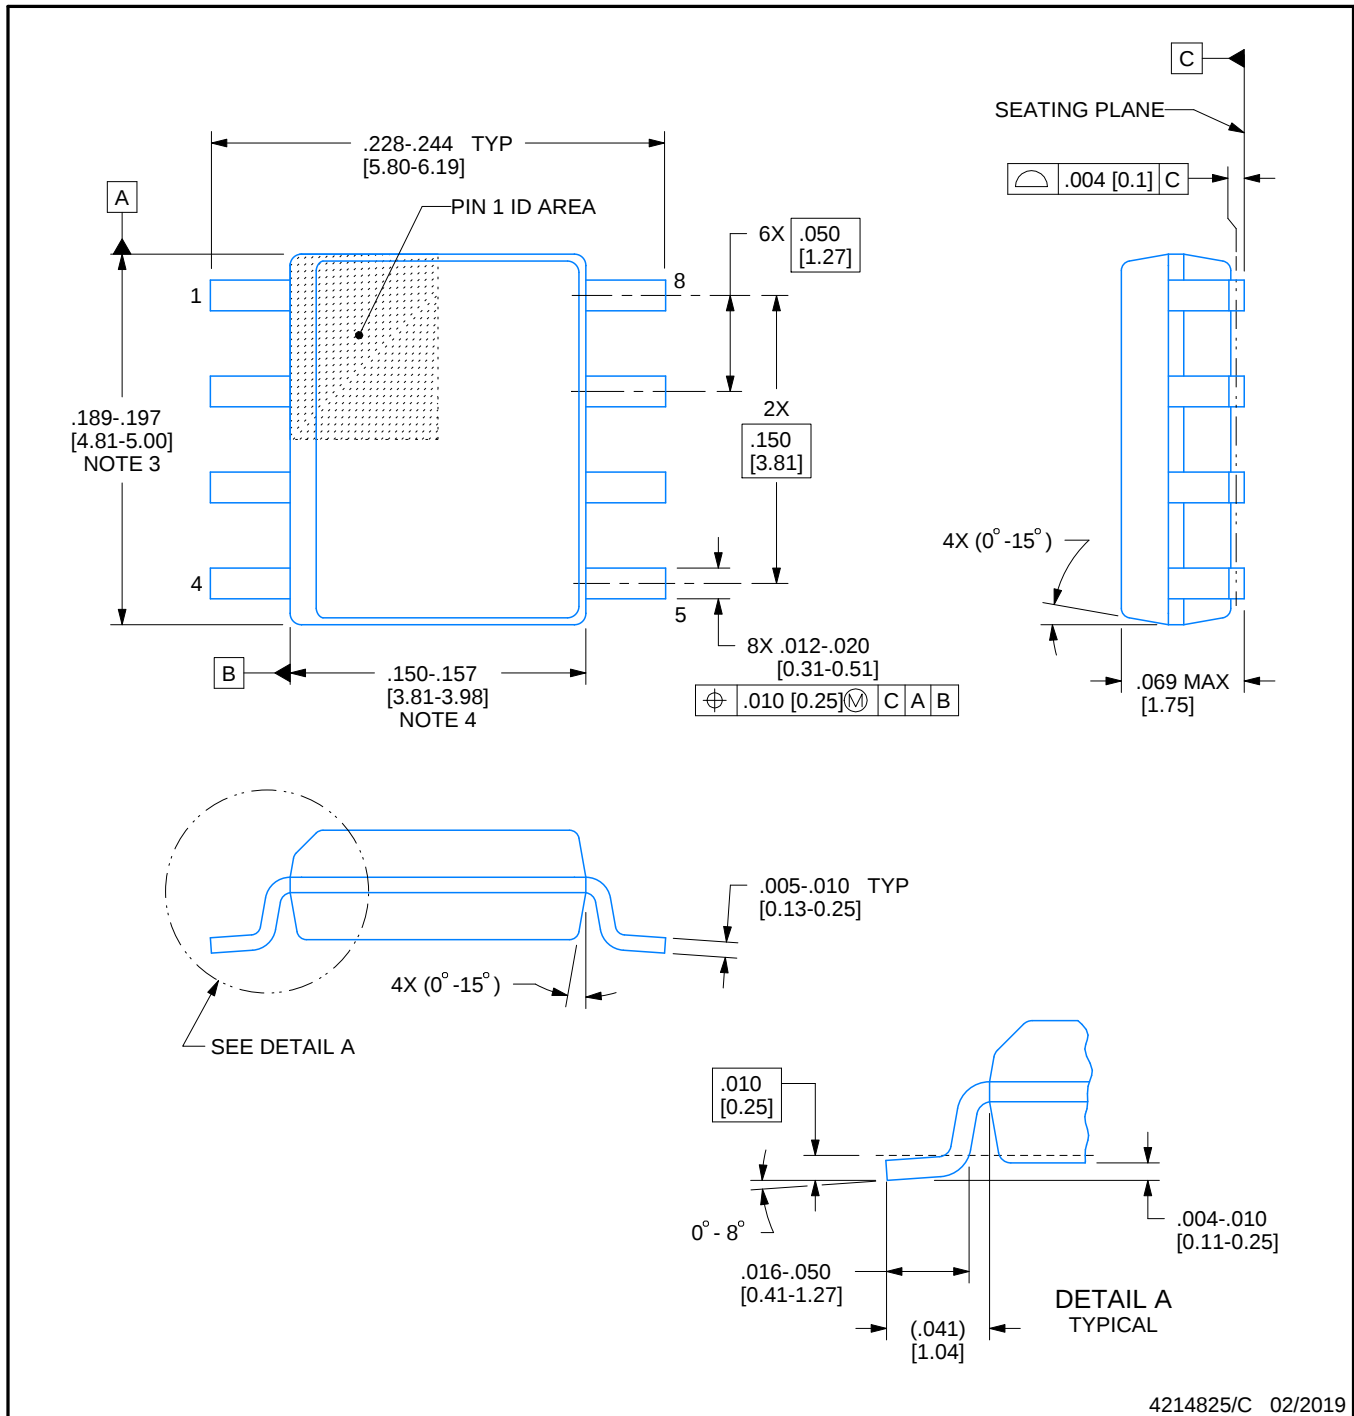

4214825/C 02/2019

## NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

**D0008A**

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



# EXAMPLE BOARD LAYOUT

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X



SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR




SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

DGK0008A



## PACKAGE OUTLINE

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



4214862/A 04/2023

### NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

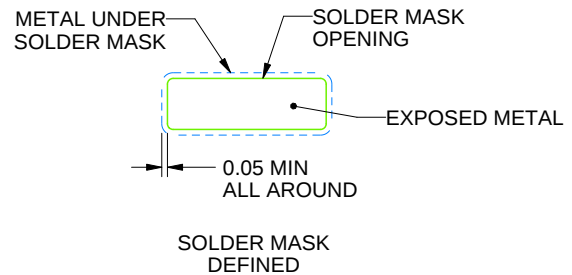

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

## EXAMPLE STENCIL DESIGN

DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025