

DESIGNATION

版 数 REV.	年月日 DATE	DCN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 問 APPD.	承 認 APPD.
2	30.Mar.2015	012843	CORRECT AN ERROR		S.YAMAGUCHI	M.SASAKI	T.SHINDOU

NOTE 1. PRODUCTION LOT No. AS INDICATED.

(E x .) T 5 0 1

LOT	NUMBER	OF	CURRENT	MONTH
1	1	1	1	1
2	2	2	2	2
3	3	3	3	3
4	4	4	4	4
5	5	5	5	5
6	6	6	6	6
7	7	7	7	7
8	8	8	8	8
9	9	9	9	9
10	10	10	10	10
11	11	11	11	11
12	12	12	12	12
13	13	13	13	13
14	14	14	14	14
15	15	15	15	15
16	16	16	16	16
17	17	17	17	17
18	18	18	18	18
19	19	19	19	19
20	20	20	20	20
21	21	21	21	21
22	22	22	22	22
23	23	23	23	23
24	24	24	24	24
25	25	25	25	25
26	26	26	26	26
27	27	27	27	27
28	28	28	28	28
29	29	29	29	29
30	30	30	30	30
31	31	31	31	31
32	32	32	32	32
33	33	33	33	33
34	34	34	34	34
35	35	35	35	35
36	36	36	36	36
37	37	37	37	37
38	38	38	38	38
39	39	39	39	39
40	40	40	40	40
41	41	41	41	41
42	42	42	42	42
43	43	43	43	43
44	44	44	44	44
45	45	45	45	45
46	46	46	46	46
47	47	47	47	47
48	48	48	48	48
49	49	49	49	49
50	50	50	50	50
51	51	51	51	51
52	52	52	52	52
53	53	53	53	53
54	54	54	54	54
55	55	55	55	55
56	56	56	56	56
57	57	57	57	57
58	58	58	58	58
59	59	59	59	59
60	60	60	60	60
61	61	61	61	61
62	62	62	62	62
63	63	63	63	63
64	64	64	64	64
65	65	65	65	65
66	66	66	66	66
67	67	67	67	67
68	68	68	68	68
69	69	69	69	69
70	70	70	70	70
71	71	71	71	71
72	72	72	72	72
73	73	73	73	73
74	74	74	74	74
75	75	75	75	75
76	76	76	76	76
77	77	77	77	77
78	78	78	78	78
79	79	79	79	79
80	80	80	80	80
81	81	81	81	81
82	82	82	82	82
83	83	83	83	83
84	84	84	84	84
85	85	85	85	85
86	86	86	86	86
87	87	87	87	87

MONTH (1 TO 9 FOR JAN. TO SEPT. RESPECTIVELY,
OCT.:0, NOV.:X, DEC.:Y)

YEAR (LAST DIGIT ONLY)

MANUFACTURE CODE

MM60-52B1-G1

SERIES PREFIX	CONTACT FINISH 1: Au (0.1 μm Min.) OVER Ni
No. OF CONTACTS	
SOCKET TYPE	MODIFY CODE
KEYING TYPE	0: 4.0mm HIGHT WITH BOSS

HATCHED AREAS ILLUSTRATE MAXIMUM
AVAILABLE COMPONENT VOLUME.

APPLICABLE DIMM(REF.)

COMPONENT AND ROUTING (ALL LAYERS,
TOP AND BOTTOM SIDE) KEEP OUT AREA
FOR LATCH SOLUTIONS. (NOTE 6)

NOTE 2. CARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.



NOTE 3. BEVEL MUST BE FREE OF CUTTING BURRS.

NOTE 4. THE HORIZONTAL AXIS FOR THE PATTERN IS ESTABLISHED BY A LINE THROUGH THE CENTER OF THE $\phi 1.6$ AND $\phi 1.1$ HOLES.


THE VERTICAL AXIS IS 90° TO THE HORIZONTAL AXIS, THROUGH THE CENTER OF DATUM F.

NOTE 5. LOCATION OF INSERTED CARD EDGE IS ALIGNED WITH C OF HOLES.


NOTE 6. ONLY WHEN THE LATCH SHOWN IN SJ105217(MM60-EZH039-B5) IS USED, THESE DIMENSIONS ARE APPLIED.

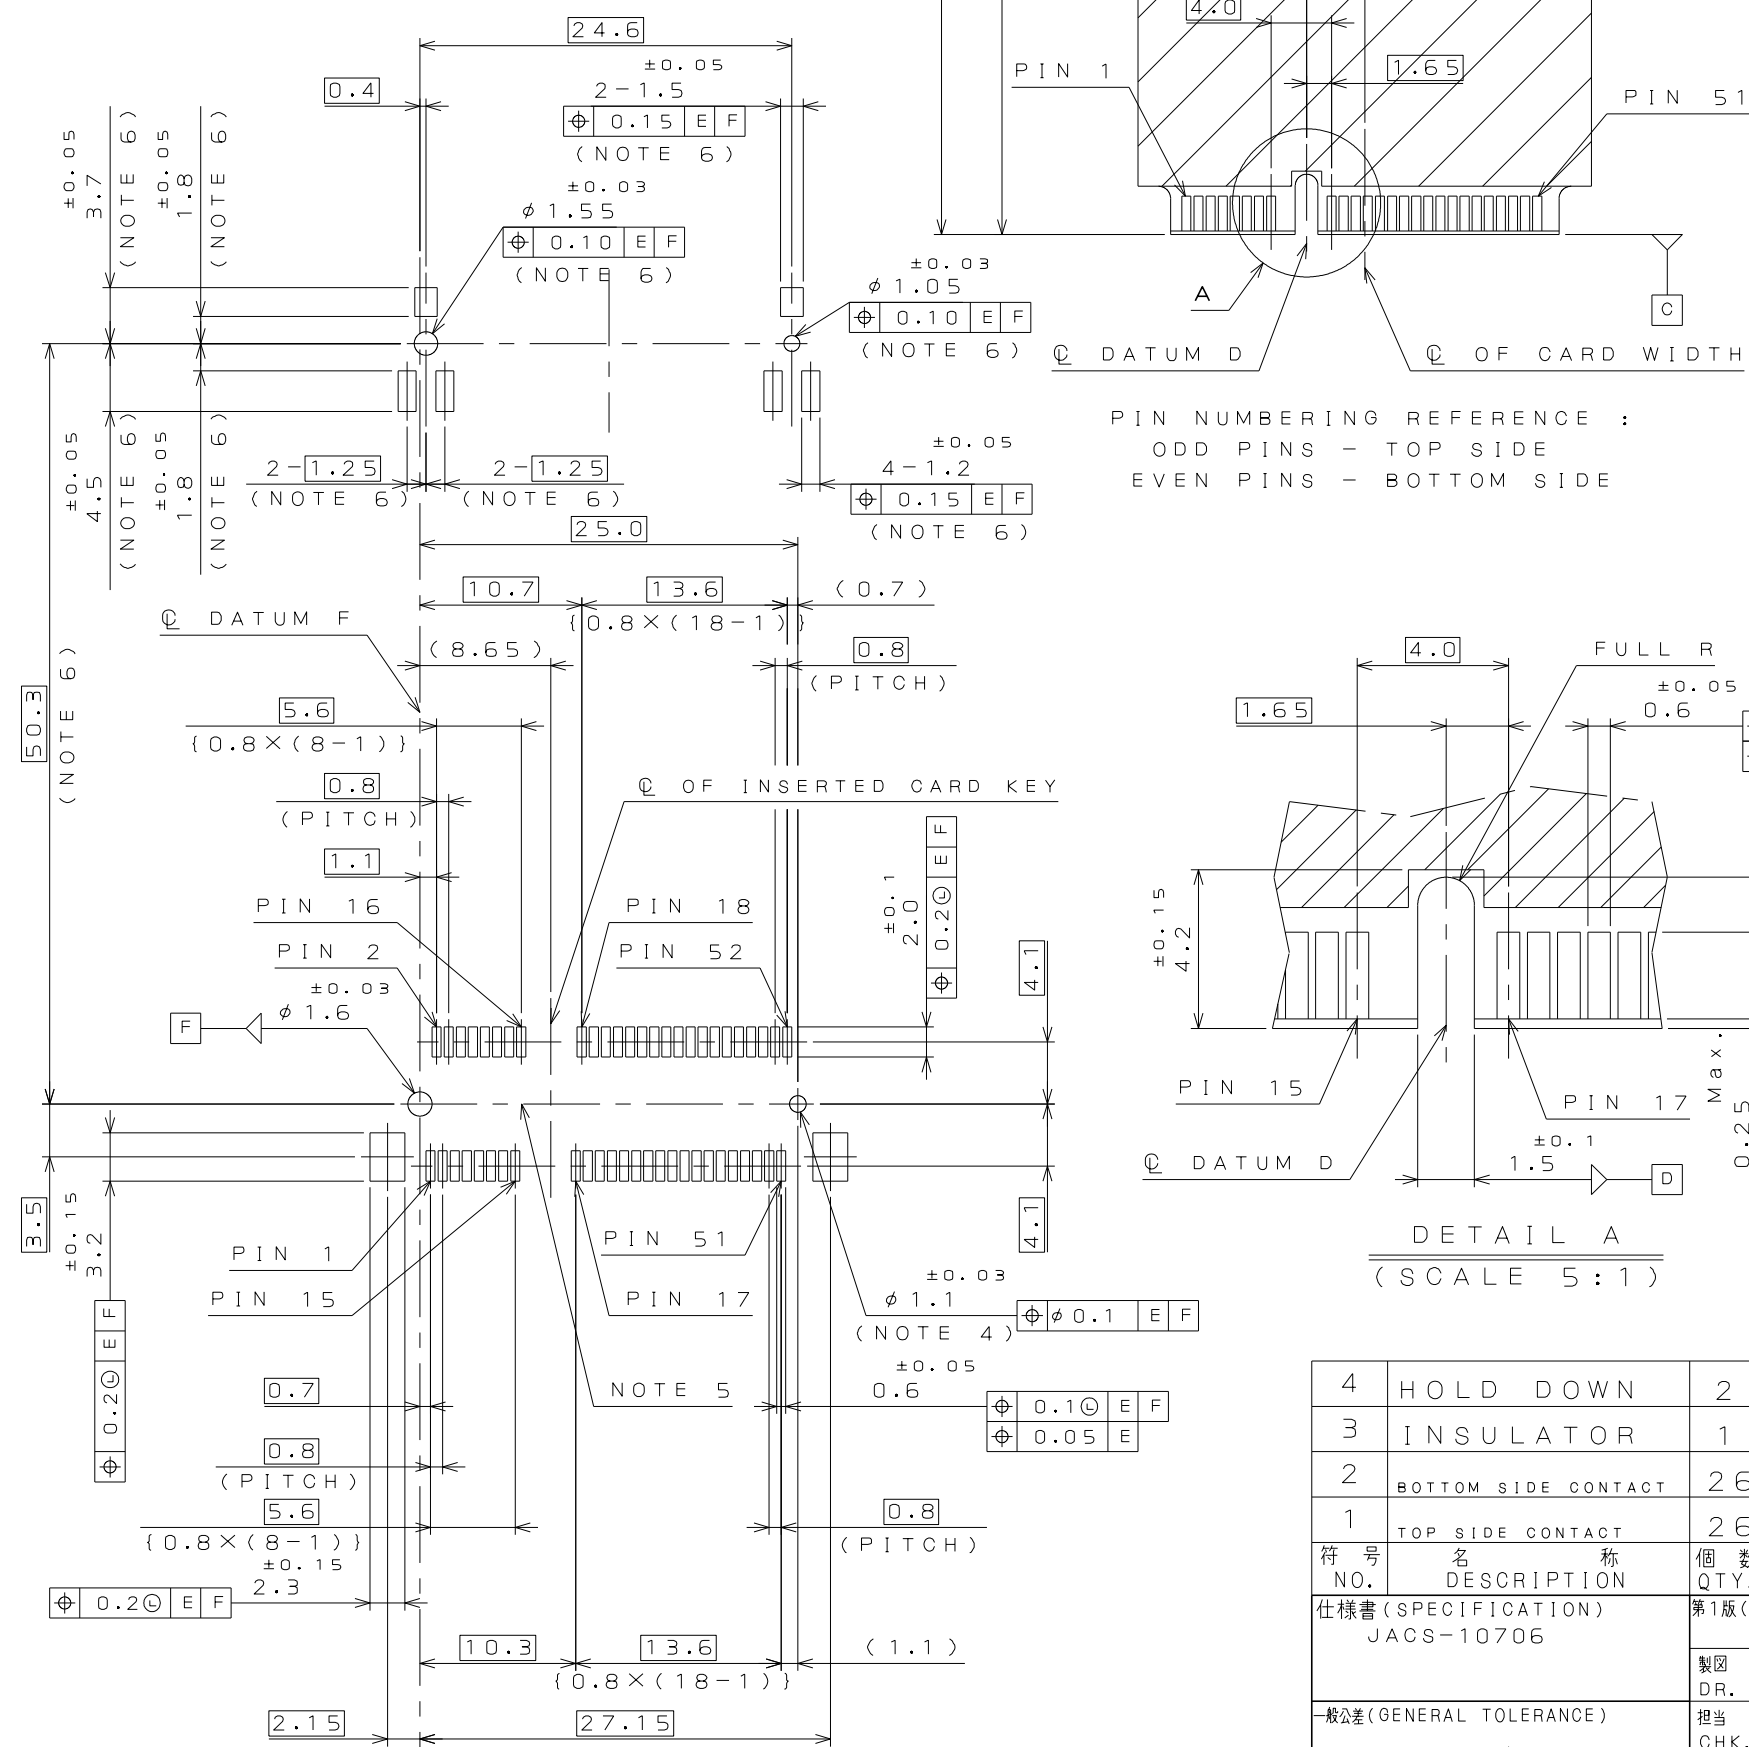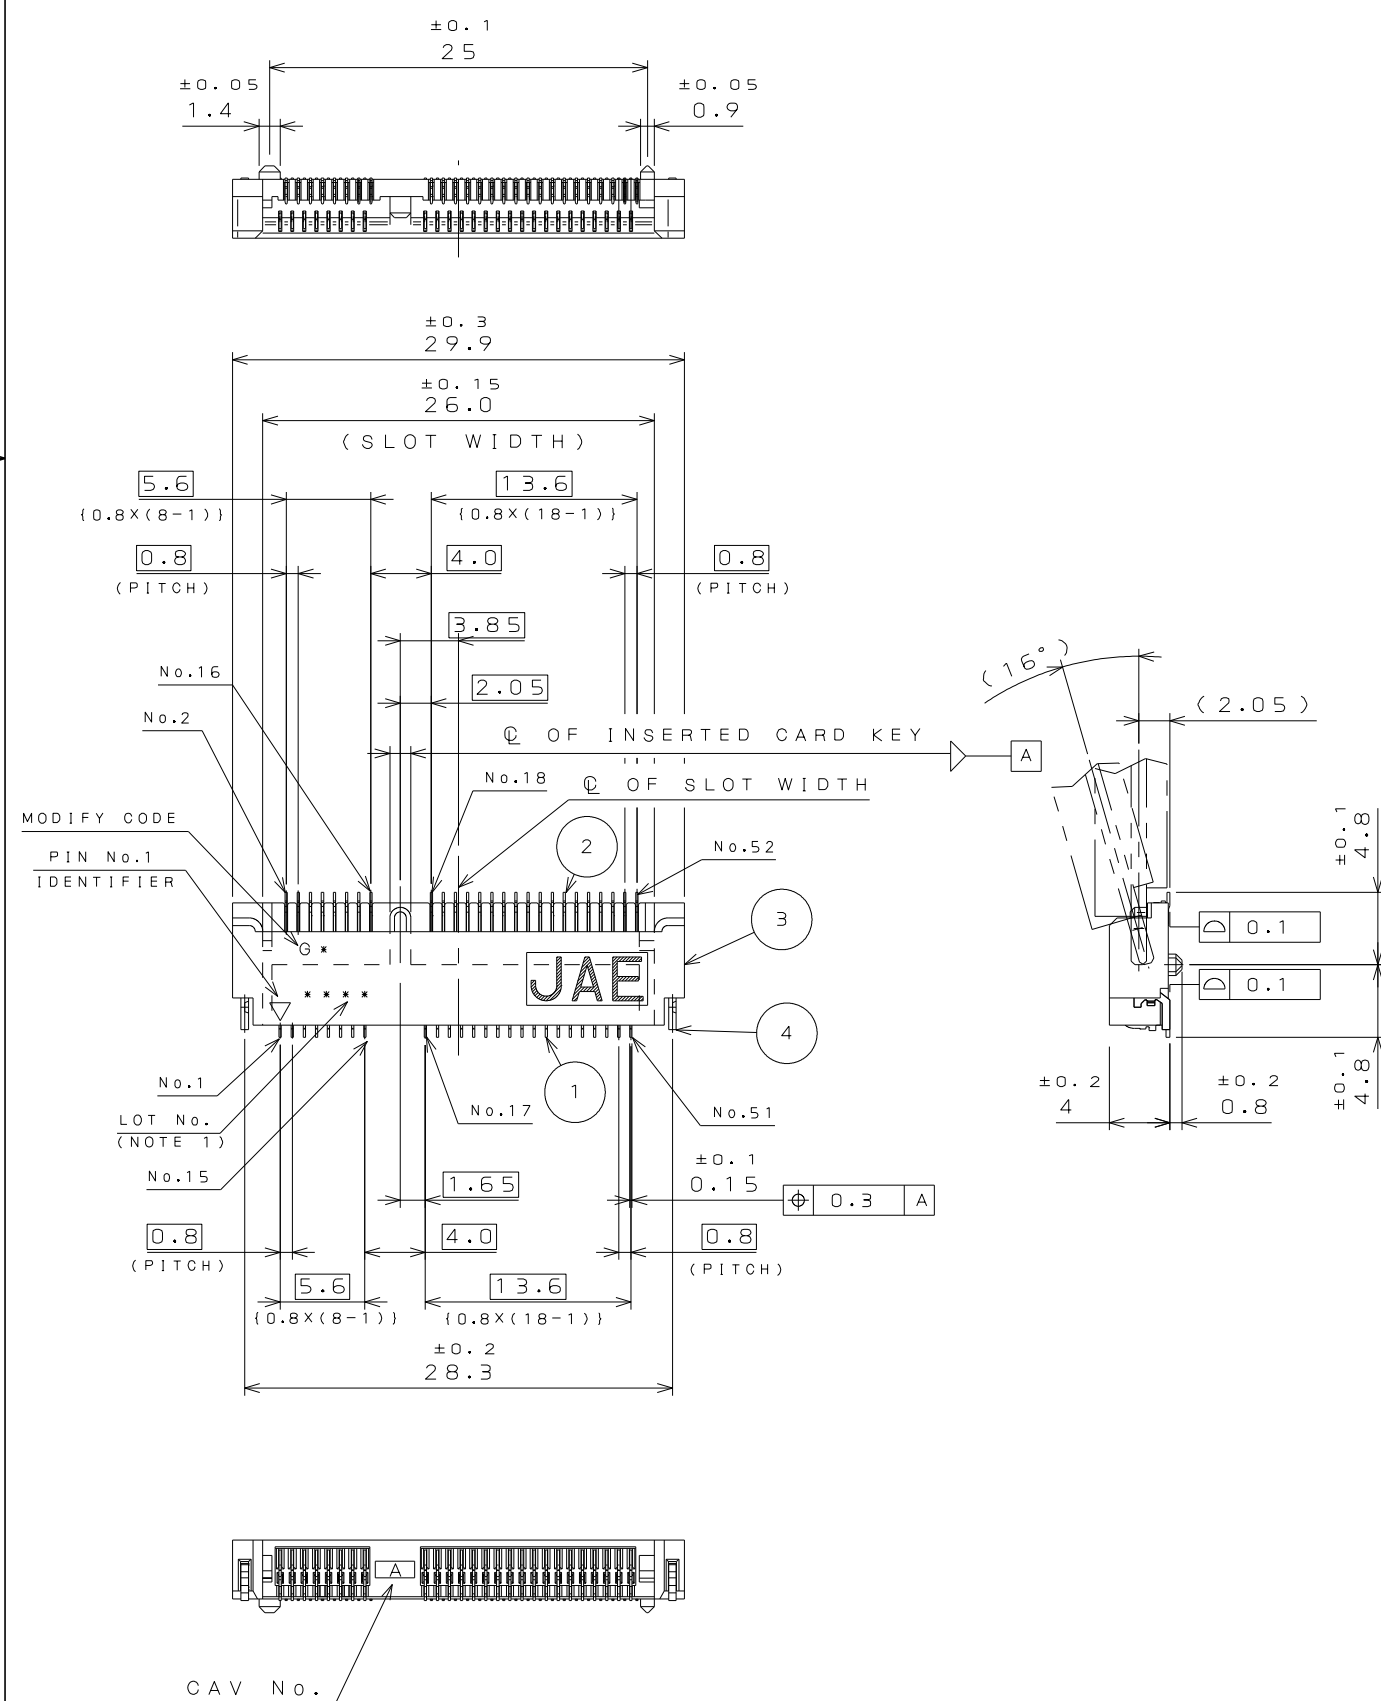


PIN NUMBERING REFERENCE :
 ODD PINS - TOP SIDE
 EVEN PINS - BOTTOM SIDE

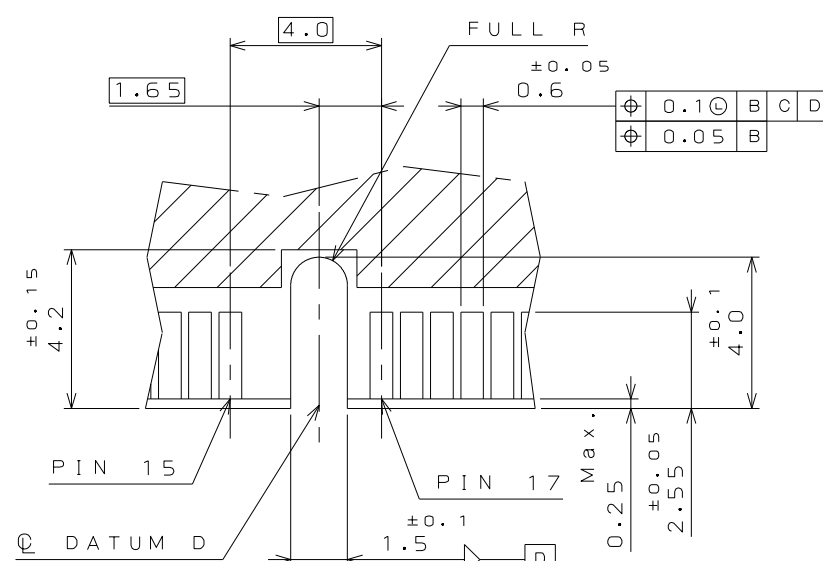

DETAIL A
(SCALE 5 : 1)

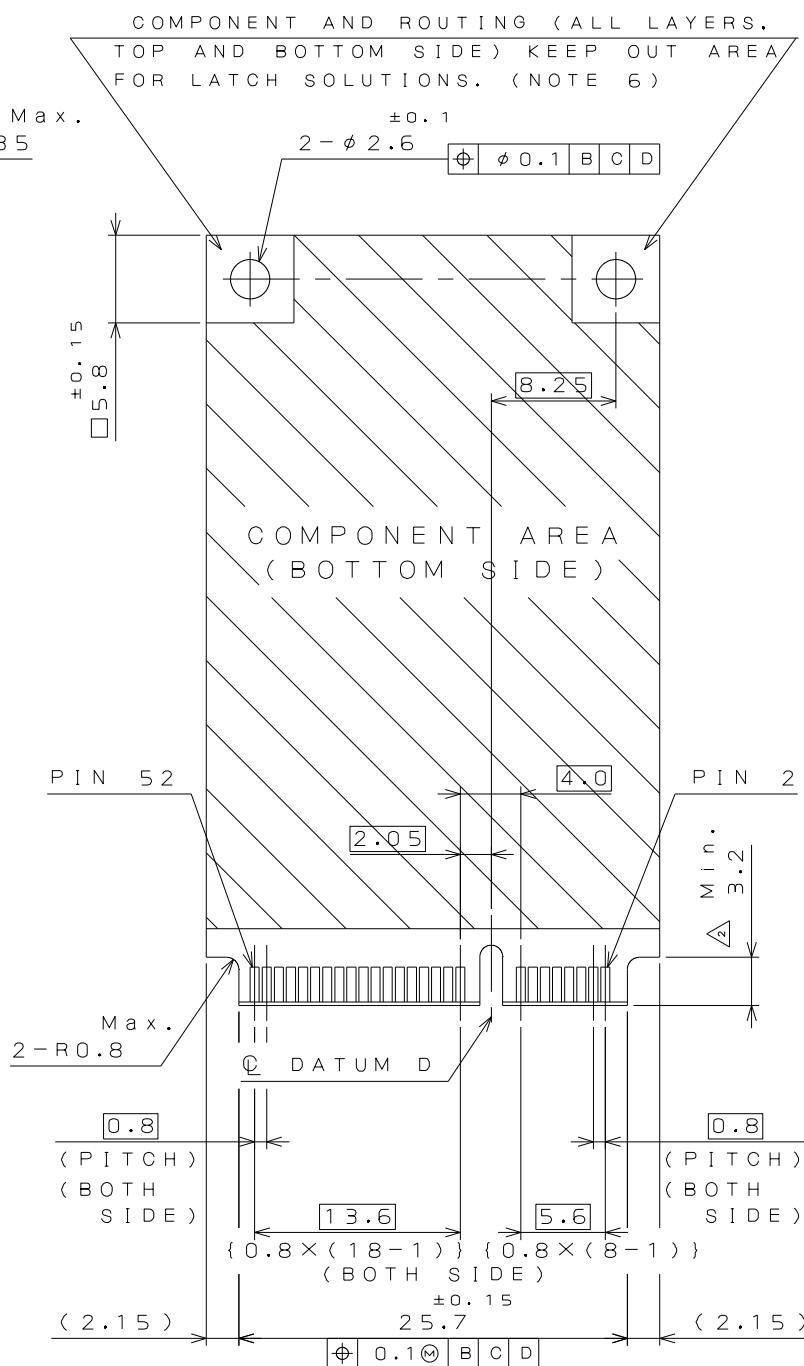

DETAIL B
 (SCALE 10:1)

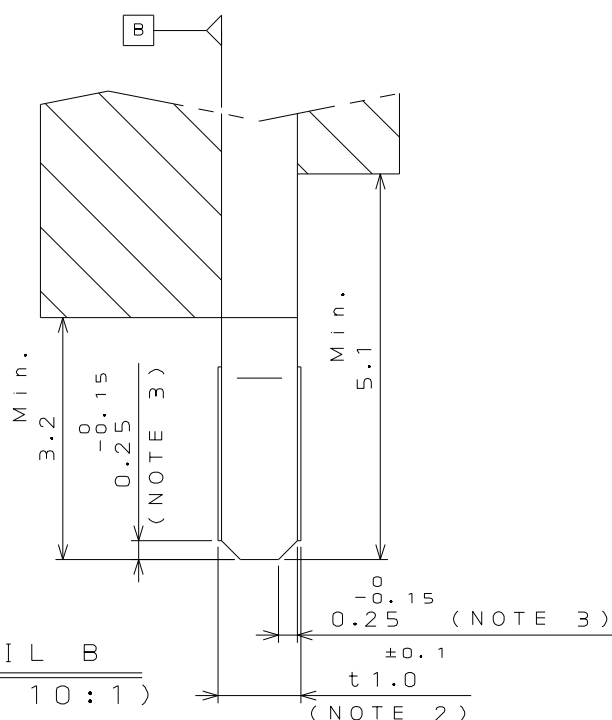

	HOLD DOWN	2	COPPER ALLOY	TIN PLATING						
	INSULATOR	1	THERMOPLASTIC					UL94 V-0		
2	BOTTOM SIDE CONTACT	26	COPPER ALLOY	CONTACT AREA :REFER TO「DESIGNATION」 SOLDERING AREA : GOLD FLASH OVER Ni						
1	TOP SIDE CONTACT	26	COPPER ALLOY	CONTACT AREA :REFER TO「DESIGNATION」 SOLDERING AREA : GOLD FLASH OVER Ni						
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	JAE CONNECTOR REFERENCE CODE	備考 REMARKS	AZ	SIZE	(REV)	
仕様書(SPECIFICATION) JACS-10706		第1版(ORIGINAL DATE) 21.JULI.2010		尺度(SCALE) 2:1	シリーズ(SERIES) MM60	日本航空電子工業株式会社				
		製図 DR.		名称(TITLE)	JAPAN AVIATION ELECTRONICS INDUSTRY, LTD. 					
一般公差(GENERAL TOLERANCE)		担当 CHK.	T.TSUJI	MM60-52B1-G1						
<u>寸法(DIMENSION)</u>		査閲 APPD.								
. ±0.8	X° ±	承認 APPD.	K.IBARAKI				図面番号(DRAWING NO.)			版数(REV)
.X ±0.4	X°X' ±						SJ110608			2
.XX ±0.1				質量(MASS)						
.XXX ±										