

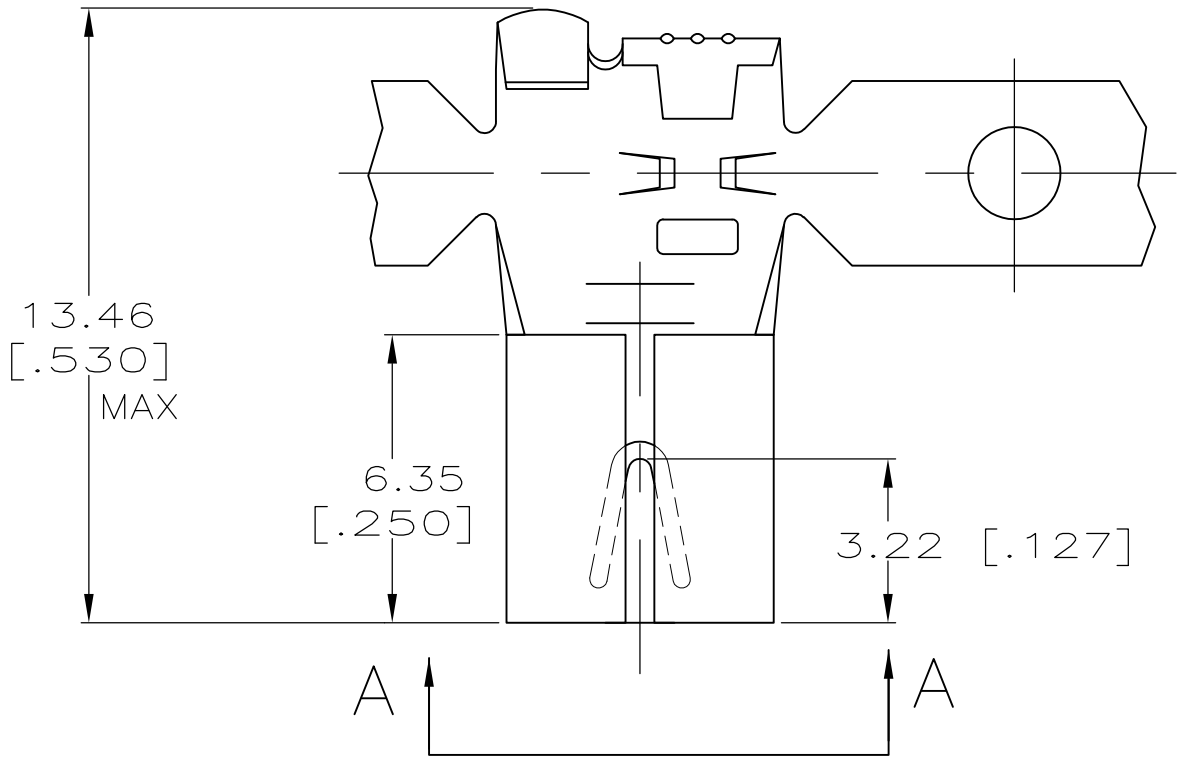


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		F	REVISED PER ECR-12-013518	23NOV2012	KH	PD

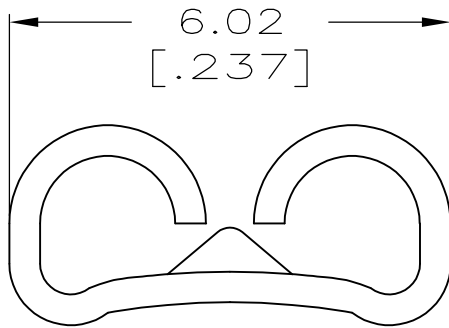


1 CONTINUOUS STRIP ON REELS

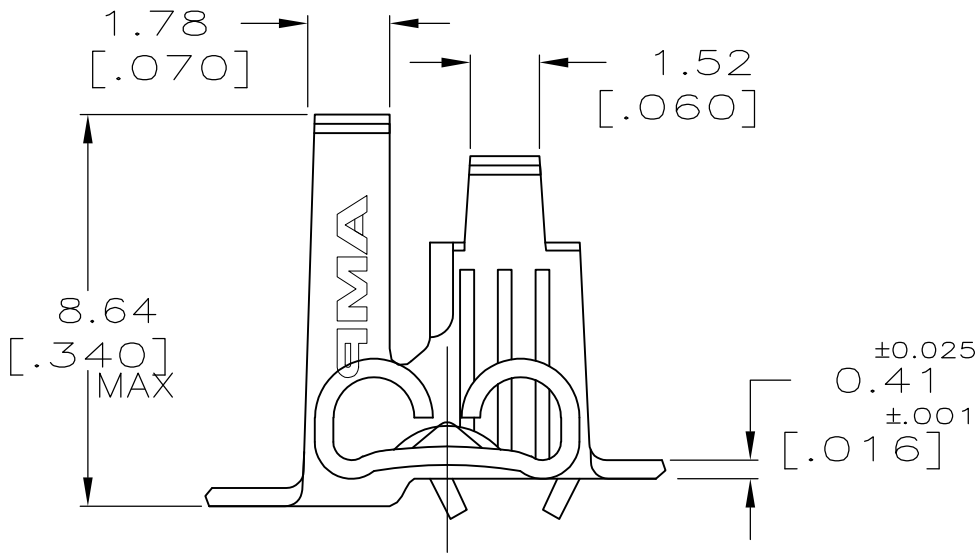

VIEW A-A
SCALE 10:1



RECOMMENDED MATING TAB

MATL:1/2 H BRASS OR NICKEL PL STL

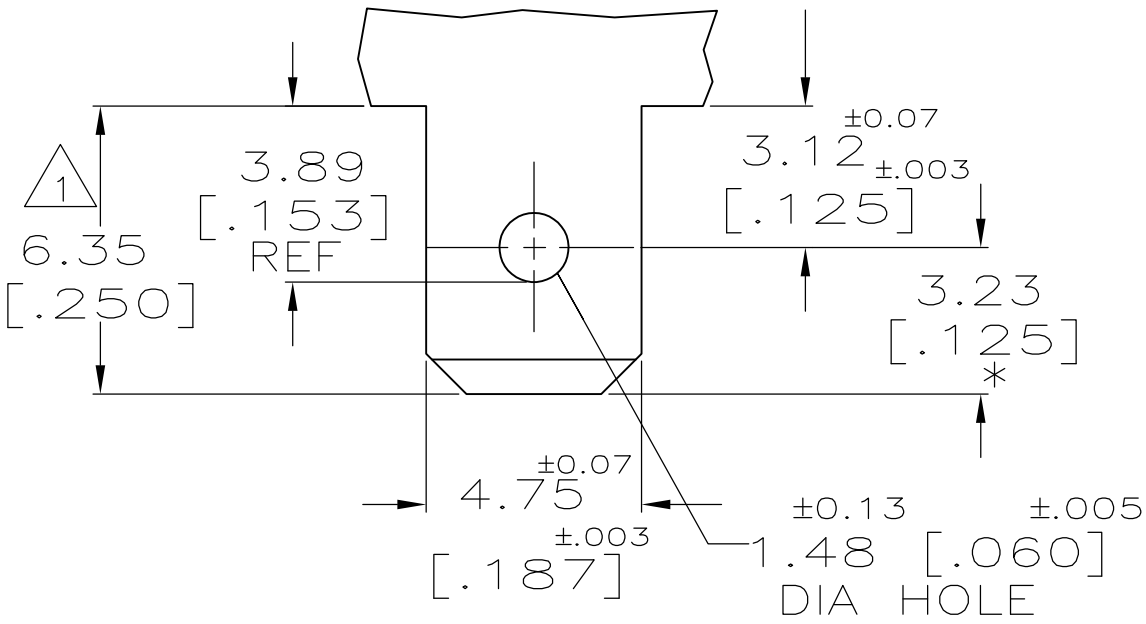

* TO BE USED ONLY WHEN SHOULDER IS ELIMINATED

1 MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.

2.79—4.32 [.110—.170] DIA		0.5—2.0mm ² [20—14] AWG		0.813 [.032]		63635—1							
INSULATION RANGE			WIRE SIZE		MATING TAB THK±0.025 [.001]		WIRE SIZE						
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN JR RUTH 1/21/92		TE Connectivity								
			CHK MS FEHER 1/21/92										
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D REINER 1/21/92		NAME							
		0 PLC ± —		PRODUCT SPEC		RECEPTACLE, FASTON, FLAG, LOCK—ON, 4.75 [.187] SERIES —							
		1 PLC ± —		—									
		2 PLC ± 0.25 [.010]		APPLICATION SPEC									
		3 PLC ± —		—									
		4 PLC ± —		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		ANGLES FINISH ± 1°		WEIGHT —		A2		00779		C—63635		—	
MATERIAL BRASS		TIN		CUSTOMER DRAWING				SCALE 6:1		SHEET 1 of 1		REV F	