

**Keyword:**  
**Lithium Xtra**

**Model:** **SL-760**

**Performance Data** **Size AA**  
(Typical values for batteries stored at 25°C for one year)

|                                   |                      |
|-----------------------------------|----------------------|
| System                            | Li/SOCl <sub>2</sub> |
| Nominal voltage                   | 3.6 V                |
| Nominal capacity                  | 2.2 Ah               |
| Nominal current                   | 2 mA                 |
| Max. continuous discharge current | 60 mA                |
| Pulse current capability          | 140 mA               |
| Anode surface area                | 14 cm <sup>2</sup>   |
| Lithium content                   | 0.65 g               |
| Weight                            | 18 g                 |
| Volume                            | 8 cm <sup>3</sup>    |
| Temperature range                 | -55...+85 °C         |




**WARNING:**

Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


**Typical Discharge Curves at +25°C**

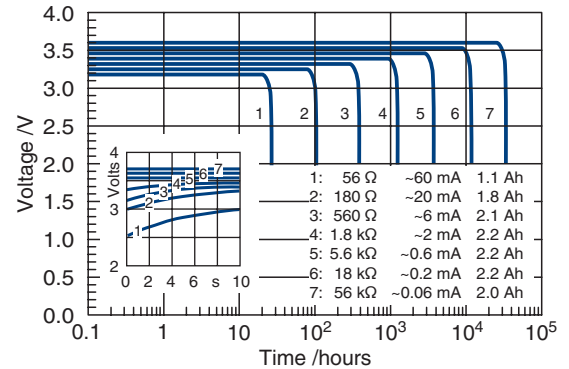



**Available Capacity**

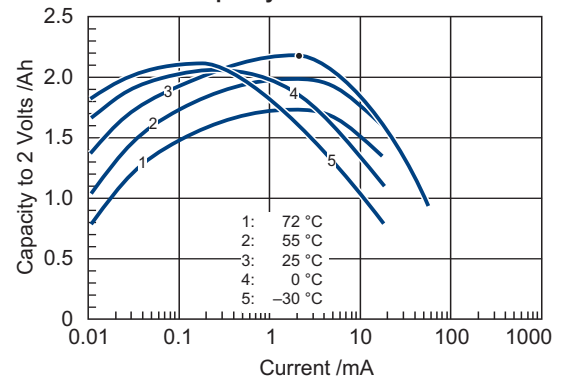

**Operating Voltage**

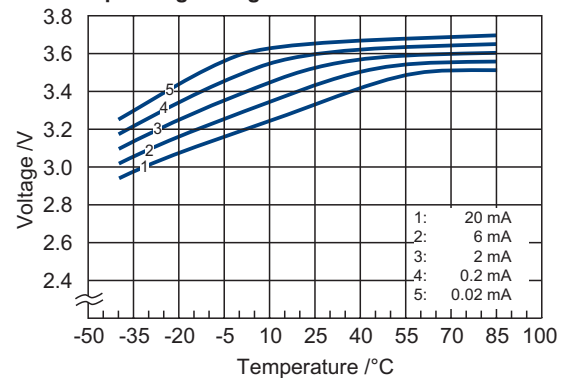

**Pulse Discharge Characteristics at +25°C**

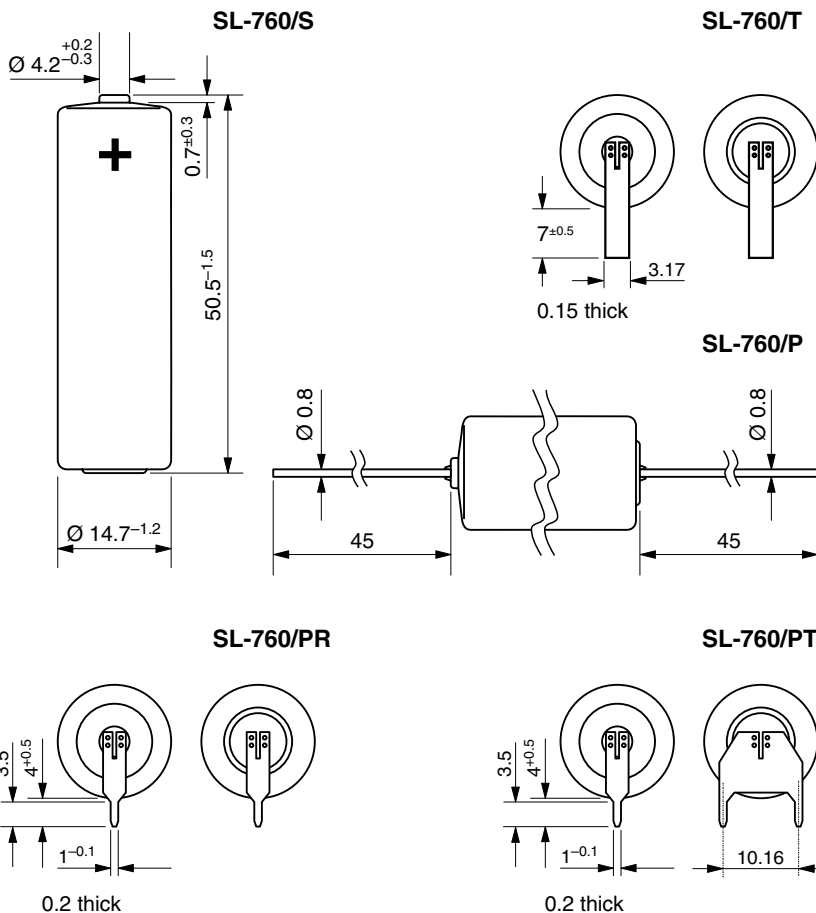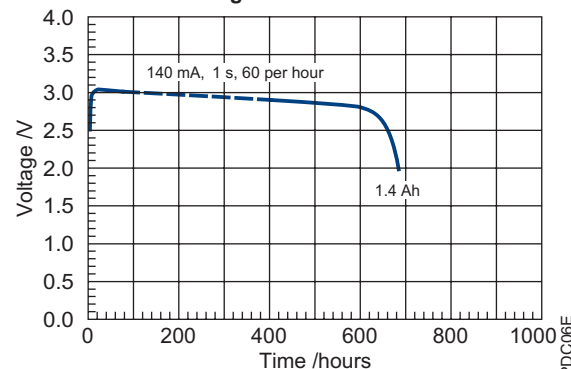

**Available Terminations**

|           |                |
|-----------|----------------|
| SL-760/S  | Standard       |
| SL-760/T  | Tags           |
| SL-760/P  | Pins           |
| SL-760/PR | Pins Radial    |
| SL-760/PT | Polarized Tags |

**Catalogue No.**

|               |
|---------------|
| 11 1 07601 00 |
| 11 1 07602 00 |
| 11 1 07603 00 |
| 11 1 07606 00 |
| 11 1 07608 00 |

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.