

OR USED AS A BASIS FOR  
WITHOUT PRIOR WRITTEN  
FROM KEYSTONE ELECTRONICS

REEL DIA. REF.

FEED DIRECTION

.500 [12.7] MIN.  
DIA. HOLE THRU

$\pm .005$  [ $\pm 0.13$ ]  
PITCH

$\pm .005$  [ $\pm 0.13$ ]  
.157 [4.0]

$\pm .005$  [ $\pm 0.13$ ]  
.059 [1.5] DIA.  
HOLE (TYP.)

.079 [2.0]

.236 [6.0]  
REF.



WIDTH  
 $\pm .005$  [ $\pm 0.13$ ]

FEED DIRECTION

.016 [0.4]  
REF.


<b>KEYSTONE ELECTRONICS CORP.</b> www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME 1632 SMT HOLDER ON TAPE AND REEL			
MATERIAL AS NOTED			
FINISH AS NOTED		DRN BY NT	DATE 1.05.11
		APP'D RH	SCALE X
TOLERANCES INCH [MM] DECIMAL ± .015 [± 0.38] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	CODE C	DWG NO. 504TR	

DATE	DESCRIPTION	REV.
5.09.11	CHANGE AS PER ECN 11-062	A
5.18.11	CHANGE AS PER ECN 110-066	B
5.29.11	CHANGE AS PER ECN 110-089	C
8.09.11	CHANGE AS PER ECN 11-102	D
3.15.12	CHANGE AS PER ECN 12-032	E
7.24.14	CHANGE AS PER ECN 14-079	F
8.12.20	CHANGE AS PER ECN 20-070	G
1.26.21	CHANGE AS PER ECN 21-006 REMOVE NEGATIVE POLARITY MARKING FROM THE BOTTOM INSIDE SURFACE	H

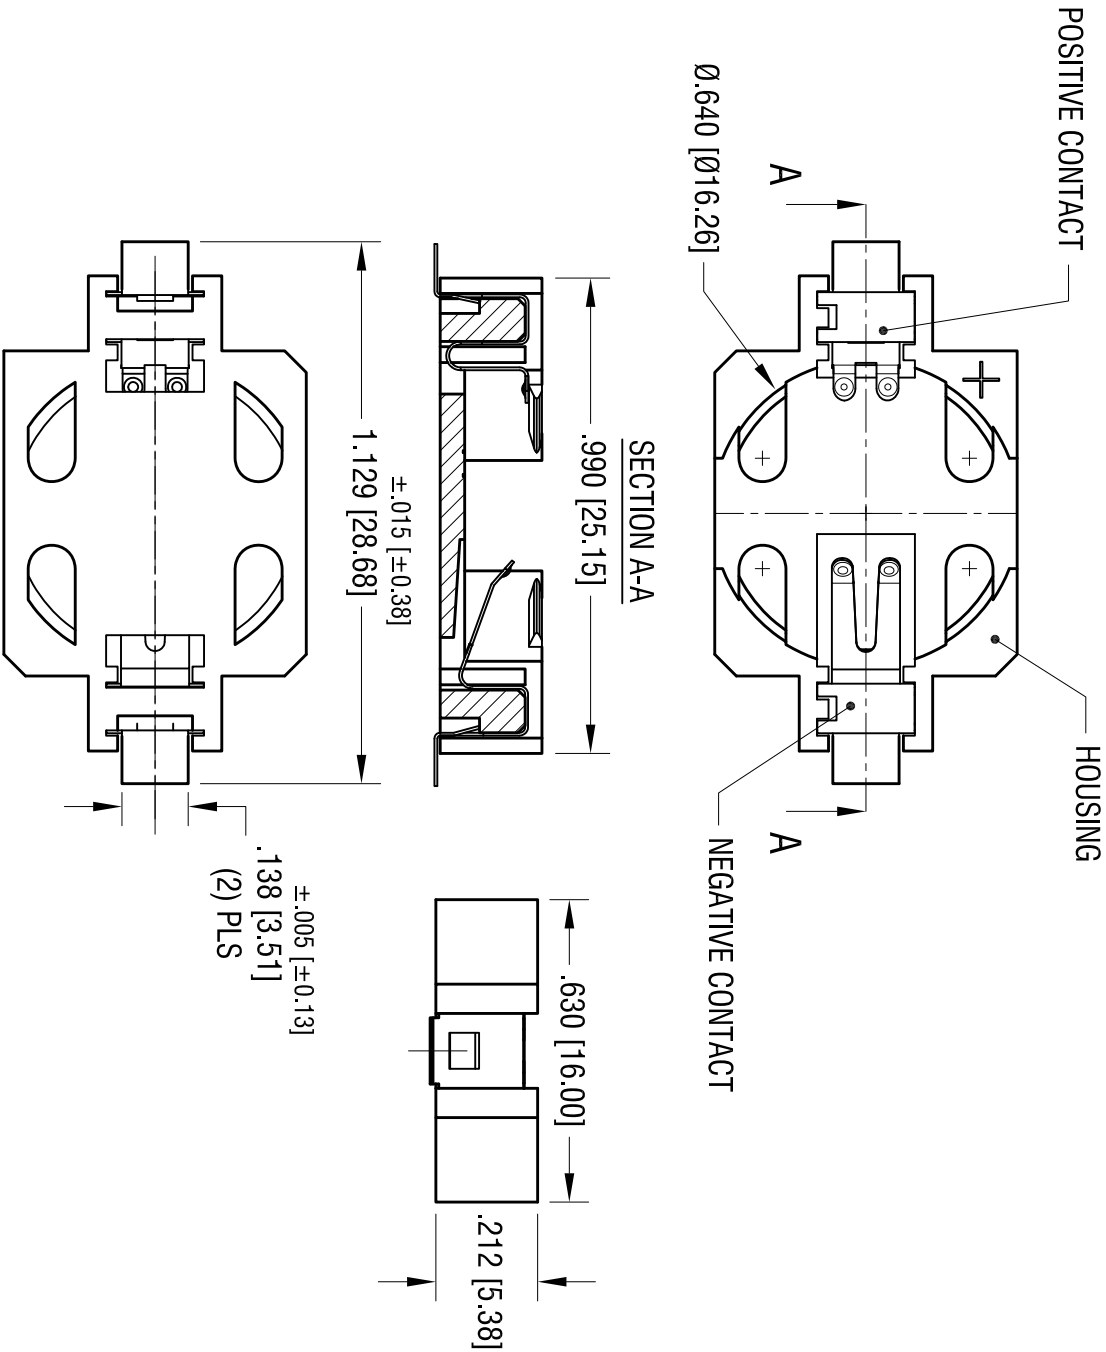

ACTUAL SIZE

- NOTES:
1. BASE:  
MAT'L - GLASS FILLED LCP UL 94V-0
  2. CONTACTS:  
MAT'L - .006 [0.15] THK PHOSPHOR BRONZE  
FINISH: GOLD FLASH PLATING

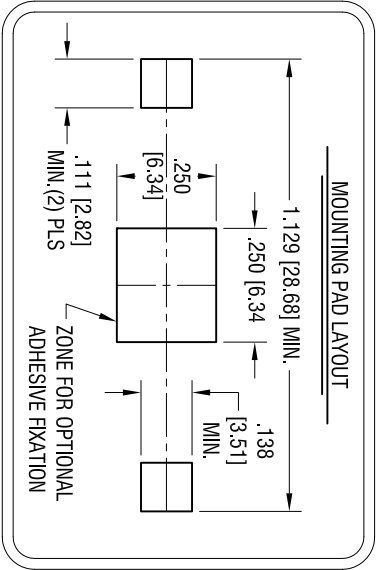

<b>KEYSTONE ELECTRONICS CORP.</b>			
www.keystone.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
1632 SMT BATTERY HOLDER			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	11.30.10
TOLERANCES		CODE	DWG NO.
DECIMAL ± .010 [± 0.25]		C	504
ANGULAR ± 1°			
UNLESS OTHERWISE SPECIFIED			