



---

"Spansion, Inc." and "Cypress Semiconductor Corp." have merged together to deliver high-performance, high-quality solutions at the heart of today's most advanced embedded systems, from automotive, industrial and networking platforms to highly interactive consumer and mobile devices. The new company "Cypress Semiconductor Corp." will continue to offer "Spansion, Inc." products to new and existing customers.

#### **Continuity of Specifications**

There is no change to this document as a result of offering the device as a Cypress product. Any changes that have been made are the result of normal document improvements and are noted in the document history page, where supported. Future revisions will occur when appropriate, and changes will be noted in a document history page.

#### **Continuity of Ordering Part Numbers**

Cypress continues to support existing part numbers. To order these products, please use only the Ordering Part Numbers listed in this document.

#### **For More Information**

Please contact your local sales office for additional information about Cypress products and solutions.

# 512 Mbit (64 Mbyte) 3.0V SPI Flash Memory

## Features

- CMOS 3.0 Volt Core with Versatile I/O
- Serial Peripheral Interface with Multi-I/O
- Density
  - 512 Mbits (64 Mbytes)
- Serial Peripheral Interface (SPI)
  - SPI Clock polarity and phase modes 0 and 3
  - Double Data Rate (DDR) option
  - Extended Addressing: 32-bit address
  - Serial Command set and footprint compatible with S25FL-A, S25FL-K, and S25FL-P SPI families
  - Multi I/O Command set and footprint compatible with S25FL-P SPI family
- READ Commands
  - Normal, Fast, Dual, Quad, Fast DDR, Dual DDR, Quad DDR
  - AutoBoot - power up or reset and execute a Normal or Quad read command automatically at a preselected address
  - Common Flash Interface (CFI) data for configuration information.
- Programming (1.5 Mbytes/s)
  - 512-byte Page Programming buffer
  - Quad-Input Page Programming (QPP) for slow clock systems
- Erase (0.5 to 0.65 Mbytes/s)
  - Uniform 256-kbyte sectors
- Cycling Endurance
  - 100,000 Program-Erase Cycles on any sector typical
- Data Retention
  - 20 Year Data Retention typical
- Security features
  - One Time Program (OTP) array of 1024 bytes
  - Block Protection:
    - Status Register bits to control protection against program or erase of a contiguous range of sectors.
    - Hardware and software control options
  - Advanced Sector Protection (ASP)
    - Individual sector protection controlled by boot code or password
- Cypress® 65 nm MirrorBit Technology with Eclipse™ Architecture
- Core Supply Voltage: 2.7V to 3.6V
- I/O Supply Voltage: 1.65V to 3.6V
  - SO16 and FBGA packages
- Temperature Range:
  - Industrial (-40°C to +85°C)
  - Industrial Plus (-40°C to +105°C)
- Packages (all Pb-free)
  - 16-lead SOIC (300 mil)
  - BGA-24 6 x 8 mm
    - 5 x 5 ball (FAB024) and 4 x 6 ball (FAC024) footprint options
  - Known Good Die and Known Tested Die

## Performance Summary

**Maximum Read Rates with the Same Core and I/O Voltage**  
( $V_{IO} = V_{CC} = 2.7V$  to  $3.6V$ )

| Command   | Clock Rate (MHz) | Mbytes /s |
|-----------|------------------|-----------|
| Read      | 50               | 6.25      |
| Fast Read | 133              | 16.6      |
| Dual Read | 104              | 26        |
| Quad Read | 104              | 52        |

**Maximum Read Rates with Lower I/O Voltage ( $V_{IO} = 1.65V$  to  $2.7V$ ,  $V_{CC} = 2.7V$  to  $3.6V$ )**

| Command   | Clock Rate (MHz) | Mbytes /s |
|-----------|------------------|-----------|
| Read      | 50               | 6.25      |
| Fast Read | 66               | 8.25      |
| Dual Read | 66               | 16.5      |
| Quad Read | 66               | 33        |

**Maximum Read Rates DDR ( $V_{IO} = V_{CC} = 3V$  to  $3.6V$ )**

| Command       | Clock Rate (MHz) | Mbytes /s |
|---------------|------------------|-----------|
| Fast Read DDR | 80               | 20        |
| Dual Read DDR | 80               | 40        |
| Quad Read DDR | 80               | 80        |

### Typical Program and Erase Rates

| Operation                                                       | kbytes/s |
|-----------------------------------------------------------------|----------|
| Page Programming (512-byte page buffer - Uniform Sector Option) | 1500     |
| 256-kbyte Logical Sector Erase (Uniform Sector Option)          | 500      |

### Current Consumption

| Operation           | Current (mA) |
|---------------------|--------------|
| Serial Read 50 MHz  | 16 (max)     |
| Serial Read 133 MHz | 33 (max)     |
| Quad Read 104 MHz   | 61 (max)     |
| Program             | 100 (max)    |
| Erase               | 100 (max)    |
| Standby             | 0.07 (typ)   |

## Contents

### Features

#### Performance Summary ..... 2

|                               |   |
|-------------------------------|---|
| <b>1. Overview</b> .....      | 4 |
| 1.1 General Description ..... | 4 |
| 1.2 Migration Notes .....     | 5 |
| 1.3 Glossary .....            | 7 |
| 1.4 Other Resources .....     | 7 |

### Hardware Interface

|                                                           |    |
|-----------------------------------------------------------|----|
| <b>2. Signal Descriptions</b> .....                       | 8  |
| 2.1 Input/Output Summary .....                            | 8  |
| 2.2 Address and Data Configuration .....                  | 9  |
| 2.3 RESET# .....                                          | 9  |
| 2.4 Serial Clock (SCK) .....                              | 9  |
| 2.5 Chip Select (CS#) .....                               | 9  |
| 2.6 Serial Input (SI) / IO0 .....                         | 10 |
| 2.7 Serial Output (SO) / IO1 .....                        | 10 |
| 2.8 Write Protect (WP#) / IO2 .....                       | 10 |
| 2.9 Hold (HOLD#) / IO3 .....                              | 10 |
| 2.10 Core Voltage Supply ( $V_{CC}$ ) .....               | 11 |
| 2.11 Versatile I/O Power Supply ( $V_{IO}$ ) .....        | 11 |
| 2.12 Supply and Signal Ground ( $V_{SS}$ ) .....          | 11 |
| 2.13 Not Connected (NC) .....                             | 11 |
| 2.14 Reserved for Future Use (RFU) .....                  | 11 |
| 2.15 Do Not Use (DNU) .....                               | 12 |
| 2.16 Block Diagrams .....                                 | 12 |
| <b>3. Signal Protocols</b> .....                          | 13 |
| 3.1 SPI Clock Modes .....                                 | 13 |
| 3.2 Command Protocol .....                                | 14 |
| 3.3 Interface States .....                                | 18 |
| 3.4 Configuration Register Effects on the Interface ..... | 23 |
| 3.5 Data Protection .....                                 | 23 |
| <b>4. Electrical Specifications</b> .....                 | 24 |
| 4.1 Absolute Maximum Ratings .....                        | 24 |
| 4.2 Operating Ranges .....                                | 24 |
| 4.3 Power-Up and Power-Down .....                         | 25 |
| 4.4 DC Characteristics .....                              | 27 |
| <b>5. Timing Specifications</b> .....                     | 28 |
| 5.1 Key to Switching Waveforms .....                      | 28 |
| 5.2 AC Test Conditions .....                              | 28 |
| 5.3 Reset .....                                           | 29 |
| 5.4 SDR AC Characteristics .....                          | 31 |
| 5.5 DDR AC Characteristics .....                          | 35 |
| <b>6. Physical Interface</b> .....                        | 38 |
| 6.1 SOIC 16-Lead Package .....                            | 38 |
| 6.2 FAB024 24-Ball BGA Package .....                      | 40 |
| 6.3 FAC024 24-Ball BGA Package .....                      | 42 |

### Software Interface

|                                    |    |
|------------------------------------|----|
| <b>7. Address Space Maps</b> ..... | 44 |
| 7.1 Overview .....                 | 44 |
| 7.2 Flash Memory Array .....       | 44 |

|                                                                           |     |
|---------------------------------------------------------------------------|-----|
| 7.3 ID-CFI Address Space .....                                            | 45  |
| 7.4 JEDEC JESD216 Serial Flash Discoverable Parameters (SFDP) Space ..... | 45  |
| 7.5 OTP Address Space .....                                               | 45  |
| 7.6 Registers .....                                                       | 47  |
| <b>8. Data Protection</b> .....                                           | 55  |
| 8.1 Secure Silicon Region (OTP) .....                                     | 55  |
| 8.2 Write Enable Command .....                                            | 55  |
| 8.3 Block Protection .....                                                | 56  |
| 8.4 Advanced Sector Protection .....                                      | 57  |
| <b>9. Commands</b> .....                                                  | 61  |
| 9.1 Command Set Summary .....                                             | 62  |
| 9.2 Identification Commands .....                                         | 67  |
| 9.3 Register Access Commands .....                                        | 69  |
| 9.4 Read Memory Array Commands .....                                      | 78  |
| 9.5 Program Flash Array Commands .....                                    | 92  |
| 9.6 Erase Flash Array Commands .....                                      | 94  |
| 9.7 One Time Program Array Commands .....                                 | 98  |
| 9.8 Advanced Sector Protection Commands .....                             | 98  |
| 9.9 Reset Commands .....                                                  | 103 |
| 9.10 Embedded Algorithm Performance Tables .....                          | 104 |
| <b>10. Software Interface Reference</b> .....                             | 105 |
| 10.1 Command Summary .....                                                | 105 |
| 10.2 Serial Flash Discoverable Parameters (SFDP) Address Map .....        | 107 |
| 10.3 Device ID and Common Flash Interface (ID-CFI) Address Map .....      | 110 |
| 10.4 Registers .....                                                      | 125 |
| 10.5 Initial Delivery State .....                                         | 128 |

### Ordering Information

|                                              |     |
|----------------------------------------------|-----|
| <b>11. Ordering Information FL512S</b> ..... | 129 |
| <b>12. Contacting Cypress</b> .....          | 130 |
| <b>13. Revision History</b> .....            | 130 |

## 1. Overview

### 1.1 General Description

The Cypress S25FL512S device is a flash non-volatile memory product using:

- MirrorBit technology - that stores two data bits in each memory array transistor
- Eclipse architecture - that dramatically improves program and erase performance
- 65 nm process lithography

This device connects to a host system via a Serial Peripheral Interface (SPI). Traditional SPI single bit serial input and output (Single I/O or SIO) is supported as well as optional two bit (Dual I/O or DIO) and four bit (Quad I/O or QIO) serial commands. This multiple width interface is called SPI Multi-I/O or MIO. In addition, the FL-S family adds support for Double Data Rate (DDR) read commands for SIO, DIO, and QIO that transfer address and read data on both edges of the clock.

The Eclipse architecture features a Page Programming Buffer that allows up to 256 words (512 bytes) to be programmed in one operation, resulting in faster effective programming and erase than prior generation SPI program or erase algorithms.

Executing code directly from flash memory is often called Execute-In-Place or XIP. By using FL-S devices at the higher clock rates supported, with QIO or DDR-QIO commands, the instruction read transfer rate can match or exceed traditional parallel interface, asynchronous, NOR flash memories while reducing signal count dramatically.

The S25FL512S product offers high densities coupled with the flexibility and fast performance required by a variety of embedded applications. It is ideal for code shadowing, XIP, and data storage.

## 1.2 Migration Notes

### 1.2.1 Features Comparison

The S25FL512S device is command set and footprint compatible with prior generation FL-K and FL-P families.

**Table 1.1** FL Generations Comparison

| Parameter                    | FL-K                         | FL-P                    | FL-S                                |
|------------------------------|------------------------------|-------------------------|-------------------------------------|
| Technology Node              | 90 nm                        | 90 nm                   | 65 nm                               |
| Architecture                 | Floating Gate                | MirrorBit               | MirrorBit Eclipse                   |
| Release Date                 | In Production                | In Production           | In Production                       |
| Density                      | 4 Mb - 128 Mb                | 32 Mb - 256 Mb          | 512 Mb                              |
| Bus Width                    | x1, x2, x4                   | x1, x2, x4              | x1, x2, x4                          |
| Supply Voltage               | 2.7V - 3.6V                  | 2.7V - 3.6V             | 2.7V - 3.6V / 1.65V - 3.6V $V_{IO}$ |
| Normal Read Speed (SDR)      | 6 MB/s (50 MHz)              | 5 MB/s (40 MHz)         | 6 MB/s (50 MHz)                     |
| Fast Read Speed (SDR)        | 13 MB/s (104 MHz)            | 13 MB/s (104 MHz)       | 17 MB/s (133 MHz)                   |
| Dual Read Speed (SDR)        | 26 MB/s (104 MHz)            | 20 MB/s (80 MHz)        | 26 MB/s (104 MHz)                   |
| Quad Read Speed (SDR)        | 52 MB/s (104 MHz)            | 40 MB/s (80 MHz)        | 52 MB/s (104 MHz)                   |
| Fast Read Speed (DDR)        | -                            | -                       | 20 MB/s (80 MHz)                    |
| Dual Read Speed (DDR)        | -                            | -                       | 40 MB/s (80 MHz)                    |
| Quad Read Speed (DDR)        | -                            | -                       | 80 MB/s (80 MHz)                    |
| Program Buffer Size          | 256B                         | 256B                    | 512B                                |
| Erase Sector Size            | 4 kB / 32 kB / 64 kB         | 64 kB / 256 kB          | 256 kB                              |
| Parameter Sector Size        | 4 kB                         | 4 kB                    | —                                   |
| Sector Erase Time (typ.)     | 30 ms (4 kB), 150 ms (64 kB) | 500 ms (64 kB)          | 520 ms (256 kB)                     |
| Page Programming Time (typ.) | 700 $\mu$ s (256B)           | 1500 $\mu$ s (256B)     | 340 $\mu$ s (512B)                  |
| OTP                          | 768B (3 x 256B)              | 506B                    | 1024B                               |
| Advanced Sector Protection   | No                           | No                      | Yes                                 |
| Auto Boot Mode               | No                           | No                      | Yes                                 |
| Erase Suspend/Resume         | Yes                          | No                      | Yes                                 |
| Program Suspend/Resume       | Yes                          | No                      | Yes                                 |
| Operating Temperature        | -40°C to +85°C               | -40°C to +85°C / +105°C | -40°C to +85°C / +105°C             |

**Notes:**

1. 256B program page option only for 128-Mb and 256-Mb density FL-S devices.
2. FL-P column indicates FL129P MIO SPI device (for 128-Mb density).
3. 64 kB sector erase option only for 128-Mb/256-Mb density FL-P and FL-S devices.
4. FL-K family devices can erase 4-kB sectors in groups of 32 kB or 64 kB.
5. Refer to individual data sheets for further details.

### 1.2.2 Known Differences from Prior Generations

#### 1.2.2.1 Error Reporting

Prior generation FL memories either do not have error status bits or do not set them if program or erase is attempted on a protected sector. The FL-S family does have error reporting status bits for program and erase operations. These can be set when there is an internal failure to program or erase or when there is an attempt to program or erase a protected sector. In either case the program or erase operation did not complete as requested by the command.

#### 1.2.2.2 Secure Silicon Region (OTP)

The size and format (address map) of the One Time Program area is different from prior generations. The method for protecting each portion of the OTP area is different. For additional details see *Secure Silicon Region (OTP)* on page 55.

### 1.2.2.3 Configuration Register Freeze Bit

The configuration register Freeze bit CR1[0], locks the state of the Block Protection bits as in prior generations. In the FL-S family it also locks the state of the configuration register TBPARM bit CR1[2], TBPROT bit CR1[5], and the Secure Silicon Region (OTP) area.

### 1.2.2.4 Sector Erase Commands

The command for erasing an 8-kbyte area (two 4-kbyte sectors) is not supported.

The command for erasing a 4-kbyte sector is not supported in the 512-Mbit density FL-S device.

The erase command for 64-kbyte sectors is not supported in the 512-Mbit density FL-S device.

### 1.2.2.5 Deep Power Down

The Deep Power Down (DPD) function is not supported in FL-S family devices.

The legacy DPD (B9h) command code is instead used to enable legacy SPI memory controllers, that can issue the former DPD command, to access a new bank address register. The bank address register allows SPI memory controllers that do not support more than 24 bits of address, the ability to provide higher order address bits for commands, as needed to access the larger address space of the 256-Mbit density FL-S device. For additional information see *Extended Address* on [page 44](#).

### 1.2.2.6 New Features

The FL-S family introduces several new features to SPI category memories:

- Extended address for access to higher memory density.
- AutoBoot for simpler access to boot code following power up.
- Enhanced High Performance read commands using mode bits to eliminate the overhead of SIO instructions when repeating the same type of read command.
- Multiple options for initial read latency (number of dummy cycles) for faster initial access time or higher clock rate read commands.
- DDR read commands for SIO, DIO, and QIO.
- Advanced Sector Protection for individually controlling the protection of each sector. This is very similar to the Advanced Sector Protection feature found in several other Cypress parallel interface NOR memory families.

## 1.3 Glossary

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Command</b>                     | All information transferred between the host system and memory during one period while CS# is low. This includes the instruction (sometimes called an operation code or opcode) and any required address, mode bits, latency cycles, or data.                                                                                                                                                                                                                                                                                                                                          |
| <b>DDP (Dual Die Package)</b>      | Two die stacked within the same package to increase the memory capacity of a single package. Often also referred to as a Multi-Chip Package (MCP).                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>DDR (Double Data Rate)</b>      | When input and output are latched on every edge of SCK.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Flash</b>                       | The name for a type of Electrical Erase Programmable Read Only Memory (EEPROM) that erases large blocks of memory bits in parallel, making the erase operation much faster than early EEPROM.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>High</b>                        | A signal voltage level $\geq V_{IH}$ or a logic level representing a binary one (1).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Instruction</b>                 | The 8 bit code indicating the function to be performed by a command (sometimes called an operation code or opcode). The instruction is always the first 8 bits transferred from host system to the memory in any command.                                                                                                                                                                                                                                                                                                                                                              |
| <b>Low</b>                         | A signal voltage level $\leq V_{IL}$ or a logic level representing a binary zero (0).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>LSB (Least Significant Bit)</b> | Generally the right most bit, with the lowest order of magnitude value, within a group of bits of a register or data value.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>MSB (Most Significant Bit)</b>  | Generally the left most bit, with the highest order of magnitude value, within a group of bits of a register or data value.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Non-Volatile</b>                | No power is needed to maintain data stored in the memory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>OPN (Ordering Part Number)</b>  | The alphanumeric string specifying the memory device type, density, package, factory non-volatile configuration, etc. used to select the desired device.                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Page</b>                        | 512 bytes aligned and length group of data.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>PCB</b>                         | Printed Circuit Board.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Register Bit References</b>     | Are in the format: Register_name[bit_number] or Register_name[bit_range_MSB: bit_range_LSB].                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>SDR (Single Data Rate)</b>      | When input is latched on the rising edge and output on the falling edge of SCK.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Sector</b>                      | Erase unit size 256 kbytes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Write</b>                       | An operation that changes data within volatile or non-volatile registers bits or non-volatile flash memory. When changing non-volatile data, an erase and reprogramming of any unchanged non-volatile data is done, as part of the operation, such that the non-volatile data is modified by the write operation, in the same way that volatile data is modified – as a single operation. The non-volatile data appears to the host system to be updated by the single write command, without the need for separate commands for erase and reprogram of adjacent, but unaffected data. |

## 1.4 Other Resources

### 1.4.1 Links to Software

<http://www.spansion.com/Support/Pages/Support.aspx>

### 1.4.2 Links to Application Notes

<http://www.spansion.com/Support/TechnicalDocuments/Pages/ApplicationNotes.aspx>

### 1.4.3 Specification Bulletins

Specification bulletins provide information on temporary differences in feature description or parametric variance since the publication of the last full data sheet. Contact your local sales office for details. Obtain the latest list of company locations and contact information at: <http://www.spansion.com/About/Pages/Locations.aspx>

## Hardware Interface

### Serial Peripheral Interface with Multiple Input / Output (SPI-MIO)

Many memory devices connect to their host system with separate parallel control, address, and data signals that require a large number of signal connections and larger package size. The large number of connections increase power consumption due to so many signals switching and the larger package increases cost.

The S25FL512S device reduces the number of signals for connection to the host system by serially transferring all control, address, and data information over 4 to 6 signals. This reduces the cost of the memory package, reduces signal switching power, and either reduces the host connection count or frees host connectors for use in providing other features.

The S25FL512S device uses the industry standard single bit Serial Peripheral Interface (SPI) and also supports optional extension commands for two bit (Dual) and four bit (Quad) wide serial transfers. This multiple width interface is called SPI Multi-I/O or SPI-MIO.

## 2. Signal Descriptions

### 2.1 Input/Output Summary

**Table 2.1** Signal List

| Signal Name     | Type     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RESET#          | Input    | <b>Hardware Reset:</b> Low = device resets and returns to standby state, ready to receive a command. The signal has an internal pull-up resistor and may be left unconnected in the host system if not used.                                                                                                                                                                                                                                                                                                                                                            |
| SCK             | Input    | <b>Serial Clock.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| CS#             | Input    | <b>Chip Select.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| SI / IO0        | I/O      | <b>Serial Input</b> for single bit data commands or IO0 for Dual or Quad commands.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| SO / IO1        | I/O      | <b>Serial Output</b> for single bit data commands. IO1 for Dual or Quad commands.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| WP# / IO2       | I/O      | <b>Write Protect</b> when not in Quad mode. IO2 in Quad mode. The signal has an internal pull-up resistor and may be left unconnected in the host system if not used for Quad commands.                                                                                                                                                                                                                                                                                                                                                                                 |
| HOLD# / IO3     | I/O      | <b>Hold</b> (pause) serial transfer in single bit or Dual data commands. IO3 in Quad-I/O mode. The signal has an internal pull-up resistor and may be left unconnected in the host system if not used for Quad commands.                                                                                                                                                                                                                                                                                                                                                |
| V <sub>CC</sub> | Supply   | <b>Core Power Supply.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| V <sub>IO</sub> | Supply   | <b>Versatile I/O Power Supply.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| V <sub>SS</sub> | Supply   | <b>Ground.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| NC              | Unused   | <b>Not Connected.</b> No device internal signal is connected to the package connector nor is there any future plan to use the connector for a signal. The connection may safely be used for routing space for a signal on a Printed Circuit Board (PCB). However, any signal connected to an NC must not have voltage levels higher than V <sub>IO</sub> .                                                                                                                                                                                                              |
| RFU             | Reserved | <b>Reserved for Future Use.</b> No device internal signal is currently connected to the package connector but there is potential future use of the connector for a signal. It is recommended to not use RFU connectors for PCB routing channels so that the PCB may take advantage of future enhanced features in compatible footprint devices.                                                                                                                                                                                                                         |
| DNU             | Reserved | <b>Do Not Use.</b> A device internal signal may be connected to the package connector. The connection may be used by Cypress for test or other purposes and is not intended for connection to any host system signal. Any DNU signal related function will be inactive when the signal is at V <sub>IL</sub> . The signal has an internal pull-down resistor and may be left unconnected in the host system or may be tied to V <sub>SS</sub> . Do not use these connections for PCB signal routing channels. Do not connect any host system signal to this connection. |



## 2.2 Address and Data Configuration

Traditional SPI single bit wide commands (Single or SIO) send information from the host to the memory only on the SI signal. Data may be sent back to the host serially on the Serial Output (SO) signal.

Dual or Quad Output commands send information from the host to the memory only on the SI signal. Data will be returned to the host as a sequence of bit pairs on IO0 and IO1 or four bit (nibble) groups on IO0, IO1, IO2, and IO3.

Dual or Quad Input/Output (I/O) commands send information from the host to the memory as bit pairs on IO0 and IO1 or four bit (nibble) groups on IO0, IO1, IO2, and IO3. Data is returned to the host similarly as bit pairs on IO0 and IO1 or four bit (nibble) groups on IO0, IO1, IO2, and IO3.

## 2.3 RESET#

The RESET# input provides a hardware method of resetting the device to standby state, ready for receiving a command. When RESET# is driven to logic low ( $V_{IL}$ ) for at least a period of  $t_{RP}$ , the device:

- terminates any operation in progress,
- tristates all outputs,
- resets the volatile bits in the Configuration Register,
- resets the volatile bits in the Status Registers,
- resets the Bank Address Register to zero,
- loads the Program Buffer with all ones,
- reloads all internal configuration information necessary to bring the device to standby mode,
- and resets the internal Control Unit to standby state.

RESET# causes the same initialization process as is performed when power comes up and requires  $t_{PU}$  time.

RESET# may be asserted low at any time. To ensure data integrity any operation that was interrupted by a hardware reset should be reinitiated once the device is ready to accept a command sequence.

When RESET# is first asserted Low, the device draws  $I_{CC1}$  (50 MHz value) during  $t_{PU}$ . If RESET# continues to be held at  $V_{SS}$  the device draws CMOS standby current ( $I_{SB}$ ).

RESET# has an internal pull-up resistor and may be left unconnected in the host system if not used.

The RESET# input is not available on all packages options. When not available the RESET# input of the device is tied to the inactive state, inside the package.

## 2.4 Serial Clock (SCK)

This input signal provides the synchronization reference for the SPI interface. Instructions, addresses, or data input are latched on the rising edge of the SCK signal. Data output changes after the falling edge of SCK, in SDR commands, and after every edge in DDR commands.

## 2.5 Chip Select (CS#)

The chip select signal indicates when a command for the device is in process and the other signals are relevant for the memory device. When the CS# signal is at the logic high state, the device is not selected and all input signals are ignored and all output signals are high impedance. Unless an internal Program, Erase or Write Registers (WRR) embedded operation is in progress, the device will be in the Standby Power mode. Driving the CS# input to logic low state enables the device, placing it in the Active Power mode. After Power-up, a falling edge on CS# is required prior to the start of any command.

## 2.6 Serial Input (SI) / IO0

This input signal is used to transfer data serially into the device. It receives instructions, addresses, and data to be programmed. Values are latched on the rising edge of serial SCK clock signal.

SI becomes IO0 - an input and output during Dual and Quad commands for receiving instructions, addresses, and data to be programmed (values latched on rising edge of serial SCK clock signal) as well as shifting out data (on the falling edge of SCK, in SDR commands, and on every edge of SCK, in DDR commands).

## 2.7 Serial Output (SO) / IO1

This output signal is used to transfer data serially out of the device. Data is shifted out on the falling edge of the serial SCK clock signal.

SO becomes IO1 - an input and output during Dual and Quad commands for receiving addresses, and data to be programmed (values latched on rising edge of serial SCK clock signal) as well as shifting out data (on the falling edge of SCK, in SDR commands, and on every edge of SCK, in DDR commands).

## 2.8 Write Protect (WP#) / IO2

When WP# is driven Low ( $V_{IL}$ ), during a WRR command and while the Status Register Write Disable (SRWD) bit of the Status Register is set to a 1, it is not possible to write to the Status and Configuration Registers. This prevents any alteration of the Block Protect (BP2, BP1, BP0) and TBPROT bits of the Status Register. As a consequence, all the data bytes in the memory area that are protected by the Block Protect and TBPROT bits, are also hardware protected against data modification if WP# is Low during a WRR command.

The WP# function is not available when the Quad mode is enabled ( $CR[1]=1$ ). The WP# function is replaced by IO2 for input and output during Quad mode for receiving addresses, and data to be programmed (values are latched on rising edge of the SCK signal) as well as shifting out data (on the falling edge of SCK, in SDR commands, and on every edge of SCK, in DDR commands).

WP# has an internal pull-up resistor; when unconnected, WP# is at  $V_{IH}$  and may be left unconnected in the host system if not used for Quad mode.

## 2.9 Hold (HOLD#) / IO3

The Hold (HOLD#) signal is used to pause any serial communications with the device without deselecting the device or stopping the serial clock.

To enter the Hold condition, the device must be selected by driving the CS# input to the logic low state. It is recommended that the user keep the CS# input low state during the entire duration of the Hold condition. This is to ensure that the state of the interface logic remains unchanged from the moment of entering the Hold condition. If the CS# input is driven to the logic high state while the device is in the Hold condition, the interface logic of the device will be reset. To restart communication with the device, it is necessary to drive HOLD# to the logic high state while driving the CS# signal into the logic low state. This prevents the device from going back into the Hold condition.


The Hold condition starts on the falling edge of the Hold (HOLD#) signal, provided that this coincides with SCK being at the logic low state. If the falling edge does not coincide with the SCK signal being at the logic low state, the Hold condition starts whenever the SCK signal reaches the logic low state. Taking the HOLD# signal to the logic low state does not terminate any Write, Program or Erase operation that is currently in progress.

During the Hold condition, SO is in high impedance and both the SI and SCK input are Don't Care.

The Hold condition ends on the rising edge of the Hold (HOLD#) signal, provided that this coincides with the SCK signal being at the logic low state. If the rising edge does not coincide with the SCK signal being at the logic low state, the Hold condition ends whenever the SCK signal reaches the logic low state.

The HOLD# function is not available when the Quad mode is enabled ( $CR[1]=1$ ). The Hold function is replaced by IO3 for input and output during Quad mode for receiving addresses, and data to be programmed (values are latched on rising edge of the SCK signal) as well as shifting out data (on the falling edge of SCK, in SDR commands, and on every edge of SCK, in DDR commands).

The HOLD# signal has an internal pull-up resistor and may be left unconnected in the host system if not used for Quad mode.

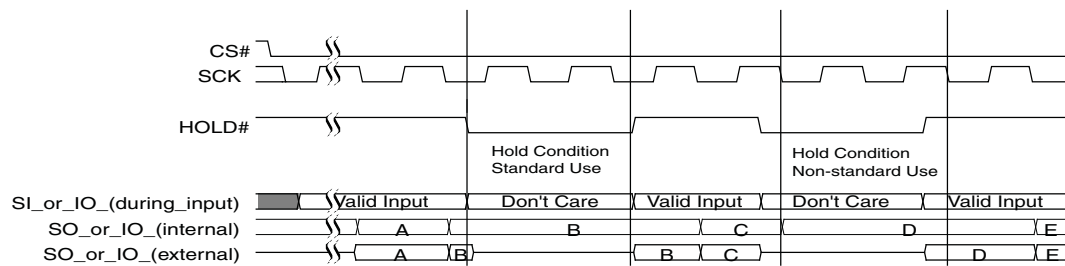**Figure 2.1 HOLD Mode Operation**


## 2.10 Core Voltage Supply ( $V_{CC}$ )

$V_{CC}$  is the voltage source for all device internal logic. It is the single voltage used for all device internal functions including read, program, and erase. The voltage may vary from 2.7V to 3.6V.

## 2.11 Versatile I/O Power Supply ( $V_{IO}$ )

The Versatile I/O ( $V_{IO}$ ) supply is the voltage source for all device input receivers and output drivers and allows the host system to set the voltage levels that the device tolerates on all inputs and drives on outputs (address, control, and IO signals). The  $V_{IO}$  range is 1.65V to  $V_{CC}$ .  $V_{IO}$  cannot be greater than  $V_{CC}$ .

For example, a  $V_{IO}$  of 1.65V - 3.6V allows for I/O at the 1.8V, 2.5V or 3V levels, driving and receiving signals to and from other 1.8V, 2.5V or 3V devices on the same data bus.  $V_{IO}$  may be tied to  $V_{CC}$  so that interface signals operate at the same voltage as the core of the device.  $V_{IO}$  is not available in all package options, when not available the  $V_{IO}$  supply is tied to  $V_{CC}$  internal to the package.

During the rise of power supplies the  $V_{IO}$  supply voltage must remain less than or equal to the  $V_{CC}$  supply voltage.

This supply is not available in all package options. For a backward compatible SO16 footprint, the  $V_{IO}$  supply is tied to  $V_{CC}$  inside the package; thus, the IO will function at  $V_{CC}$  level.

## 2.12 Supply and Signal Ground ( $V_{SS}$ )

$V_{SS}$  is the common voltage drain and ground reference for the device core, input signal receivers, and output drivers.

## 2.13 Not Connected (NC)

No device internal signal is connected to the package connector nor is there any future plan to use the connector for a signal. The connection may safely be used for routing space for a signal on a Printed Circuit Board (PCB). However, any signal connected to an NC must not have voltage levels higher than  $V_{IO}$ .

## 2.14 Reserved for Future Use (RFU)


No device internal signal is currently connected to the package connector but is there potential future use of the connector. It is recommended to not use RFU connectors for PCB routing channels so that the PCB may take advantage of future enhanced features in compatible footprint devices.

## 2.15 Do Not Use (DNU)


A device internal signal may be connected to the package connector. The connection may be used by Cypress for test or other purposes and is not intended for connection to any host system signal. Any DNU signal related function will be inactive when the signal is at  $V_{IL}$ . The signal has an internal pull-down resistor and may be left unconnected in the host system or may be tied to  $V_{SS}$ . Do not use these connections for PCB signal routing channels. Do not connect any host system signal to these connections.

## 2.16 Block Diagrams


**Figure 2.2** Bus Master and Memory Devices on the SPI Bus — Single Bit Data Path

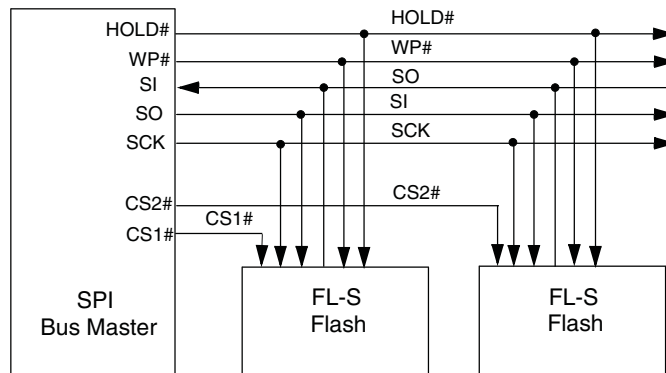

**Figure 2.3** Bus Master and Memory Devices on the SPI Bus — Dual Bit Data Path

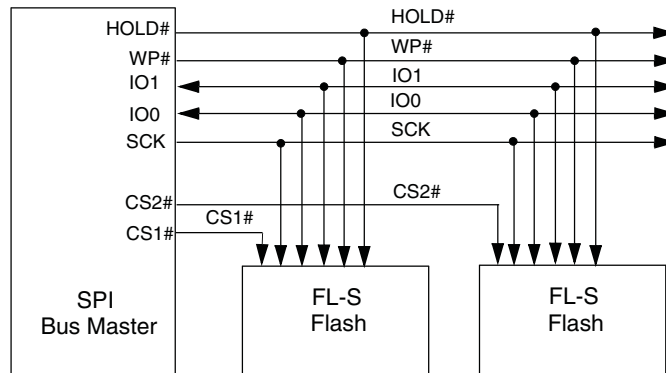

**Figure 2.4** Bus Master and Memory Devices on the SPI Bus — Quad Bit Data Path

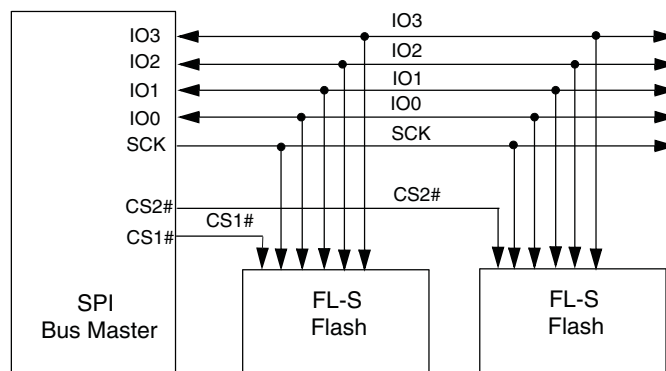

## 3. Signal Protocols

### 3.1 SPI Clock Modes

#### 3.1.1 Single Data Rate (SDR)

The S25FL512S device can be driven by an embedded microcontroller (bus master) in either of the two following clocking modes.


- **Mode 0** with Clock Polarity (CPOL) = 0 and, Clock Phase (CPHA) = 0
- **Mode 3** with CPOL = 1 and, CPHA = 1

For these two modes, input data into the device is always latched in on the rising edge of the SCK signal and the output data is always available from the falling edge of the SCK clock signal.

The difference between the two modes is the clock polarity when the bus master is in standby mode and not transferring any data.

- SCK will stay at logic low state with CPOL = 0, CPHA = 0
- SCK will stay at logic high state with CPOL = 1, CPHA = 1

**Figure 3.1** SPI SDR Modes Supported

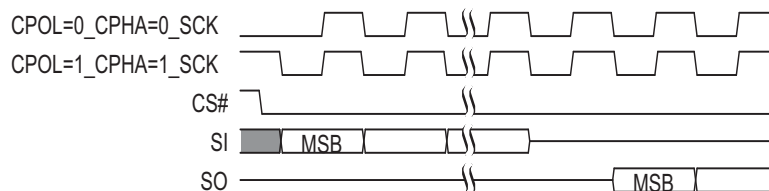

Timing diagrams throughout the remainder of the document are generally shown as both mode 0 and 3 by showing SCK as both high and low at the fall of CS#. In some cases a timing diagram may show only mode 0 with SCK low at the fall of CS#. In such a case, mode 3 timing simply means clock is high at the fall of CS# so no SCK rising edge set up or hold time to the falling edge of CS# is needed for mode 3.


SCK cycles are measured (counted) from one falling edge of SCK to the next falling edge of SCK. In mode 0 the beginning of the first SCK cycle in a command is measured from the falling edge of CS# to the first falling edge of SCK because SCK is already low at the beginning of a command.

#### 3.1.2 Double Data Rate (DDR)

Mode 0 and Mode 3 are also supported for DDR commands. In DDR commands, the instruction bits are always latched on the rising edge of clock, the same as in SDR commands. However, the address and input data that follow the instruction are latched on both the rising and falling edges of SCK. The first address bit is latched on the first rising edge of SCK following the falling edge at the end of the last instruction bit. The first bit of output data is driven on the falling edge at the end of the last access latency (dummy) cycle.

SCK cycles are measured (counted) in the same way as in SDR commands, from one falling edge of SCK to the next falling edge of SCK. In mode 0 the beginning of the first SCK cycle in a command is measured from the falling edge of CS# to the first falling edge of SCK because SCK is already low at the beginning of a command.

**Figure 3.2** SPI DDR Modes Supported

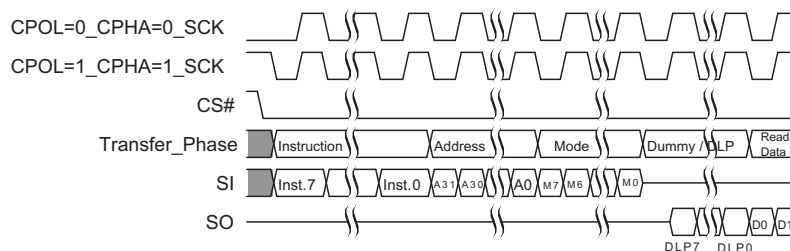

## 3.2 Command Protocol

All communication between the host system and S25FL512S memory device is in the form of units called commands.

All commands begin with an instruction that selects the type of information transfer or device operation to be performed. Commands may also have an address, instruction modifier, latency period, data transfer to the memory, or data transfer from the memory. All instruction, address, and data information is transferred serially between the host system and memory device.

All instructions are transferred from host to memory as a single bit serial sequence on the SI signal.

Single bit wide commands may provide an address or data sent only on the SI signal. Data may be sent back to the host serially on the SO signal.

Dual or Quad Output commands provide an address sent to the memory only on the SI signal. Data will be returned to the host as a sequence of bit pairs on IO0 and IO1 or four bit (nibble) groups on IO0, IO1, IO2, and IO3.

Dual or Quad Input/Output (I/O) commands provide an address sent from the host as bit pairs on IO0 and IO1 or, four bit (nibble) groups on IO0, IO1, IO2, and IO3. Data is returned to the host similarly as bit pairs on IO0 and IO1 or, four bit (nibble) groups on IO0, IO1, IO2, and IO3.


Commands are structured as follows:

- Each command begins with CS# going low and ends with CS# returning high. The memory device is selected by the host driving the Chip Select (CS#) signal low throughout a command.
- The serial clock (SCK) marks the transfer of each bit or group of bits between the host and memory.
- Each command begins with an 8-bit (byte) instruction. The instruction is always presented only as a single bit serial sequence on the Serial Input (SI) signal with one bit transferred to the memory device on each SCK rising edge. The instruction selects the type of information transfer or device operation to be performed.
- The instruction may be stand alone or may be followed by address bits to select a location within one of several address spaces in the device. The instruction determines the address space used. The address may be either a 24-bit or a 32-bit byte boundary, address. The address transfers occur on SCK rising edge, in SDR commands, or on every SCK edge, in DDR commands.
- The width of all transfers following the instruction are determined by the instruction sent. Following transfers may continue to be single bit serial on only the SI or Serial Output (SO) signals, they may be done in 2-bit groups per (dual) transfer on the IO0 and IO1 signals, or they may be done in 4-bit groups per (quad) transfer on the IO0-IO3 signals. Within the dual or quad groups the least significant bit is on IO0. More significant bits are placed in significance order on each higher numbered IO signal. Single bits or parallel bit groups are transferred in most to least significant bit order.
- Some instructions send an instruction modifier called mode bits, following the address, to indicate that the next command will be of the same type with an implied, rather than an explicit, instruction. The next command thus does not provide an instruction byte, only a new address and mode bits. This reduces the time needed to send each command when the same command type is repeated in a sequence of commands. The mode bit transfers occur on SCK rising edge, in SDR commands, or on every SCK edge, in DDR commands.
- The address or mode bits may be followed by write data to be stored in the memory device or by a read latency period before read data is returned to the host.
- Write data bit transfers occur on SCK rising edge, in SDR commands, or on every SCK edge, in DDR commands.
- SCK continues to toggle during any read access latency period. The latency may be zero to several SCK cycles (also referred to as dummy cycles). At the end of the read latency cycles, the first read data bits are driven from the outputs on SCK falling edge at the end of the last read latency cycle. The first read data bits are considered transferred to the host on the following SCK rising edge. Each following transfer occurs on the next SCK rising edge, in SDR commands, or on every SCK edge, in DDR commands.
- If the command returns read data to the host, the device continues sending data transfers until the host takes the CS# signal high. The CS# signal can be driven high after any transfer in the read data sequence. This will terminate the command.


- At the end of a command that does not return data, the host drives the CS# input high. The CS# signal must go high after the eighth bit, of a stand alone instruction or, of the last write data byte that is transferred. That is, the CS# signal must be driven high when the number of clock cycles after CS# signal was driven low is an exact multiple of eight cycles. If the CS# signal does not go high exactly at the eight SCK cycle boundary of the instruction or write data, the command is rejected and not executed.
- All instruction, address, and mode bits are shifted into the device with the Most Significant Bits (MSB) first. The data bits are shifted in and out of the device MSB first. All data is transferred in byte units with the lowest address byte sent first. Following bytes of data are sent in lowest to highest byte address order i.e. the byte address increments.
- All attempts to read the flash memory array during a program, erase, or a write cycle (embedded operations) are ignored. The embedded operation will continue to execute without any affect. A very limited set of commands are accepted during an embedded operation. These are discussed in the individual command descriptions.
- Depending on the command, the time for execution varies. A command to read status information from an executing command is available to determine when the command completes execution and whether the command was successful.

### 3.2.1 Command Sequence Examples


**Figure 3.3** Stand Alone Instruction Command

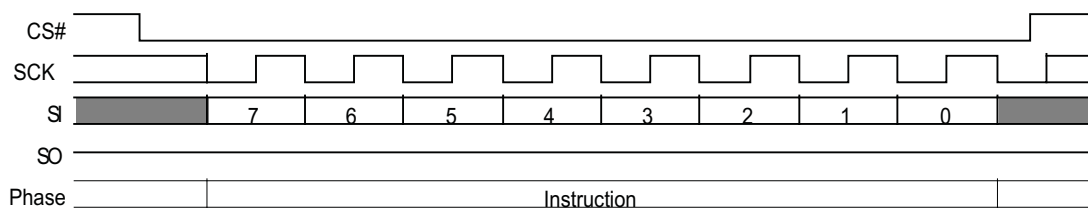


**Figure 3.4** Single Bit Wide Input Command

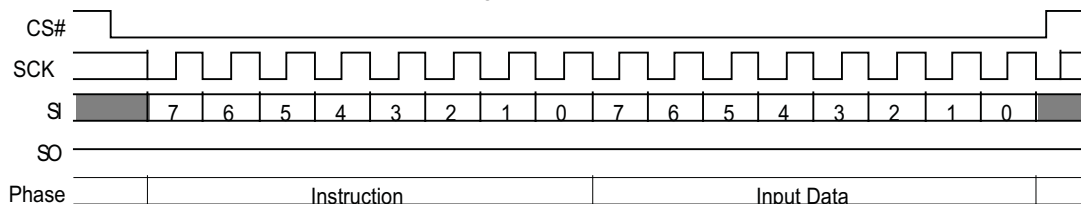


**Figure 3.5** Single Bit Wide Output Command

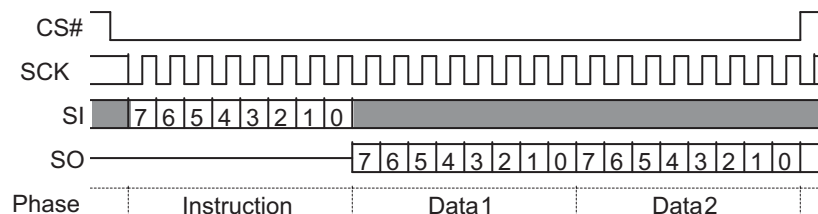


**Figure 3.6** Single Bit Wide I/O Command without Latency

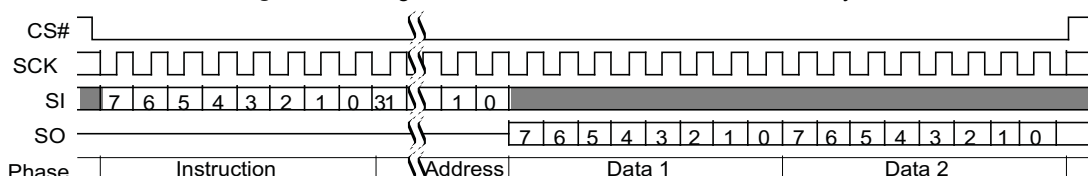


**Figure 3.7** Single Bit Wide I/O Command with Latency

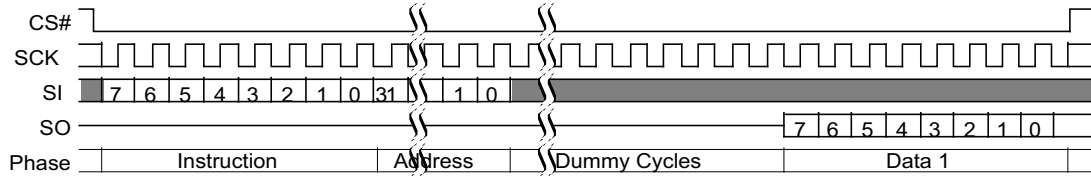


**Figure 3.8** Dual Output Command

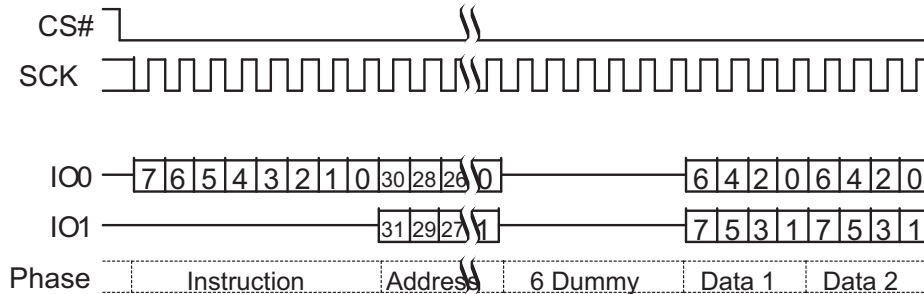


**Figure 3.9** Quad Output Command without Latency

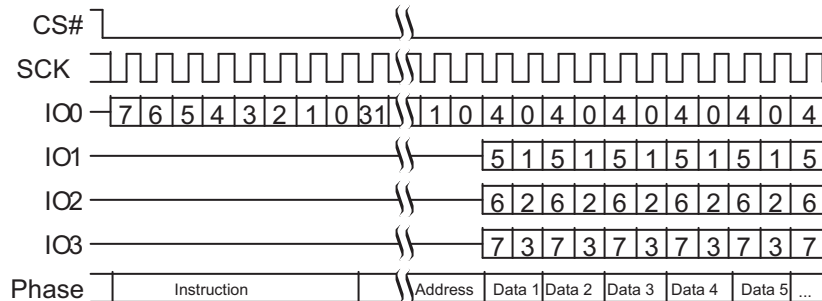

**Figure 3.10** Dual I/O Command

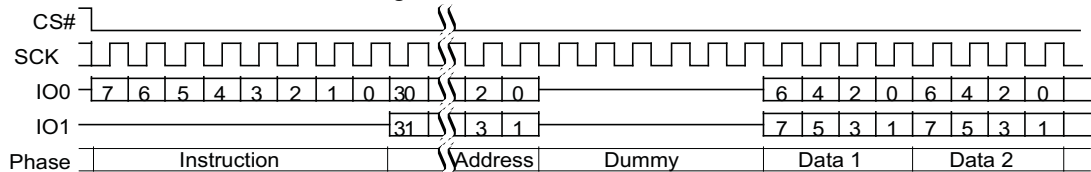


**Figure 3.11** Quad I/O Command

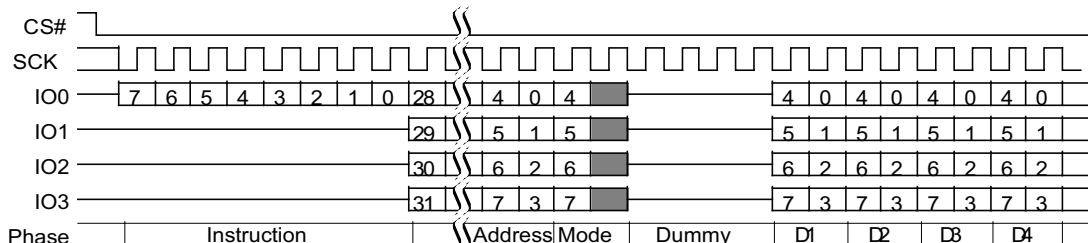





**Figure 3.12** DDR Fast Read with EHPLC = 00b

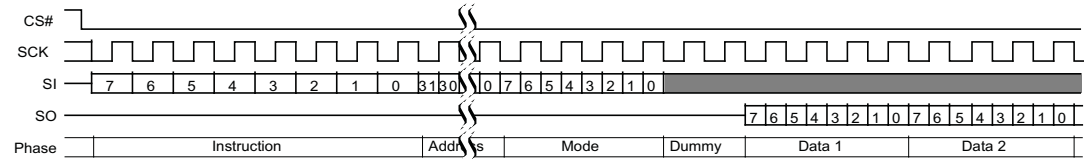

**Figure 3.13** DDR Dual I/O Read with EHPLC = 01b and DLP

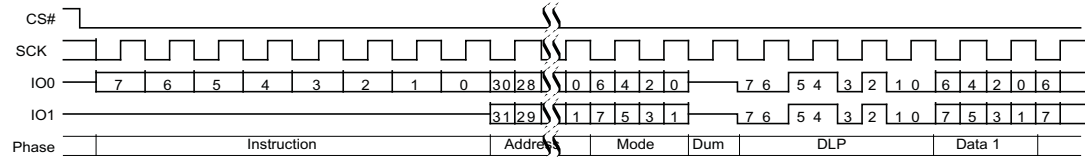

**Figure 3.14** DDR Quad I/O Read

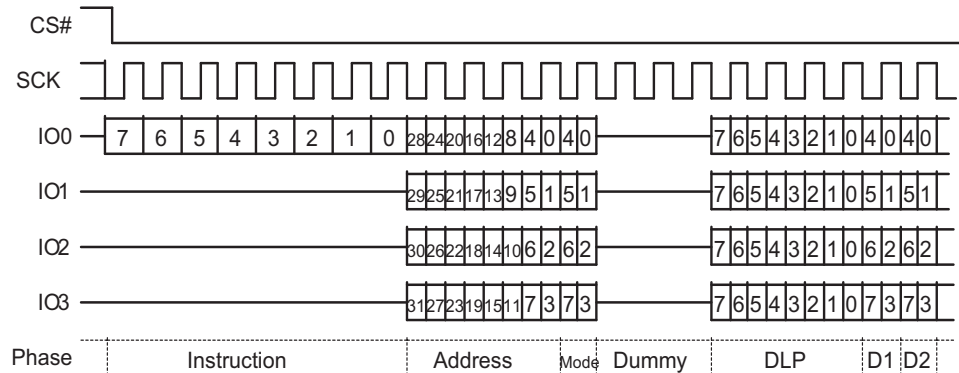

Additional sequence diagrams, specific to each command, are provided in [Section 9., Commands on page 61](#).

### 3.3 Interface States

This section describes the input and output signal levels as related to the SPI interface behavior.

**Table 3.1** Interface States Summary

| Interface State                                    | V <sub>CC</sub>             | V <sub>IO</sub>                              | RESET# | SCK      | CS# | HOLD# / IO3 | WP# / IO2 | SO / IO1 | SI / IO0 |
|----------------------------------------------------|-----------------------------|----------------------------------------------|--------|----------|-----|-------------|-----------|----------|----------|
| Power-Off                                          | < V <sub>CC</sub> (low)     | ≤ V <sub>CC</sub>                            | X      | X        | X   | X           | X         | Z        | X        |
| Low Power<br>Hardware Data Protection              | < V <sub>CC</sub> (cut-off) | ≤ V <sub>CC</sub>                            | X      | X        | X   | X           | X         | Z        | X        |
| Power-On (Cold) Reset                              | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | X      | X        | X   | X           | X         | Z        | X        |
| Hardware (Warm) Reset                              | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HL     | X        | X   | X           | X         | Z        | X        |
| Interface Standby                                  | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | X        | HH  | X           | X         | Z        | X        |
| Instruction Cycle                                  | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HH          | HV        | Z        | HV       |
| Hold Cycle                                         | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HV or HT | HL  | HL          | X         | X        | X        |
| Single Input Cycle<br>Host to Memory Transfer      | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HH          | X         | Z        | HV       |
| Single Latency (Dummy) Cycle                       | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HH          | X         | Z        | X        |
| Single Output Cycle<br>Memory to Host Transfer     | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HH          | X         | MV       | X        |
| Dual Input Cycle<br>Host to Memory Transfer        | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HH          | X         | HV       | HV       |
| Dual Latency (Dummy) Cycle                         | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HH          | X         | X        | X        |
| Dual Output Cycle<br>Memory to Host Transfer       | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HH          | X         | MV       | MV       |
| QPP Address Input Cycle<br>Host to Memory Transfer | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | X           | X         | X        | HV       |
| Quad Input Cycle<br>Host to Memory Transfer        | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HV          | HV        | HV       | HV       |
| Quad Latency (Dummy) Cycle                         | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | X           | X         | X        | X        |
| Quad Output Cycle<br>Memory to Host Transfer       | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | MV          | MV        | MV       | MV       |
| DDR Single Input Cycle<br>Host to Memory Transfer  | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | X           | X         | X        | HV       |
| DDR Dual Input Cycle<br>Host to Memory Transfer    | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | X           | X         | HV       | HV       |
| DDR Quad Input Cycle<br>Host to Memory Transfer    | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | HV          | HV        | HV       | HV       |
| DDR Latency (Dummy) Cycle                          | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | MV or Z     | MV or Z   | MV or Z  | MV or Z  |
| DDR Single Output Cycle<br>Memory to Host Transfer | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | Z           | Z         | MV       | X        |
| DDR Dual Output Cycle<br>Memory to Host Transfer   | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | Z           | Z         | MV       | MV       |
| DDR Quad Output Cycle<br>Memory to Host Transfer   | ≥ V <sub>CC</sub> (min)     | ≥ V <sub>IO</sub> (min)<br>≤ V <sub>CC</sub> | HH     | HT       | HL  | MV          | MV        | MV       | MV       |

**Legend:**

Z = no driver - floating signal  
 HL = Host driving V<sub>IL</sub>  
 HH = Host driving V<sub>IH</sub>  
 HV = either HL or HH  
 X = HL or HH or Z  
 HT = toggling between HL and HH  
 ML = Memory driving V<sub>IL</sub>  
 MH = Memory driving V<sub>IH</sub>  
 MV = either ML or MH

### 3.3.1 Power-Off

When the core supply voltage is at or below the  $V_{CC}$  (low) voltage, the device is considered to be powered off. The device does not react to external signals, and is prevented from performing any program or erase operation.

### 3.3.2 Low Power Hardware Data Protection

When  $V_{CC}$  is less than  $V_{CC}$  (cut-off) the memory device will ignore commands to ensure that program and erase operations can not start when the core supply voltage is out of the operating range.

### 3.3.3 Power-On (Cold) Reset

When the core voltage supply remains at or below the  $V_{CC}$  (low) voltage for  $\geq t_{PD}$  time, then rises to  $\geq V_{CC}$  (Minimum) the device will begin its Power-On Reset (POR) process. POR continues until the end of  $t_{PU}$ . During  $t_{PU}$  the device does not react to external input signals nor drive any outputs. Following the end of  $t_{PU}$  the device transitions to the Interface Standby state and can accept commands. For additional information on POR see *Power-On (Cold) Reset* [on page 29](#).

### 3.3.4 Hardware (Warm) Reset

Some of the device package options provide a RESET# input. When RESET# is driven low for  $t_{RP}$  time the device starts the hardware reset process. The process continues for  $t_{RPH}$  time. Following the end of both  $t_{RPH}$  and the reset hold time following the rise of RESET# ( $t_{RH}$ ) the device transitions to the Interface Standby state and can accept commands. For additional information on hardware reset see *POR followed by Hardware Reset* [on page 30](#).

### 3.3.5 Interface Standby

When CS# is high the SPI interface is in standby state. Inputs other than RESET# are ignored. The interface waits for the beginning of a new command. The next interface state is Instruction Cycle when CS# goes low to begin a new command.

While in interface standby state the memory device draws standby current ( $I_{SB}$ ) if no embedded algorithm is in progress. If an embedded algorithm is in progress, the related current is drawn until the end of the algorithm when the entire device returns to standby current draw.

### 3.3.6 Instruction Cycle

When the host drives the MSB of an instruction and CS# goes low, on the next rising edge of SCK the device captures the MSB of the instruction that begins the new command. On each following rising edge of SCK the device captures the next lower significance bit of the 8 bit instruction. The host keeps RESET# high, CS# low, HOLD# high, and drives Write Protect (WP#) signal as needed for the instruction. However, WP# is only relevant during instruction cycles of a WRR command and is otherwise ignored.

Each instruction selects the address space that is operated on and the transfer format used during the remainder of the command. The transfer format may be Single, Dual output, Quad output, Dual I/O, Quad I/O, DDR Single I/O, DDR Dual I/O, or DDR Quad I/O. The expected next interface state depends on the instruction received.

Some commands are stand alone, needing no address or data transfer to or from the memory. The host returns CS# high after the rising edge of SCK for the eighth bit of the instruction in such commands. The next interface state in this case is Interface Standby.

### 3.3.7 Hold

When Quad mode is not enabled (CR[1]=0) the HOLD# / IO3 signal is used as the HOLD# input. The host keeps RESET# high, HOLD# low, SCK may be at a valid level or continue toggling, and CS# is low. When HOLD# is low a command is paused, as though SCK were held low. SI / IO0 and SO / IO1 ignore the input level when acting as inputs and are high impedance when acting as outputs during hold state. Whether these signals are input or output depends on the command and the point in the command sequence when HOLD# is asserted low.

When HOLD# returns high the next state is the same state the interface was in just before HOLD# was asserted low.

When Quad mode is enabled the HOLD# / IO3 signal is used as IO3.

During DDR commands the HOLD# and WP# inputs are ignored.

### **3.3.8 Single Input Cycle - Host to Memory Transfer**

Several commands transfer information after the instruction on the single serial input (SI) signal from host to the memory device. The dual output, and quad output commands send address to the memory using only SI but return read data using the I/O signals. The host keeps RESET# high, CS# low, HOLD# high, and drives SI as needed for the command. The memory does not drive the Serial Output (SO) signal.

The expected next interface state depends on the instruction. Some instructions continue sending address or data to the memory using additional Single Input Cycles. Others may transition to Single Latency, or directly to Single, Dual, or Quad Output.

### **3.3.9 Single Latency (Dummy) Cycle**

Read commands may have zero to several latency cycles during which read data is read from the main flash memory array before transfer to the host. The number of latency cycles are determined by the Latency Code in the configuration register (CR[7:6]). During the latency cycles, the host keeps RESET# high, CS# low, and HOLD# high. The Write Protect (WP#) signal is ignored. The host may drive the SI signal during these cycles or the host may leave SI floating. The memory does not use any data driven on SI / IO0 or other I/O signals during the latency cycles. In dual or quad read commands, the host must stop driving the I/O signals on the falling edge at the end of the last latency cycle. It is recommended that the host stop driving I/O signals during latency cycles so that there is sufficient time for the host drivers to turn off before the memory begins to drive at the end of the latency cycles. This prevents driver conflict between host and memory when the signal direction changes. The memory does not drive the Serial Output (SO) or I/O signals during the latency cycles.

The next interface state depends on the command structure i.e. the number of latency cycles, and whether the read is single, dual, or quad width.

### **3.3.10 Single Output Cycle - Memory to Host Transfer**

Several commands transfer information back to the host on the single Serial Output (SO) signal. The host keeps RESET# high, CS# low, and HOLD# high. The Write Protect (WP#) signal is ignored. The memory ignores the Serial Input (SI) signal. The memory drives SO with data.

The next interface state continues to be Single Output Cycle until the host returns CS# to high ending the command.

### **3.3.11 Dual Input Cycle - Host to Memory Transfer**

The Read Dual I/O command transfers two address or mode bits to the memory in each cycle. The host keeps RESET# high, CS# low, HOLD# high. The Write Protect (WP#) signal is ignored. The host drives address on SI / IO0 and SO / IO1.

The next interface state following the delivery of address and mode bits is a Dual Latency Cycle if there are latency cycles needed or Dual Output Cycle if no latency is required.

### **3.3.12 Dual Latency (Dummy) Cycle**

Read commands may have zero to several latency cycles during which read data is read from the main flash memory array before transfer to the host. The number of latency cycles are determined by the Latency Code in the configuration register (CR[7:6]). During the latency cycles, the host keeps RESET# high, CS# low, and HOLD# high. The Write Protect (WP#) signal is ignored. The host may drive the SI / IO0 and SO / IO1 signals during these cycles or the host may leave SI / IO0 and SO / IO1 floating. The memory does not use any data driven on SI / IO0 and SO / IO1 during the latency cycles. The host must stop driving SI / IO0 and SO / IO1 on the falling edge at the end of the last latency cycle. It is recommended that the host stop driving them during all latency cycles so that there is sufficient time for the host drivers to turn off before the memory begins to drive at the end of the latency cycles. This prevents driver conflict between host and memory when the signal direction changes. The memory does not drive the SI / IO0 and SO / IO1 signals during the latency cycles.

The next interface state following the last latency cycle is a Dual Output Cycle.

### **3.3.13 Dual Output Cycle - Memory to Host Transfer**

The Read Dual Output and Read Dual I/O return data to the host two bits in each cycle. The host keeps RESET# high, CS# low, and HOLD# high. The Write Protect (WP#) signal is ignored. The memory drives data on the SI / IO0 and SO / IO1 signals during the dual output cycles.

The next interface state continues to be Dual Output Cycle until the host returns CS# to high ending the command.

### **3.3.14 QPP or QOR Address Input Cycle**

The Quad Page Program and Quad Output Read commands send address to the memory only on IO0. The other IO signals are ignored because the device must be in Quad mode for these commands thus the Hold and Write Protect features are not active. The host keeps RESET# high, CS# low, and drives IO0.

For QPP the next interface state following the delivery of address is the Quad Input Cycle.

For QOR the next interface state following address is a Quad Latency Cycle if there are latency cycles needed or Quad Output Cycle if no latency is required.

### **3.3.15 Quad Input Cycle - Host to Memory Transfer**

The Quad I/O Read command transfers four address or mode bits to the memory in each cycle. The Quad Page Program command transfers four data bits to the memory in each cycle. The host keeps RESET# high, CS# low, and drives the IO signals.

For Quad I/O Read the next interface state following the delivery of address and mode bits is a Quad Latency Cycle if there are latency cycles needed or Quad Output Cycle if no latency is required. For Quad Page Program the host returns CS# high following the delivery of data to be programmed and the interface returns to standby state.

### **3.3.16 Quad Latency (Dummy) Cycle**

Read commands may have zero to several latency cycles during which read data is read from the main flash memory array before transfer to the host. The number of latency cycles are determined by the Latency Code in the configuration register (CR[7:6]). During the latency cycles, the host keeps RESET# high, CS# low. The host may drive the IO signals during these cycles or the host may leave the IO floating. The memory does not use any data driven on IO during the latency cycles. The host must stop driving the IO signals on the falling edge at the end of the last latency cycle. It is recommended that the host stop driving them during all latency cycles so that there is sufficient time for the host drivers to turn off before the memory begins to drive at the end of the latency cycles. This prevents driver conflict between host and memory when the signal direction changes. The memory does not drive the IO signals during the latency cycles.

The next interface state following the last latency cycle is a Quad Output Cycle.

### **3.3.17 Quad Output Cycle - Memory to Host Transfer**

The Quad Output Read and Quad I/O Read return data to the host four bits in each cycle. The host keeps RESET# high, and CS# low. The memory drives data on IO0-IO3 signals during the Quad output cycles.

The next interface state continues to be Quad Output Cycle until the host returns CS# to high ending the command.

### **3.3.18 DDR Single Input Cycle - Host to Memory Transfer**

The DDR Fast Read command sends address, and mode bits to the memory only on the IO0 signal. One bit is transferred on the rising edge of SCK and one bit on the falling edge in each cycle. The host keeps RESET# high, and CS# low. The other IO signals are ignored by the memory.

The next interface state following the delivery of address and mode bits is a DDR Latency Cycle.

### **3.3.19 DDR Dual Input Cycle - Host to Memory Transfer**

The DDR Dual I/O Read command sends address, and mode bits to the memory only on the IO0 and IO1 signals. Two bits are transferred on the rising edge of SCK and two bits on the falling edge in each cycle. The host keeps RESET# high, and CS# low. The IO2 and IO3 signals are ignored by the memory.

The next interface state following the delivery of address and mode bits is a DDR Latency Cycle.

### **3.3.20 DDR Quad Input Cycle - Host to Memory Transfer**

The DDR Quad I/O Read command sends address, and mode bits to the memory on all the IO signals. Four bits are transferred on the rising edge of SCK and four bits on the falling edge in each cycle. The host keeps RESET# high, and CS# low.

The next interface state following the delivery of address and mode bits is a DDR Latency Cycle.

### **3.3.21 DDR Latency Cycle**

DDR Read commands may have one to several latency cycles during which read data is read from the main flash memory array before transfer to the host. The number of latency cycles are determined by the Latency Code in the configuration register (CR[7:6]). During the latency cycles, the host keeps RESET# high and CS# low. The host may not drive the IO signals during these cycles. So that there is sufficient time for the host drivers to turn off before the memory begins to drive. This prevents driver conflict between host and memory when the signal direction changes. The memory has an option to drive all the IO signals with a Data Learning Pattern (DLP) during the last 4 latency cycles. The DLP option should not be enabled when there are fewer than five latency cycles so that there is at least one cycle of high impedance for turn around of the IO signals before the memory begins driving the DLP. When there are more than 4 cycles of latency the memory does not drive the IO signals until the last four cycles of latency.

The next interface state following the last latency cycle is a DDR Single, Dual, or Quad Output Cycle, depending on the instruction.

### **3.3.22 DDR Single Output Cycle - Memory to Host Transfer**

The DDR Fast Read command returns bits to the host only on the SO / IO1 signal. One bit is transferred on the rising edge of SCK and one bit on the falling edge in each cycle. The host keeps RESET# high, and CS# low. The other IO signals are not driven by the memory.

The next interface state continues to be DDR Single Output Cycle until the host returns CS# to high ending the command.

### **3.3.23 DDR Dual Output Cycle - Memory to Host Transfer**

The DDR Dual I/O Read command returns bits to the host only on the IO0 and IO1 signals. Two bits are transferred on the rising edge of SCK and two bits on the falling edge in each cycle. The host keeps RESET# high, and CS# low. The IO2 and IO3 signals are not driven by the memory.

The next interface state continues to be DDR Dual Output Cycle until the host returns CS# to high ending the command.

### **3.3.24 DDR Quad Output Cycle - Memory to Host Transfer**

The DDR Quad I/O Read command returns bits to the host on all the IO signals. Four bits are transferred on the rising edge of SCK and four bits on the falling edge in each cycle. The host keeps RESET# high, and CS# low.

The next interface state continues to be DDR Quad Output Cycle until the host returns CS# to high ending the command.

### 3.4 Configuration Register Effects on the Interface

The configuration register bits 7 and 6 (CR1[7:6]) select the latency code for all read commands. The latency code selects the number of mode bit and latency cycles for each type of instruction.

The configuration register bit 1 (CR1[1]) selects whether Quad mode is enabled to ignore HOLD# and WP# and allow Quad Page Program, Quad Output Read, and Quad I/O Read commands. Quad mode must also be selected to allow Read DDR Quad I/O commands.

### 3.5 Data Protection

Some basic protection against unintended changes to stored data are provided and controlled purely by the hardware design. These are described below. Other software managed protection methods are discussed in the software section ([page 44](#)) of this document.

#### 3.5.1 Power-Up

When the core supply voltage is at or below the  $V_{CC}$  (low) voltage, the device is considered to be powered off. The device does not react to external signals, and is prevented from performing any program or erase operation. Program and erase operations continue to be prevented during the Power-on Reset (POR) because no command is accepted until the exit from POR to the Interface Standby state.

#### 3.5.2 Low Power

When  $V_{CC}$  is less than  $V_{CC}$  (cut-off) the memory device will ignore commands to ensure that program and erase operations can not start when the core supply voltage is out of the operating range.

#### 3.5.3 Clock Pulse Count

The device verifies that all program, erase, and Write Registers (WRR) commands consist of a clock pulse count that is a multiple of eight before executing them. A command not having a multiple of 8 clock pulse count is ignored and no error status is set for the command.

## 4. Electrical Specifications

### 4.1 Absolute Maximum Ratings

**Table 4.1** Absolute Maximum Ratings

|                                                                  |                                    |
|------------------------------------------------------------------|------------------------------------|
| Storage Temperature Plastic Packages                             | –65°C to +150°C                    |
| Ambient Temperature with Power Applied                           | –65°C to +125°C                    |
| V <sub>CC</sub>                                                  | –0.5V to +4.0V                     |
| V <sub>IO</sub> (Note 1)                                         | –0.5V to +4.0V                     |
| Input Voltage with Respect to Ground (V <sub>SS</sub> ) (Note 2) | –0.5V to +(V <sub>IO</sub> + 0.5V) |
| Output Short Circuit Current (Note 3)                            | 100 mA                             |

**Notes:**

1. V<sub>IO</sub> must always be less than or equal V<sub>CC</sub> + 200 mV.
2. See Input Signal Overshoot on page 25 for allowed maximums during signal transition.
3. No more than one output may be shorted to ground at a time. Duration of the short circuit should not be greater than one second.
4. Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational sections of this data sheet is not implied. Exposure of the device to absolute maximum rating conditions for extended periods may affect device reliability.

### 4.2 Operating Ranges

Operating ranges define those limits between which the functionality of the device is guaranteed.

#### 4.2.1 Temperature Ranges

Industrial (I) Devices

Ambient Temperature (T<sub>A</sub>) ..... –40°C to +85°C

Industrial Plus (A) Devices

Ambient Temperature (T<sub>A</sub>) ..... –40°C to +105°C

Industrial Plus operating and performance parameters will be determined by device characterization and may vary from standard industrial temperature range devices as currently shown in this specification.

#### 4.2.2 Power Supply Voltages

Some package options provide access to a separate input and output buffer power supply called V<sub>IO</sub>. Packages which do not provide the separate V<sub>IO</sub> connection, internally connect the device V<sub>IO</sub> to V<sub>CC</sub>. For these packages the references to V<sub>IO</sub> are then also references to V<sub>CC</sub>.

V<sub>CC</sub> .....2.7V to 3.6V


V<sub>IO</sub> .....1.65V to V<sub>CC</sub> + 200 mV




### 4.2.3 Input Signal Overshoot

During DC conditions, input or I/O signals should remain equal to or between  $V_{SS}$  and  $V_{IO}$ . During voltage transitions, inputs or I/Os may overshoot  $V_{SS}$  to  $-2.0V$  or overshoot to  $V_{IO} + 2.0V$ , for periods up to 20 ns.

**Figure 4.1** Maximum Negative Overshoot Waveform

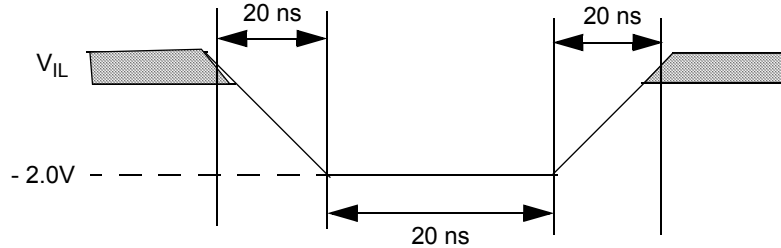

**Figure 4.2** Maximum Positive Overshoot Waveform

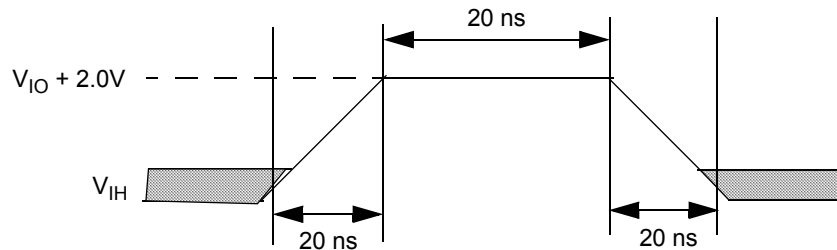

## 4.3 Power-Up and Power-Down

The device must not be selected at power-up or power-down (that is, CS# must follow the voltage applied on  $V_{CC}$ ) until  $V_{CC}$  reaches the correct value as follows:

- $V_{CC}$  (min) at power-up, and then for a further delay of  $t_{PU}$
- $V_{SS}$  at power-down

A simple pull-up resistor (generally of the order of 100 k $\Omega$ ) on Chip Select (CS#) can usually be used to insure safe and proper power-up and power-down.

The device ignores all instructions until a time delay of  $t_{PU}$  has elapsed after the moment that  $V_{CC}$  rises above the minimum  $V_{CC}$  threshold. See Figure 4.3. However, correct operation of the device is not guaranteed if  $V_{CC}$  returns below  $V_{CC}$  (min) during  $t_{PU}$ . No command should be sent to the device until the end of  $t_{PU}$ .



After power-up ( $t_{PU}$ ), the device is in Standby mode (not Deep Power Down mode), draws CMOS standby current ( $I_{SB}$ ), and the WEL bit is reset.

During power-down or voltage drops below  $V_{CC}$  (cut-off), the voltage must drop below  $V_{CC}$  (low) for a period of  $t_{PD}$  for the part to initialize correctly on power-up. See Figure 4.4. If during a voltage drop the  $V_{CC}$  stays above  $V_{CC}$  (cut-off) the part will stay initialized and will work correctly when  $V_{CC}$  is again above  $V_{CC}$  (min). In the event Power-on Reset (POR) did not complete correctly after power up, the assertion of the RESET# signal or receiving a software reset command (RESET) will restart the POR process.

Normal precautions must be taken for supply rail decoupling to stabilize the  $V_{CC}$  supply at the device. Each device in a system should have the  $V_{CC}$  rail decoupled by a suitable capacitor close to the package supply connection (this capacitor is generally of the order of 0.1  $\mu$ f).

**Table 4.2** Power-Up / Power-Down Voltage and Timing

| Symbol                     | Parameter                                                                                                            | Min        | Max | Unit          |
|----------------------------|----------------------------------------------------------------------------------------------------------------------|------------|-----|---------------|
| $V_{CC} \text{ (min)}$     | $V_{CC}$ (minimum operation voltage)                                                                                 | 2.7        |     | V             |
| $V_{CC} \text{ (cut-off)}$ | $V_{CC}$ (Cut Off where re-initialization is needed)                                                                 | 2.4        |     | V             |
| $V_{CC} \text{ (low)}$     | $V_{CC}$ (low voltage for initialization to occur)<br>$V_{CC}$ (Low voltage for initialization to occur at embedded) | 1.0<br>2.3 |     | V             |
| $t_{PU}$                   | $V_{CC}$ (min) to Read operation                                                                                     |            | 300 | $\mu\text{s}$ |
| $t_{PD}$                   | $V_{CC}$ (low) time                                                                                                  | 1.0        |     | $\mu\text{s}$ |

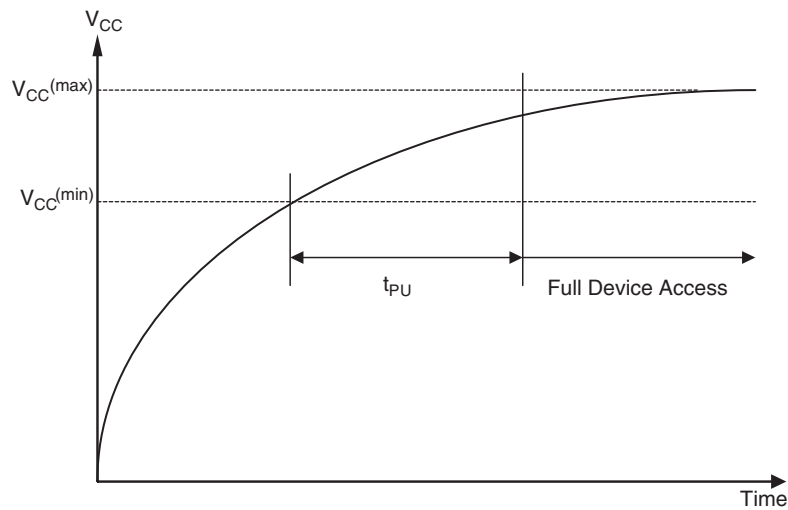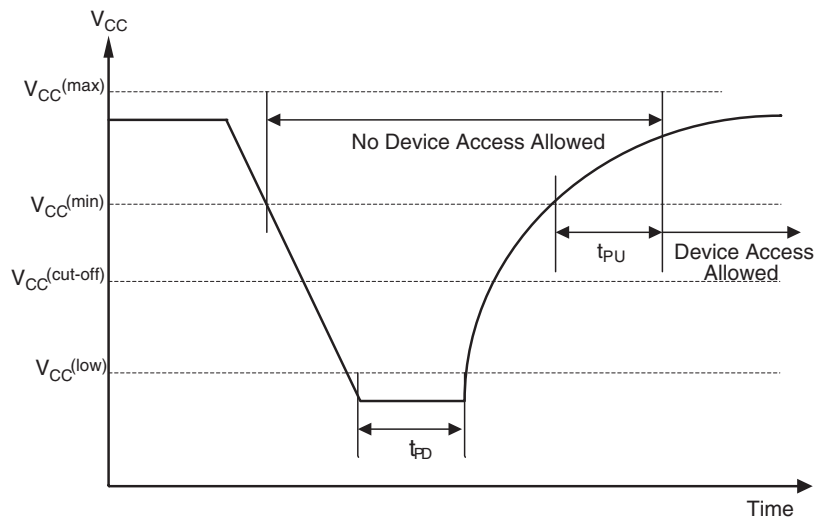**Figure 4.3** Power-Up

**Figure 4.4** Power-Down and Voltage Drop


## 4.4 DC Characteristics

Applicable within operating ranges.

**Table 4.3** DC Characteristics

| Symbol                     | Parameter                                  | Test Conditions                                                                                                                                                              | Min                  | Typ (1) | Max                                     | Unit          |
|----------------------------|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------|-----------------------------------------|---------------|
| $V_{IL}$                   | Input Low Voltage                          |                                                                                                                                                                              | -0.5                 |         | $0.2 \times V_{IO}$                     | V             |
| $V_{IH}$                   | Input High Voltage                         |                                                                                                                                                                              | $0.7 \times V_{IO}$  |         | $V_{IO} + 0.4$                          | V             |
| $V_{OL}$                   | Output Low Voltage                         | $I_{OL} = 1.6 \text{ mA}$ , $V_{CC} = V_{CC \text{ min}}$                                                                                                                    |                      |         | $0.15 \times V_{IO}$                    | V             |
| $V_{OH}$                   | Output High Voltage                        | $I_{OH} = -0.1 \text{ mA}$                                                                                                                                                   | $0.85 \times V_{IO}$ |         |                                         | V             |
| $I_{LI}$                   | Input Leakage Current                      | $V_{CC} = V_{CC \text{ Max}}$ , $V_{IN} = V_{IH}$ or $V_{IL}$                                                                                                                |                      |         | $\pm 2$                                 | $\mu\text{A}$ |
| $I_{LO}$                   | Output Leakage Current                     | $V_{CC} = V_{CC \text{ Max}}$ , $V_{IN} = V_{IH}$ or $V_{IL}$                                                                                                                |                      |         | $\pm 2$                                 | $\mu\text{A}$ |
| $I_{CC1}$                  | Active Power Supply Current (READ)         | Serial SDR@50 MHz<br>Serial SDR@133 MHz<br>Quad SDR @ 80 MHz<br>Quad SDR @104 MHz<br>Quad DDR @ 66 MHz<br>Quad DDR @80 MHz<br>Outputs unconnected during read data return(2) |                      |         | 16<br>33/35 (3)<br>50<br>61<br>75<br>90 | mA            |
| $I_{CC2}$                  | Active Power Supply Current (Page Program) | $CS\# = V_{IO}$                                                                                                                                                              |                      |         | 100                                     | mA            |
| $I_{CC3}$                  | Active Power Supply Current (WRR)          | $CS\# = V_{IO}$                                                                                                                                                              |                      |         | 100                                     | mA            |
| $I_{CC4}$                  | Active Power Supply Current (SE)           | $CS\# = V_{IO}$                                                                                                                                                              |                      |         | 100                                     | mA            |
| $I_{CC5}$                  | Active Power Supply Current (BE)           | $CS\# = V_{IO}$                                                                                                                                                              |                      |         | 100                                     | mA            |
| $I_{SB}$ (Industrial)      | Standby Current                            | RESET#, $CS\# = V_{IO}$ ; SI, SCK = $V_{IO}$ or $V_{SS}$ ,<br>Industrial Temp                                                                                                |                      | 70      | 100                                     | $\mu\text{A}$ |
| $I_{SB}$ (Industrial Plus) | Standby Current                            | RESET#, $CS\# = V_{IO}$ ; SI, SCK = $V_{IO}$ or $V_{SS}$ ,<br>Industrial Plus Temp                                                                                           |                      | 70      | 300                                     | $\mu\text{A}$ |

**Notes:**

1. Typical values are at  $T_{AI} = 25^\circ\text{C}$  and  $V_{CC} = V_{IO} = 3\text{V}$ .
2. Output switching current is not included.
3. Industrial temperature range / Industrial Plus temperature range.

### 4.4.1 Active Power and Standby Power Modes

The device is enabled and in the Active Power mode when Chip Select ( $CS\#$ ) is Low. When  $CS\#$  is high, the device is disabled, but may still be in an Active Power mode until all program, erase, and write operations have completed. The device then goes into the Standby Power mode, and power consumption drops to  $I_{SB}$ .

## 5. Timing Specifications

### 5.1 Key to Switching Waveforms

Figure 5.1 Waveform Element Meanings



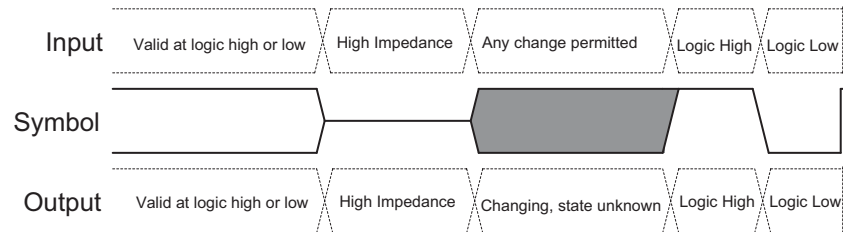


Figure 5.2 Input, Output, and Timing Reference Levels

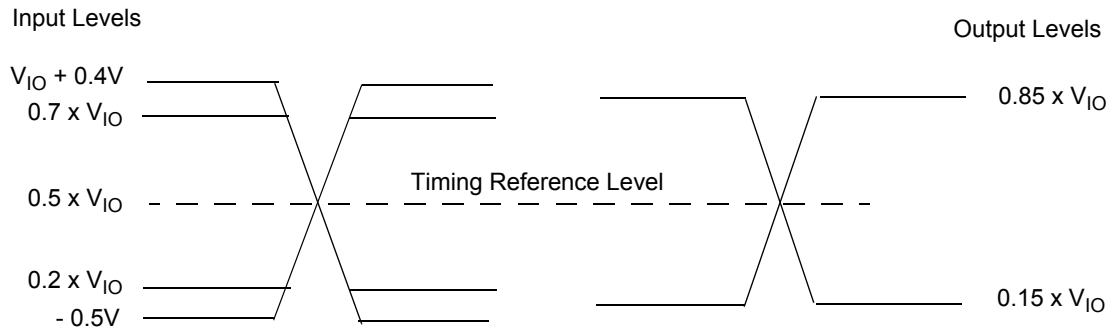

### 5.2 AC Test Conditions

Figure 5.3 Test Setup

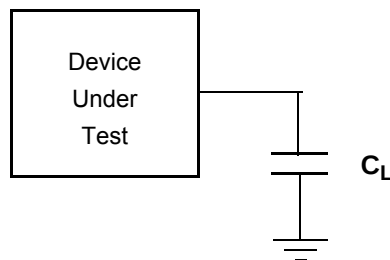

**Table 5.1** AC Measurement Conditions

| Symbol | Parameter                 | Min                            | Max | Unit |
|--------|---------------------------|--------------------------------|-----|------|
| $C_L$  | Load Capacitance          | 30<br>15 (4)                   |     | pF   |
|        | Input Rise and Fall Times |                                | 2.4 | ns   |
|        | Input Pulse Voltage       | 0.2 x $V_{IO}$ to 0.8 $V_{IO}$ |     | V    |
|        | Input Timing Ref Voltage  | 0.5 $V_{IO}$                   |     | V    |
|        | Output Timing Ref Voltage | 0.5 $V_{IO}$                   |     | V    |

**Notes:**

1. Output High-Z is defined as the point where data is no longer driven.
2. Input slew rate: 1.5 V/ns.
3. AC characteristics tables assume clock and data signals have the same slew rate (slope).
4. DDR Operation.

## 5.2.1 Capacitance Characteristics

**Table 5.2** Capacitance

|           | Parameter                                       | Test Conditions                 | Min | Max | Unit |
|-----------|-------------------------------------------------|---------------------------------|-----|-----|------|
| $C_{IN}$  | Input Capacitance (applies to SCK, CS#, RESET#) | 1 MHz, $T_A = 25^\circ\text{C}$ |     | 8   | pF   |
| $C_{OUT}$ | Output Capacitance (applies to All I/O)         | 1 MHz, $T_A = 25^\circ\text{C}$ |     | 8   | pF   |


**Note:**



1. For more information on capacitance, please consult the IBIS models.

## 5.3 Reset

### 5.3.1 Power-On (Cold) Reset

The device executes a Power-On Reset (POR) process until a time delay of  $t_{PU}$  has elapsed after the moment that  $V_{CC}$  rises above the minimum  $V_{CC}$  threshold. See [Figure 4.3 on page 26](#), [Table 4.2 on page 26](#), and [Table 5.3 on page 30](#). The device must not be selected (CS# to go high with  $V_{IO}$ ) during power-up ( $t_{PU}$ ), i.e. no commands may be sent to the device until the end of  $t_{PU}$ . RESET# is ignored during POR. If RESET# is low during POR and remains low through and beyond the end of  $t_{PU}$ , CS# must remain high until  $t_{RH}$  after RESET# returns high. RESET# must return high for greater than  $t_{RS}$  before returning low to initiate a hardware reset.

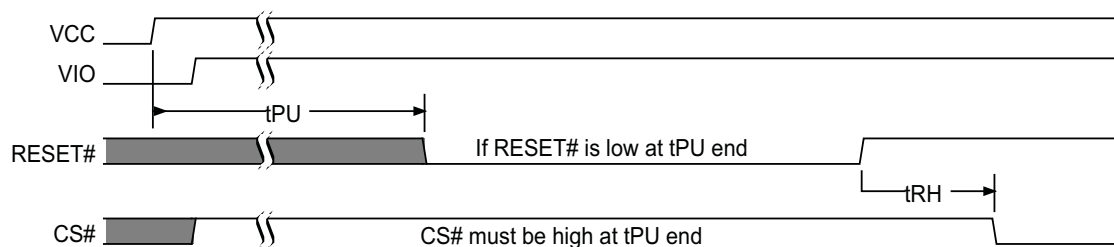**Figure 5.4** Reset Low at the End of POR

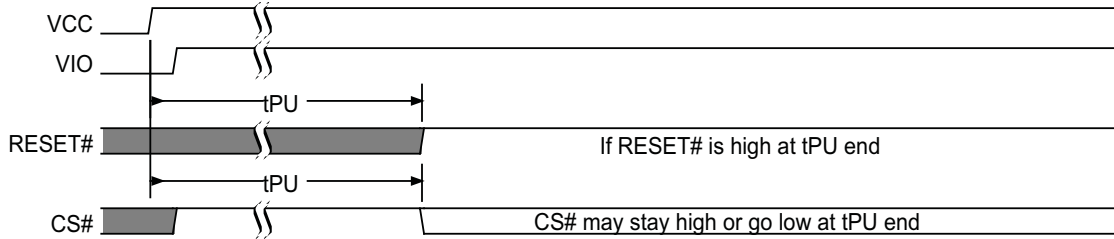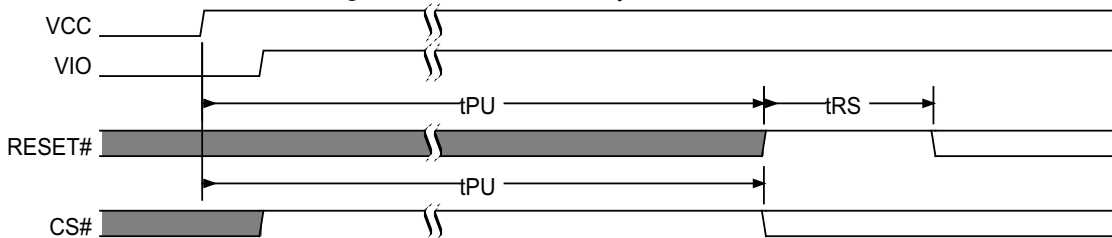
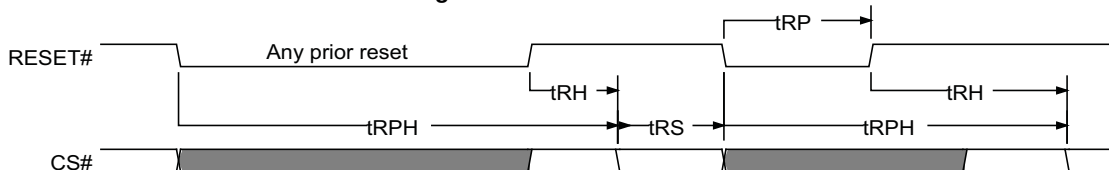
**Figure 5.5 Reset High at the End of POR**

**Figure 5.6 POR followed by Hardware Reset**


### 5.3.2 Hardware (Warm) Reset

When the RESET# input transitions from  $V_{IH}$  to  $V_{IL}$  the device will reset register states in the same manner as power-on reset but, does not go through the full reset process that is performed during POR. The hardware reset process requires a period of  $t_{RPH}$  to complete. If the POR process did not complete correctly for any reason during power-up ( $t_{PU}$ ), RESET# going low will initiate the full POR process instead of the hardware reset process and will require  $t_{PU}$  to complete the POR process.

The RESET# input provides a hardware method of resetting the flash memory device to standby state.

- RESET# must be high for  $t_{RS}$  following  $t_{PU}$  or  $t_{RPH}$ , before going low again to initiate a hardware reset.
- When RESET# is driven low for at least a minimum period of time ( $t_{RP}$ ), the device terminates any operation in progress, tri-states all outputs, and ignores all read/write commands for the duration of  $t_{RPH}$ . The device resets the interface to standby state.
- If CS# is low at the time RESET# is asserted, CS# must return high during  $t_{RPH}$  before it can be asserted low again after  $t_{RH}$ .
- Hardware Reset is only offered in 16-lead SOIC and BGA packages.

**Figure 5.7 Hardware Reset**

**Table 5.3 Hardware Reset Parameters**

| Parameter | Description                                                     | Limit | Time | Unit    |
|-----------|-----------------------------------------------------------------|-------|------|---------|
| $t_{RS}$  | Reset Setup - Prior Reset end and RESET# high before RESET# low | Min   | 50   | ns      |
| $t_{RPH}$ | Reset Pulse Hold - RESET# low to CS# low                        | Min   | 35   | $\mu$ s |
| $t_{RP}$  | RESET# Pulse Width                                              | Min   | 200  | ns      |
| $t_{RH}$  | Reset Hold - RESET# high before CS# low                         | Min   | 50   | ns      |

**Notes:**

1. RESET# Low is optional and ignored during Power-up ( $t_{PU}$ ). If Reset# is asserted during the end of  $t_{PU}$ , the device will remain in the reset state and  $t_{RH}$  will determine when CS# may go Low.
2. Sum of  $t_{RP}$  and  $t_{RH}$  must be equal to or greater than  $t_{RPH}$ .

## 5.4 SDR AC Characteristics

**Table 5.4** AC Characteristics (Single Die Package,  $V_{IO} = V_{CC}$  2.7V to 3.6V)

| Symbol              | Parameter                                                                                                    | Min           | Typ | Max                            | Unit |
|---------------------|--------------------------------------------------------------------------------------------------------------|---------------|-----|--------------------------------|------|
| $F_{SCK, R}$        | SCK Clock Frequency for READ and 4READ instructions                                                          | DC            |     | 50 (7)                         | MHz  |
| $F_{SCK, C}$        | SCK Clock Frequency for single commands as shown in Table 9.2 on page 63 (4)                                 | DC            |     | 133 (7)                        | MHz  |
| $F_{SCK, C}$        | SCK Clock Frequency for the following dual and quad commands: DOR, 4DOR, QOR, 4QOR, DIOR, 4DIOR, QIOR, 4QIOR | DC            |     | 104 (7)                        | MHz  |
| $F_{SCK, QPP}$      | SCK Clock Frequency for the QPP, 4QPP commands                                                               | DC            |     | 80 (7)                         | MHz  |
| $P_{SCK}$           | SCK Clock Period                                                                                             | $1/F_{SCK}$   |     | $\infty$                       |      |
| $t_{WH}, t_{CH}$    | Clock High Time (5)                                                                                          | 45% $P_{SCK}$ |     |                                | ns   |
| $t_{WL}, t_{CL}$    | Clock Low Time (5)                                                                                           | 45% $P_{SCK}$ |     |                                | ns   |
| $t_{CRT}, t_{CLCH}$ | Clock Rise Time (slew rate)                                                                                  | 0.1           |     |                                | V/ns |
| $t_{CFT}, t_{CHCL}$ | Clock Fall Time (slew rate)                                                                                  | 0.1           |     |                                | V/ns |
| $t_{CS}$            | CS# High Time (Read Instructions)<br>CS# High Time (Program/Erase)                                           | 10<br>50      |     |                                | ns   |
| $t_{CSS}$           | CS# Active Setup Time (relative to SCK)                                                                      | 3             |     |                                | ns   |
| $t_{CSH}$           | CS# Active Hold Time (relative to SCK)                                                                       | 3             |     | 3000 (6)                       | ns   |
| $t_{SU}$            | Data in Setup Time                                                                                           | 2             |     |                                | ns   |
| $t_{HD}$            | Data in Hold Time                                                                                            | 2             |     |                                | ns   |
| $t_V$               | Clock Low to Output Valid                                                                                    |               |     | 8.0 (2)<br>7.65 (3)<br>6.5 (4) | ns   |
| $t_{HO}$            | Output Hold Time                                                                                             | 2             |     |                                | ns   |
| $t_{DIS}$           | Output Disable Time                                                                                          | 0             |     | 8                              | ns   |
| $t_{WPS}$           | WP# Setup Time                                                                                               | 20 (1)        |     |                                | ns   |
| $t_{WPH}$           | WP# Hold Time                                                                                                | 100 (1)       |     |                                | ns   |
| $t_{HLCH}$          | HOLD# Active Setup Time (relative to SCK)                                                                    | 3             |     |                                | ns   |
| $t_{CHHH}$          | HOLD# Active Hold Time (relative to SCK)                                                                     | 3             |     |                                | ns   |
| $t_{HHCH}$          | HOLD# Non Active Setup Time (relative to SCK)                                                                | 3             |     |                                | ns   |
| $t_{CHHL}$          | HOLD# Non Active Hold Time (relative to SCK)                                                                 | 3             |     |                                | ns   |
| $t_{HZ}$            | HOLD# enable to Output Invalid                                                                               |               |     | 8                              | ns   |
| $t_{LZ}$            | HOLD# disable to Output Valid                                                                                |               |     | 8                              | ns   |

**Notes:**

1. Only applicable as a constraint for WRR instruction when SRWD is set to a 1.
2. Full  $V_{CC}$  range (2.7 - 3.6V) and  $CL = 30$  pF.
3. Regulated  $V_{CC}$  range (3.0 - 3.6V) and  $CL = 30$  pF.
4. Regulated  $V_{CC}$  range (3.0 - 3.6V) and  $CL = 15$  pF.
5.  $\pm 10\%$  duty cycle is supported for frequencies  $\leq 50$  MHz.
6. Maximum value only applies during Program/Erase Suspend/Resume commands.
7. For Industrial Plus temperature range (-40°C to +105°C), all SCK frequencies are 5% slower than the max values shown.


**Table 5.5** AC Characteristics (Single Die Package,  $V_{IO}$  1.65V to 2.7V,  $V_{CC}$  2.7V to 3.6V)

| Symbol              | Parameter                                                          | Min           | Typ | Max                  | Unit |
|---------------------|--------------------------------------------------------------------|---------------|-----|----------------------|------|
| $F_{SCK, R}$        | SCK Clock Frequency for READ, 4READ instructions                   | DC            |     | 50 (6)               | MHz  |
| $F_{SCK, C}$        | SCK Clock Frequency for all others (3)                             | DC            |     | 66 (6)               | MHz  |
| $P_{SCK}$           | SCK Clock Period                                                   | $1/F_{SCK}$   |     | $\infty$             |      |
| $t_{WH}, t_{CH}$    | Clock High Time (4)                                                | 45% $P_{SCK}$ |     |                      | ns   |
| $t_{WL}, t_{CL}$    | Clock Low Time (4)                                                 | 45% $P_{SCK}$ |     |                      | ns   |
| $t_{CRT}, t_{CLCH}$ | Clock Rise Time (slew rate)                                        | 0.1           |     |                      | V/ns |
| $t_{CFT}, t_{CHCL}$ | Clock Fall Time (slew rate)                                        | 0.1           |     |                      | V/ns |
| $t_{CS}$            | CS# High Time (Read Instructions)<br>CS# High Time (Program/Erase) | 10<br>50      |     |                      | ns   |
| $t_{CSS}$           | CS# Active Setup Time (relative to SCK)                            | 10            |     |                      | ns   |
| $t_{CSH}$           | CS# Active Hold Time (relative to SCK)                             | 3             |     | 3000 (5)             | ns   |
| $t_{SU}$            | Data in Setup Time                                                 | 5             |     |                      | ns   |
| $t_{HD}$            | Data in Hold Time                                                  | 4             |     |                      | ns   |
| $t_V$               | Clock Low to Output Valid                                          |               |     | 14.5 (2)<br>12.0 (3) | ns   |
| $t_{HO}$            | Output Hold Time                                                   | 2             |     |                      | ns   |
| $t_{DIS}$           | Output Disable Time                                                | 0             |     | 14                   | ns   |
| $t_{WPS}$           | WP# Setup Time                                                     | 20 (1)        |     |                      | ns   |
| $t_{WPH}$           | WP# Hold Time                                                      | 100 (1)       |     |                      | ns   |
| $t_{HLCH}$          | HOLD# Active Setup Time (relative to SCK)                          | 5             |     |                      | ns   |
| $t_{CHHH}$          | HOLD# Active Hold Time (relative to SCK)                           | 5             |     |                      | ns   |
| $t_{HHCH}$          | HOLD# Non Active Setup Time (relative to SCK)                      | 5             |     |                      | ns   |
| $t_{CHHL}$          | HOLD# Non Active Hold Time (relative to SCK)                       | 5             |     |                      | ns   |
| $t_{HZ}$            | HOLD# enable to Output Invalid                                     |               |     | 14                   | ns   |
| $t_{LZ}$            | HOLD# disable to Output Valid                                      |               |     | 14                   | ns   |

**Notes:**

- Only applicable as a constraint for WRR instruction when SRWD is set to a 1.
- $CL = 30$  pF.
- $CL = 15$  pF.
- $\pm 10\%$  duty cycle is supported for frequencies  $\leq 50$  MHz.
- Maximum value only applies during Program/Erase Suspend/Resume commands.
- For Industrial Plus temperature range ( $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ), all SCK frequencies are 5% slower than the max values shown.


## 5.4.1 Clock Timing

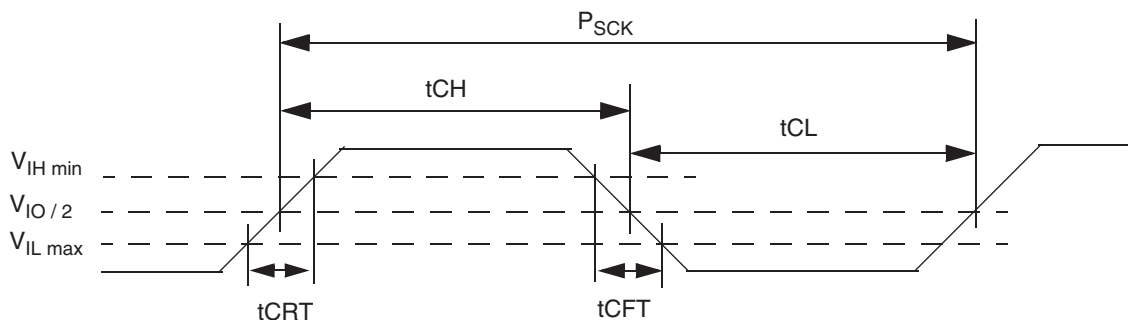**Figure 5.8** Clock Timing


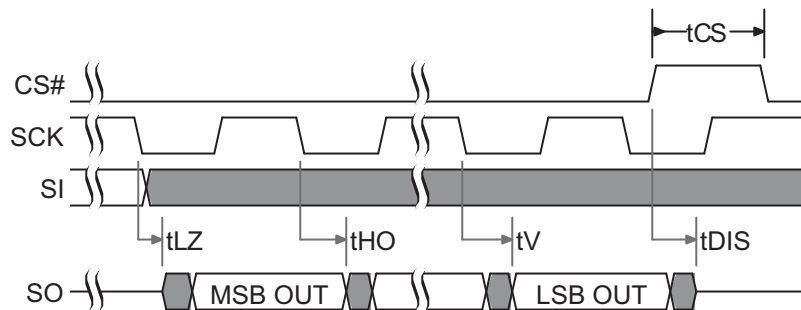


## 5.4.2 Input / Output Timing


**Figure 5.9** SPI Single Bit Input Timing

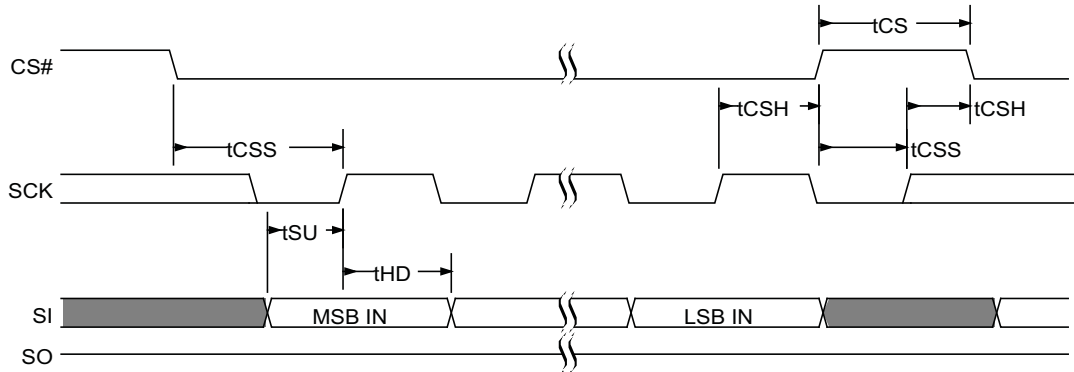

**Figure 5.10** SPI Single Bit Output Timing



**Figure 5.11** SPI SDR MIO Timing

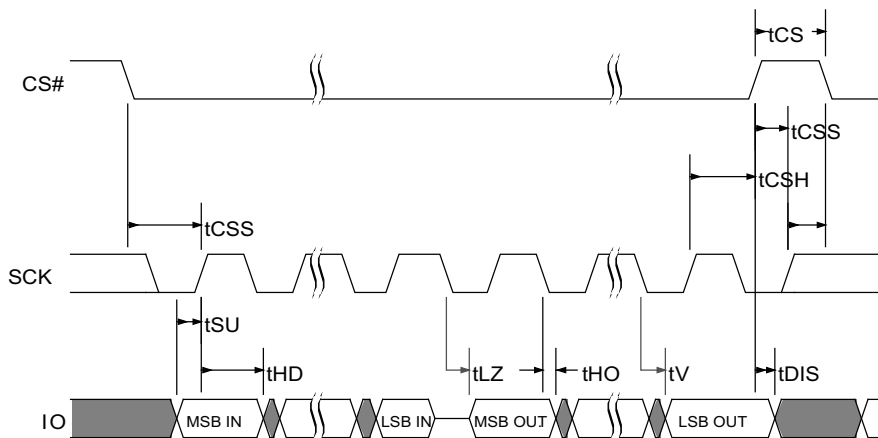



The diagram shows the timing relationships for the SPI interface. The signals are CS#, SCK, HOLD#, SI\_or\_IO\_(during\_input), and SO\_or\_IO\_(during\_output). The timing parameters are defined as follows:

- $t_{CHHH}$ : Chip Select Hold Time (High to High)
- $t_{HLCH}$ : Chip Select Hold Time (Low to High)
- $t_{HHCH}$ : Chip Select Hold Time (High to High)
- $t_{CHHL}$ : Chip Select Hold Time (High to Low)
- $t_{HZ}$ : Input Hold Time (High to High)
- $t_{LZ}$ : Input Hold Time (Low to Low)

The diagram also shows the 'Hold Condition Standard Use' and 'Hold Condition Non-standard Use' periods.

## 5.5 DDR AC Characteristics

**Table 5.6** AC Characteristics DDR Operation


| Symbol           | Parameter                                    | 66 MHz        |     |          | 80 MHz        |     |          | Unit |
|------------------|----------------------------------------------|---------------|-----|----------|---------------|-----|----------|------|
|                  |                                              | Min           | Typ | Max      | Min           | Typ | Max      |      |
| $F_{SCK, R}$     | SCK Clock Frequency for DDR READ instruction | DC            |     | 66 (3)   | DC            |     | 80 (3)   | MHz  |
| $P_{SCK, R}$     | SCK Clock Period for DDR READ instruction    | 15            |     | $\infty$ | 12.5          |     | $\infty$ | ns   |
| $t_{WH}, t_{CH}$ | Clock High Time                              | 45% $P_{SCK}$ |     |          | 45% $P_{SCK}$ |     |          | ns   |
| $t_{WL}, t_{CL}$ | Clock Low Time                               | 45% $P_{SCK}$ |     |          | 45% $P_{SCK}$ |     |          | ns   |
| $t_{CS}$         | CS# High Time (Read Instructions)            | 10            |     |          | 10            |     |          | ns   |
| $t_{CSS}$        | CS# Active Setup Time (relative to SCK)      | 3             |     |          | 3             |     |          | ns   |
| $t_{CSH}$        | CS# Active Hold Time (relative to SCK)       | 3             |     |          | 3             |     |          | ns   |
| $t_{SU}$         | IO in Setup Time                             | 2             |     | 3000 (2) | 1.5           |     | 3000 (2) | ns   |
| $t_{HD}$         | IO in Hold Time                              | 2             |     |          | 1.5           |     |          | ns   |
| $t_V$            | Clock Low to Output Valid                    | 0             |     | 6.5 (1)  | 1.5           |     | 6.5 (1)  | ns   |
| $t_{HO}$         | Output Hold Time                             | 0             |     |          | 1.5           |     |          | ns   |
| $t_{DIS}$        | Output Disable Time                          |               |     | 8        |               |     | 8        | ns   |
| $t_{LZ}$         | Clock to Output Low Impedance                | 0             |     | 8        | 0             |     | 8        | ns   |
| $t_{O\_SKEW}$    | First Output to last Output data valid time  |               |     | 600      |               |     | 600      | ps   |

**Notes:**

1. Regulated  $V_{CC}$  range (3.0 - 3.6V) and  $CL = 15$  pF.
2. Maximum value only applies during Program/Erase Suspend/Resume commands.
3. For Industrial Plus temperature range (-40°C to +105°C), all SCK frequencies are 5% slower than the max values shown.


### 5.5.1 DDR Input Timing


**Figure 5.14** SPI DDR Input Timing

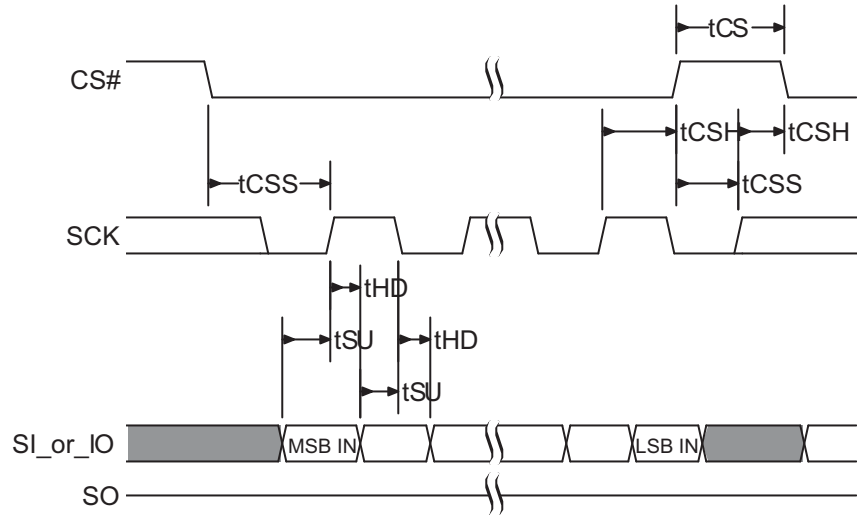

### 5.5.2 DDR Output Timing

**Figure 5.15** SPI DDR Output Timing

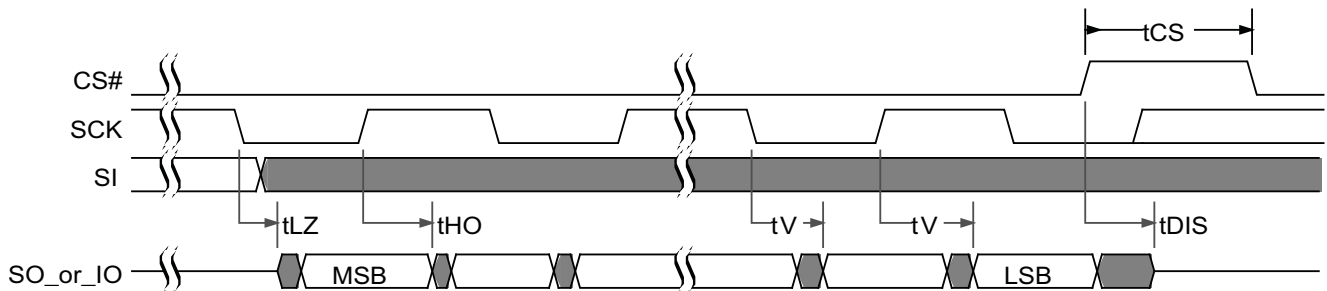

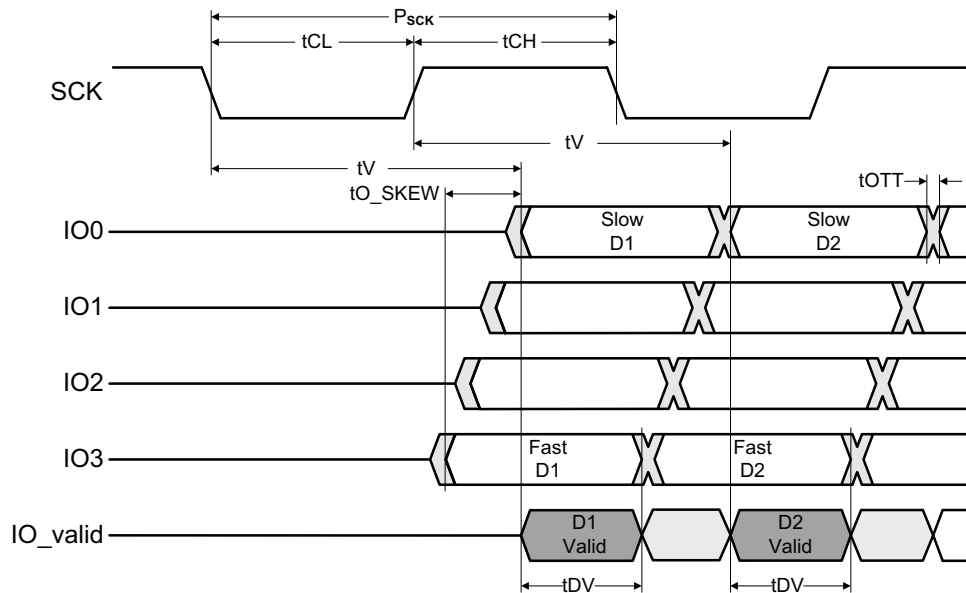**Figure 5.16 SPI DDR Data Valid Window**

**Notes:**

1.  $t_{CLH}$  is the shorter duration of  $t_{CL}$  or  $t_{CH}$ .
2.  $t_{O\_SKEW}$  is the maximum difference (delta) between the minimum and maximum  $t_V$  (output valid) across all IO signals.
3.  $t_{OTT}$  is the maximum Output Transition Time from one valid data value to the next valid data value on each IO.
4.  $t_{OTT}$  is dependent on system level considerations including:
  - a. Memory device output impedance (drive strength).
  - b. System level parasitics on the IOs (primarily bus capacitance).
  - c. Host memory controller input  $V_{IH}$  and  $V_{IL}$  levels at which 0 to 1 and 1 to 0 transitions are recognized.
  - d. As an example, assuming that the above considerations result a memory output slew rate of 2V/ns and a 3V transition (from 1 to 0 or 0 to 1) is required by the host, the  $t_{OTT}$  would be:  

$$t_{OTT} = 3V / (2V/ns) = 1.5 \text{ ns}$$
  - e.  $t_{OTT}$  is not a specification tested by Cypress, it is system dependent and must be derived by the system designer based on the above considerations.
5. The minimum data valid window ( $t_{DV}$ ) can be calculated as follows:
  - a. As an example, assuming:
    - i. 80 MHz clock frequency = 12.5 ns clock period
    - ii. DDR operations are specified to have a duty cycle of 45% or higher
    - iii.  $t_{CLH} = 0.45 \cdot P_{SCK} = 0.45 \cdot 12.5 \text{ ns} = 5.625 \text{ ns}$
    - iv.  $t_{O\_SKEW} = 600 \text{ ps}$
    - v.  $t_{OTT} = 1.5 \text{ ns}$
  - b.  $t_{DV} = t_{CLH} - t_{O\_SKEW} - t_{OTT}$
  - c.  $t_{DV} = 5.625 \text{ ns} - 600 \text{ ps} - 1.5 \text{ ns} = 3.525 \text{ ns}$

## 6. Physical Interface

**Table 6.1** Model Specific Connections

|              |                                                                                                                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VIO / RFU    | Versatile I/O or RFU - Some device models bond this connector to the device I/O power supply, other models bond the device I/O supply to Vcc within the package leaving this package connector unconnected. |
| RESET# / RFU | RESET# or RFU - Some device models bond this connector to the device RESET# signal, other models bond the RESET# signal to Vcc within the package leaving this package connector unconnected.               |


**Note:**

Refer to [Table 2.1](#), [Signal List on page 8](#) for signal descriptions.

### 6.1 SOIC 16-Lead Package


#### 6.1.1 SOIC 16 Connection Diagram

**Figure 6.1** 16-Lead SOIC Package, Top View

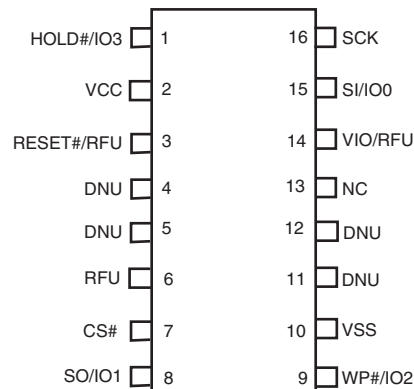

## 6.1.2 SOIC 16 Physical Diagram

### S03016 — 16-Lead Wide Plastic Small Outline Package (300-mil Body Width)

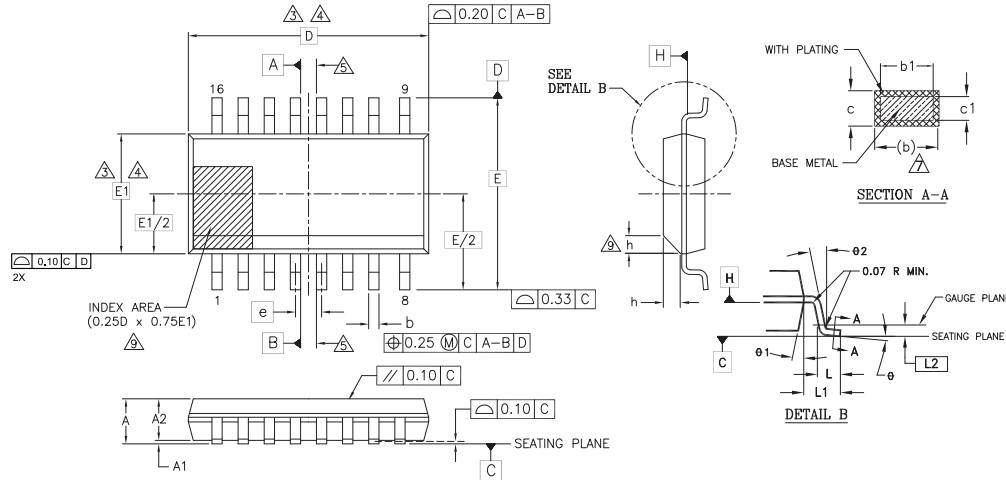

| PACKAGE | SO3 016 (inches) |       | SO3 016 (mm) |      |
|---------|------------------|-------|--------------|------|
| JEDEC   | MS-013(E)AA      |       | MS-013(E)AA  |      |
| SYMBOL  | MIN              | MAX   | MIN          | MAX  |
| A       | 0.093            | 0.104 | 2.35         | 2.65 |
| A1      | 0.004            | 0.012 | 0.10         | 0.30 |
| A2      | 0.081            | 0.104 | 2.05         | 2.55 |
| b       | 0.012            | 0.020 | 0.31         | 0.51 |
| b1      | 0.011            | 0.019 | 0.27         | 0.48 |
| c       | 0.008            | 0.013 | 0.20         | 0.33 |
| c1      | 0.008            | 0.012 | 0.20         | 0.30 |
| D       | 0.406 BSC        |       | 10.30 BSC    |      |
| E       | 0.406 BSC        |       | 10.30 BSC    |      |
| E1      | 0.295 BSC        |       | 7.50 BSC     |      |
| e       | 0.050 BSC        |       | 1.27 BSC     |      |
| L       | 0.016            | 0.050 | 0.40         | 1.27 |
| L1      | 0.055 REF        |       | 1.40 REF     |      |
| L2      | 0.010 BSC        |       | 0.25 BSC     |      |
| N       | 16               |       | 16           |      |
| h       | 0.10             | 0.30  | 0.25         | 0.75 |
| θ       | 0°               | 8°    | 0°           | 8°   |
| θ1      | 5°               | 15°   | 5°           | 15°  |
| θ2      | 0°               | —     | 0°           | —    |

#### NOTES:


- ALL DIMENSIONS ARE IN BOTH INCHES AND MILLIMETERS.
- DIMENSIONING AND TOLERANCING PER ASME Y14.5M - 1994.
- △ DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 mm PER END. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 mm PER SIDE. D AND E1 DIMENSIONS ARE DETERMINED AT DATUM H.
- △ THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM. DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH. BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- △ DATUMS A AND B TO BE DETERMINED AT DATUM H.
- "N" IS THE MAXIMUM NUMBER OF TERMINAL POSITIONS FOR THE SPECIFIED PACKAGE LENGTH.
- △ THE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.10 TO 0.25 mm FROM THE LEAD TIP.
- △ DIMENSION "b" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.10 mm TOTAL IN EXCESS OF THE "b" DIMENSION AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE LEAD FOOT.
- △ THIS CHAMFER FEATURE IS OPTIONAL. IF IT IS NOT PRESENT, THEN A PIN 1 IDENTIFIER MUST BE LOCATED WITHIN THE INDEX AREA INDICATED.
- LEAD COPLANARITY SHALL BE WITHIN 0.10 mm AS MEASURED FROM THE SEATING PLANE.

g1011r2 \ 16-038.3 \ 4.1.11

## 6.2 FAB024 24-Ball BGA Package

### 6.2.1 Connection Diagram

Figure 6.2 24-Ball BGA, 5 x 5 Ball Footprint (FAB024), Top View

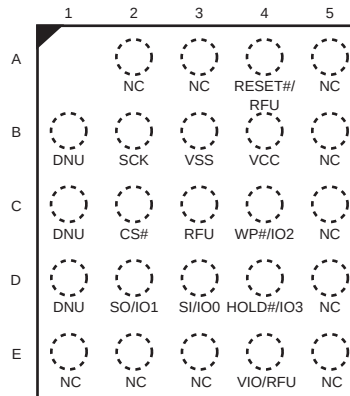


**Note:**

Signal connections are in the same relative positions as FAC024 BGA, allowing a single PCB footprint to use either package.



## 6.2.2 FAB024 Physical Diagram

### FAB024 — 24-Ball BGA (8 x 6 mm) Package

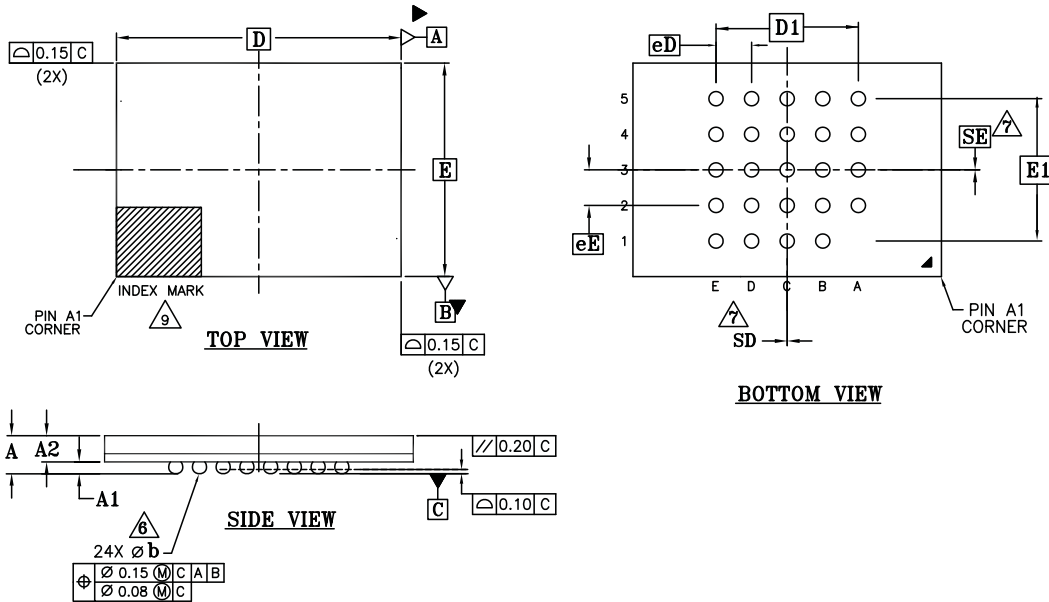

#### NOTES:

1. DIMENSIONING AND TOLERANCING METHODS PER ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. BALL POSITION DESIGNATION PER JEP95, SECTION 4.3, SPP-010.
4. [e] REPRESENTS THE SOLDER BALL GRID PITCH.
5. SYMBOL "MD" IS THE BALL MATRIX SIZE IN THE "D" DIRECTION. SYMBOL "ME" IS THE BALL MATRIX SIZE IN THE "E" DIRECTION. n IS THE NUMBER OF POPULATED SOLDER BALL POSITIONS FOR MATRIX SIZE MD X ME.

6 DIMENSION "b" IS MEASURED AT THE MAXIMUM BALL DIAMETER IN A PLANE PARALLEL TO DATUM C.

7 SD AND SE ARE MEASURED WITH RESPECT TO DATUMS A AND B AND DEFINE THE POSITION OF THE CENTER SOLDER BALL IN THE OUTER ROW.

WHEN THERE IS AN ODD NUMBER OF SOLDER BALLS IN THE OUTER ROW SD OR SE = 0.000.

WHEN THERE IS AN EVEN NUMBER OF SOLDER BALLS IN THE OUTER ROW, SD OR SE =  $\frac{e}{2}$

8. "+" INDICATES THE THEORETICAL CENTER OF DEPOPULATED BALLS.

9. A1 CORNER TO BE IDENTIFIED BY CHAMFER, LASER OR INK MARK, METALLIZED MARK INDENTATION OR OTHER MEANS.


| PACKAGE | FAB024                      |      |      |                             |
|---------|-----------------------------|------|------|-----------------------------|
| JEDEC   | N/A                         |      |      |                             |
|         | 8.00mm x 6.00mm NOM PACKAGE |      |      |                             |
| SYMBOL  | MIN.                        | NOM. | MAX. | NOTE                        |
| A       | —                           | —    | 1.20 | OVERALL THICKNESS           |
| A1      | 0.20                        | —    | —    | BALL HEIGHT                 |
| A2      | 0.70                        | —    | 0.90 | BODY THICKNESS              |
| D       | 8.00 BSC.                   |      |      | BODY SIZE                   |
| E       | 6.00 BSC.                   |      |      | BODY SIZE                   |
| D1      | 4.00 BSC.                   |      |      | BALL FOOTPRINT              |
| E1      | 4.00 BSC.                   |      |      | BALL FOOTPRINT              |
| MD      | 5                           |      |      | ROW MATRIX SIZE D DIRECTION |
| ME      | 5                           |      |      | ROW MATRIX SIZE E DIRECTION |
| N       | 24                          |      |      | TOTAL BALL COUNT            |
| φb      | 0.35                        | 0.40 | 0.45 | BALL DIAMETER               |
| ⊙       | 1.00 BSC.                   |      |      | BALL PITCH                  |
| SD/SE   | 0.00                        |      |      | SOLDER BALL PLACEMENT       |
|         | A1                          |      |      | DEPOPULATED SOLDER BALLS    |
|         | I                           |      |      | PACKAGE OUTLINE TYPE        |

4002/F16-038 Rev.A /6.04.09

## 6.3 FAC024 24-Ball BGA Package

### 6.3.1 Connection Diagram

Figure 6.3 24-Ball BGA, 4 x 6 Ball Footprint (FAC024), Top View

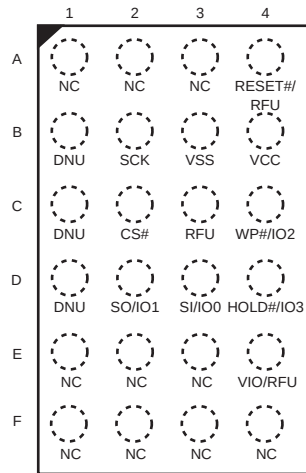


**Note:**

1. Signal connections are in the same relative positions as FAB024 BGA, allowing a single PCB footprint to use either package.

### 6.3.2 FAC024 Physical Diagram

#### FAC024 — 24-Ball BGA (6 x 8 mm) Package

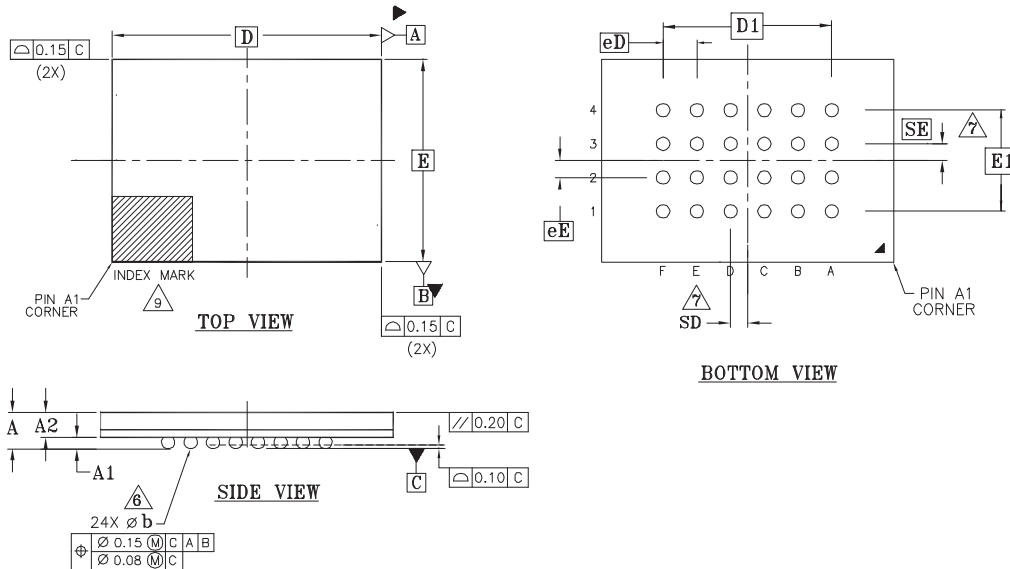

|         |                               |      |      |                          |
|---------|-------------------------------|------|------|--------------------------|
| PACKAGE | FAC024                        |      |      | NOTE                     |
| JEDEC   | N/A                           |      |      |                          |
| D x E   | 8.00 mm x 6.00 mm NOM PACKAGE |      |      |                          |
| SYMBOL  | MIN                           | NOM  | MAX  |                          |
| A       | ---                           | ---  | 1.20 | PROFILE                  |
| A1      | 0.25                          | ---  | ---  | BALL HEIGHT              |
| A2      | 0.70                          | ---  | 0.90 | BODY THICKNESS           |
| D       | 8.00 BSC.                     |      |      | BODY SIZE                |
| E       | 6.00 BSC.                     |      |      | BODY SIZE                |
| D1      | 5.00 BSC.                     |      |      | MATRIX FOOTPRINT         |
| E1      | 3.00 BSC.                     |      |      | MATRIX FOOTPRINT         |
| MD      | 6                             |      |      | MATRIX SIZE D DIRECTION  |
| ME      | 4                             |      |      | MATRIX SIZE E DIRECTION  |
| N       | 24                            |      |      | BALL COUNT               |
| Øb      | 0.35                          | 0.40 | 0.45 | BALL DIAMETER            |
| e       | 1.00 BSC.                     |      |      | BALL PITCH               |
| SD/ SE  | 0.5/0.5                       |      |      | SOLDER BALL PLACEMENT    |
|         |                               |      |      | DEPOPULATED SOLDER BALLS |
|         | J                             |      |      | PACKAGE OUTLINE TYPE     |

#### NOTES:

- DIMENSIONING AND TOLERANCING METHODS PER ASME Y14.5M-1994.
- ALL DIMENSIONS ARE IN MILLIMETERS.
- BALL POSITION DESIGNATION PER JEP95, SECTION 4.3, SPP-010.
- $\boxed{e}$  REPRESENTS THE SOLDER BALL GRID PITCH.
- SYMBOL "MD" IS THE BALL MATRIX SIZE IN THE "D" DIRECTION.  
SYMBOL "ME" IS THE BALL MATRIX SIZE IN THE "E" DIRECTION.  
n IS THE NUMBER OF POPULATED SOLDER BALL POSITIONS FOR MATRIX SIZE MD X ME.
- DIMENSION "b" IS MEASURED AT THE MAXIMUM BALL DIAMETER IN A PLANE PARALLEL TO DATUM C.
- DATUM C IS THE SEATING PLANE AND IS DEFINED BY THE CROWNS OF THE SOLDER BALLS.
- SD AND SE ARE MEASURED WITH RESPECT TO DATUMS A AND B AND DEFINE THE POSITION OF THE CENTER SOLDER BALL IN THE OUTER ROW.
- WHEN THERE IS AN ODD NUMBER OF SOLDER BALLS IN THE OUTER ROW SD OR SE = 0.000.
- WHEN THERE IS AN EVEN NUMBER OF SOLDER BALLS IN THE OUTER ROW, SD OR SE = e/2
- "+" INDICATES THE THEORETICAL CENTER OF DEPOPULATED BALLS.
- A1 CORNER TO BE IDENTIFIED BY CHAMFER, LASER OR INK MARK, METALLIZED MARK INDENTATION OR OTHER MEANS.
- OUTLINE AND DIMENSIONS PER CUSTOMER REQUIREMENT.

3642 F16-038.9 \ 09.10.09

### 6.3.3 Special Handling Instructions for FBGA Packages

Flash memory devices in BGA packages may be damaged if exposed to ultrasonic cleaning methods. The package and/or data integrity may be compromised if the package body is exposed to temperatures above 150°C for prolonged periods of time.

## Software Interface

This section discusses the features and behaviors most relevant to host system software that interacts with the S25FL512S memory device.

## 7. Address Space Maps

### 7.1 Overview

#### 7.1.1 Extended Address

The S25FL512S device supports 32-bit addresses to enable higher density devices than allowed by previous generation (legacy) SPI devices that supported only 24-bit addresses. A 24-bit byte resolution address can access only 16 Mbytes (128 Mbits) of maximum density. A 32-bit byte resolution address allows direct addressing of up to a 4 Gbytes (32 Gbits) of address space.

Legacy commands continue to support 24-bit addresses for backward software compatibility. Extended 32-bit addresses are enabled in three ways:

- Bank address register — a software (command) loadable internal register that supplies the high order bits of address when legacy 24-bit addresses are in use.
- Extended address mode — a bank address register bit that changes all legacy commands to expect 32 bits of address supplied from the host system.
- New commands — that perform both legacy and new functions, which expect 32-bit address.

The default condition at power-up and after reset, is the Bank address register loaded with zeros and the extended address mode set for 24-bit addresses. This enables legacy software compatible access to the first 128 Mbits of a device.

#### 7.1.2 Multiple Address Spaces

Many commands operate on the main flash memory array. Some commands operate on address spaces separate from the main flash array. Each separate address space uses the full 32-bit address but may only define a small portion of the available address space.

## 7.2 Flash Memory Array

The main flash array is divided into erase units called sectors. The sectors are organized as uniform 256-kbyte sectors.

**Table 7.1** S25FL512S Sector and Memory Address Map, Uniform 256-kbyte Sectors

| Sector Size (kbyte) | Sector Count | Sector Range | Address Range (8-bit) | Notes                   |
|---------------------|--------------|--------------|-----------------------|-------------------------|
| 256                 | 256          | SA00         | 00000000h-0003FFFFh   | Sector Starting Address |
|                     |              | :            | :                     | —                       |
|                     |              | SA255        | 03FC0000h-03FFFFFFh   | Sector Ending Address   |

**Note:** This is a condensed table that uses a sector as a reference. There are address ranges that are not explicitly listed. All 256-kB sectors have the pattern XXXX0000h-XXXXFFFFh.

### 7.3 ID-CFI Address Space

The RDIDJ command (9Fh) reads information from a separate flash memory address space for device identification (ID) and Common Flash Interface (CFI) information. See *Device ID and Common Flash Interface (ID-CFI) Address Map on page 110* for the tables defining the contents of the ID-CFI address space. The ID-CFI address space is programmed by Cypress and read-only for the host system.

### 7.4 JEDEC JESD216 Serial Flash Discoverable Parameters (SFDP) Space.

The RSFDP command (5Ah) reads information from a separate Flash memory address space for device identification, feature, and configuration information, in accord with the JEDEC JESD216B standard for Serial Flash Discoverable Parameters. The ID-CFI address space is incorporated as one of the SFDP parameters.

See *Section 10.2, Serial Flash Discoverable Parameters (SFDP) Address Map on page 107* for the table defining the contents of the SFDP address space. The SFDP address space is programmed by Cypress and is read-only for the host system

### 7.5 OTP Address Space

Each S25FL512S memory device has a 1024-byte One Time Program (OTP) address space that is separate from the main flash array. The OTP area is divided into 32, individually lockable, 32-byte aligned and length regions.

In the 32-byte region starting at address zero:


- The 16 lowest address bytes are programmed by Cypress with a 128-bit random number. Only Cypress is able to program these bytes.
- The next 4 higher address bytes (OTP Lock Bytes) are used to provide one bit per OTP region to permanently protect each region from programming. The bytes are erased when shipped from Cypress. After an OTP region is programmed, it can be locked to prevent further programming, by programming the related protection bit in the OTP Lock Bytes.
- The next higher 12 bytes of the lowest address region are Reserved for Future Use (RFU). The bits in these RFU bytes may be programmed by the host system but it must be understood that a future device may use those bits for protection of a larger OTP space. The bytes are erased when shipped from Cypress.

The remaining regions are erased when shipped from Cypress, and are available for programming of additional permanent data.

Refer to *Figure 7.1, OTP Address Space on page 46* for a pictorial representation of the OTP memory space.

The OTP memory space is intended for increased system security. OTP values, such as the random number programmed by Cypress, can be used to “mate” a flash component with the system CPU/ASIC to prevent device substitution.

The configuration register FREEZE (CR1[0]) bit protects the entire OTP memory space from programming when set to 1. This allows trusted boot code to control programming of OTP regions then set the FREEZE bit to prevent further OTP memory space programming during the remainder of normal power-on system operation.

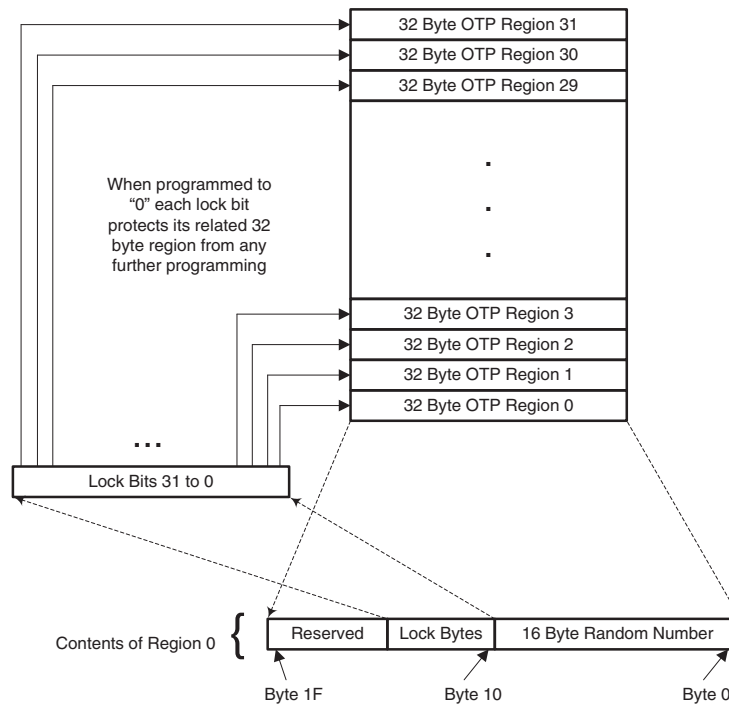**Figure 7.1 OTP Address Space**

**Table 7.2 OTP Address Map**

| Region    | Byte Address Range (Hex) | Contents                                                                                                                                            | Initial Delivery State (Hex)      |
|-----------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Region 0  | 000                      | Least Significant Byte of Spansion Programmed Random Number                                                                                         | Spansion Programmed Random Number |
|           | ...                      | ...                                                                                                                                                 |                                   |
|           | 00F                      | Most Significant Byte of Spansion Programmed Random Number                                                                                          |                                   |
|           | 010 to 013               | Region Locking Bits<br>Byte 10 [bit 0] locks region 0 from programming when = 0<br>...<br>Byte 13 [bit 7] locks region 31 from programming when = 0 | All bytes = FF                    |
|           | 014 to 01F               | Reserved for Future Use (RFU)                                                                                                                       | All bytes = FF                    |
| Region 1  | 020 to 03F               | Available for User Programming                                                                                                                      | All bytes = FF                    |
| Region 2  | 040 to 05F               | Available for User Programming                                                                                                                      | All bytes = FF                    |
| ...       | ...                      | Available for User Programming                                                                                                                      | All bytes = FF                    |
| Region 31 | 3E0 to 3FF               | Available for User Programming                                                                                                                      | All bytes = FF                    |

## 7.6 Registers

Registers are small groups of memory cells used to configure how the S25FL512-S memory device operates or to report the status of device operations. The registers are accessed by specific commands. The commands (and hexadecimal instruction codes) used for each register are noted in each register description. The individual register bits may be volatile, non-volatile, or One Time Programmable (OTP). The type for each bit is noted in each register description. The default state shown for each bit refers to the state after power-on reset, hardware reset, or software reset if the bit is volatile. If the bit is non-volatile or OTP, the default state is the value of the bit when the device is shipped from Cypress. Non-volatile bits have the same cycling (erase and program) endurance as the main flash array.

### 7.6.1 Status Register 1 (SR1)

Related Commands: Read Status Register (RDSR1 05h), Write Registers (WRR 01h), Write Enable (WREN 06h), Write Disable (WRDI 04h), Clear Status Register (CLSR 30h).

**Table 7.3** Status Register-1 (SR1)

| Bits | Field Name | Function                      | Type                                           | Default State                                 | Description                                                                                                                                                                                                                |
|------|------------|-------------------------------|------------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | SRWD       | Status Register Write Disable | Non-Volatile                                   | 0                                             | 1 = Locks state of SRWD, BP, and configuration register bits when WP# is low by ignoring WRR command<br>0 = No protection, even when WP# is low                                                                            |
| 6    | P_ERR      | Programming Error Occurred    | Volatile, Read only                            | 0                                             | 1 = Error occurred.<br>0 = No Error                                                                                                                                                                                        |
| 5    | E_ERR      | Erase Error Occurred          | Volatile, Read only                            | 0                                             | 1 = Error occurred<br>0 = No Error                                                                                                                                                                                         |
| 4    | BP2        | Block Protection              | Volatile if CR1[3]=1, Non-Volatile if CR1[3]=0 | 1 if CR1[3]=1,<br>0 when shipped from Cypress | Protects selected range of sectors (Block) from Program or Erase                                                                                                                                                           |
| 3    | BP1        |                               |                                                |                                               |                                                                                                                                                                                                                            |
| 2    | BP0        |                               |                                                |                                               |                                                                                                                                                                                                                            |
| 1    | WEL        | Write Enable Latch            | Volatile                                       | 0                                             | 1 = Device accepts Write Registers (WRR), program or erase commands<br>0 = Device ignores Write Registers (WRR), program or erase commands<br>This bit is not affected by WRR, only WREN and WRDI commands affect this bit |
| 0    | WIP        | Write in Progress             | Volatile, Read only                            | 0                                             | 1 = Device Busy, a Write Registers (WRR), program, erase or other operation is in progress<br>0 = Ready Device is in standby mode and can accept commands                                                                  |

The Status Register contains both status and control bits:

**Status Register Write Disable (SRWD) SR1[7]:** Places the device in the Hardware Protected mode when this bit is set to 1 and the WP# input is driven low. In this mode, the SRWD, BP2, BP1, and BP0 bits of the Status Register become read-only bits and the Write Registers (WRR) command is no longer accepted for execution. If WP# is high the SRWD bit and BP bits may be changed by the WRR command. If SRWD is 0, WP# has no effect and the SRWD bit and BP bits may be changed by the WRR command. The SRWD bit has the same non-volatile endurance as the main flash array.

**Program Error (P\_ERR) SR1[6]:** The Program Error Bit is used as a program operation success or failure indication. When the Program Error bit is set to a 1 it indicates that there was an error in the last program operation. This bit will also be set when the user attempts to program within a protected main memory sector or locked OTP region. When the Program Error bit is set to a 1 this bit can be reset to 0 with the Clear Status Register (CLSR) command. This is a read-only bit and is not affected by the WRR command.

**Erase Error (E\_ERR) SR1[5]:** The Erase Error Bit is used as an Erase operation success or failure indication. When the Erase Error bit is set to a 1 it indicates that there was an error in the last erase operation. This bit will also be set when the user attempts to erase an individual protected main memory sector. The Bulk Erase command will not set E\_ERR if a protected sector is found during the command execution. When the Erase Error bit is set to a 1 this bit can be reset to 0 with the Clear Status Register (CLSR) command. This is a read-only bit and is not affected by the WRR command.

**Block Protection (BP2, BP1, BP0) SR1[4:2]:** These bits define the main flash array area to be software-protected against program and erase commands. The BP bits are either volatile or non-volatile, depending on the state of the BP non-volatile bit (BPNV) in the configuration register. When one or more of the BP bits is set to 1, the relevant memory area is protected against program and erase. The Bulk Erase (BE) command can be executed only when the BP bits are cleared to 0's. See *Block Protection* on page 56 for a description of how the BP bit values select the memory array area protected. The BP bits have the same non-volatile endurance as the main flash array.

**Write Enable Latch (WEL) SR1[1]:** The WEL bit must be set to 1 to enable program, write, or erase operations as a means to provide protection against inadvertent changes to memory or register values. The Write Enable (WREN) command execution sets the Write Enable Latch to a 1 to allow any program, erase, or write commands to execute afterwards. The Write Disable (WRDI) command can be used to set the Write Enable Latch to a 0 to prevent all program, erase, and write commands from execution. The WEL bit is cleared to 0 at the end of any successful program, write, or erase operation. Following a failed operation the WEL bit may remain set and should be cleared with a WRDI command following a CLSR command. After a power down/power up sequence, hardware reset, or software reset, the Write Enable Latch is set to a 0. The WRR command does not affect this bit.

**Write In Progress (WIP) SR1[0]:** Indicates whether the device is performing a program, write, erase operation, or any other operation, during which a new operation command will be ignored. When the bit is set to a 1 the device is busy performing an operation. While WIP is 1, only Read Status (RDSR1 or RDSR2), Erase Suspend (ERSP), Program Suspend (PGSP), Clear Status Register (CLSR), and Software Reset (RESET) commands may be accepted. ERSP and PGSP will only be accepted if memory array erase or program operations are in progress. The status register E\_ERR and P\_ERR bits are updated while WIP = 1. When P\_ERR or E\_ERR bits are set to one, the WIP bit will remain set to one indicating the device remains busy and unable to receive new operation commands. A Clear Status Register (CLSR) command must be received to return the device to standby mode. When the WIP bit is cleared to 0 no operation is in progress. This is a read-only bit.

## 7.6.2 Configuration Register 1 (CR1)

Related Commands: Read Configuration Register (RDCR 35h), Write Registers (WRR 01h). The Configuration Register bits can be changed using the WRR command with sixteen input cycles.

The configuration register controls certain interface and data protection functions.

**Table 7.4** Configuration Register (CR1)

| Bits | Field Name | Function                                                                                               | Type         | Default State | Description                                                                   |
|------|------------|--------------------------------------------------------------------------------------------------------|--------------|---------------|-------------------------------------------------------------------------------|
| 7    | LC1        | Latency Code                                                                                           | Non-Volatile | 0             | Selects number of initial read latency cycles<br>See Latency Code Tables      |
| 6    | LC0        |                                                                                                        |              | 0             |                                                                               |
| 5    | TBPROT     | Configures Start of Block Protection                                                                   | OTP          | 0             | 1 = BP starts at bottom (Low address)<br>0 = BP starts at top (High address)  |
| 4    | RFU        | RFU                                                                                                    | RFU          | 0             | Reserved for Future Use                                                       |
| 3    | BPNV       | Configures BP2-0 in Status Register                                                                    | OTP          | 0             | 1 = Volatile<br>0 = Non-Volatile                                              |
| 2    | RFU        | RFU                                                                                                    | RFU          | 0             | Reserved for Future Use                                                       |
| 1    | QUAD       | Puts the device into Quad I/O operation                                                                | Non-Volatile | 0             | 1 = Quad<br>0 = Dual or Serial                                                |
| 0    | FREEZE     | Lock current state of BP2-0 bits in Status Register, TBPROT in Configuration Register, and OTP regions | Volatile     | 0             | 1 = Block Protection and OTP locked<br>0 = Block Protection and OTP un-locked |



**Latency Code (LC) CR1[7:6]:** The Latency Code selects the number of mode and dummy cycles between the end of address and the start of read data output for all read commands.

Some read commands send mode bits following the address to indicate that the next command will be of the same type with an implied, rather than an explicit, instruction. The next command thus does not provide an instruction byte, only a new address and mode bits. This reduces the time needed to send each command when the same command type is repeated in a sequence of commands.

Dummy cycles provide additional latency that is needed to complete the initial read access of the flash array before data can be returned to the host system. Some read commands require additional latency cycles as the SCK frequency is increased.

The following latency code tables provide different latency settings that are configured by Cypress. The High Performance versus the Enhanced High Performance settings are selected by the ordering part number.

Where mode or latency (dummy) cycles are shown in the tables as a dash, that read command is not supported at the frequency shown. Read is supported only up to 50 MHz but the same latency value is assigned in each latency code and the command may be used when the device is operated at  $\leq 50$  MHz with any latency code setting. Similarly, only the Fast Read command is supported up to 133 MHz but the same 10b latency code is used for Fast Read up to 133 MHz and for the other dual and quad read commands up to 104 MHz. It is not necessary to change the latency code from a higher to a lower frequency when operating at lower frequencies where a particular command is supported. The latency code values for a higher frequency can be used for accesses at lower frequencies.

The High Performance settings provide latency options that are the same or faster than alternate source SPI memories. These settings provide mode bits only for the Quad I/O Read command.

The Enhanced High Performance settings similarly provide latency options the same or faster than additional alternate source SPI memories and adds mode bits for the Dual I/O Read, DDR Fast Read, and DDR Dual I/O Read commands.

Read DDR Data Learning Pattern (DLP) bits may be placed within the dummy cycles immediately before the start of read data, if there are 5 or more dummy cycles. See *Read Memory Array Commands* on page 78 for more information on the DLP.

**Table 7.5** Latency Codes for SDR High Performance

| Freq. (MHz) | LC | Read       |       | Fast Read  |       | Read Dual Out |       | Read Quad Out |       | Dual I/O Read |       | Quad I/O Read |       |
|-------------|----|------------|-------|------------|-------|---------------|-------|---------------|-------|---------------|-------|---------------|-------|
|             |    | (03h, 13h) |       | (0Bh, 0Ch) |       | (3Bh, 3Ch)    |       | (6Bh, 6Ch)    |       | (BBh, BCh)    |       | (EBh, ECh)    |       |
|             |    | Mode       | Dummy | Mode       | Dummy | Mode          | Dummy | Mode          | Dummy | Mode          | Dummy | Mode          | Dummy |
| $\leq 50$   | 11 | 0          | 0     | 0          | 0     | 0             | 0     | 0             | 0     | 0             | 4     | 2             | 1     |
| $\leq 80$   | 00 | -          | -     | 0          | 8     | 0             | 8     | 0             | 8     | 0             | 4     | 2             | 4     |
| $\leq 90$   | 01 | -          | -     | 0          | 8     | 0             | 8     | 0             | 8     | 0             | 5     | 2             | 4     |
| $\leq 104$  | 10 | -          | -     | 0          | 8     | 0             | 8     | 0             | 8     | 0             | 6     | 2             | 5     |
| $\leq 133$  | 10 | -          | -     | 0          | 8     | -             | -     | -             | -     | -             | -     | -             | -     |

**Table 7.6** Latency Codes for DDR High Performance

| Freq. (MHz) | LC | DDR Fast Read |       | DDR Dual I/O Read |       | Read DDR Quad I/O |       |
|-------------|----|---------------|-------|-------------------|-------|-------------------|-------|
|             |    | (0Dh, 0Eh)    |       | (BDh, BEh)        |       | (EDh, EEh)        |       |
|             |    | Mode          | Dummy | Mode              | Dummy | Mode              | Dummy |
| $\leq 50$   | 11 | 0             | 4     | 0                 | 4     | 1                 | 3     |
| $\leq 66$   | 00 | 0             | 5     | 0                 | 6     | 1                 | 6     |
| $\leq 66$   | 01 | 0             | 6     | 0                 | 7     | 1                 | 7     |
| $\leq 66$   | 10 | 0             | 7     | 0                 | 8     | 1                 | 8     |

**Table 7.7** Latency Codes for SDR Enhanced High Performance

| Freq.<br>(MHz) | LC | Read       |       | Fast Read  |       | Read Dual Out |       | Read Quad Out |       | Dual I/O Read |       | Quad I/O Read |       |
|----------------|----|------------|-------|------------|-------|---------------|-------|---------------|-------|---------------|-------|---------------|-------|
|                |    | (03h, 13h) |       | (0Bh, 0Ch) |       | (3Bh, 3Ch)    |       | (6Bh, 6Ch)    |       | (BBh, BCh)    |       | (EBh, ECh)    |       |
|                |    | Mode       | Dummy | Mode       | Dummy | Mode          | Dummy | Mode          | Dummy | Mode          | Dummy | Mode          | Dummy |
| ≤ 50           | 11 | 0          | 0     | 0          | 0     | 0             | 0     | 0             | 0     | 4             | 0     | 2             | 1     |
| ≤ 80           | 00 | -          | -     | 0          | 8     | 0             | 8     | 0             | 8     | 4             | 0     | 2             | 4     |
| ≤ 90           | 01 | -          | -     | 0          | 8     | 0             | 8     | 0             | 8     | 4             | 1     | 2             | 4     |
| ≤ 104          | 10 | -          | -     | 0          | 8     | 0             | 8     | 0             | 8     | 4             | 2     | 2             | 5     |
| ≤ 133          | 10 | -          | -     | 0          | 8     | -             | -     | -             | -     | -             | -     | -             | -     |

**Table 7.8** Latency Codes for DDR Enhanced High Performance

| Freq.<br>(MHz) | LC | DDR Fast Read |       | DDR Dual I/O Read |       | Read DDR Quad I/O |       |
|----------------|----|---------------|-------|-------------------|-------|-------------------|-------|
|                |    | (0Dh, 0Eh)    |       | (BDh, BEh)        |       | (EDh, EEh)        |       |
|                |    | Mode          | Dummy | Mode              | Dummy | Mode              | Dummy |
| ≤ 50           | 11 | 4             | 1     | 2                 | 2     | 1                 | 3     |
| ≤ 66           | 00 | 4             | 2     | 2                 | 4     | 1                 | 6     |
| ≤ 66           | 01 | 4             | 4     | 2                 | 5     | 1                 | 7     |
| ≤ 66           | 10 | 4             | 5     | 2                 | 6     | 1                 | 8     |
| ≤ 80           | 00 | 4             | 2     | 2                 | 4     | 1                 | 6     |
| ≤ 80           | 01 | 4             | 4     | 2                 | 5     | 1                 | 7     |
| ≤ 80           | 10 | 4             | 5     | 2                 | 6     | 1                 | 8     |

**Note:**

1. When using DDR I/O commands with the Data Learning Pattern (DLP) enabled, a Latency Code that provides 5 or more dummy cycles should be selected to allow 1 cycle of additional time for the host to stop driving before the memory starts driving the 4 cycle DLP. It is recommended to use LC 10 for DDR Fast Read, LC 01 for DDR Dual I/O Read, and LC 00 for DDR Quad I/O Read, if the Data Learning Pattern (DLP) for DDR is used.

**Top or Bottom Protection (TBPROT) CR1[5]:** This bit defines the operation of the Block Protection bits BP2, BP1, and BP0 in the Status Register. As described in the status register section, the BP2-0 bits allow the user to optionally protect a portion of the array, ranging from 1/64, 1/4, 1/2, etc., up to the entire array. When TBPROT is set to a 0 the Block Protection is defined to start from the top (maximum address) of the array. When TBPROT is set to a 1 the Block Protection is defined to start from the bottom (zero address) of the array. The TBPROT bit is OTP and set to a 0 when shipped from Cypress. If TBPROT is programmed to 1, an attempt to change it back to 0 will fail and set the Program Error bit (P\_ERR in SR1[6]).

The desired state of TBPROT must be selected during the initial configuration of the device during system manufacture; before the first program or erase operation on the main flash array. TBPROT must not be programmed after programming or erasing is done in the main flash array.

**CR1[4]:** Reserved for Future Use

**Block Protection Non-Volatile (BPNV) CR1[3]:** The BPNV bit defines whether or not the BP2-0 bits in the Status Register are volatile or non-volatile. The BPNV bit is OTP and cleared to a0 with the BP bits cleared to 000 when shipped from Cypress. When BPNV is set to a 0 the BP2-0 bits in the Status Register are non-volatile. When BPNV is set to a 1 the BP2-0 bits in the Status Register are volatile and will be reset to binary 111 after POR, hardware reset, or command reset. If BPNV is programmed to 1, an attempt to change it back to 0 will fail and set the Program Error bit (P\_ERR in SR1[6]).

**CR1[2]:** Reserved for Future Use.

**Quad Data Width (QUAD) CR1[1]:** When set to 1, this bit switches the data width of the device to 4 bit - Quad mode. That is, WP# becomes IO2 and HOLD# becomes IO3. The WP# and HOLD# inputs are not monitored for their normal functions and are internally set to high (inactive). The commands for Serial, Dual Output, and Dual I/O Read still function normally but, there is no need to drive WP# and Hold# inputs for those commands when switching between commands using different data path widths. The QUAD bit must be set to one when using Read Quad Out, Quad I/O Read, Read DDR Quad I/O, and Quad Page Program commands. The QUAD bit is non-volatile.

**Freeze Protection (FREEZE) CR1[0]:** The Freeze Bit, when set to 1, locks the current state of the BP2-0 bits in Status Register, the TBPROT and TBPARM bits in the Configuration Register, and the OTP address space. This prevents writing, programming, or erasing these areas. As long as the FREEZE bit remains cleared to logic 0 the other bits of the Configuration Register, including FREEZE, are writable, and the OTP address space is programmable. Once the FREEZE bit has been written to a logic 1 it can only be cleared to a logic 0 by a power-off to power-on cycle or a hardware reset. Software reset will not affect the state of the FREEZE bit. The FREEZE bit is volatile and the default state of FREEZE after power-on is 0. The FREEZE bit can be set in parallel with updating other values in CR1 by a single WRR command.

### 7.6.3 Status Register 2 (SR2)

Related Commands: Read Status Register 2 (RDSR2 07h).

**Table 7.9** Status Register-2 (SR2)

| Bits | Field Name | Function        | Type                | Default State | Description                                                    |
|------|------------|-----------------|---------------------|---------------|----------------------------------------------------------------|
| 7    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                        |
| 6    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                        |
| 5    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                        |
| 4    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                        |
| 3    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                        |
| 2    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                        |
| 1    | ES         | Erase Suspend   | Volatile, Read only | 0             | 1 = In erase suspend mode<br>0 = Not in erase suspend mode     |
| 0    | PS         | Program Suspend | Volatile, Read only | 0             | 1 = In program suspend mode<br>0 = Not in program suspend mode |

**Erase Suspend (ES) SR2[1]:** The Erase Suspend bit is used to determine when the device is in Erase Suspend mode. This is a status bit that cannot be written. When Erase Suspend bit is set to 1, the device is in erase suspend mode. When Erase Suspend bit is cleared to 0, the device is not in erase suspend mode. Refer to Erase Suspend and Resume Commands (75h) (7Ah) for details about the Erase Suspend/Resume commands.

**Program Suspend (PS) SR2[0]:** The Program Suspend bit is used to determine when the device is in Program Suspend mode. This is a status bit that cannot be written. When Program Suspend bit is set to 1, the device is in program suspend mode. When the Program Suspend bit is cleared to 0, the device is not in program suspend mode. Refer to *Program Suspend (PGSP 85h)* and *Resume (PGRS 8Ah)* on page 93 for details.

### 7.6.4 AutoBoot Register

Related Commands: AutoBoot Read (ABRD 14h) and AutoBoot Write (ABWR 15h).

The AutoBoot Register provides a means to automatically read boot code as part of the power on reset, hardware reset, or software reset process.

**Table 7.10** AutoBoot Register

| Bits    | Field Name | Function               | Type         | Default State | Description                                                                                           |
|---------|------------|------------------------|--------------|---------------|-------------------------------------------------------------------------------------------------------|
| 31 to 9 | ABSA       | AutoBoot Start Address | Non-Volatile | 000000h       | 512 byte boundary address for the start of boot code access                                           |
| 8 to 1  | ABSD       | AutoBoot Start Delay   | Non-Volatile | 00h           | Number of initial delay cycles between CS# going low and the first bit of boot code being transferred |
| 0       | ABE        | AutoBoot Enable        | Non-Volatile | 0             | 1 = AutoBoot is enabled<br>0 = AutoBoot is not enabled                                                |

## 7.6.5 Bank Address Register

Related Commands: Bank Register Access (BRAC B9h), Write Register (WRR 01h), Bank Register Read (BRRD 16h) and Bank Register Write (BRWR 17h).

The Bank Address register supplies additional high order bits of the main flash array byte boundary address for legacy commands that supply only the low order 24 bits of address. The Bank Address is used as the high bits of address (above A23) for all 3-byte address commands when EXTADD=0. The Bank Address is not used when EXTADD = 1 and traditional 3-byte address commands are instead required to provide all four bytes of address.

**Table 7.11** Bank Address Register (BAR)

| Bits   | Field Name | Function                | Type     | Default State | Description                                                                                                           |
|--------|------------|-------------------------|----------|---------------|-----------------------------------------------------------------------------------------------------------------------|
| 7      | EXTADD     | Extended Address Enable | Volatile | 0b            | 1 = 4-byte (32-bits) addressing required from command.<br>0 = 3-byte (24-bits) addressing from command + Bank Address |
| 6 to 2 | RFU        | Reserved                | Volatile | 00000b        | Reserved for Future Use                                                                                               |
| 1      | BA25       | Bank Address            | Volatile | 0             | A25 for 512 Mb device                                                                                                 |
| 0      | BA24       | Bank Address            | Volatile | 0             | A24 for 512 Mb device                                                                                                 |

Extended Address (EXTADD) BAR[7]: EXTADD controls the address field size for legacy SPI commands. By default (power up reset, hardware reset, and software reset), it is cleared to 0 for 3 bytes (24 bits) of address. When set to 1, the legacy commands will require 4 bytes (32 bits) for the address field. This is a volatile bit.

## 7.6.6 ASP Register (ASPR)

Related Commands: ASP Read (ASPRD 2Bh) and ASP Program (ASPP 2Fh).

The ASP register is a 16-bit OTP memory location used to permanently configure the behavior of Advanced Sector Protection (ASP) features.

**Table 7.12** ASP Register (ASPR)

| Bits    | Field Name | Function                            | Type | Default State | Description                                                                                                    |
|---------|------------|-------------------------------------|------|---------------|----------------------------------------------------------------------------------------------------------------|
| 15 to 9 | RFU        | Reserved                            | OTP  | 1             | Reserved for Future Use                                                                                        |
| 8       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 7       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 6       | RFU        | Reserved                            | OTP  | 1             | Reserved for Future Use                                                                                        |
| 5       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 4       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 3       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 2       | PWDMLB     | Password Protection Mode Lock Bit   | OTP  | 1             | 0 = Password Protection Mode permanently enabled.<br>1 = Password Protection Mode not permanently enabled.     |
| 1       | PSTMLB     | Persistent Protection Mode Lock Bit | OTP  | 1             | 0 = Persistent Protection Mode permanently enabled.<br>1 = Persistent Protection Mode not permanently enabled. |
| 0       | RFU        | Reserved                            | OTP  | 1             | Reserved for Future Use                                                                                        |

**Note:**

1. Default value depends on ordering part number, see Initial Delivery State on page 128.

**Reserved for Future Use (RFU) ASPR[15:3, 0].**

**Password Protection Mode Lock Bit (PWDMLB) ASPR[2]:** When programmed to 0, the Password Protection Mode is permanently selected.

**Persistent Protection Mode Lock Bit (PSTMLB) ASPR[1]:** When programmed to 0, the Persistent Protection Mode is permanently selected. PWDMLB and PSTMLB are mutually exclusive, only one may be programmed to zero.

### 7.6.7 Password Register (PASS)

Related Commands: Password Read (PASSRD E7h) and Password Program (PASSP E8h).

**Table 7.13** Password Register (PASS)

| Bits    | Field Name | Function        | Type | Default State      | Description                                                                                                                                                               |
|---------|------------|-----------------|------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 63 to 0 | PWD        | Hidden Password | OTP  | FFFFFFFF-FFFFFFFFh | Non-volatile OTP storage of 64-bit password. The password is no longer readable after the password protection mode is selected by programming ASP register bit 2 to zero. |

### 7.6.8 PPB Lock Register (PPBL)

Related Commands: PPB Lock Read (PLBRD A7h, PLBWR A6h)

**Table 7.14** PPB Lock Register (PPBL)

| Bits   | Field Name | Function          | Type     | Default State                                                  | Description                                                                                                    |
|--------|------------|-------------------|----------|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| 7 to 1 | RFU        | Reserved          | Volatile | 00h                                                            | Reserved for Future Use                                                                                        |
| 0      | PPBLOCK    | Protect PPB Array | Volatile | Persistent Protection Mode = 1<br>Password Protection Mode = 0 | 0 = PPB array protected until next power cycle or hardware reset<br>1 = PPB array may be programmed or erased. |

### 7.6.9 PPB Access Register (PPBAR)

Related Commands: PPB Read (PPBRD E2h)

**Table 7.15** PPB Access Register (PPBAR)

| Bits   | Field Name | Function                       | Type         | Default State | Description                                                                                                                                                                                                                                                                                  |
|--------|------------|--------------------------------|--------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | PPB        | Read or Program per sector PPB | Non-volatile | FFh           | 00h = PPB for the sector addressed by the PPBRD or PPBP command is programmed to 0, protecting that sector from program or erase operations.<br>FFh = PPB for the sector addressed by the PPBRD or PPBP command is erased to 1, not protecting that sector from program or erase operations. |

### 7.6.10 DYB Access Register (DYBAR)

Related Commands: DYB Read (DYBRD E0h) and DYB Program (DYBP E1h).

**Table 7.16** DYB Access Register (DYBAR)

| Bits   | Field Name | Function                     | Type     | Default State | Description                                                                                                                                                                                                                                                                            |
|--------|------------|------------------------------|----------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | DYB        | Read or Write per sector DYB | Volatile | FFh           | 00h = DYB for the sector addressed by the DYBRD or DYBP command is cleared to 0, protecting that sector from program or erase operations.<br>FFh = DYB for the sector addressed by the DYBRD or DYBP command is set to 1, not protecting that sector from program or erase operations. |

### 7.6.11 SPI DDR Data Learning Registers

Related Commands: Program NVDLR (PNVDLR 43h), Write VDLR (WVDLR 4Ah), Data Learning Pattern Read (DLPRD 41h).

The Data Learning Pattern (DLP) resides in an 8-bit Non-Volatile Data Learning Register (NVDLR) as well as an 8-bit Volatile Data Learning Register (VDLR). When shipped from Cypress, the NVDLR value is 00h. Once programmed, the NVDLR cannot be reprogrammed or erased; a copy of the data pattern in the NVDLR will also be written to the VDLR. The VDLR can be written to at any time, but on reset or power cycles the data pattern will revert back to what is in the NVDLR. During the learning phase described in the SPI DDR modes, the DLP will come from the VDLR. Each IO will output the same DLP value for every clock edge. For example, if the DLP is 34h (or binary 00110100) then during the first clock edge all IO's will output 0; subsequently, the 2nd clock edge all I/O's will output 0, the 3rd will output 1, etc.

When the VDLR value is 00h, no preamble data pattern is presented during the dummy phase in the DDR commands.

**Table 7.17** Non-Volatile Data Learning Register (NVDLR)

| Bits   | Field Name | Function                           | Type | Default State | Description                                                                                                                                                                                                          |
|--------|------------|------------------------------------|------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | NVDLP      | Non-Volatile Data Learning Pattern | OTP  | 00h           | OTP value that may be transferred to the host during DDR read command latency (dummy) cycles to provide a training pattern to help the host more accurately center the data capture point in the received data bits. |

**Table 7.18** Volatile Data Learning Register (NVDLR)

| Bits   | Field Name | Function                       | Type     | Default State                                | Description                                                                                                                                                        |
|--------|------------|--------------------------------|----------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | VDLP       | Volatile Data Learning Pattern | Volatile | Takes the value of NVDLR during POR or Reset | Volatile copy of the NVDLP used to enable and deliver the Data Learning Pattern (DLP) to the outputs. The VDLP may be changed by the host during system operation. |

## 8. Data Protection

### 8.1 Secure Silicon Region (OTP)

The device has a 1024-byte One Time Program (OTP) address space that is separate from the main flash array. The OTP area is divided into 32, individually lockable, 32-byte aligned and length regions.

The OTP memory space is intended for increased system security. OTP values can “mate” a flash component with the system CPU/ASIC to prevent device substitution. See *OTP Address Space* on page 45, *One Time Program Array Commands* on page 98, and *OTP Read (OTPR 4Bh)*: on page 98.

#### 8.1.1 Reading OTP Memory Space

The OTP Read command uses the same protocol as Fast Read. OTP Read operations outside the valid 1-kB OTP address range will yield indeterminate data.

#### 8.1.2 Programming OTP Memory Space

The protocol of the OTP programming command is the same as Page Program. The OTP Program command can be issued multiple times to any given OTP address, but this address space can never be erased. The valid address range for OTP Program is depicted in [Figure 7.1, OTP Address Space on page 46](#). OTP Program operations outside the valid OTP address range will be ignored and the WEL in SR1 will remain high (set to 1). OTP Program operations while FREEZE = 1 will fail with P\_ERR in SR1 set to 1.

#### 8.1.3 Cypress Programmed Random Number

Cypress standard practice is to program the low order 16 bytes of the OTP memory space (locations 0x0 to 0xF) with a 128-bit random number using the Linear Congruential Random Number Method. The seed value for the algorithm is a random number concatenated with the day and time of tester insertion.

#### 8.1.4 Lock Bytes

The LSB of each Lock byte protects the lowest address region related to the byte, the MSB protects the highest address region related to the byte. The next higher address byte similarly protects the next higher 8 regions. The LSB bit of the lowest address Lock Byte protects the higher address 16 bytes of the lowest address region. In other words, the LSB of location 0x10 protects all the Lock Bytes and RFU bytes in the lowest address region from further programming. See [Section 7.5, OTP Address Space on page 45](#).

### 8.2 Write Enable Command

The Write Enable (WREN) command must be written prior to any command that modifies non-volatile data. The WREN command sets the Write Enable Latch (WEL) bit. The WEL bit is cleared to 0 (disables writes) during power-up, hardware reset, or after the device completes the following commands:

- Reset
- Page Program (PP)
- Sector Erase (SE)
- Bulk Erase (BE)
- Write Disable (WRDI)
- Write Registers (WRR)
- Quad-input Page Programming (QPP)
- OTP Byte Programming (OTPP)

## 8.3 Block Protection

The Block Protect bits (Status Register bits BP2, BP1, BP0) in combination with the Configuration Register TBPROT bit can be used to protect an address range of the main flash array from program and erase operations. The size of the range is determined by the value of the BP bits and the upper or lower starting point of the range is selected by the TBPROT bit of the configuration register.

**Table 8.1** Upper Array Start of Protection (TBPROT = 0)

| Status Register Content |     |     | Protected Fraction of Memory Array | Protected Memory (kbytes)<br>FL512S<br>512 Mb |
|-------------------------|-----|-----|------------------------------------|-----------------------------------------------|
| BP2                     | BP1 | BP0 |                                    |                                               |
| 0                       | 0   | 0   | None                               | 0                                             |
| 0                       | 0   | 1   | Upper 64th                         | 1024                                          |
| 0                       | 1   | 0   | Upper 32nd                         | 2048                                          |
| 0                       | 1   | 1   | Upper 16th                         | 4096                                          |
| 1                       | 0   | 0   | Upper 8th                          | 8192                                          |
| 1                       | 0   | 1   | Upper 4th                          | 16384                                         |
| 1                       | 1   | 0   | Upper Half                         | 32768                                         |
| 1                       | 1   | 1   | All Sectors                        | 65536                                         |

**Table 8.2** Lower Array Start of Protection (TBPROT = 1)

| Status Register Content |     |     | Protected Fraction of Memory Array | Protected Memory (kbytes)<br>FL512S<br>512 Mb |
|-------------------------|-----|-----|------------------------------------|-----------------------------------------------|
| BP2                     | BP1 | BP0 |                                    |                                               |
| 0                       | 0   | 0   | None                               | 0                                             |
| 0                       | 0   | 1   | Lower 64th                         | 1024                                          |
| 0                       | 1   | 0   | Lower 32nd                         | 2048                                          |
| 0                       | 1   | 1   | Lower 16th                         | 4096                                          |
| 1                       | 0   | 0   | Lower 8th                          | 8192                                          |
| 1                       | 0   | 1   | Lower 4th                          | 16384                                         |
| 1                       | 1   | 0   | Lower Half                         | 32768                                         |
| 1                       | 1   | 1   | All Sectors                        | 65536                                         |

When Block Protection is enabled (i.e., any BP2-0 are set to 1), Advanced Sector Protection (ASP) can still be used to protect sectors not protected by the Block Protection scheme. In the case that both ASP and Block Protection are used on the same sector the logical OR of ASP and Block Protection related to the sector is used. Recommendation: ASP and Block Protection should not be used concurrently. Use one or the other, but not both.

### 8.3.1 Freeze bit

Bit0 of the Configuration Register is the FREEZE bit. The FREEZE bit locks the BP2-0 bits in Status Register 1 and the TBPROT bit in the Configuration Register to their value at the time the FREEZE bit is set to 1. Once the FREEZE bit has been written to a logic 1 it cannot be cleared to a logic 0 until a power-on-reset is executed. As long as the FREEZE bit is cleared to logic 0 the status register BP bits and the TBPROT bit of the Configuration Register are writable. The FREEZE bit also protects the entire OTP memory space from programming when set to 1. Any attempt to change the BP bits with the WRR command while FREEZE = 1 is ignored and no error status is set.

### 8.3.2 Write Protect Signal

The Write Protect (WP#) input in combination with the Status Register Write Disable (SRWD) bit provide hardware input signal controlled protection. When WP# is Low and SRWD is set to 1 the Status and Configuration register is protected from alteration. This prevents disabling or changing the protection defined by the Block Protect bits.




## 8.4 Advanced Sector Protection

Advanced Sector Protection (ASP) is the name used for a set of independent hardware and software methods used to disable or enable programming or erase operations, individually, in any or all sectors. An overview of these methods is shown in [Figure 8.1, Advanced Sector Protection Overview](#) on page 57.

Block Protection and ASP protection settings for each sector are logically OR'd to define the protection for each sector, i.e. if either mechanism is protecting a sector the sector cannot be programmed or erased. Refer to [Block Protection](#) on page 56 for full details of the BP2-0 bits.

**Figure 8.1** Advanced Sector Protection Overview

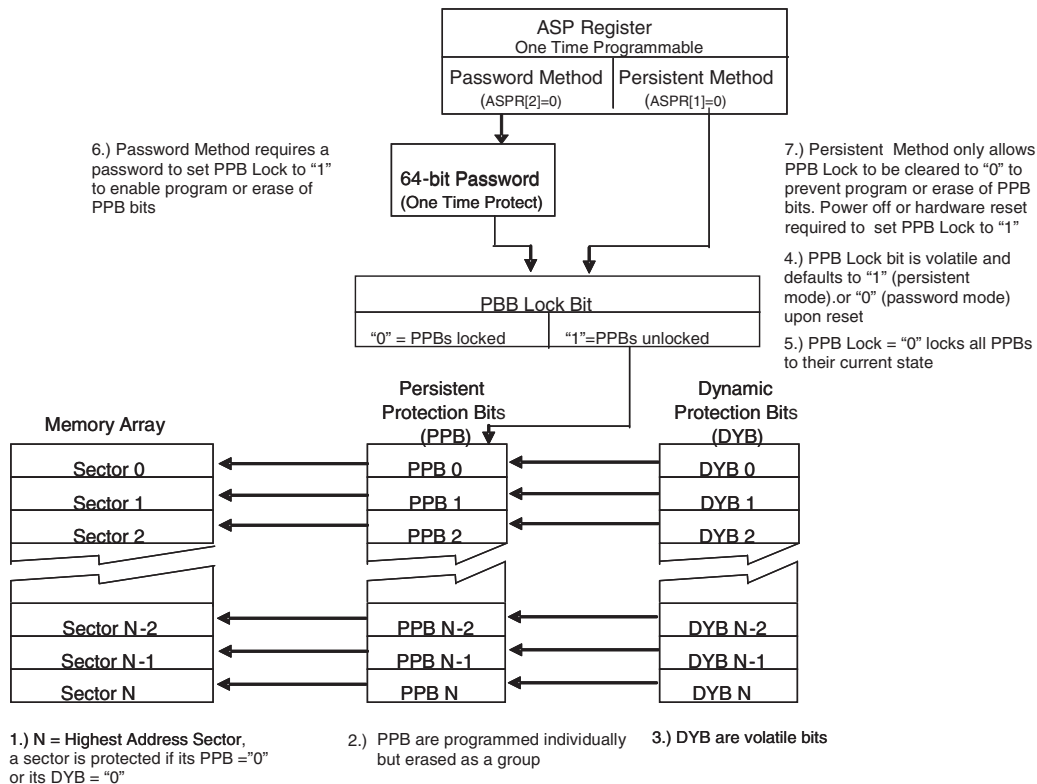

Every main flash array sector has a non-volatile (PPB) and a volatile (DYB) protection bit associated with it. When either bit is 0, the sector is protected from program and erase operations.

The PPB bits are protected from program and erase when the PPB Lock bit is 0. There are two methods for managing the state of the PPB Lock bit, Persistent Protection and Password Protection.

The Persistent Protection method sets the PPB Lock bit to 1 during POR, or Hardware Reset so that the PPB bits are unprotected by a device reset. There is a command to clear the PPB Lock bit to 0 to protect the PPB. There is no command in the Persistent Protection method to set the PPB Lock bit to 1, therefore the PPB Lock bit will remain at 0 until the next power-off or hardware reset. The Persistent Protection method allows boot code the option of changing sector protection by programming or erasing the PPB, then protecting the PPB from further change for the remainder of normal system operation by clearing the PPB Lock bit to 0. This is sometimes called Boot-code controlled sector protection.

The Password method clears the PPB Lock bit to 0 during POR, or Hardware Reset to protect the PPB. A 64-bit password may be permanently programmed and hidden for the password method. A command can be used to provide a password for comparison with the hidden password. If the password matches, the PPB Lock bit is set to 1 to unprotect the PPB. A command can be used to clear the PPB Lock bit to 0. This method requires use of a password to control PPB protection.

The selection of the PPB Lock bit management method is made by programming OTP bits in the ASP Register so as to permanently select the method used.

### 8.4.1 ASP Register

The ASP register is used to permanently configure the behavior of Advanced Sector Protection (ASP) features. See [Table 7.12, ASP Register \(ASPR\) on page 52](#).

As shipped from the factory, all devices default ASP to the Persistent Protection mode, with all sectors unprotected, when power is applied. The device programmer or host system must then choose which sector protection method to use. Programming either of the, one-time programmable, Protection Mode Lock Bits, locks the part permanently in the selected mode:

- ASPR[2:1] = 11 = No ASP mode selected, Persistent Protection Mode is the default.
- ASPR[2:1] = 10 = Persistent Protection Mode permanently selected.
- ASPR[2:1] = 01 = Password Protection Mode permanently selected.
- ASPR[2:1] = 00 = Illegal condition, attempting to program both bits to zero results in a programming failure.

ASP register programming rules:

- If the password mode is chosen, the password must be programmed prior to setting the Protection Mode Lock Bits.
- Once the Protection Mode is selected, the Protection Mode Lock Bits are permanently protected from programming and no further changes to the ASP register is allowed.

The programming time of the ASP Register is the same as the typical page programming time. The system can determine the status of the ASP register programming operation by reading the WIP bit in the Status Register. See [Status Register 1 \(SR1\) on page 47](#) for information on WIP.

After selecting a sector protection method, each sector can operate in each of the following states:

- Dynamically Locked — A sector is protected and can be changed by a simple command.
- Persistently Locked — A sector is protected and cannot be changed if its PPB Bit is 0.
- Unlocked — The sector is unprotected and can be changed by a simple command.

### 8.4.2 Persistent Protection Bits

The Persistent Protection Bits (PPB) are located in a separate nonvolatile flash array. One of the PPB bits is related to each sector. When a PPB is 0, its related sector is protected from program and erase operations. The PPB are programmed individually but must be erased as a group, similar to the way individual words may be programmed in the main array but an entire sector must be erased at the same time. The PPB have the same program and erase endurance as the main flash memory array. Preprogramming and verification prior to erasure are handled by the device.

Programming a PPB bit requires the typical page programming time. Erasing all the PPBs requires typical sector erase time. During PPB bit programming and PPB bit erasing, status is available by reading the Status register. Reading of a PPB bit requires the initial access time of the device.

**Notes:**

1. Each PPB is individually programmed to 0 and all are erased to 1 in parallel.
2. If the PPB Lock bit is 0, the PPB Program or PPB Erase command does not execute and fails without programming or erasing the PPB.
3. The state of the PPB for a given sector can be verified by using the PPB Read command.

### 8.4.3 Dynamic Protection Bits

Dynamic Protection Bits are volatile and unique for each sector and can be individually modified. DYB only control the protection for sectors that have their PPB set to 1. By issuing the DYB Write command, a DYB is cleared to 0 or set to 1, thus placing each sector in the protected or unprotected state respectively. This feature allows software to easily protect sectors against inadvertent changes, yet does not prevent the easy removal of protection when changes are needed. The DYBs can be set or cleared as often as needed as they are volatile bits.

#### 8.4.4 PPB Lock Bit (PPBL[0])

The PPB Lock Bit is a volatile bit for protecting all PPB bits. When cleared to 0, it locks all PPBs and when set to 1, it allows the PPBs to be changed.

The PLBWR command is used to clear the PPB Lock bit to 0. The PPB Lock Bit must be cleared to 0 only after all the PPBs are configured to the desired settings.

In Persistent Protection mode, the PPB Lock is set to 1 during POR or a hardware reset. When cleared to 0, no software command sequence can set the PPB Lock bit to 1, only another hardware reset or power-up can set the PPB Lock bit.

In the Password Protection mode, the PPB Lock bit is cleared to 0 during POR or a hardware reset. The PPB Lock bit can only be set to 1 by the Password Unlock command.

#### 8.4.5 Sector Protection States Summary

Each sector can be in one of the following protection states:

- Unlocked — The sector is unprotected and protection can be changed by a simple command. The protection state defaults to unprotected after a power cycle, software reset, or hardware reset.
- Dynamically Locked — A sector is protected and protection can be changed by a simple command. The protection state is not saved across a power cycle or reset.
- Persistently Locked — A sector is protected and protection can only be changed if the PPB Lock Bit is set to 1. The protection state is non-volatile and saved across a power cycle or reset. Changing the protection state requires programming and/or erase of the PPB bits

**Table 8.3** Sector Protection States

| Protection Bit Values |     |     | Sector State                                        |
|-----------------------|-----|-----|-----------------------------------------------------|
| PPB Lock              | PPB | DYB |                                                     |
| 1                     | 1   | 1   | Unprotected – PPB and DYB are changeable            |
| 1                     | 1   | 0   | Protected – PPB and DYB are changeable              |
| 1                     | 0   | 1   | Protected – PPB and DYB are changeable              |
| 1                     | 0   | 0   | Protected – PPB and DYB are changeable              |
| 0                     | 1   | 1   | Unprotected – PPB not changeable, DYB is changeable |
| 0                     | 1   | 0   | Protected – PPB not changeable, DYB is changeable   |
| 0                     | 0   | 1   | Protected – PPB not changeable, DYB is changeable   |
| 0                     | 0   | 0   | Protected – PPB not changeable, DYB is changeable   |

#### 8.4.6 Persistent Protection Mode

The Persistent Protection method sets the PPB Lock bit to 1 during POR or Hardware Reset so that the PPB bits are unprotected by a device hardware reset. Software reset does not affect the PPB Lock bit. The PLBWR command can clear the PPB Lock bit to 0 to protect the PPB. There is no command to set the PPB Lock bit therefore the PPB Lock bit will remain at 0 until the next power-off or hardware reset.

### 8.4.7 Password Protection Mode

Password Protection Mode allows an even higher level of security than the Persistent Sector Protection Mode, by requiring a 64-bit password for unlocking the PPB Lock bit. In addition to this password requirement, after power up and hardware reset, the PPB Lock bit is cleared to 0 to ensure protection at power-up. Successful execution of the Password Unlock command by entering the entire password clears the PPB Lock bit, allowing for sector PPB modifications.

Password Protection Notes:

- Once the Password is programmed and verified, the Password Mode (ASPR[2]=0) must be set in order to prevent reading the password.
- The Password Program Command is only capable of programming '0's. Programming a 1 after a cell is programmed as a 0 results in the cell left as a 0 with no programming error set.
- The password is all 1's when shipped from Cypress. It is located in its own memory space and is accessible through the use of the Password Program and Password Read commands.
- All 64-bit password combinations are valid as a password.
- The Password Mode, once programmed, prevents reading the 64-bit password and further password programming. All further program and read commands to the password region are disabled and these commands are ignored. There is no means to verify what the password is after the Password Mode Lock Bit is selected. Password verification is only allowed before selecting the Password Protection mode.
- The Protection Mode Lock Bits are not erasable.
- The exact password must be entered in order for the unlocking function to occur. If the password unlock command provided password does not match the hidden internal password, the unlock operation fails in the same manner as a programming operation on a protected sector. The P\_ERR bit is set to one and the WIP Bit remains set. In this case it is a failure to change the state of the PPB Lock bit because it is still protected by the lack of a valid password.
- The Password Unlock command cannot be accepted any faster than once every  $100\ \mu\text{s} \pm 20\ \mu\text{s}$ . This makes it take an unreasonably long time (58 million years) for a hacker to run through all the 64-bit combinations in an attempt to correctly match a password. The Read Status Register 1 command may be used to read the WIP bit to determine when the device has completed the password unlock command or is ready to accept a new password command. When a valid password is provided the password unlock command does not insert the  $100\ \mu\text{s}$  delay before returning the WIP bit to zero.
- If the password is lost after selecting the Password Mode, there is no way to set the PPB Lock bit.

## 9. Commands

All communication between the host system and the S25FL512S memory device is in the form of units called commands.

All commands begin with an instruction that selects the type of information transfer or device operation to be performed. Commands may also have an address, instruction modifier, latency period, data transfer to the memory, or data transfer from the memory. All instruction, address, and data information is transferred serially between the host system and memory device.

All instructions are transferred from host to memory as a single bit serial sequence on the SI signal.

Single bit wide commands may provide an address or data sent only on the SI signal. Data may be sent back to the host serially on SO signal.

Dual or Quad Output commands provide an address sent to the memory only on the SI signal. Data will be returned to the host as a sequence of bit pairs on IO0 and IO1 or four bit (nibble) groups on IO0, IO1, IO2, and IO3.

Dual or Quad Input/Output (I/O) commands provide an address sent from the host as bit pairs on IO0 and IO1 or, four bit (nibble) groups on IO0, IO1, IO2, and IO3. Data is returned to the host similarly as bit pairs on IO0 and IO1 or, four bit (nibble) groups on IO0, IO1, IO2, and IO3.

Commands are structured as follows:

- Each command begins with an eight bit (byte) instruction.
- The instruction may be stand alone or may be followed by address bits to select a location within one of several address spaces in the device. The address may be either a 24-bit or 32-bit byte boundary address.
- The Serial Peripheral Interface with Multiple IO provides the option for each transfer of address and data information to be done one, two, or four bits in parallel. This enables a trade off between the number of signal connections (IO bus width) and the speed of information transfer. If the host system can support a two or four bit wide IO bus the memory performance can be increased by using the instructions that provide parallel two bit (dual) or parallel four bit (quad) transfers.
- The width of all transfers following the instruction are determined by the instruction sent.
- All single bits or parallel bit groups are transferred in most to least significant bit order.
- Some instructions send instruction modifier (mode) bits following the address to indicate that the next command will be of the same type with an implied, rather than an explicit, instruction. The next command thus does not provide an instruction byte, only a new address and mode bits. This reduces the time needed to send each command when the same command type is repeated in a sequence of commands.
- The address or mode bits may be followed by write data to be stored in the memory device or by a read latency period before read data is returned to the host.
- Read latency may be zero to several SCK cycles (also referred to as dummy cycles).
- All instruction, address, mode, and data information is transferred in byte granularity. Addresses are shifted into the device with the most significant byte first. All data is transferred with the lowest address byte sent first. Following bytes of data are sent in lowest to highest byte address order i.e. the byte address increments.
- All attempts to read the flash memory array during a program, erase, or a write cycle (embedded operations) are ignored. The embedded operation will continue to execute without any affect. A very limited set of commands are accepted during an embedded operation. These are discussed in the individual command descriptions. While a program, erase, or write operation is in progress, it is recommended to check that the Write-In Progress (WIP) bit is 0 before issuing most commands to the device, to ensure the new command can be accepted.
- Depending on the command, the time for execution varies. A command to read status information from an executing command is available to determine when the command completes execution and whether the command was successful.
- Although host software in some cases is used to directly control the SPI interface signals, the hardware interfaces of the host system and the memory device generally handle the details of signal relationships and timing. For this reason, signal relationships and timing are not covered in detail within this software interface focused section of the document. Instead, the focus is on the logical sequence of bits transferred in each command rather than the signal timing and relationships. Following are some general signal relationship descriptions to keep in mind. For additional information on the bit level format and signal timing relationships of commands, see *Command Protocol* on page 14.

- The host always controls the Chip Select (CS#), Serial Clock (SCK), and Serial Input (SI) - SI for single bit wide transfers. The memory drives Serial Output (SO) for single bit read transfers. The host and memory alternately drive the IO0-IO3 signals during Dual and Quad transfers.
- All commands begin with the host selecting the memory by driving CS# low before the first rising edge of SCK. CS# is kept low throughout a command and when CS# is returned high the command ends. Generally, CS# remains low for eight bit transfer multiples to transfer byte granularity information. Some commands will not be accepted if CS# is returned high not at an 8 bit boundary.

## 9.1 Command Set Summary

### 9.1.1 Extended Addressing

To accommodate addressing above 128 Mb, there are three options:

1. New instructions are provided with 4-byte address, used to access up to 32 Gb of memory.

| Instruction Name | Description                        | Code (Hex) |
|------------------|------------------------------------|------------|
| 4FAST_READ       | Read Fast (4-byte Address)         | 0C         |
| 4READ            | Read (4-byte Address)              | 13         |
| 4DOR             | Read Dual Out (4-byte Address)     | 3C         |
| 4QOR             | Read Quad Out (4-byte Address)     | 6C         |
| 4DIOR            | Dual I/O Read (4-byte Address)     | BC         |
| 4QIOR            | Quad I/O Read (4-byte Address)     | EC         |
| 4DDRFR           | Read DDR Fast (4-byte Address)     | 0E         |
| 4DDRDIOR         | DDR Dual I/O Read (4-byte Address) | BE         |
| 4DDRQIOR         | DDR Quad I/O Read (4-byte Address) | EE         |
| 4PP              | Page Program (4-byte Address)      | 12         |
| 4QPP             | Quad Page Program (4-byte Address) | 34         |
| 4SE              | Erase 256 kB (4-byte Address)      | DC         |

2. For backward compatibility to the 3-byte address instructions, the standard instructions can be used in conjunction with the EXTADD Bit in the Bank Address Register (BAR[7]). By default BAR[7] is cleared to 0 (following power up and hardware reset), to enable 3-byte (24-bit) addressing. When set to 1, the legacy commands are changed to require 4 bytes (32 bits) for the address field. The following instructions can be used in conjunction with EXTADD bit to switch from 3 bytes to 4 bytes of address field.

| Instruction Name | Description                        | Code (Hex) |
|------------------|------------------------------------|------------|
| READ             | Read (3-byte Address)              | 03         |
| FAST_READ        | Read Fast (3-byte Address)         | 0B         |
| DOR              | Read Dual Out (3-byte Address)     | 3B         |
| QOR              | Read Quad Out (3-byte Address)     | 6B         |
| DIOR             | Dual I/O Read (3-byte Address)     | BB         |
| QIOR             | Quad I/O Read (3-byte Address)     | EB         |
| DDRFR            | Read DDR Fast (3-byte Address)     | 0D         |
| DDRDIOR          | DDR Dual I/O Read (3-byte Address) | BD         |
| DDRQIOR          | DDR Quad I/O Read (3-byte Address) | ED         |
| PP               | Page Program (3-byte Address)      | 02         |
| QPP              | Quad Page Program (3-byte Address) | 32         |
| SE               | Erase 256 kB (3-byte Address)      | D8         |

3. For backward compatibility to the 3-byte addressing, the standard instructions can be used in conjunction with the Bank Address Register:
  - a. The Bank Address Register is used to switch between 128-Mbit (16-Mbyte) banks of memory. The standard 3-byte address selects an address within the bank selected by the Bank Address Register.
    - i. The host system writes the Bank Address Register to access beyond the first 128 Mbits of memory.
    - ii. This applies to read, erase, and program commands.
  - b. The Bank Register provides the high order (4th) byte of address, which is used to address the available memory at addresses greater than 16 Mbytes.
  - c. Bank Register bits are volatile.
    - i. On power up, the default is Bank0 (the lowest address 16 Mbytes).
  - d. For Read, the device will continuously transfer out data until the end of the array.
    - i. There is no bank to bank delay.
    - ii. The Bank Address Register is not updated.
    - iii. The Bank Address Register value is used only for the initial address of an access.

**Table 9.1** Bank Address Map

| Bank Address Register Bits |       | Bank | Memory Array Address Range (Hex) |          |
|----------------------------|-------|------|----------------------------------|----------|
| Bit 1                      | Bit 0 |      |                                  |          |
| 0                          | 0     | 0    | 00000000                         | 00FFFFFF |
| 0                          | 1     | 1    | 01000000                         | 01FFFFFF |
| 1                          | 0     | 2    | 02000000                         | 02FFFFFF |
| 1                          | 1     | 3    | 03000000                         | 03FFFFFF |

**Table 9.2** S25FL512S Command Set (sorted by function)

| Function                   | Command Name   | Command Description                           | Instruction Value (Hex) | Maximum Frequency (MHz) <sup>(1)</sup> |
|----------------------------|----------------|-----------------------------------------------|-------------------------|----------------------------------------|
| Read Device Identification | READ_ID (REMS) | Read Electronic Manufacturer Signature        | 90                      | 133                                    |
|                            | RDID           | Read ID (JEDEC Manufacturer ID and JEDEC CFI) | 9F                      | 133                                    |
|                            | RES            | Read Electronic Signature                     | AB                      | 50                                     |
|                            | RSFDP          | Read Serial Flash Discoverable Parameters     | 5A                      | 133                                    |

**Table 9.2** S25FL512S Command Set (sorted by function) (Continued)

| Function            | Command Name | Command Description                                                        | Instruction Value (Hex) | Maximum Frequency (MHz) <sup>(1)</sup> |
|---------------------|--------------|----------------------------------------------------------------------------|-------------------------|----------------------------------------|
| Register Access     | RDSR1        | Read Status Register-1                                                     | 05                      | 133                                    |
|                     | RDSR2        | Read Status Register-2                                                     | 07                      | 133                                    |
|                     | RDCR         | Read Configuration Register-1                                              | 35                      | 133                                    |
|                     | WRR          | Write Register (Status-1, Configuration-1)                                 | 01                      | 133                                    |
|                     | WRDI         | Write Disable                                                              | 04                      | 133                                    |
|                     | WREN         | Write Enable                                                               | 06                      | 133                                    |
|                     | CLSR         | Clear Status Register-1 - Erase/Prog. Fail Reset                           | 30                      | 133                                    |
|                     | ABRD         | AutoBoot Register Read                                                     | 14                      | 133 (QUAD=0)<br>104 (QUAD=1)           |
|                     | ABWR         | AutoBoot Register Write                                                    | 15                      | 133                                    |
|                     | BRRD         | Bank Register Read                                                         | 16                      | 133                                    |
|                     | BRWR         | Bank Register Write                                                        | 17                      | 133                                    |
|                     | BRAC         | Bank Register Access<br>(Legacy Command formerly used for Deep Power Down) | B9                      | 133                                    |
|                     | DLPRD        | Data Learning Pattern Read                                                 | 41                      | 133                                    |
|                     | PNVDLR       | Program NV Data Learning Register                                          | 43                      | 133                                    |
|                     | WVDLR        | Write Volatile Data Learning Register                                      | 4A                      | 133                                    |
| Read Flash Array    | READ         | Read (3- or 4-byte address)                                                | 03                      | 50                                     |
|                     | 4READ        | Read (4-byte address)                                                      | 13                      | 50                                     |
|                     | FAST_READ    | Fast Read (3- or 4-byte address)                                           | 0B                      | 133                                    |
|                     | 4FAST_READ   | Fast Read (4-byte address)                                                 | 0C                      | 133                                    |
|                     | DDRFR        | DDR Fast Read (3- or 4-byte address)                                       | 0D                      | 80                                     |
|                     | 4DDRFR       | DDR Fast Read (4-byte address)                                             | 0E                      | 80                                     |
|                     | DOR          | Read Dual Out (3- or 4-byte address)                                       | 3B                      | 104                                    |
|                     | 4DOR         | Read Dual Out (4-byte address)                                             | 3C                      | 104                                    |
|                     | QOR          | Read Quad Out (3- or 4-byte address)                                       | 6B                      | 104                                    |
|                     | 4QOR         | Read Quad Out (4-byte address)                                             | 6C                      | 104                                    |
|                     | DIOR         | Dual I/O Read (3- or 4-byte address)                                       | BB                      | 104                                    |
|                     | 4DIOR        | Dual I/O Read (4-byte address)                                             | BC                      | 104                                    |
|                     | DDRDIOR      | DDR Dual I/O Read (3- or 4-byte address)                                   | BD                      | 80                                     |
|                     | 4DDRDIOR     | DDR Dual I/O Read (4-byte address)                                         | BE                      | 80                                     |
|                     | QIOR         | Quad I/O Read (3- or 4-byte address)                                       | EB                      | 104                                    |
|                     | 4QIOR        | Quad I/O Read (4-byte address)                                             | EC                      | 104                                    |
|                     | DDRQIOR      | DDR Quad I/O Read (3- or 4-byte address)                                   | ED                      | 80                                     |
|                     | 4DDRQIOR     | DDR Quad I/O Read (4-byte address)                                         | EE                      | 80                                     |
| Program Flash Array | PP           | Page Program (3- or 4-byte address)                                        | 02                      | 133                                    |
|                     | 4PP          | Page Program (4-byte address)                                              | 12                      | 133                                    |
|                     | QPP          | Quad Page Program (3- or 4-byte address)                                   | 32                      | 80                                     |
|                     | QPP          | Quad Page Program - Alternate instruction (3- or 4-byte address)           | 38                      | 80                                     |
|                     | 4QPP         | Quad Page Program (4-byte address)                                         | 34                      | 80                                     |
|                     | PGSP         | Program Suspend                                                            | 85                      | 133                                    |
|                     | PGRS         | Program Resume                                                             | 8A                      | 133                                    |



**Table 9.2** S25FL512S Command Set (sorted by function) (Continued)

| Function                   | Command Name | Command Description                         | Instruction Value (Hex) | Maximum Frequency (MHz) <sup>(1)</sup> |
|----------------------------|--------------|---------------------------------------------|-------------------------|----------------------------------------|
| Erase Flash Array          | BE           | Bulk Erase                                  | 60                      | 133                                    |
|                            | BE           | Bulk Erase (alternate command)              | C7                      | 133                                    |
|                            | SE           | Erase 256 kB (3- or 4-byte address)         | D8                      | 133                                    |
|                            | 4SE          | Erase 256 kB (4-byte address)               | DC                      | 133                                    |
|                            | ERSP         | Erase Suspend                               | 75                      | 133                                    |
|                            | ERRS         | Erase Resume                                | 7A                      | 133                                    |
| One Time Program Array     | OTPP         | OTP Program                                 | 42                      | 133                                    |
|                            | OTPR         | OTP Read                                    | 4B                      | 133                                    |
| Advanced Sector Protection | DYBRD        | DYB Read                                    | E0                      | 133                                    |
|                            | DYBWR        | DYB Write                                   | E1                      | 133                                    |
|                            | PPBRD        | PPB Read                                    | E2                      | 133                                    |
|                            | PPBP         | PPB Program                                 | E3                      | 133                                    |
|                            | PPBE         | PPB Erase                                   | E4                      | 133                                    |
|                            | ASPRD        | ASP Read                                    | 2B                      | 133                                    |
|                            | ASPP         | ASP Program                                 | 2F                      | 133                                    |
|                            | PLBRD        | PPB Lock Bit Read                           | A7                      | 133                                    |
|                            | PLBWR        | PPB Lock Bit Write                          | A6                      | 133                                    |
|                            | PASSRD       | Password Read                               | E7                      | 133                                    |
|                            | PASSP        | Password Program                            | E8                      | 133                                    |
| Reset                      | PASSU        | Password Unlock                             | E9                      | 133                                    |
|                            | RESET        | Software Reset                              | F0                      | 133                                    |
|                            | MBR          | Mode Bit Reset                              | FF                      | 133                                    |
| Reserved for Future Use    | MPM          | Reserved for Multi-I/O-High Perf Mode (MPM) | A3                      | 133                                    |
| RFU                        | Reserved-18  | Reserved                                    | 18                      |                                        |
| RFU                        | Reserved-E5  | Reserved                                    | E5                      |                                        |
| RFU                        | Reserved-E6  | Reserved                                    | E6                      |                                        |

**Note:**

1. For Industrial Plus temperature range (-40°C to +105°C), all Maximum frequency values are 5% slower than the Max values shown.

## 9.1.2 Read Device Identification

There are multiple commands to read information about the device manufacturer, device type, and device features. SPI memories from different vendors have used different commands and formats for reading information about the memories. The S25FL512S device supports the three most common device information commands.

## 9.1.3 Register Read or Write

There are multiple registers for reporting embedded operation status or controlling device configuration options. There are commands for reading or writing these registers. Registers contain both volatile and non-volatile bits. Non-volatile bits in registers are automatically erased and programmed as a single (write) operation.

### 9.1.3.1 Monitoring Operation Status

The host system can determine when a write, program, erase, suspend or other embedded operation is complete by monitoring the Write in Progress (WIP) bit in the Status Register. The Read from Status Register-1 command provides the state of the WIP bit. The program error (P\_ERR) and erase error (E\_ERR) bits in the status register indicate whether the most recent program or erase command has not completed successfully. When P\_ERR or E\_ERR bits are set to one, the WIP bit will remain set to one indicating the device remains busy. Under this condition, only the CLSR, WRDI, RDSR1, RDSR2, and software RESET commands are valid commands. A Clear Status Register (CLSR) followed by a Write Disable (WRDI) command must be sent to return the device to standby state. CLSR clears the WIP, P\_ERR, and E\_ERR bits. WRDI clears the WEL bit. Alternatively, Hardware Reset, or Software Reset (RESET) may be used to return the device to standby state.

### 9.1.3.2 Configuration

There are commands to read, write, and protect registers that control interface path width, interface timing, interface address length, and some aspects of data protection.

### 9.1.4 Read Flash Array

Data may be read from the memory starting at any byte boundary. Data bytes are sequentially read from incrementally higher byte addresses until the host ends the data transfer by driving CS# input High. If the byte address reaches the maximum address of the memory array, the read will continue at address zero of the array.

There are several different read commands to specify different access latency and data path widths. Double Data Rate (DDR) commands also define the address and data bit relationship to both SCK edges:

- The Read command provides a single address bit per SCK rising edge on the SI signal with read data returning a single bit per SCK falling edge on the SO signal. This command has zero latency between the address and the returning data but is limited to a maximum SCK rate of 50 MHz.
- Other read commands have a latency period between the address and returning data but can operate at higher SCK frequencies. The latency depends on the configuration register latency code.
- The Fast Read command provides a single address bit per SCK rising edge on the SI signal with read data returning a single bit per SCK falling edge on the SO signal and may operate up to 133 MHz.
- Dual or Quad Output read commands provide address a single bit per SCK rising edge on the SI / IO0 signal with read data returning two bits, or four bits of data per SCK falling edge on the IO0-IO3 signals.
- Dual or Quad I/O Read commands provide address two bits or four bits per SCK rising edge with read data returning two bits, or four bits of data per SCK falling edge on the IO0-IO3 signals.
- Fast (Single), Dual, or Quad Double Data Rate read commands provide address one bit, two bits or four bits per every SCK edge with read data returning one bit, two bits, or four bits of data per every SCK edge on the IO0-IO3 signals. Double Data Rate (DDR) operation is only supported for core and I/O voltages of 3 to 3.6V.

### 9.1.5 Program Flash Array

Programming data requires two commands: Write Enable (WREN), and Page Program (PP or QPP). The Page Program command accepts from 1 byte up to 512 consecutive bytes of data (page) to be programmed in one operation. Programming means that bits can either be left at 1, or programmed from 1 to 0. Changing bits from 0 to 1 requires an erase operation.

### 9.1.6 Erase Flash Array

The Sector Erase (SE) and Bulk Erase (BE) commands set all the bits in a sector or the entire memory array to 1. A bit needs to be first erased to 1 before programming can change it to a 0. While bits can be individually programmed from a 1 to 0, erasing bits from 0 to 1 must be done on a sector-wide (SE) or array-wide (BE) level.

### 9.1.7 OTP, Block Protection, and Advanced Sector Protection

There are commands to read and program a separate One Time Programmable (OTP) array for permanent data such as a serial number. There are commands to control a contiguous group (block) of flash memory array sectors that are protected from program and erase operations. There are commands to control which individual flash memory array sectors are protected from program and erase operations.

### 9.1.8 Reset

There is a command to reset to the default conditions present after power on to the device. There is a command to reset (exit from) the Enhanced Performance Read Modes.

### 9.1.9 Reserved

Some instructions are reserved for future use. In this generation of the S25FL512S some of these command instructions may be unused and not affect device operation, some may have undefined results.

Some commands are reserved to ensure that a legacy or alternate source device command is allowed without affect. This allows legacy software to issue some commands that are not relevant for the current generation S25FL512S device with the assurance these commands do not cause some unexpected action.

Some commands are reserved for use in special versions of the FL-S not addressed by this document or for a future generation. This allows new host memory controller designs to plan the flexibility to issue these command instructions. The command format is defined if known at the time this document revision is published.


## 9.2 Identification Commands

### 9.2.1 Read Identification - REMS (Read\_ID or REMS 90h)

The READ\_ID command identifies the Device Manufacturer ID and the Device ID. The command is also referred to as Read Electronic Manufacturer and device Signature (REMS). READ-ID (REMS) is only supported for backward compatibility and should not be used for new software designs. New software designs should instead make use of the RDID command.

The command is initiated by shifting on SI the instruction code "90h" followed by a 24-bit address of 00000h. Following this, the Manufacturer ID and the Device ID are shifted out on SO starting at the falling edge of SCK after address. The Manufacturer ID and the Device ID are always shifted out with the MSB first. If the 24-bit address is set to 000001h, then the Device ID is read out first followed by the Manufacturer ID. The Manufacturer ID and Device ID output data toggles between address 000000H and 000001H until terminated by a low to high transition on CS# input. The maximum clock frequency for the READ\_ID command is 133 MHz.

**Figure 9.1** READ\_ID (90h) Command Sequence

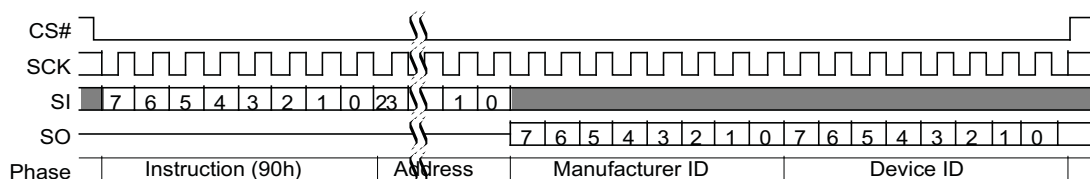

**Table 9.3** Read\_ID Values

| Device    | Manufacturer ID (hex) | Device ID (hex) |
|-----------|-----------------------|-----------------|
| S25FL512S | 01                    | 19              |

### 9.2.2 Read Identification (RDID 9Fh):

The Read Identification (RDID) command provides read access to manufacturer identification, device identification, and Common Flash Interface (CFI) information. The manufacturer identification is assigned by JEDEC. The CFI structure is defined by JEDEC standard. The device identification and CFI values are assigned by Cypress.


The JEDEC Common Flash Interface (CFI) specification defines a device information structure, which allows a vendor-specified software flash management program (driver) to be used for entire families of flash devices. Software support can then be device-independent, JEDEC manufacturer ID independent, forward and backward-compatible for the specified flash device families. System vendors can standardize their flash drivers for long-term software compatibility by using the CFI values to configure a family driver from the CFI information of the device in use.

Any RDID command issued while a program, erase, or write cycle is in progress is ignored and has no effect on execution of the program, erase, or write cycle that is in progress.

The RDID instruction is shifted on SI. After the last bit of the RDID instruction is shifted into the device, a byte of manufacturer identification, two bytes of device identification, extended device identification, and CFI information will be shifted sequentially out on SO. As a whole this information is referred to as ID-CFI. See *ID-CFI Address Space* on page 45 for the detail description of the ID-CFI contents.

Continued shifting of output beyond the end of the defined ID-CFI address space will provide undefined data. The RDID command sequence is terminated by driving CS# to the logic high state anytime during data output.

The maximum clock frequency for the RDID command is 133 MHz.

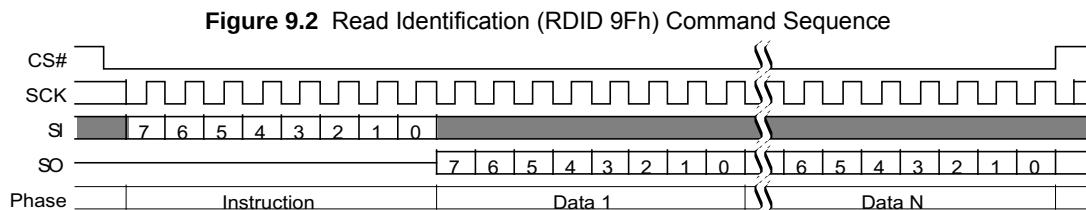

### 9.2.3 Read Electronic Signature (RES) (ABh):


The RES command is used to read a single byte Electronic Signature from SO. RES is only supported for backward compatibility and should not be used for new software designs. New software designs should instead make use of the RDID command.

The RES instruction is shifted in followed by three dummy bytes onto SI. After the last bit of the three dummy bytes are shifted into the device, a byte of Electronic Signature will be shifted out of SO. Each bit is shifted out by the falling edge of SCK. The maximum clock frequency for the RES command is 50 MHz.

The Electronic Signature can be read repeatedly by applying multiples of eight clock cycles.

The RES command sequence is terminated by driving CS# to the logic high state anytime during data output.

**Figure 9.3** Read Electronic Signature (RES ABh) Command Sequence

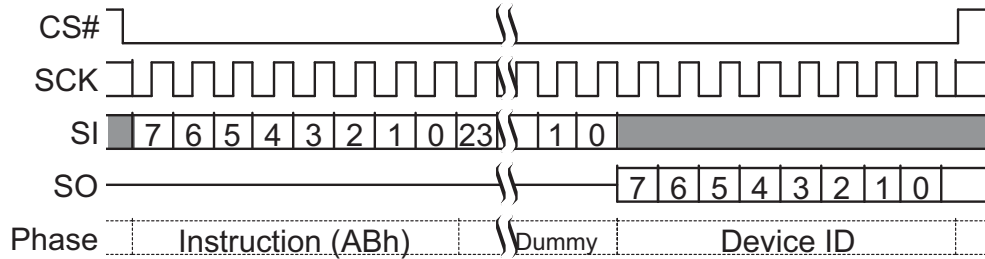


**Table 9.4** RES Values

| Device    | Device ID (hex) |
|-----------|-----------------|
| S25FL512S | 19              |

### 9.2.4 Read Serial Flash Discoverable Parameters (RSFDP 5Ah)

The command is initiated by shifting on SI the instruction code '5Ah', followed by a 24-bit address of 000000h, followed by eight dummy cycles. The SFDP bytes are then shifted out on SO starting at the falling edge of SCK after the eight dummy cycles. The SFDP bytes are always shifted out with the MSB first. If the 24-bit address is set to any other value, the selected location in the SFDP space is the starting point of the data read. This enables random access to any parameter in the SFDP space. The maximum clock frequency for the RSFDP command is 133 MHz.

**Figure 9.4** RSFDP Command Sequence

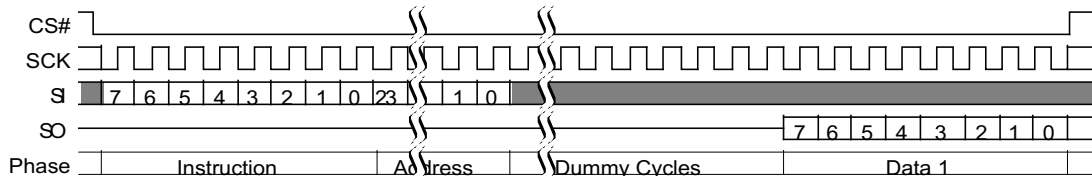


## 9.3 Register Access Commands

### 9.3.1 Read Status Register-1 (RDSR1 05h):

The Read Status Register-1 (RDSR1) command allows the Status Register-1 contents to be read from SO. The Status Register-1 contents may be read at any time, even while a program, erase, or write operation is in progress. It is possible to read the Status Register-1 continuously by providing multiples of eight clock cycles. The status is updated for each eight cycle read. The maximum clock frequency for the RDSR1 (05h) command is 133 MHz.


**Figure 9.5** Read Status Register-1 (RDSR1 05h) Command Sequence

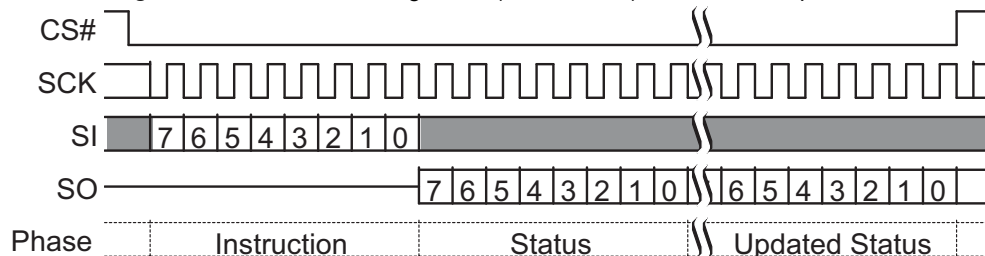

### 9.3.2 Read Status Register-2 (RDSR2 07h):

The Read Status Register (RDSR2) command allows the Status Register-2 contents to be read from SO. The Status Register-2 contents may be read at any time, even while a program, erase, or write operation is in progress. It is possible to read the Status Register-2 continuously by providing multiples of eight clock cycles. The status is updated for each eight cycle read. The maximum clock frequency for the RDSR2 command is 133 MHz.


**Figure 9.6** Read Status Register-2 (RDSR2 07h) Command Sequence

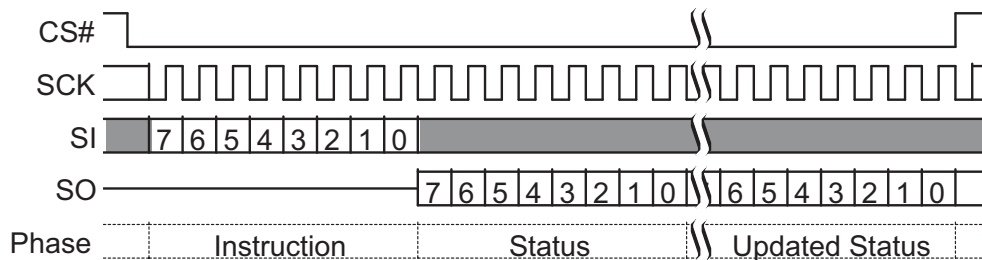

### 9.3.3 Read Configuration Register (RDCR 35h):

The Read Configuration Register (RDCR) command allows the Configuration Register contents to be read from SO. It is possible to read the Configuration Register continuously by providing multiples of eight clock cycles. The Configuration Register contents may be read at any time, even while a program, erase, or write operation is in progress.


**Figure 9.7** Read Configuration Register (RDCR 35h) Command Sequence

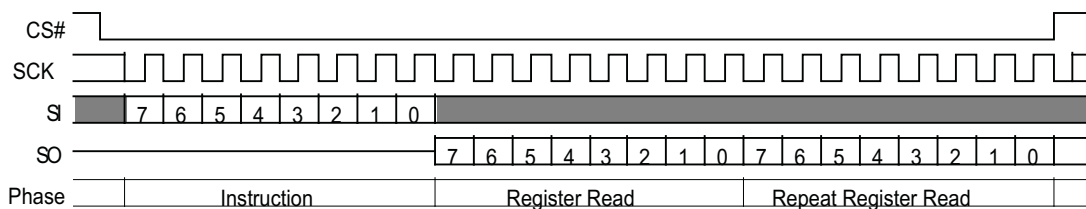

### 9.3.4 Bank Register Read (BRRD 16h)

The Read the Bank Register (BRRD) command allows the Bank address Register contents to be read from SO. The instruction is first shifted in from SI. Then the 8-bit Bank Register is shifted out on SO. It is possible to read the Bank Register continuously by providing multiples of eight clock cycles. The maximum operating clock frequency for the BRRD command is 133 MHz.

**Figure 9.8** Read Bank Register (BRRD 16h) Command

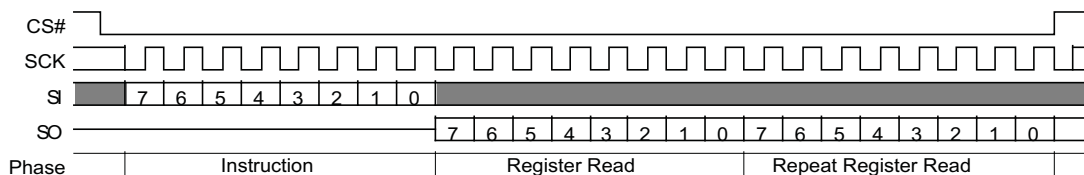


### 9.3.5 Bank Register Write (BRWR 17h)

The Bank Register Write (BRWR) command is used to write address bits above A23, into the Bank Address Register (BAR). The command is also used to write the Extended address control bit (EXTADD) that is also in BAR[7]. BAR provides the high order addresses needed by devices having more than 128 Mbits (16 Mbytes), when using 3-byte address commands without extended addressing enabled (BAR[7] EXTADD = 0). Because this command is part of the addressing method and is not changing data in the flash memory, this command does not require the WREN command to precede it.

The BRWR instruction is entered, followed by the data byte on SI. The Bank Register is one data byte in length.

The BRWR command has no effect on the P\_ERR, E\_ERR or WIP bits of the Status and Configuration Registers. Any bank address bit reserved for the future should always be written as a 0.

**Figure 9.9** Bank Register Write (BRWR 17h) Command

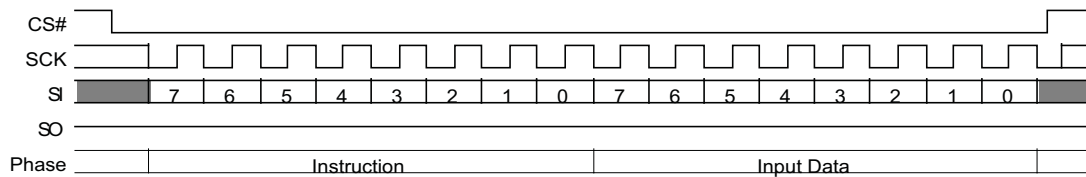

### 9.3.6 Bank Register Access (BRAC B9h):


The Bank Register Read and Write commands provide full access to the Bank Address Register (BAR) but they are both commands that are not present in legacy SPI memory devices. Host system SPI memory controller interfaces may not be able to easily support such new commands. The Bank Register Access (BRAC) command uses the same command code and format as the Deep Power Down (DPD) command that is available in legacy SPI memories. The FL-S family does not support a DPD feature but assigns this legacy command code to the BRAC command to enable write access to the Bank Address Register for legacy systems that are able to send the legacy DPD (B9h) command.

When the BRAC command is sent, the FL-S family device will then interpret an immediately following Write Register (WRR) command as a write to the lower address bits of the BAR. A WREN command is not used between the BRAC and WRR commands. Only the lower two bits of the first data byte following the WRR command code are used to load BAR[1:0]. The upper bits of that byte and the content of the optional WRR command second data byte are ignored. Following the WRR command the access to BAR is closed and the device interface returns to the standby state. The combined BRAC followed by WRR command sequence has no effect on the value of the ExtAdd bit (BAR[7]).

Commands other than WRR may immediately follow BRAC and execute normally. However, any command other than WRR, or any other sequence in which CS# goes low and returns high, following a BRAC command, will close the access to BAR and return to the normal interpretation of a WRR command as a write to Status Register-1 and the Configuration Register.

The BRAC + WRR sequence is allowed only when the device is in standby, program suspend, or erase suspend states. This command sequence is illegal when the device is performing an embedded algorithm or when the program (P\_ERR) or erase (E\_ERR) status bits are set to 1.

**Figure 9.10** BRAC (B9h) Command Sequence

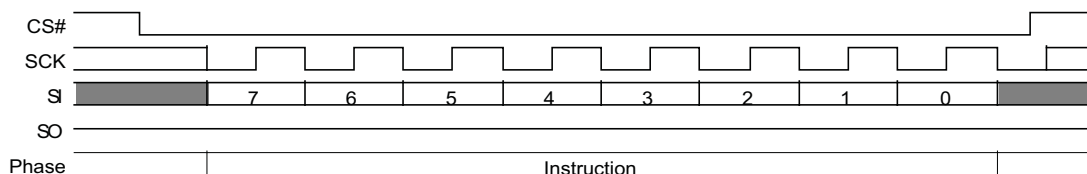

### 9.3.7 Write Registers (WRR 01h):

The Write Registers (WRR) command allows new values to be written to both the Status Register-1 and Configuration Register. Before the Write Registers (WRR) command can be accepted by the device, a Write Enable (WREN) command must be received. After the Write Enable (WREN) command has been decoded successfully, the device will set the Write Enable Latch (WEL) in the Status Register to enable any write operations.


The Write Registers (WRR) command is entered by shifting the instruction and the data bytes on SI. The Status Register is one data byte in length.

The Write Registers (WRR) command will set the P\_ERR or E\_ERR bits if there is a failure in the WRR operation. Any Status or Configuration Register bit reserved for the future must be written as a 0.


CS# must be driven to the logic high state after the eighth or sixteenth bit of data has been latched. If not, the Write Registers (WRR) command is not executed. If CS# is driven high after the eighth cycle then only the Status Register-1 is written; otherwise, after the sixteenth cycle both the Status and Configuration Registers are written. When the configuration register QUAD bit CR[1] is 1, only the WRR command format with 16 data bits may be used.

As soon as CS# is driven to the logic high state, the self-timed Write Registers (WRR) operation is initiated. While the Write Registers (WRR) operation is in progress, the Status Register may still be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed Write Registers (WRR) operation, and is a 0 when it is completed. When the Write Registers (WRR) operation is completed, the Write Enable Latch (WEL) is set to a 0. The maximum clock frequency for the WRR command is 133 MHz.

**Figure 9.11** Write Registers (WRR 01h) Command Sequence – 8 data bits

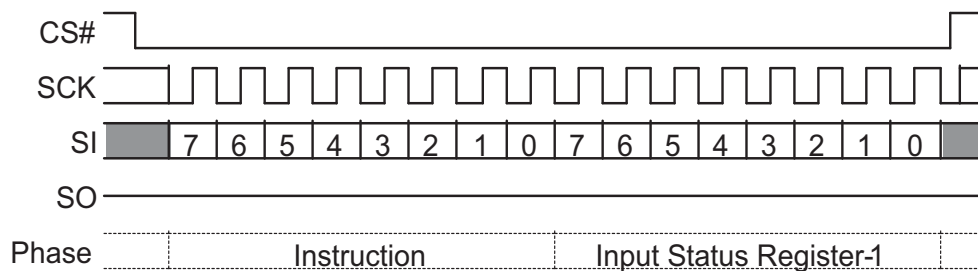

**Figure 9.12** Write Registers (WRR 01h) Command Sequence – 16 data bits

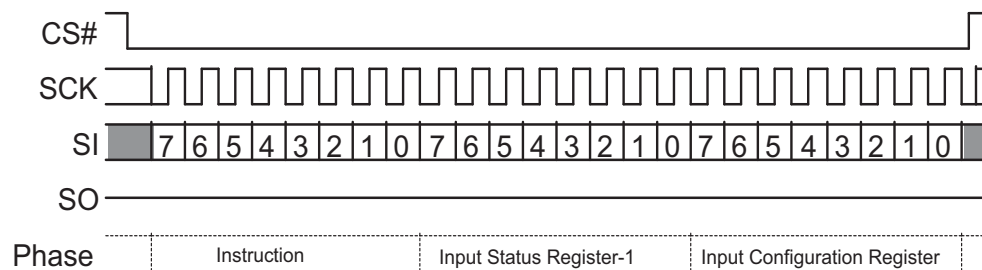

The Write Registers (WRR) command allows the user to change the values of the Block Protect (BP2, BP1, and BP0) bits to define the size of the area that is to be treated as read-only. The Write Registers (WRR) command also allows the user to set the Status Register Write Disable (SRWD) bit to a 1 or a 0. The Status Register Write Disable (SRWD) bit and Write Protect (WP#) signal allow the BP bits to be hardware protected.

When the Status Register Write Disable (SRWD) bit of the Status Register is a 0 (its initial delivery state), it is possible to write to the Status Register provided that the Write Enable Latch (WEL) bit has previously been set by a Write Enable (WREN) command, regardless of the whether Write Protect (WP#) signal is driven to the logic high or logic low state.



When the Status Register Write Disable (SRWD) bit of the Status Register is set to a 1, two cases need to be considered, depending on the state of Write Protect (WP#):

- If Write Protect (WP#) signal is driven to the logic high state, it is possible to write to the Status and Configuration Registers provided that the Write Enable Latch (WEL) bit has previously been set to a “1” by initiating a Write Enable (WREN) command.
- If Write Protect (WP#) signal is driven to the logic low state, it is not possible to write to the Status and Configuration Registers even if the Write Enable Latch (WEL) bit has previously been set to a 1 by a Write Enable (WREN) command. Attempts to write to the Status and Configuration Registers are rejected, and are not accepted for execution. As a consequence, all the data bytes in the memory area that are protected by the Block Protect (BP2, BP1, BP0) bits of the Status Register, are also hardware protected by WP#.

The WP# hardware protection can be provided:

- by setting the Status Register Write Disable (SRWD) bit after driving Write Protect (WP#) signal to the logic low state;
- or by driving Write Protect (WP#) signal to the logic low state after setting the Status Register Write Disable (SRWD) bit to a 1.

The only way to release the hardware protection is to pull the Write Protect (WP#) signal to the logic high state. If WP# is permanently tied high, hardware protection of the BP bits can never be activated.

**Table 9.5** Block Protection Modes

| WP# | SRWD Bit | Mode               | Write Protection of Registers                                                                                                                                                                | Memory Content                                                                   |                                                                            |
|-----|----------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------|
|     |          |                    |                                                                                                                                                                                              | Protected Area                                                                   | Unprotected Area                                                           |
| 1   | 1        | Software Protected | Status and Configuration Registers are Writable (if WREN command has set the WEL bit). The values in the SRWD, BP2, BP1, and BP0 bits and those in the Configuration Register can be changed | Protected against Page Program, Quad Input Program, Sector Erase, and Bulk Erase | Ready to accept Page Program, Quad Input Program and Sector Erase commands |
| 1   | 0        |                    |                                                                                                                                                                                              |                                                                                  |                                                                            |
| 0   | 0        |                    |                                                                                                                                                                                              |                                                                                  |                                                                            |
| 0   | 1        | Hardware Protected | Status and Configuration Registers are Hardware Write Protected. The values in the SRWD, BP2, BP1, and BP0 bits and those in the Configuration Register cannot be changed                    | Protected against Page Program, Sector Erase, and Bulk Erase                     | Ready to accept Page Program or Erase commands                             |

**Notes:**

1. The Status Register originally shows 00h when the device is first shipped from Cypress to the customer.
2. Hardware protection is disabled when Quad Mode is enabled (QUAD bit = 1 in Configuration Register). WP# becomes IO2; therefore, it cannot be utilized.


The WRR command has an alternate function of loading the Bank Address Register if the command immediately follows a BRAC command. See *Bank Register Access (BRAC B9h)*: [on page 71](#).

### 9.3.8 Write Enable (WREN 06h)

The Write Enable (WREN) command sets the Write Enable Latch (WEL) bit of the Status Register 1 (SR1[1]) to a 1. The Write Enable Latch (WEL) bit must be set to a 1 by issuing the Write Enable (WREN) command to enable write, program and erase commands.

CS# must be driven into the logic high state after the eighth bit of the instruction byte has been latched in on SI. Without CS# being driven to the logic high state after the eighth bit of the instruction byte has been latched in on SI, the write enable operation will not be executed.

**Figure 9.13** Write Enable (WREN 06h) Command Sequence

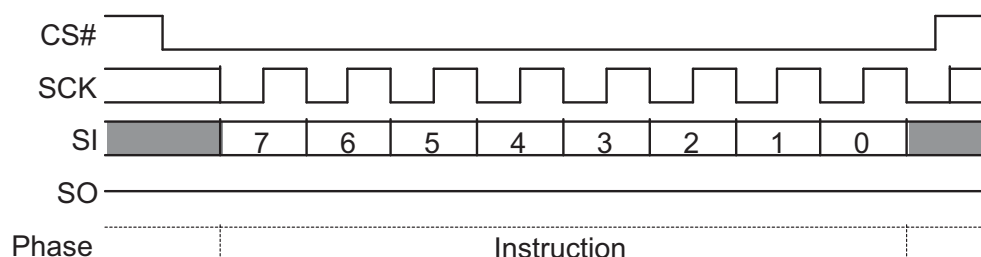


### 9.3.9 Write Disable (WRDI 04h)

The Write Disable (WRDI) command sets the Write Enable Latch (WEL) bit of the Status Register-1 (SR1[1]) to a 0.

The Write Enable Latch (WEL) bit may be set to a 0 by issuing the Write Disable (WRDI) command to disable Page Program (PP), Sector Erase (SE), Bulk Erase (BE), Write Registers (WRR), OTP Program (OTPP), and other commands, that require WEL be set to 1 for execution. The WRDI command can be used by the user to protect memory areas against inadvertent writes that can possibly corrupt the contents of the memory. The WRDI command is ignored during an embedded operation while WIP bit =1.

CS# must be driven into the logic high state after the eighth bit of the instruction byte has been latched in on SI. Without CS# being driven to the logic high state after the eighth bit of the instruction byte has been latched in on SI, the write disable operation will not be executed.


**Figure 9.14** Write Disable (WRDI 04h) Command Sequence

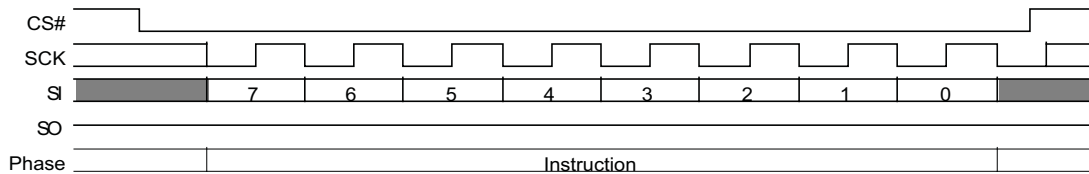

### 9.3.10 Clear Status Register (CLSR 30h):

The Clear Status Register command resets bit SR1[5] (Erase Fail Flag) and bit SR1[6] (Program Fail Flag). It is not necessary to set the WEL bit before the Clear SR command is executed. The Clear SR command will be accepted even when the device remains busy with WIP set to 1, as the device does remain busy when either error bit is set. The WEL bit will be unchanged after this command is executed.

**Figure 9.15** Clear Status Register (CLSR 30h) Command Sequence

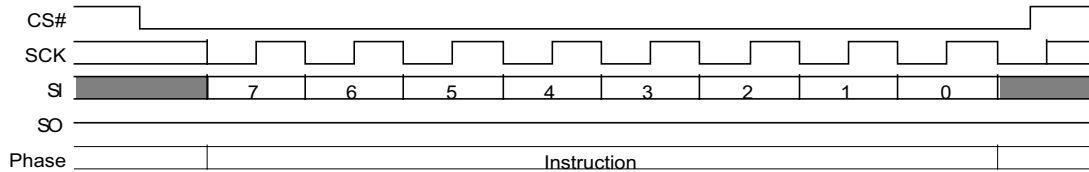

### 9.3.11 AutoBoot

SPI devices normally require 32 or more cycles of command and address shifting to initiate a read command. And, in order to read boot code from an SPI device, the host memory controller or processor must supply the read command from a hardwired state machine or from some host processor internal ROM code.

Parallel NOR devices need only an initial address, supplied in parallel in a single cycle, and initial access time to start reading boot code.

The AutoBoot feature allows the host memory controller to take boot code from an S25FL512S device immediately after the end of reset, without having to send a read command. This saves 32 or more cycles and simplifies the logic needed to initiate the reading of boot code.

- As part of the power up reset, hardware reset, or command reset process the AutoBoot feature automatically starts a read access from a pre-specified address. At the time the reset process is completed, the device is ready to deliver code from the starting address. The host memory controller only needs to drive CS# signal from high to low and begin toggling the SCK signal. The S25FL512S device will delay code output for a pre-specified number of clock cycles before code streams out.
  - The Auto Boot Start Delay (ABSD) field of the AutoBoot register specifies the initial delay if any is needed by the host.
  - The host cannot send commands during this time.
  - If ABSD = 0, the maximum SCK frequency is 50 MHz.
  - If ABSD > 0, the maximum SCK frequency is 133 MHz if the QUAD bit CR1[1] is 0 or 104 MHz if the QUAD bit is set to 1.

- The starting address of the boot code is selected by the value programmed into the AutoBoot Start Address (ABSA) field of the AutoBoot Register which specifies a 512 byte boundary aligned location; the default address is 00000000h.
- Data will continuously shift out until CS# returns high.
- At any point after the first data byte is transferred, when CS# returns high, the SPI device will reset to standard SPI mode; able to accept normal command operations.
- A minimum of one byte must be transferred.
- AutoBoot mode will not initiate again until another power cycle or a reset occurs.
- An AutoBoot Enable bit (ABE) is set to enable the AutoBoot feature.

The AutoBoot register bits are non-volatile and provide:

- The starting address (512-byte boundary), set by the AutoBoot Start Address (ABSA). The size of the ABSA field is 23 bits for devices up to 32-Gbit.
- The number of initial delay cycles, set by the AutoBoot Start Delay (ABSD) 8-bit count value.
- The AutoBoot Enable.

If the configuration register QUAD bit CR1[1] is set to 1, the boot code will be provided 4 bits per cycle in the same manner as a Read Quad Out command. If the QUAD bit is 0 the code is delivered serially in the same manner as a Read command.

Figure 9.16 AutoBoot Sequence (CR1[1]=0)


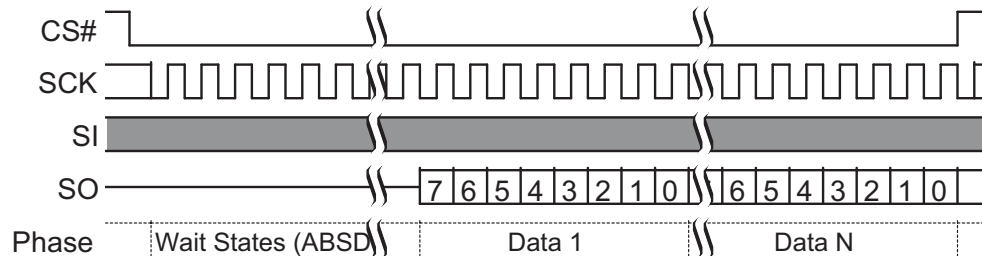



Figure 9.17 AutoBoot Sequence (CR1[1]=1)

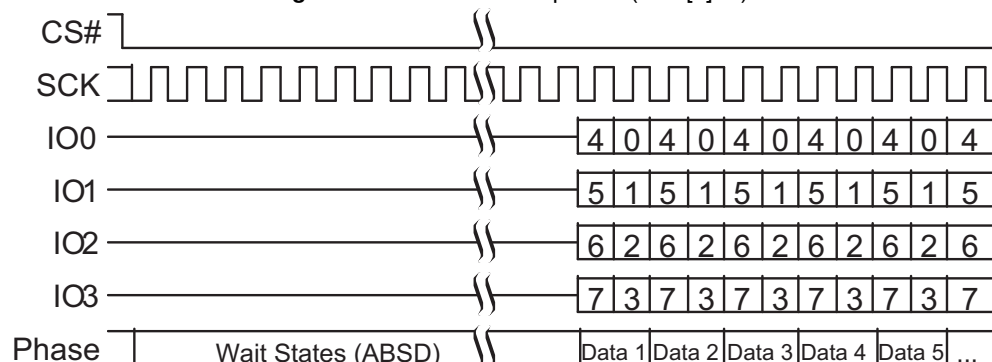

### 9.3.12 AutoBoot Register Read (ABRD 14h)

The AutoBoot Register Read command is shifted into SI. Then the 32-bit AutoBoot Register is shifted out on SO, least significant byte first, most significant bit of each byte first. It is possible to read the AutoBoot Register continuously by providing multiples of 32 clock cycles. If the QUAD bit CR1[1] is cleared to 0, the maximum operating clock frequency for ABRD command is 133 MHz. If the QUAD bit CR1[1] is set to 1, the maximum operating clock frequency for ABRD command is 104 MHz.

**Figure 9.18** AutoBoot Register Read (ABRD 14h) Command

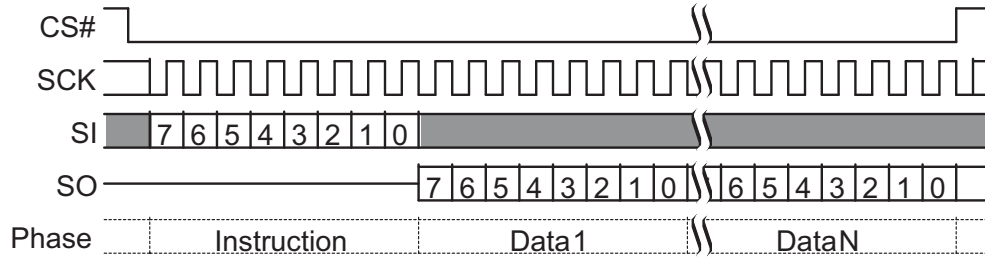

### 9.3.13 AutoBoot Register Write (ABWR 15h)


Before the ABWR command can be accepted, a Write Enable (WREN) command must be issued and decoded by the device, which sets the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The ABWR command is entered by shifting the instruction and the data bytes on SI, least significant byte first, most significant bit of each byte first. The ABWR data is 32 bits in length.

The ABWR command has status reported in Status Register-1 as both an erase and a programming operation. An E\_ERR or a P\_ERR may be set depending on whether the erase or programming phase of updating the register fails.

CS# must be driven to the logic high state after the 32nd bit of data has been latched. If not, the ABWR command is not executed. As soon as CS# is driven to the logic high state, the self-timed ABWR operation is initiated. While the ABWR operation is in progress, Status Register-1 may be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed ABWR operation, and is a 0 when it is completed. When the ABWR cycle is completed, the Write Enable Latch (WEL) is set to a 0. The maximum clock frequency for the ABWR command is 133 MHz.

**Figure 9.19** AutoBoot Register Write (ABWR) Command

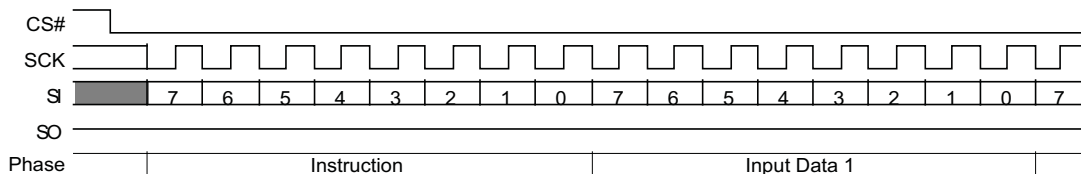


### 9.3.14 Program NVDLR (PNVDLR 43h)

Before the Program NVDLR (PNVDLR) command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device. After the Write Enable (WREN) command has been decoded successfully, the device will set the Write Enable Latch (WEL) to enable the PNVDLR operation.

The PNVDLR command is entered by shifting the instruction and the data byte on SI.

CS# must be driven to the logic high state after the eighth (8th) bit of data has been latched. If not, the PNVDLR command is not executed. As soon as CS# is driven to the logic high state, the self-timed PNVDLR operation is initiated. While the PNVDLR operation is in progress, the Status Register may be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed PNVDLR cycle, and is a 0 when it is completed. The PNVDLR operation can report a program error in the P\_ERR bit of the status register. When the PNVDLR operation is completed, the Write Enable Latch (WEL) is set to a 0. The maximum clock frequency for the PNVDLR command is 133 MHz.

**Figure 9.20** Program NVDLR (PNVDLR 43h) Command Sequence

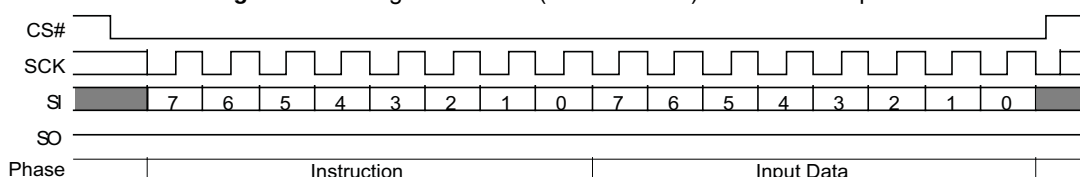


### 9.3.15 Write VDLR (WVDLR 4Ah)

Before the Write VDLR (WVDLR) command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device. After the Write Enable (WREN) command has been decoded successfully, the device will set the Write Enable Latch (WEL) to enable WVDLR operation.

The WVDLR command is entered by shifting the instruction and the data byte on SI.

CS# must be driven to the logic high state after the eighth (8th) bit of data has been latched. If not, the WVDLR command is not executed. As soon as CS# is driven to the logic high state, the WVDLR operation is initiated with no delays. The maximum clock frequency for the PNVDLR command is 133 MHz.


Figure 9.21 Write VDLR (WVDLR 4Ah) Command Sequence

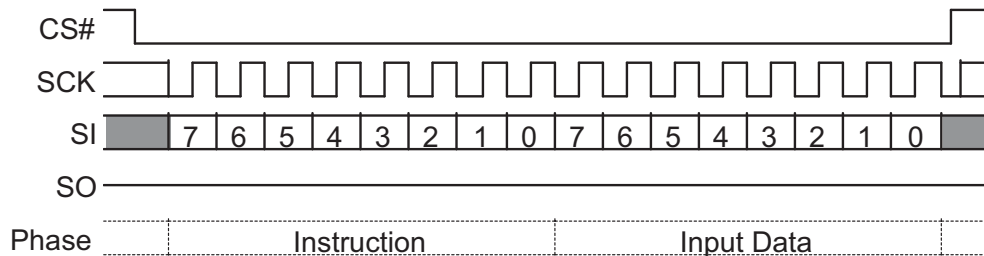

### 9.3.16 Data Learning Pattern Read (DLPRD 41h)

The instruction is shifted on SI, then the 8-bit DLP is shifted out on SO. It is possible to read the DLP continuously by providing multiples of eight clock cycles. The maximum operating clock frequency for the DLPRD command is 133 MHz.

Figure 9.22 DLP Read (DLPRD 41h) Command Sequence

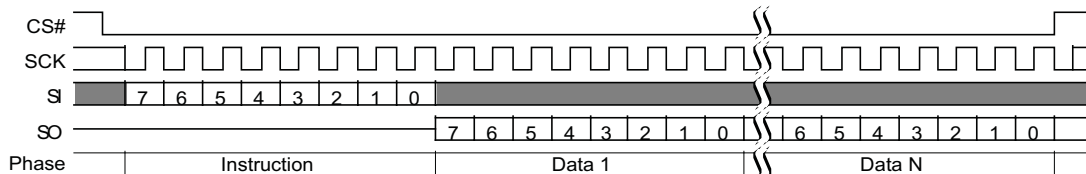

## 9.4 Read Memory Array Commands

Read commands for the main flash array provide many options for prior generation SPI compatibility or enhanced performance SPI:

- Some commands transfer address or data on each rising edge of SCK. These are called Single Data Rate commands (SDR).
- Some SDR commands transfer address one bit per rising edge of SCK and return data 1, 2, or 4 bits of data per rising edge of SCK. These are called Read or Fast Read for 1-bit data; Dual Output Read for 2-bit data, and Quad Output for 4-bit data.
- Some SDR commands transfer both address and data 2 or 4 bits per rising edge of SCK. These are called Dual I/O for 2 bit and Quad I/O for 4 bit.
- Some commands transfer address and data on both the rising edge and falling edge of SCK. These are called Double Data Rate (DDR) commands.
- There are DDR commands for 1, 2, or 4 bits of address or data per SCK edge. These are called Fast DDR for 1-bit, Dual I/O DDR for 2-bit, and Quad I/O DDR for 4-bit per edge transfer.

All of these commands begin with an instruction code that is transferred one bit per SCK rising edge. The instruction is followed by either a 3- or 4-byte address transferred at SDR or DDR. Commands transferring address or data 2 or 4 bits per clock edge are called Multiple I/O (MIO) commands. For FL-S devices at 256 Mbits or higher density, the traditional SPI 3-byte addresses are unable to directly address all locations in the memory array. These devices have a bank address register that is used with 3-byte address commands to supply the high order address bits beyond the address from the host system. The default bank address is zero. Commands are provided to load and read the bank address register. These devices may also be configured to take a 4-byte address from the host system with the traditional 3-byte address commands. The 4-byte address mode for traditional commands is activated by setting the External Address (EXTADD) bit in the bank address register to 1.

The Quad I/O commands provide a performance improvement option controlled by mode bits that are sent following the address bits. The mode bits indicate whether the command following the end of the current read will be another read of the same type, without an instruction at the beginning of the read. These mode bits give the option to eliminate the instruction cycles when doing a series of Quad I/O read accesses.

A device ordering option provides an enhanced high performance option by adding a similar mode bit scheme to the DDR Fast Read, Dual I/O, and Dual I/O DDR commands, in addition to the Quad I/O command.

Some commands require delay cycles following the address or mode bits to allow time to access the memory array. The delay cycles are traditionally called dummy cycles. The dummy cycles are ignored by the memory thus any data provided by the host during these cycles is “don’t care” and the host may also leave the SI signal at high impedance during the dummy cycles. When MIO commands are used the host must stop driving the IO signals (outputs are high impedance) before the end of last dummy cycle. When DDR commands are used the host must not drive the I/O signals during any dummy cycle. The number of dummy cycles varies with the SCK frequency or performance option selected via the Configuration Register 1 (CR1) Latency Code (LC). Dummy cycles are measured from SCK falling edge to next SCK falling edge. SPI outputs are traditionally driven to a new value on the falling edge of each SCK. Zero dummy cycles means the returning data is driven by the memory on the same falling edge of SCK that the host stops driving address or mode bits.

The DDR commands may optionally have an 8-edge Data Learning Pattern (DLP) driven by the memory, on all data outputs, in the dummy cycles immediately before the start of data. The DLP can help the host memory controller determine the phase shift from SCK to data edges so that the memory controller can capture data at the center of the data eye.

When using SDR I/O commands at higher SCK frequencies (>50 MHz), an LC that provides 1 or more dummy cycles should be selected to allow additional time for the host to stop driving before the memory starts driving data, to minimize I/O driver conflict. When using DDR I/O commands with the DLP enabled, an LC that provides 5 or more dummy cycles should be selected to allow 1 cycle of additional time for the host to stop driving before the memory starts driving the 4 cycle DLP.

Each read command ends when CS# is returned High at any point during data return. CS# must not be returned High during the mode or dummy cycles before data returns as this may cause mode bits to be captured incorrectly; making it indeterminate as to whether the device remains in enhanced high performance read mode.

### 9.4.1 Read (Read 03h or 4READ 13h):


The instruction

- 03h (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 03h (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 13h is followed by a 4-byte address (A31-A0)

Then the memory contents, at the address given, are shifted out on SO. The maximum operating clock frequency for the READ command is 50 MHz.

The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

**Figure 9.23** Read Command Sequence (READ 03h or 13h)

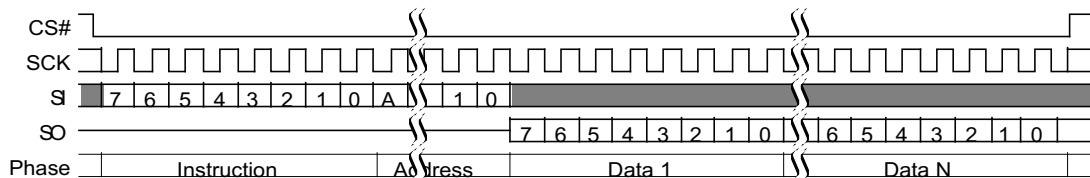

### 9.4.2 Fast Read (FAST\_READ 0Bh or 4FAST\_READ 0Ch):

The instruction


- 0Bh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 0Bh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 0Ch is followed by a 4-byte address (A31-A0)

The address is followed by zero or eight dummy cycles depending on the latency code set in the Configuration Register. The dummy cycles allow the device internal circuits additional time for accessing the initial address location. During the dummy cycles the data value on SO is "don't care" and may be high impedance. Then the memory contents, at the address given, are shifted out on SO.

The maximum operating clock frequency for FAST READ command is 133 MHz.


The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

**Figure 9.24** Fast Read (FAST\_READ 0Bh or 0Ch) Command Sequence with Read Latency

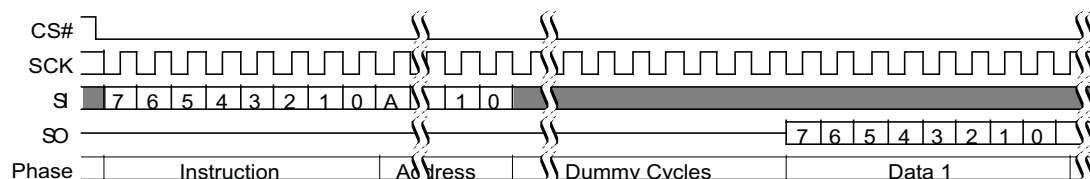



**Figure 9.25** Fast Read Command (FAST\_READ 0Bh or 0Ch) Sequence without Read Latency

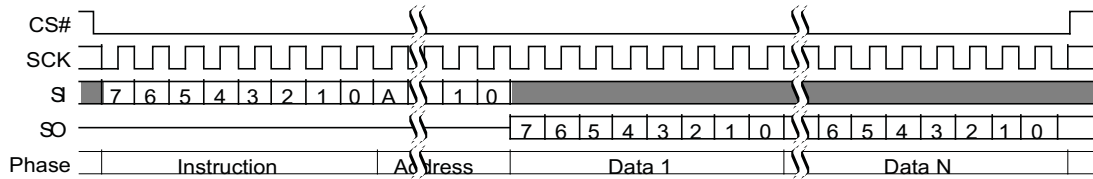

### 9.4.3 Dual Output Read (DOR 3Bh or 4DOR 3Ch):

The instruction


- 3Bh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 3Bh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 3Ch is followed by a 4-byte address (A31-A0)

Then the memory contents, at the address given, is shifted out two bits at a time through IO0 (SI) and IO1 (SO). Two bits are shifted out at the SCK frequency by the falling edge of the SCK signal.


The maximum operating clock frequency for the Dual Output Read command is 104 MHz. For Dual Output Read commands, there are zero or eight dummy cycles required after the last address bit is shifted into SI before data begins shifting out of IO0 and IO1. This latency period (i.e., dummy cycles) allows the device's internal circuitry enough time to read from the initial address. During the dummy cycles, the data value on SI is a "don't care" and may be high impedance. The number of dummy cycles is determined by the frequency of SCK (refer to [Table 7.7, Latency Codes for SDR Enhanced High Performance on page 50](#)).

The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

**Figure 9.26** Dual Output Read Command Sequence (3-Byte Address, 3Bh [ExtAdd=0], LC=10b)

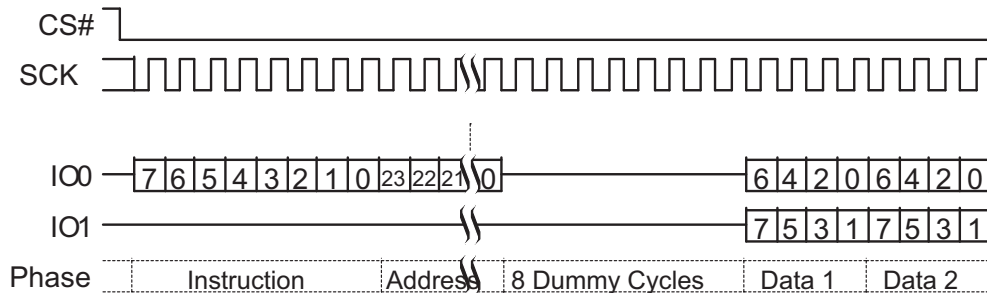


**Figure 9.27** Dual Output Read Command Sequence (4-Byte Address, 3Ch or 3Bh [ExtAdd=1, LC=10b])

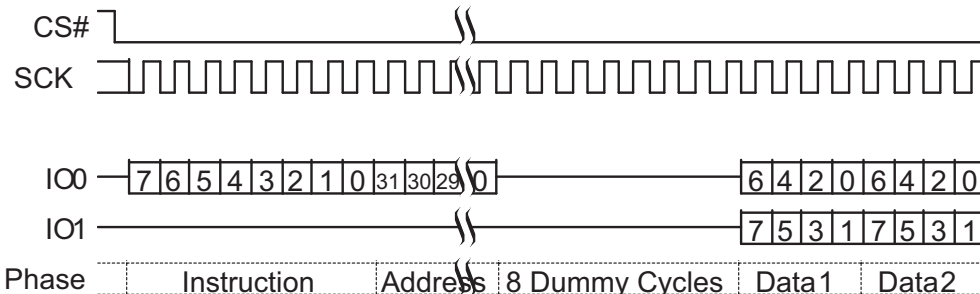



**Figure 9.28** Dual Output Read Command Sequence (4-Byte Address, 3Ch or 3Bh [ExtAdd=1, LC=11b])

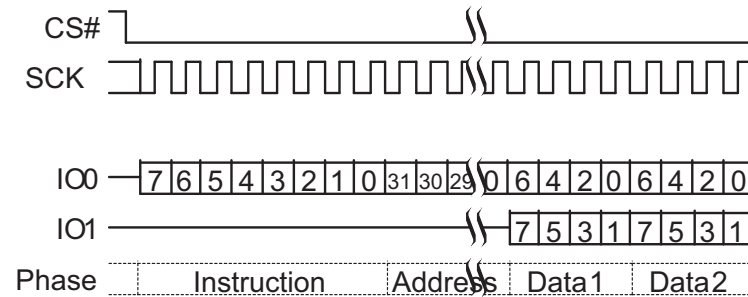

#### 9.4.4 Quad Output Read (QOR 6Bh or 4QOR 6Ch):

The instruction

- 6Bh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 6Bh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 6Ch is followed by a 4-byte address (A31-A0)


Then the memory contents, at the address given, is shifted out four bits at a time through IO0-IO3. Each nibble (4 bits) is shifted out at the SCK frequency by the falling edge of the SCK signal.

The maximum operating clock frequency for Quad Output Read command is 104 MHz. For Quad Output Read Mode, there may be dummy cycles required after the last address bit is shifted into SI before data begins shifting out of IO0-IO3. This latency period (i.e., dummy cycles) allows the device's internal circuitry enough time to set up for the initial address. During the dummy cycles, the data value on IO0-IO3 is a "don't care" and may be high impedance. The number of dummy cycles is determined by the frequency of SCK (refer to [Table 7.7, Latency Codes for SDR Enhanced High Performance on page 50](#)).


The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

The QUAD bit of Configuration Register must be set (CR Bit1=1) to enable the Quad mode capability.

**Figure 9.29** Quad Output Read (QOR 6Bh or 4QOR 6Ch) Command Sequence with Read Latency

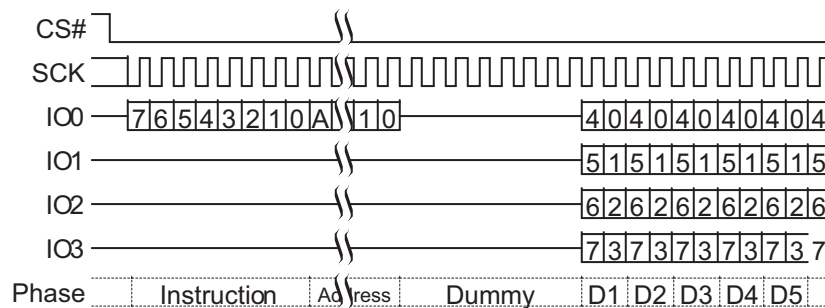

**Figure 9.30** Quad Output Read (QOR 6Bh or 4QOR 6Ch) Command Sequence without Read Latency

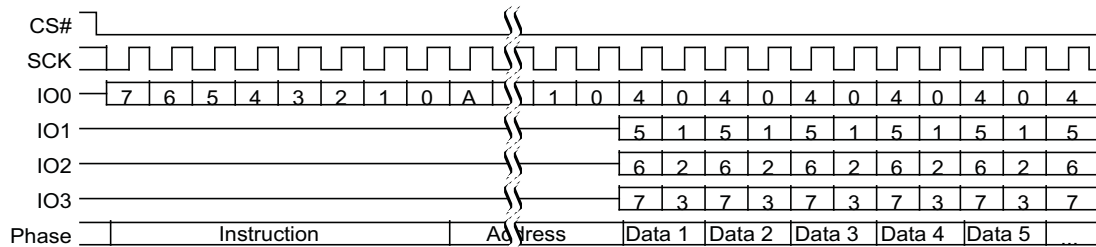

### 9.4.5 Dual I/O Read (DIOR BBh or 4DIOR BCh):

The instruction

- BBh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- BBh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- BCh is followed by a 4-byte address (A31-A0)

The Dual I/O Read commands improve throughput with two I/O signals — IO0 (SI) and IO1 (SO). It is similar to the Dual Output Read command but takes input of the address two bits per SCK rising edge. In some applications, the reduced address input time might allow for code execution in place (XIP) i.e. directly from the memory device.

The maximum operating clock frequency for Dual I/O Read is 104 MHz.

For the Dual I/O Read command, there is a latency required after the last address bits are shifted into SI and SO before data begins shifting out of IO0 and IO1. There are different ordering part numbers that select the latency code table used for this command, either the High Performance LC (HPLC) table or the Enhanced High Performance LC (EHPLC) table. The HPLC table does not provide cycles for mode bits so each Dual I/O Read command starts with the 8 bit instruction, followed by address, followed by a latency period.

This latency period (dummy cycles) allows the device internal circuitry enough time to access data at the initial address. During the dummy cycles, the data value on SI and SO are “don’t care” and may be high impedance. The number of dummy cycles is determined by the frequency of SCK ([Table 7.7, Latency Codes for SDR Enhanced High Performance on page 50](#)). The number of dummy cycles is set by the LC bits in the Configuration Register (CR1).

The EHPLC table does provide cycles for mode bits so a series of Dual I/O Read commands may eliminate the 8-bit instruction after the first Dual I/O Read command sends a mode bit pattern of Axh that indicates the following command will also be a Dual I/O Read command. The first Dual I/O Read command in a series starts with the 8-bit instruction, followed by address, followed by four cycles of mode bits, followed by a latency period. If the mode bit pattern is Axh the next command is assumed to be an additional Dual I/O Read command that does not provide instruction bits. That command starts with address, followed by mode bits, followed by latency.

The Enhanced High Performance feature removes the need for the instruction sequence and greatly improves code execution (XIP). The upper nibble (bits 7-4) of the Mode bits control the length of the next Dual I/O Read command through the inclusion or exclusion of the first byte instruction code. The lower nibble (bits 3-0) of the Mode bits are “don’t care” (“x”) and may be high impedance. If the Mode bits equal Axh, then the device remains in Dual I/O Enhanced High Performance Read Mode and the next address can be entered (after CS# is raised high and then asserted low) without the BBh or BCh instruction, as shown in [Figure 9.34](#); thus, eliminating eight cycles for the command sequence. The following sequences will release the device from Dual I/O Enhanced High Performance Read mode; after which, the device can accept standard SPI commands:

1. During the Dual I/O Enhanced High Performance Command Sequence, if the Mode bits are any value other than Axh, then the next time CS# is raised high the device will be released from Dual I/O Read Enhanced High Performance Read mode.

During any operation, if CS# toggles high to low to high for eight cycles (or less) and data input (IO0 and IO1) are not set for a valid instruction sequence, then the device will be released from Dual I/O Enhanced High Performance Read mode. Note that the four mode bit cycles are part of the device’s internal circuitry latency time to access the initial address after the last address cycle that is clocked into IO0 (SI) and IO1 (SO).


It is important that the I/O signals be set to high-impedance at or before the falling edge of the first data out clock. At higher clock speeds the time available to turn off the host outputs before the memory device begins to drive (bus turn around) is diminished. It is allowed and may be helpful in preventing I/O signal contention, for the host system to turn off the I/O signal outputs (make them high impedance) during the last two “don’t care” mode cycles or during any dummy cycles.

Following the latency period the memory content, at the address given, is shifted out two bits at a time through IO0 (SI) and IO1 (SO). Two bits are shifted out at the SCK frequency at the falling edge of SCK signal.


The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

CS# should not be driven high during mode or dummy bits as this may make the mode bits indeterminate.


**Figure 9.31** Dual I/O Read Command Sequence (3-Byte Address, BBh [ExtAdd=0], HPLC=00b)

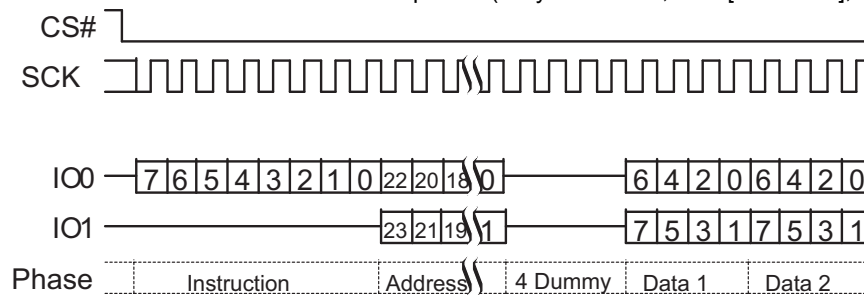


**Figure 9.32** Dual I/O Read Command Sequence (4-Byte Address, BBh [ExtAdd=1], HPLC=10b)

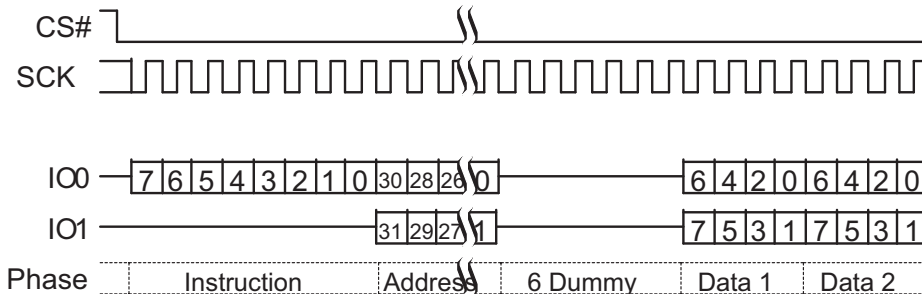

**Figure 9.33** Dual I/O Read Command Sequence (4-Byte Address, BCh or BBh [ExtAdd=1], EHPLC=10b)

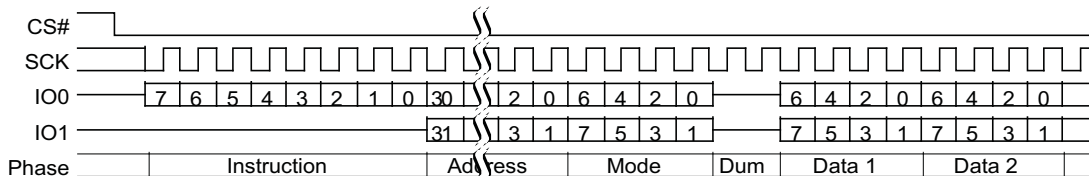

**Figure 9.34** Continuous Dual I/O Read Command Sequence (4-Byte Address, BCh or BBh [ExtAdd=1], EHPLC=10b)

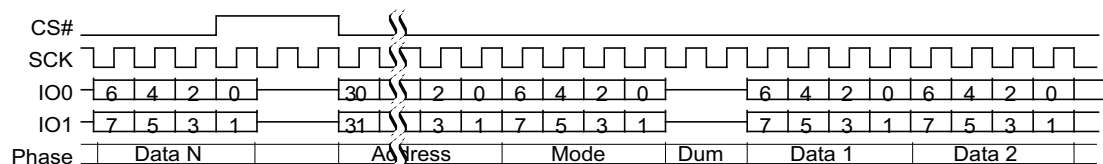

### 9.4.6 Quad I/O Read (QIOR EBh or 4QIOR ECh):

The instruction

- EBh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- EBh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- ECh is followed by a 4-byte address (A31-A0)

The Quad I/O Read command improves throughput with four I/O signals — IO0-IO3. It is similar to the Quad Output Read command but allows input of the address bits four bits per serial SCK clock. In some applications, the reduced instruction overhead might allow for code execution (XIP) directly from the S25FL512S device. The QUAD bit of the Configuration Register must be set (CR Bit1=1) to enable the Quad capability of the S25FL512S device.

The maximum operating clock frequency for Quad I/O Read is 104 MHz.

For the Quad I/O Read command, there is a latency required after the mode bits (described below) before data begins shifting out of IO0-IO3. This latency period (i.e., dummy cycles) allows the device's internal circuitry enough time to access data at the initial address. During latency cycles, the data value on IO0-IO3 are "don't care" and may be high impedance. The number of dummy cycles is determined by the frequency of SCK and the latency code table (refer to [Table 7.7, Latency Codes for SDR Enhanced High Performance on page 50](#)). There are different ordering part numbers that select the latency code table used for this command, either the High Performance LC (HPLC) table or the Enhanced High Performance LC (EHPLC) table. The number of dummy cycles is set by the LC bits in the Configuration Register (CR1). However, both latency code tables use the same latency values for the Quad I/O Read command.

Following the latency period, the memory contents at the address given, is shifted out four bits at a time through IO0-IO3. Each nibble (4 bits) is shifted out at the SCK frequency by the falling edge of the SCK signal.

The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

Address jumps can be done without the need for additional Quad I/O Read instructions. This is controlled through the setting of the Mode bits (after the address sequence, as shown in [Figure 9.35 on page 85](#) or [Figure 9.37 on page 85](#)). This added feature removes the need for the instruction sequence and greatly improves code execution (XIP). The upper nibble (bits 7-4) of the Mode bits control the length of the next Quad I/O instruction through the inclusion or exclusion of the first byte instruction code. The lower nibble (bits 3-0) of the Mode bits are "don't care" ("x"). If the Mode bits equal Axh, then the device remains in Quad I/O High Performance Read Mode and the next address can be entered (after CS# is raised high and then asserted low) without requiring the EBh or ECh instruction, as shown in [Figure 9.36 on page 85](#) or [Figure 9.38 on page 85](#); thus, eliminating eight cycles for the command sequence. The following sequences will release the device from Quad I/O High Performance Read mode; after which, the device can accept standard SPI commands:


1. During the Quad I/O Read Command Sequence, if the Mode bits are any value other than Axh, then the next time CS# is raised high the device will be released from Quad I/O High Performance Read mode.

During any operation, if CS# toggles high to low to high for eight cycles (or less) and data input (IO0-IO3) are not set for a valid instruction sequence, then the device will be released from Quad I/O High Performance Read mode. Note that the two mode bit clock cycles and additional wait states (i.e., dummy cycles) allow the device's internal circuitry latency time to access the initial address after the last address cycle that is clocked into IO0-IO3.


It is important that the IO0-IO3 signals be set to high-impedance at or before the falling edge of the first data out clock. At higher clock speeds the time available to turn off the host outputs before the memory device begins to drive (bus turn around) is diminished. It is allowed and may be helpful in preventing IO0-IO3 signal contention, for the host system to turn off the IO0-IO3 signal outputs (make them high impedance) during the last "don't care" mode cycle or during any dummy cycles.

CS# should not be driven high during mode or dummy bits as this may make the mode bits indeterminate.


**Figure 9.35** Quad I/O Read Command Sequence (3-Byte Address, EBh [ExtAdd=0], LC=00b)

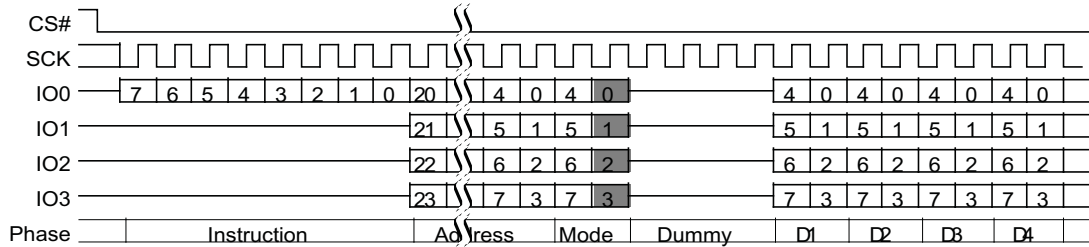


**Figure 9.36** Continuous Quad I/O Read Command Sequence (3-Byte Address), LC=00b

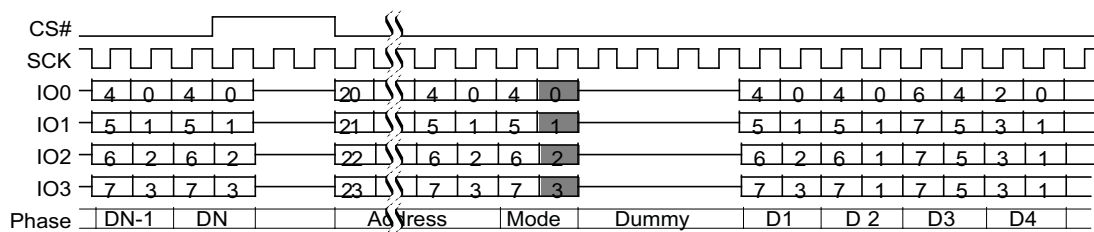

**Figure 9.37** Quad I/O Read Command Sequence(4-Byte Address, ECh or EBh [ExtAdd=1], LC=00b)

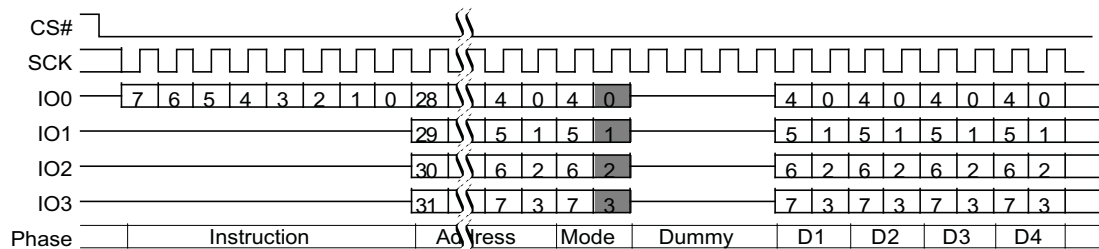

**Figure 9.38** Continuous Quad I/O Read Command Sequence (4-Byte Address), LC=00b

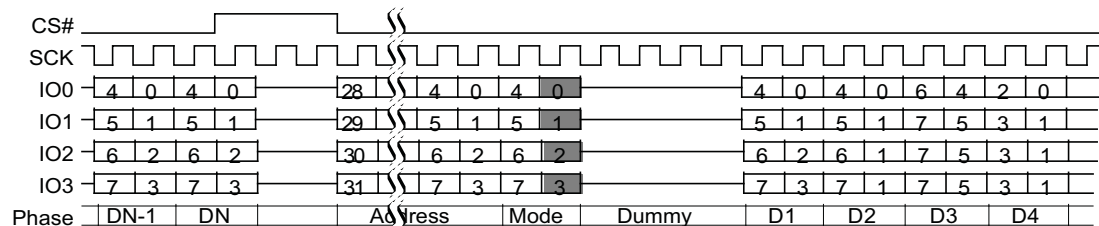

### 9.4.7 DDR Fast Read (DDRF 0Dh, 4DDRF 0Eh)

The instruction

- 0Dh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 0Dh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 0Eh is followed by a 4-byte address (A31-A0)

The DDR Fast Read command improves throughput by transferring address and data on both the falling and rising edge of SCK. It is similar to the Fast Read command but allows transfer of address and data on every edge of the clock.

The maximum operating clock frequency for DDR Fast Read command is 80 MHz.

For the DDR Fast Read command, there is a latency required after the last address bits are shifted into SI before data begins shifting out of SO. There are different ordering part numbers that select the latency code table used for this command, either the High Performance LC (HPLC) table or the Enhanced High Performance LC (EHPLC) table. The HPLC table does not provide cycles for mode bits so each DDR Fast Read command starts with the 8-bit instruction, followed by address, followed by a latency period.

This latency period (dummy cycles) allows the device internal circuitry enough time to access data at the initial address. During the dummy cycles, the data value on SI is "don't care" and may be high impedance. The number of dummy cycles is determined by the frequency of SCK ([Table 7.7, Latency Codes for SDR Enhanced High Performance on page 50](#)). The number of dummy cycles is set by the LC bits in the Configuration Register (CR1).

Then the memory contents, at the address given, is shifted out, in DDR fashion, one bit at a time on each clock edge through SO. Each bit is shifted out at the SCK frequency by the rising and falling edge of the SCK signal.

The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

The EHPLC table does provide cycles for mode bits so a series of DDR Fast Read commands may eliminate the 8-bit instruction after the first DDR Fast Read command sends a mode bit pattern of complementary first and second Nibbles, e.g. A5h, 5Ah, 0Fh, etc., that indicates the following command will also be a DDR Fast Read command. The first DDR Fast Read command in a series starts with the 8-bit instruction, followed by address, followed by four cycles of mode bits, followed by a latency period. If the mode bit pattern is complementary the next command is assumed to be an additional DDR Fast Read command that does not provide instruction bits. That command starts with address, followed by mode bits, followed by latency.

When the EHPLC table is used, address jumps can be done without the need for additional DDR Fast Read instructions. This is controlled through the setting of the Mode bits (after the address sequence, as shown in [Figure 9.39 on page 87](#) and [Figure 9.41 on page 87](#). This added feature removes the need for the eight bit SDR instruction sequence to reduce initial access time (improves XIP performance). The Mode bits control the length of the next DDR Fast Read operation through the inclusion or exclusion of the first byte instruction code. If the upper nibble (IO[7:4]) and lower nibble (IO[3:0]) of the Mode bits are complementary (i.e. 5h and Ah) then the next address can be entered (after CS# is raised high and then asserted low) without requiring the 0Dh or 0Eh instruction, as shown in [Figure 9.40](#) and [Figure 9.42](#), thus, eliminating eight cycles from the command sequence. The following sequences will release the device from this continuous DDR Fast Read mode; after which, the device can accept standard SPI commands:


1. During the DDR Fast Read Command Sequence, if the Mode bits are not complementary the next time CS# is raised high the device will be released from the continuous DDR Fast Read mode.
2. During any operation, if CS# toggles high to low to high for eight cycles (or less) and data input (SI) are not set for a valid instruction sequence, then the device will be released from DDR Fast Read mode.

CS# should not be driven high during mode or dummy bits as this may make the mode bits indeterminate.


The HOLD function is not valid during any part of a Fast DDR Command.

Although the data learning pattern (DLP) is programmable, the following example shows example of the DLP of 34h. The DLP 34h (or 00110100) will be driven on each of the active outputs (i.e. all four IOs on a x4 device, both IOs on a x2 device and the single SO output on a x1 device). This pattern was chosen to cover both DC and AC data transition scenarios. The two DC transition scenarios include data low for a long period of time (two half clocks) followed by a high going transition (001) and the complementary low going transition (110). The two AC transition scenarios include data low for a short period of time (one half clock) followed by a high going transition (101) and the complementary low going transition (010). The DC transitions will typically occur with a starting point closer to the supply rail than the AC transitions that may not have fully settled to their steady state (DC) levels. In many cases the DC transitions will bound the beginning of the data valid period and the AC transitions will bound the ending of the data valid period. These transitions will allow the host controller to identify the beginning and ending of the valid data eye. Once the data eye has been characterized the optimal data capture point can be chosen. See [Section 7.6.11, SPI DDR Data Learning Registers on page 54](#) for more details.


**Figure 9.39** DDR Fast Read Initial Access (3-Byte Address, 0Dh [ExtAdd=0, EHPLC=11b])

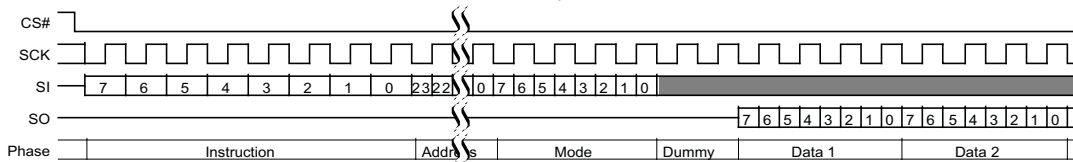

**Figure 9.40** Continuous DDR Fast Read Subsequent Access (3-Byte Address [ExtAdd=0, EHPLC=11b])

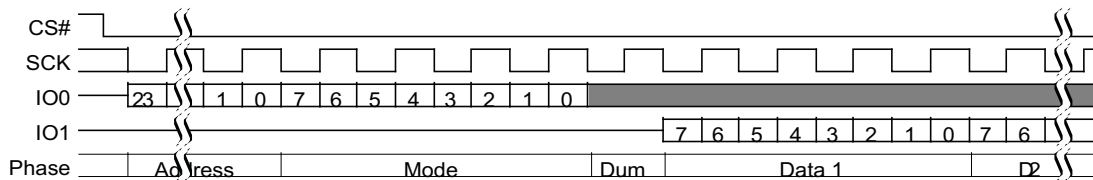


**Figure 9.41** DDR Fast Read Initial Access (4-Byte Address, 0Eh or 0Dh [ExtAdd=1], EHPLC=01b)

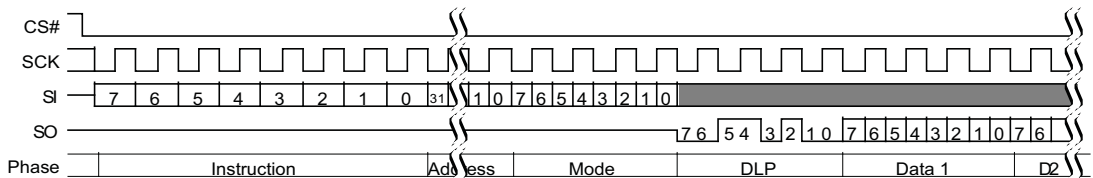

**Note:**

1. Example DLP of 34h (or 00110100).


**Figure 9.42** Continuous DDR Fast Read Subsequent Access (4-Byte Address [ExtAdd=1], EHPLC=01b)

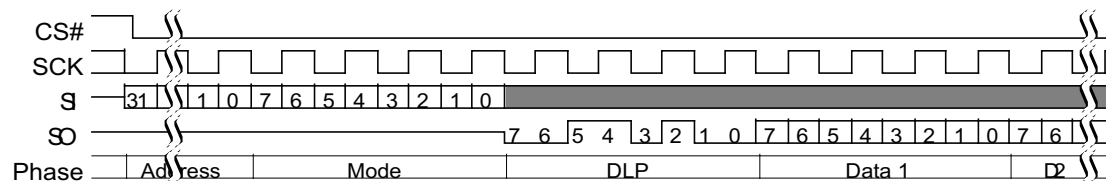

**Note:**

1. Example DLP of 34h (or 00110100).

**Figure 9.43** DDR Fast Read Subsequent Access (4-Byte Address, HPLC=01b)

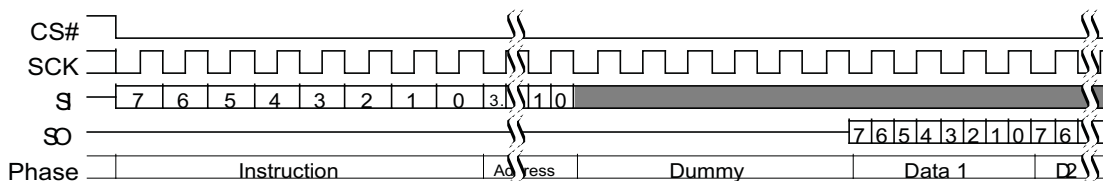



### 9.4.8 DDR Dual I/O Read (BDh, BEh)

The instruction

- BDh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- BDh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- BEh is followed by a 4-byte address (A31-A0)

Then the memory contents, at the address given, is shifted out, in a DDR fashion, two bits at a time on each clock edge through IO0 (SI) and IO1 (SO). Two bits are shifted out at the SCK frequency by the rising and falling edge of the SCK signal.

The DDR Dual I/O Read command improves throughput with two I/O signals — IO0 (SI) and IO1 (SO). It is similar to the Dual I/O Read command but transfers two address, mode, or data bits on every edge of the clock. In some applications, the reduced instruction overhead might allow for code execution (XIP) directly from the S25FL512S device.

The maximum operating clock frequency for DDR Dual I/O Read command is 80 MHz.

For DDR Dual I/O Read commands, there is a latency required after the last address bits are shifted into IO0 and IO1, before data begins shifting out of IO0 and IO1. There are different ordering part numbers that select the latency code table used for this command, either the High Performance LC (HPLC) table or the Enhanced High Performance LC (EHPLC) table. The number of latency (dummy) clocks is determined by the frequency of SCK (refer to [Table 7.6, Latency Codes for DDR High Performance on page 49](#) or [Table 7.8, Latency Codes for DDR Enhanced High Performance on page 50](#)). The number of dummy cycles is set by the LC bits in the Configuration Register (CR1).

The HPLC table does not provide cycles for mode bits so each Dual I/O command starts with the 8 bit instruction, followed by address, followed by a latency period. This latency period allows the device's internal circuitry enough time to access the initial address. During these latency cycles, the data value on SI (IO0) and SO (IO1) are "don't care" and may be high impedance. When the Data Learning Pattern (DLP) is enabled the host system must not drive the IO signals during the dummy cycles. The IO signals must be left high impedance by the host so that the memory device can drive the DLP during the dummy cycles.

The EHPLC table does provide cycles for mode bits so a series of Dual I/O DDR commands may eliminate the 8 bit instruction after the first command sends a complementary mode bit pattern, as shown in [Figure 9.44](#) and [Figure 9.46 on page 89](#). This added feature removes the need for the eight bit SDR instruction sequence and dramatically reduces initial access times (improves XIP performance). The Mode bits control the length of the next DDR Dual I/O Read operation through the inclusion or exclusion of the first byte instruction code. If the upper nibble (IO[7:4]) and lower nibble (IO[3:0]) of the Mode bits are complementary (i.e. 5h and Ah) the device transitions to Continuous DDR Dual I/O Read Mode and the next address can be entered (after CS# is raised high and then asserted low) without requiring the BDh or BEh instruction, as shown in [Figure 9.45 on page 89](#), and thus, eliminating eight cycles from the command sequence. The following sequences will release the device from Continuous DDR Dual I/O Read mode; after which, the device can accept standard SPI commands:

1. During the DDR Dual I/O Read Command Sequence, if the Mode bits are not complementary the next time CS# is raised high and then asserted low the device will be released from DDR Dual I/O Read mode.
2. During any operation, if CS# toggles high to low to high for eight cycles (or less) and data input (IO0 and IO1) are not set for a valid instruction sequence, then the device will be released from DDR Dual I/O Read mode.

The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.

CS# should not be driven high during mode or dummy bits as this may make the mode bits indeterminate. The HOLD function is not valid during Dual I/O DDR commands.


Note that the memory devices may drive the IOs with a preamble prior to the first data value. The preamble is a data learning pattern (DLP) that is used by the host controller to optimize data capture at higher frequencies. The preamble DLP drives the IO bus for the four clock cycles immediately before data is output. The host must be sure to stop driving the IO bus prior to the time that the memory starts outputting the preamble.




The preamble is intended to give the host controller an indication about the round trip time from when the host drives a clock edge to when the corresponding data value returns from the memory device. The host controller will skew the data capture point during the preamble period to optimize timing margins and then use the same skew time to capture the data during the rest of the read operation. The optimized capture point will be determined during the preamble period of every read operation. This optimization strategy is intended to compensate for both the PVT (process, voltage, temperature) of both the memory device and the host controller as well as any system level delays caused by flight time on the PCB.

Although the data learning pattern (DLP) is programmable, the following example shows example of the DLP of 34h. The DLP 34h (or 00110100) will be driven on each of the active outputs (i.e. all four SIOs on a x4 device, both SIOs on a x2 device and the single SO output on a x1 device). This pattern was chosen to cover both DC and AC data transition scenarios. The two DC transition scenarios include data low for a long period of time (two half clocks) followed by a high going transition (001) and the complementary low going transition (110). The two AC transition scenarios include data low for a short period of time (one half clock) followed by a high going transition (101) and the complementary low going transition (010). The DC transitions will typically occur with a starting point closer to the supply rail than the AC transitions that may not have fully settled to their steady state (DC) levels. In many cases the DC transitions will bound the beginning of the data valid period and the AC transitions will bound the ending of the data valid period. These transitions will allow the host controller to identify the beginning and ending of the valid data eye. Once the data eye has been characterized the optimal data capture point can be chosen. See [Section 7.6.11, SPI DDR Data Learning Registers](#) on page 54 for more details.


**Figure 9.44** DDR Dual I/O Read Initial Access (4-Byte Address, BEh or BDh [ExtAdd=1], EHPLC= 01b)

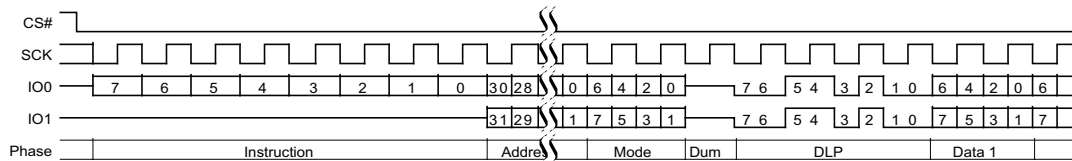

**Figure 9.45** Continuous DDR Dual I/O Read Subsequent Access (4-Byte Address, EHPLC= 01b)

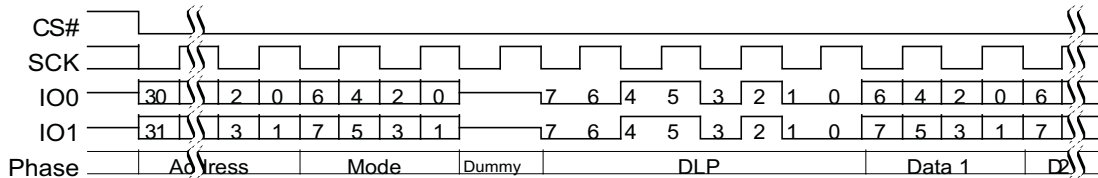

**Figure 9.46** DDR Dual I/O Read (4-Byte Address, BEh or BDh [ExtAdd=1], HPLC=00b)

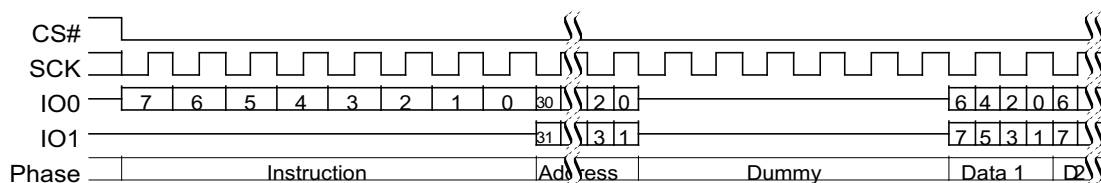

### 9.4.9 DDR Quad I/O Read (EDh, EEh)

The Read DDR Quad I/O command improves throughput with four I/O signals - IO0-IO3. It is similar to the Quad I/O Read command but allows input of the address four bits on every edge of the clock. In some applications, the reduced instruction overhead might allow for code execution (XIP) directly from the S25FL512S device. The QUAD bit of the Configuration Register must be set (CR Bit1=1) to enable the Quad capability.

The instruction

- EDh (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- EDh (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- EEh is followed by a 4-byte address (A31-A0)

The address is followed by mode bits. Then the memory contents, at the address given, is shifted out, in a DDR fashion, with four bits at a time on each clock edge through IO0-IO3.

The maximum operating clock frequency for Read DDR Quad I/O command is 80 MHz.

For Read DDR Quad I/O, there is a latency required after the last address and mode bits are shifted into the IO0-IO3 signals before data begins shifting out of IO0-IO3. This latency period (dummy cycles) allows the device's internal circuitry enough time to access the initial address. During these latency cycles, the data value on IO0-IO3 are "don't care" and may be high impedance. When the Data Learning Pattern (DLP) is enabled the host system must not drive the IO signals during the dummy cycles. The IO signals must be left high impedance by the host so that the memory device can drive the DLP during the dummy cycles.

There are different ordering part numbers that select the latency code table used for this command, either the High Performance LC (HPLC) table or the Enhanced High Performance LC (EHPLC) table. The number of dummy cycles is determined by the frequency of SCK (refer to [Table 7.6, Latency Codes for DDR High Performance on page 49](#)). The number of dummy cycles is set by the LC bits in the Configuration Register (CR1).

Both latency tables provide cycles for mode bits so a series of Quad I/O DDR commands may eliminate the 8 bit instruction after the first command sends a complementary mode bit pattern, as shown in [Figure 9.47](#) and [Figure 9.49](#). This feature removes the need for the eight bit SDR instruction sequence and dramatically reduces initial access times (improves XIP performance). The Mode bits control the length of the next Read DDR Quad I/O operation through the inclusion or exclusion of the first byte instruction code. If the upper nibble (IO[7:4]) and lower nibble (IO[3:0]) of the Mode bits are complementary (i.e. 5h and Ah) the device transitions to Continuous Read DDR Quad I/O Mode and the next address can be entered (after CS# is raised high and then asserted low) without requiring the EDh or EEh instruction, as shown in [Figure 9.48 on page 91](#) and [Figure 9.50 on page 91](#) thus, eliminating eight cycles from the command sequence. The following sequences will release the device from Continuous Read DDR Quad I/O mode; after which, the device can accept standard SPI commands:

1. During the Read DDR Quad I/O Command Sequence, if the Mode bits are not complementary the next time CS# is raised high and then asserted low the device will be released from Read DDR Quad I/O mode.
2. During any operation, if CS# toggles high to low to high for eight cycles (or less) and data input (IO0, IO1, IO2, and IO3) are not set for a valid instruction sequence, then the device will be released from Read DDR Quad I/O mode.

The address can start at any byte location of the memory array. The address is automatically incremented to the next higher address in sequential order after each byte of data is shifted out. The entire memory can therefore be read out with one single read instruction and address 000000h provided. When the highest address is reached, the address counter will wrap around and roll back to 000000h, allowing the read sequence to be continued indefinitely.


CS# should not be driven high during mode or dummy bits as this may make the mode bits indeterminate. The HOLD function is not valid during Quad I/O DDR commands.

Note that the memory devices drive the IOs with a preamble prior to the first data value. The preamble is a pattern that is used by the host controller to optimize data capture at higher frequencies. The preamble drives the IO bus for the four clock cycles immediately before data is output. The host must be sure to stop driving the IO bus prior to the time that the memory starts outputting the preamble.


The preamble is intended to give the host controller an indication about the round trip time from when the host drives a clock edge to when the corresponding data value returns from the memory device. The host controller will skew the data capture point during the preamble period to optimize timing margins and then use the same skew time to capture the data during the rest of the read operation. The optimized capture point will be determined during the preamble period of every read operation. This optimization strategy is intended to compensate for both the PVT (process, voltage, temperature) of both the memory device and the host controller as well as any system level delays caused by flight time on the PCB.

Although the data learning pattern (DLP) is programmable, the following example shows example of the DLP of 34h. The DLP 34h (or 00110100) will be driven on each of the active outputs (i.e. all four SIOs on a x4 device, both SIOs on a x2 device and the single SO output on a x1 device). This pattern was chosen to cover both DC and AC data transition scenarios. The two DC transition scenarios include data low for a long period of time (two half clocks) followed by a high going transition (001) and the complementary low going transition (110). The two AC transition scenarios include data low for a short period of time (one half clock) followed by a high going transition (101) and the complementary low going transition (010). The DC transitions will typically occur with a starting point closer to the supply rail than the AC transitions that may not have fully settled to their steady state (DC) levels. In many cases the DC transitions will bound the beginning of the data valid period and the AC transitions will bound the ending of the data valid period. These transitions will allow the host controller to identify the beginning and ending of the valid data eye. Once the data eye has been characterized the optimal data capture point can be chosen. See *SPI DDR Data Learning Registers* on [page 54](#) for more details.


**Figure 9.47** DDR Quad I/O Read Initial Access (3-Byte Address, EDh [ExtAdd=0], HPLC=11b)

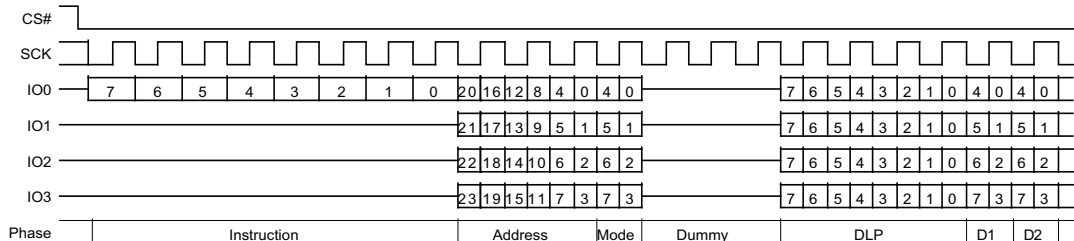

**Figure 9.48** Continuous DDR Quad I/O Read Subsequent Access (3-Byte Address, HPLC=11b)

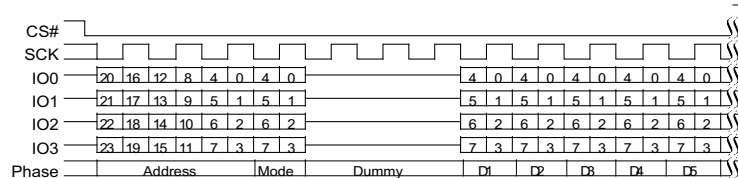


**Figure 9.49** DDR Quad I/O Read Initial Access (4-Byte Address, EEh or EDh [ExtAdd=1], EHPLC=01b)

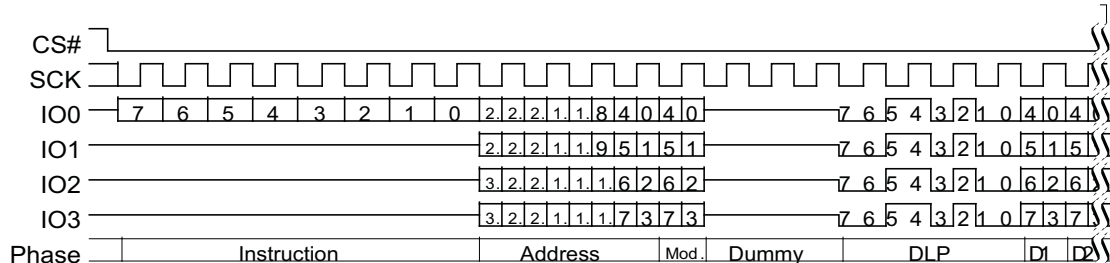

**Note:**

1. Example DLP of 34h (or 00110100).

**Figure 9.50** Continuous DDR Quad I/O Read Subsequent Access (4-Byte Address, EHPLC=01b)

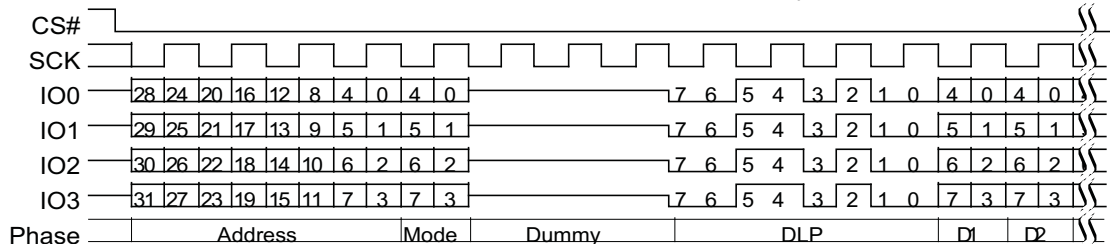

**Note:**

1. Example DLP of 34h (or 00110100).

## 9.5 Program Flash Array Commands

### 9.5.1 Program Granularity

#### 9.5.1.1 Page Programming

Page Programming is done by loading a Page Buffer with data to be programmed and issuing a programming command to move data from the buffer to the memory array. This sets an upper limit on the amount of data that can be programmed with a single programming command. Page Programming allows up to a page size (512 bytes) to be programmed in one operation. The page is aligned on the page size address boundary. It is possible to program from one bit up to a page size in each Page programming operation. It is recommended that a multiple of 16 byte length and aligned Program Blocks be written. For the very best performance, programming should be done in full pages of 512 bytes aligned on 512-byte boundaries with each Page being programmed only once.

#### 9.5.1.2 Single Byte Programming

Single Byte Programming allows full backward compatibility to the standard SPI Page Programming (PP) command by allowing a single byte to be programmed anywhere in the memory array.

### 9.5.2 Page Program (PP 02h or 4PP 12h):

The Page Program (PP) commands allows bytes to be programmed in the memory (changing bits from 1 to 0). Before the Page Program (PP) commands can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device. After the Write Enable (WREN) command has been decoded successfully, the device sets the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The instruction

- 02h (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 02h (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 12h is followed by a 4-byte address (A31-A0)


and at least one data byte on SI. Up to a page can be provided on SI after the 3-byte address with instruction 02h or 4-byte address with instruction 12h has been provided. If the 9 least significant address bits (A8-A0) are not all zero, all transmitted data that goes beyond the end of the current page are programmed from the start address of the same page (from the address whose 9 least significant bits (A8-A0) are all zero) i.e. the address wraps within the page aligned address boundaries. This is a result of only requiring the user to enter one single page address to cover the entire page boundary.

If less than a page of data is sent to the device, these data bytes will be programmed in sequence, starting at the provided address within the page, without having any affect on the other bytes of the same page.

For optimized timings, using the Page Program (PP) command to load the entire page size program buffer within the page boundary will save overall programming time versus loading less than a page size into the program buffer.

The programming process is managed by the flash memory device internal control logic. After a programming command is issued, the programming operation status can be checked using the Read Status Register-1 command. The WIP bit (SR1[0]) will indicate when the programming operation is completed. The P\_ERR bit (SR1[6]) will indicate if an error occurs in the programming operation that prevents successful completion of programming.

**Figure 9.51** Page Program (PP 02h or 4PP 12h) Command Sequence

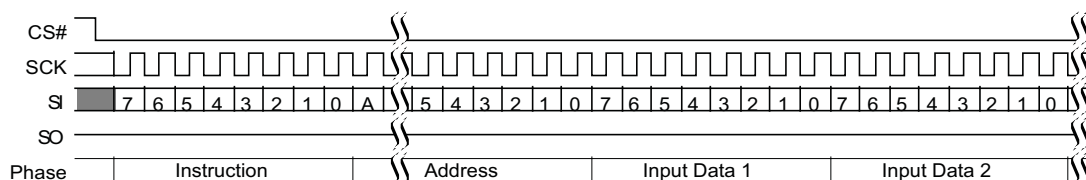

### 9.5.3 Quad Page Program (QPP 32h or 38h, or 4QPP 34h)

The Quad-input Page Program (QPP) command allows bytes to be programmed in the memory (changing bits from 1 to 0). The Quad-input Page Program (QPP) command allows up to a page size (512 bytes) of data to be loaded into the Page Buffer using four signals: IO0-IO3. QPP can improve performance for PROM Programmer and applications that have slower clock speeds (< 12 MHz) by loading 4 bits of data per clock cycle. Systems with faster clock speeds do not realize as much benefit for the QPP command since the inherent page program time becomes greater than the time it takes to clock-in the data. The maximum frequency for the QPP command is 80 MHz.

To use Quad Page Program the Quad Enable Bit in the Configuration Register must be set (QUAD=1). A Write Enable command must be executed before the device will accept the QPP command (Status Register-1, WEL=1).

The instruction


- 32h (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 32h (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 38h (ExtAdd=0) is followed by a 3-byte address (A23-A0) or
- 38h (ExtAdd=1) is followed by a 4-byte address (A31-A0) or
- 34h is followed by a 4-byte address (A31-A0)

and at least one data byte, into the IO signals. Data must be programmed at previously erased (FFh) memory locations.

QPP requires programming to be done one full page at a time. While less than a full page of data may be loaded for programming, the entire page is considered programmed, any locations not filled with data will be left as ones, the same page must not be programmed more than once.

All other functions of QPP are identical to Page Program. The QPP command sequence is shown in the figure below.

**Figure 9.52** Quad 512-byte Page Program Command Sequence

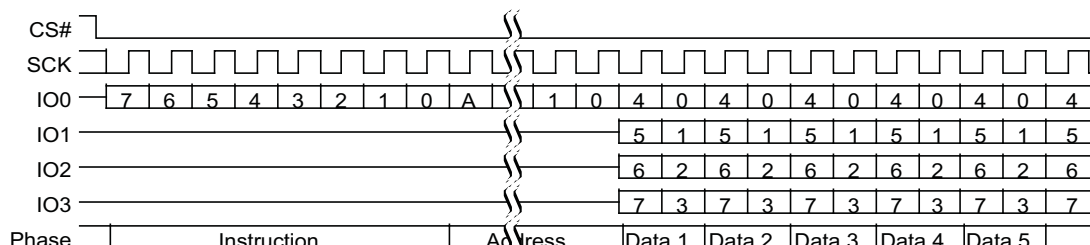

### 9.5.4 Program Suspend (PGSP 85h) and Resume (PGRS 8Ah)

The Program Suspend command allows the system to interrupt a programming operation and then read from any other non-erase-suspended sector or non-program-suspended-page. Program Suspend is valid only during a programming operation.

Commands allowed after the Program Suspend command is issued:

- Read Status Register 1 (RDSR1 05h)
- Read Status Register 2 (RDSR2 07h)


The Write in Progress (WIP) bit in Status Register 1 (SR1[0]) must be checked to know when the programming operation has stopped. The Program Suspend Status bit in the Status Register-2 (SR2[0]) can be used to determine if a programming operation has been suspended or was completed at the time WIP changes to 0. The time required for the suspend operation to complete is  $t_{PSL}$ , see [Table 9.8, Program Suspend AC Parameters on page 104](#).

See [Table 9.6, Commands Allowed During Program or Erase Suspend on page 96](#) for the commands allowed while programming is suspend.


The Program Resume command 8Ah must be written to resume the programming operation after a Program Suspend. If the programming operation was completed during the suspend operation, a resume command is not needed and has no effect if issued. Program Resume commands will be ignored unless a Program operation is suspended.

After a Program Resume command is issued, the WIP bit in the Status Register-1 will be set to a 1 and the programming operation will resume. Program operations may be interrupted as often as necessary e.g. a program suspend command could immediately follow a program resume command but, in order for a program operation to progress to completion there must be some periods of time between resume and the next suspend command greater than or equal to  $t_{PRS}$ . See [Table 9.8, Program Suspend AC Parameters on page 104](#).

**Figure 9.53** Program Suspend (PGSP 85h) Command Sequence

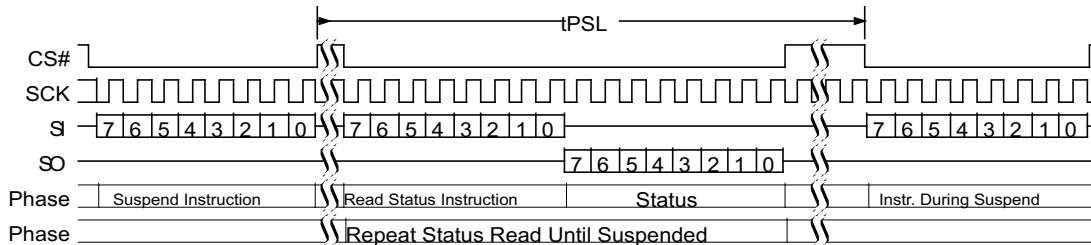

**Figure 9.54** 10.55 Program Resume (PGRS 8Ah) Command Sequence

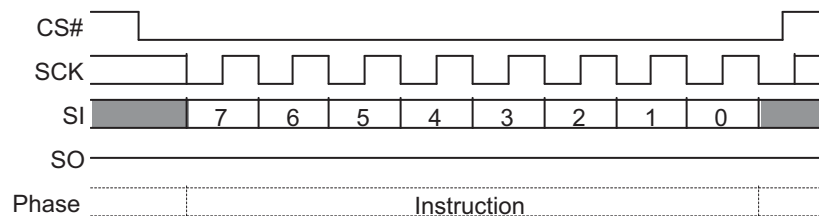

## 9.6 Erase Flash Array Commands

### 9.6.1 Sector Erase (SE D8h or 4SE DCh):

The Sector Erase (SE) command sets all bits in the addressed sector to 1 (all bytes are FFh). Before the Sector Erase (SE) command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device, which sets the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The instruction

- D8h [ExtAdd=0] is followed by a 3-byte address (A23-A0), or
- D8h [ExtAdd=1] is followed by a 4-byte address (A31-A0), or
- DCh is followed by a 4-byte address (A31-A0)


CS# must be driven into the logic high state after the twenty-fourth or thirty-second bit of address has been latched in on SI. This will initiate the erase cycle, which involves the pre-programming and erase of the chosen sector. If CS# is not driven high after the last bit of address, the sector erase operation will not be executed.

As soon as CS# is driven into the logic high state, the internal erase cycle will be initiated. With the internal erase cycle in progress, the user can read the value of the Write-In Progress (WIP) bit to check if the operation has been completed. The WIP bit will indicate a 1 when the erase cycle is in progress and a0 when the erase cycle has been completed.

A Sector Erase (SE) command applied to a sector that has been Write Protected through the Block Protection bits or ASP, will not be executed and will set the E\_ERR status.

ASP has a PPB and a DYB protection bit for each sector.

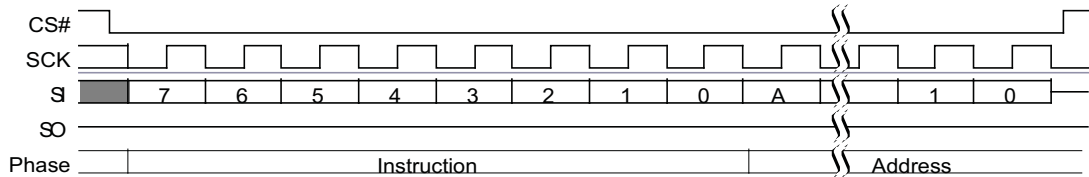

**Figure 9.55** Sector Erase (SE D8h or 4SE DCh) Command Sequence


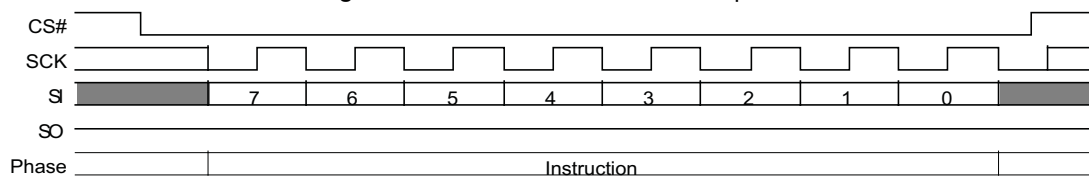
### 9.6.2 Bulk Erase (BE 60h or C7h):

The Bulk Erase (BE) command sets all bits to 1 (all bytes are FFh) inside the entire flash memory array. Before the BE command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device, which sets the Write Enable Latch (WEL) in the Status Register to enable any write operations.

CS# must be driven into the logic high state after the eighth bit of the instruction byte has been latched in on SI. This will initiate the erase cycle, which involves the pre-programming and erase of the entire flash memory array. If CS# is not driven high after the last bit of instruction, the BE operation will not be executed.

As soon as CS# is driven into the logic high state, the erase cycle will be initiated. With the erase cycle in progress, the user can read the value of the Write-In Progress (WIP) bit to determine when the operation has been completed. The WIP bit will indicate a 1 when the erase cycle is in progress and a 0 when the erase cycle has been completed.

A BE command can be executed only when the Block Protection (BP2, BP1, BP0) bits are set to 0's. If the BP bits are not zero, the BE command is not executed and E\_ERR is not set. The BE command will skip any sectors protected by the DYB or PPB and the E\_ERR status will not be set.

**Figure 9.56** Bulk Erase Command Sequence


### 9.6.3 Erase Suspend and Resume Commands (ERSP 75h or ERRS 7Ah)

The Erase Suspend command, allows the system to interrupt a sector erase operation and then read from or program data to, any other sector. Erase Suspend is valid only during a sector erase operation. The Erase Suspend command is ignored if written during the Bulk Erase operation.

When the Erase Suspend command is written during the sector erase operation, the device requires a maximum of  $t_{ESL}$  (erase suspend latency) to suspend the erase operation and update the status bits. See [Table 9.9, Erase Suspend AC Parameters on page 104](#).

Commands allowed after the Erase Suspend command is issued:

- Read Status Register 1 (RDSR1 05h)
- Read Status Register 2 (RDSR2 07h)

The Write in Progress (WIP) bit in Status Register 1 (SR1[0]) must be checked to know when the erase operation has stopped. The Erase Suspend bit in Status Register-2 (SR2[1]) can be used to determine if an erase operation has been suspended or was completed at the time WIP changes to 0.

If the erase operation was completed during the suspend operation, a resume command is not needed and has no effect if issued. Erase Resume commands will be ignored unless an Erase operation is suspended.

See [Table 9.6, Commands Allowed During Program or Erase Suspend on page 96](#) for the commands allowed while erase is suspend.

After the erase operation has been suspended, the sector enters the erase-suspend mode. The system can read data from or program data to the device. Reading at any address within an erase-suspended sector produces undetermined data.

A WREN command is required before any command that will change non-volatile data, even during erase suspend.

The WRR and PPB Erase commands are not allowed during Erase Suspend, it is therefore not possible to alter the Block Protection or PPB bits during Erase Suspend. If there are sectors that may need programming during Erase suspend, these sectors should be protected only by DYB bits that can be turned off during Erase Suspend. However, WRR is allowed immediately following the BRAC command; in this special case the WRR is interpreted as a write to the Bank Address Register, not a write to SR1 or CR1.

If a program command is sent for a location within an erase suspended sector the program operation will fail with the P\_ERR bit set.


After an erase-suspended program operation is complete, the device returns to the erase-suspend mode. The system can determine the status of the program operation by reading the WIP bit in the Status Register, just as in the standard program operation.

The Erase Resume command 7Ah must be written to resume the erase operation if an Erase is suspend. Erase Resume commands will be ignored unless an Erase is Suspend.


After an Erase Resume command is sent, the WIP bit in the status register will be set to a 1 and the erase operation will continue. Further Resume commands are ignored.

Erase operations may be interrupted as often as necessary e.g. an erase suspend command could immediately follow an erase resume command but, in order for an erase operation to progress to completion there must be some periods of time between resume and the next suspend command greater than or equal to  $t_{ERS}$ . See [Table 9.9, Erase Suspend AC Parameters on page 104](#).

**Figure 9.57 Erase Suspend (ERSP 75h) Command Sequence**

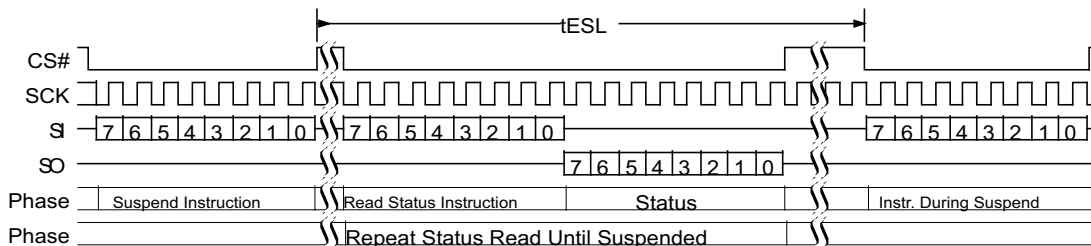

**Figure 9.58 Erase Resume (ERRS 7Ah) Command Sequence**

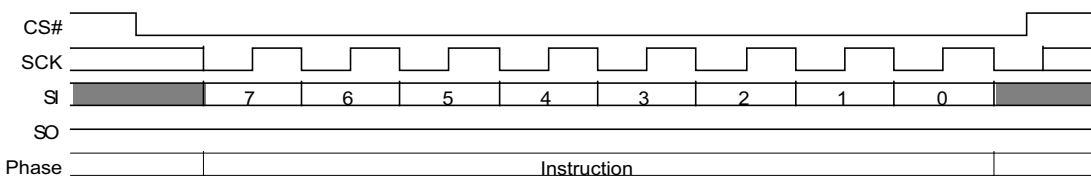

**Table 9.6 Commands Allowed During Program or Erase Suspend**

| Instruction Name | Instruction Code (Hex) | Allowed During Erase Suspend | Allowed During Program Suspend | Comment                                                                                                                      |
|------------------|------------------------|------------------------------|--------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| BRAC             | B9                     | X                            | X                              | Bank address register may need to be changed during a suspend to reach a sector for read or program.                         |
| BRRD             | 16                     | X                            | X                              | Bank address register may need to be changed during a suspend to reach a sector for read or program.                         |
| BRWR             | 17                     | X                            | X                              | Bank address register may need to be changed during a suspend to reach a sector for read or program.                         |
| CLSR             | 30                     | X                            |                                | Clear status may be used if a program operation fails during erase suspend.                                                  |
| DYBRD            | E0                     | X                            |                                | It may be necessary to remove and restore dynamic protection during erase suspend to allow programming during erase suspend. |
| DYBWR            | E1                     | X                            |                                | It may be necessary to remove and restore dynamic protection during erase suspend to allow programming during erase suspend. |



**Table 9.6** Commands Allowed During Program or Erase Suspend (Continued)

| Instruction Name | Instruction Code (Hex) | Allowed During Erase Suspend | Allowed During Program Suspend | Comment                                                                                                                                 |
|------------------|------------------------|------------------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| ERRS             | 7A                     | X                            |                                | Required to resume from erase suspend.                                                                                                  |
| DDRFR            | 0D                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| 4DDRFR           | 0E                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| FAST_READ        | 0B                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| 4FAST_READ       | 0C                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| MBR              | FF                     | X                            | X                              | May need to reset a read operation during suspend.                                                                                      |
| PGRS             | 8A                     | X                            | X                              | Needed to resume a program operation. A program resume may also be used during nested program suspend within an erase suspend.          |
| PGSP             | 85                     | X                            |                                | Program suspend allowed during erase suspend.                                                                                           |
| PP               | 02                     | X                            |                                | Required for array program during erase suspend.                                                                                        |
| 4PP              | 12                     | X                            |                                | Required for array program during erase suspend.                                                                                        |
| PPBRD            | E2                     | X                            |                                | Allowed for checking persistent protection before attempting a program command during erase suspend.                                    |
| QPP              | 32, 38                 | X                            |                                | Required for array program during erase suspend.                                                                                        |
| 4QPP             | 34                     | X                            |                                | Required for array program during erase suspend.                                                                                        |
| 4READ            | 13                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| RDCR             | 35                     | X                            | X                              |                                                                                                                                         |
| DIOR             | BB                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| 4DIOR            | BC                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| DOR              | 3B                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| 4DOR             | 3C                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| DDRDIOR          | BD                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| 4DDRDIOR         | BE                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| DDRQIOR          | ED                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| DDRQIOR4         | EE                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| QIOR             | EB                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| 4QIOR            | EC                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| QOR              | 6B                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| 4QOR             | 6C                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| RDSR1            | 05                     | X                            | X                              | Needed to read WIP to determine end of suspend process.                                                                                 |
| RDSR2            | 07                     | X                            | X                              | Needed to read suspend status to determine whether the operation is suspended or complete.                                              |
| READ             | 03                     | X                            | X                              | All array reads allowed in suspend.                                                                                                     |
| RESET            | F0                     | X                            | X                              | Reset allowed anytime.                                                                                                                  |
| WREN             | 06                     | X                            |                                | Required for program command within erase suspend.                                                                                      |
| WRR              | 01                     | X                            | X                              | Bank register may need to be changed during a suspend to reach a sector needed for read or program. WRR is allowed when following BRAC. |

## 9.7 One Time Program Array Commands


### 9.7.1 OTP Program (OTPP 42h):

The OTP Program command programs data in the One Time Program region, which is in a different address space from the main array data. The OTP region is 1024 bytes so, the address bits from A23 to A10 must be zero for this command. Refer to [Section 7.5, OTP Address Space on page 45](#) for details on the OTP region. The protocol of the OTP Program command is the same as the Page Program command. Before the OTP Program command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device, which sets the Write Enable Latch (WEL) in the Status Register to enable any write operations.

To program the OTP array in bit granularity, the rest of the bits within a data byte can be set to 1.

Each region in the OTP memory space can be programmed one or more times, provided that the region is not locked. Attempting to program zeros in a region that is locked will fail with the P\_ERR bit in SR1 set to 1. Programming ones, even in a protected area does not cause an error and does not set P\_ERR. Subsequent OTP programming can be performed only on the un-programmed bits (that is, 1 data).


Figure 9.59 Page Program (OTPP 42h) Command Sequence

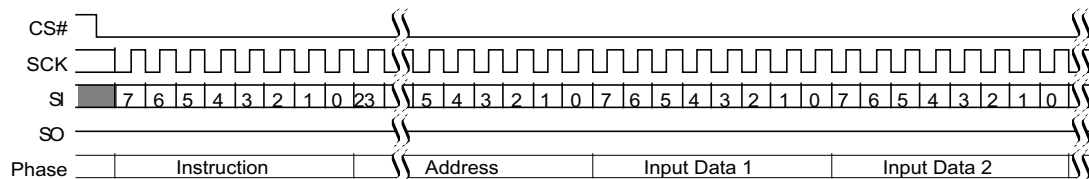

### 9.7.2 OTP Read (OTPR 4Bh):

The OTP Read command reads data from the OTP region. The OTP region is 1024 bytes so, the address bits from A23 to A10 must be zero for this command. Refer to [OTP Address Space on page 45](#) for details on the OTP region. The protocol of the OTP Read command is similar to the Fast Read command except that it will not wrap to the starting address after the OTP address is at its maximum; instead, the data beyond the maximum OTP address will be undefined. Also, the OTP Read command is not affected by the latency code. The OTP read command always has one dummy byte of latency as shown below.

Figure 9.60 Read OTP (OTPR 4Bh) Command Sequence

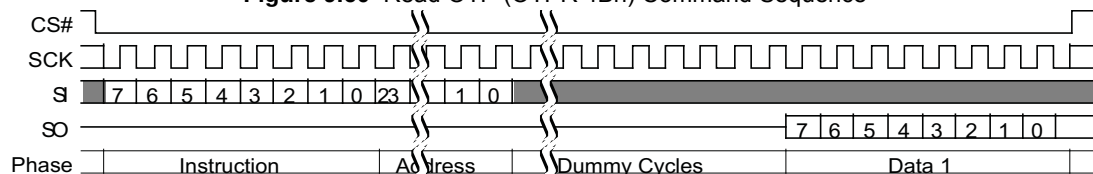


## 9.8 Advanced Sector Protection Commands

### 9.8.1 ASP Read (ASPRD 2Bh)

The ASP Read instruction 2Bh is shifted into SI by the rising edge of the SCK signal. Then the 16-bit ASP register contents is shifted out on the serial output SO, least significant byte first. Each bit is shifted out at the SCK frequency by the falling edge of the SCK signal. It is possible to read the ASP register continuously by providing multiples of 16 clock cycles. The maximum operating clock frequency for the ASP Read (ASPRD) command is 133 MHz.

Figure 9.61 ASPRD Command

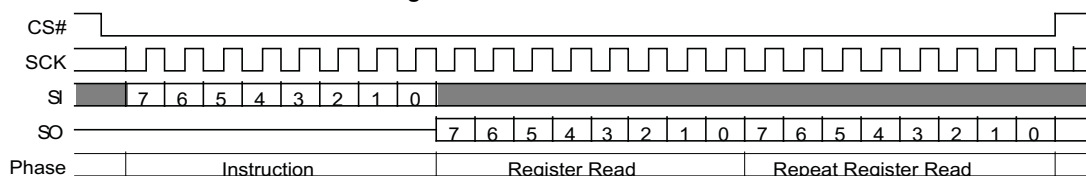

### 9.8.2 ASP Program (ASPP 2Fh)


Before the ASP Program (ASPP) command can be accepted by the device, a Write Enable (WREN) command must be issued. After the Write Enable (WREN) command has been decoded, the device will set the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The ASPP command is entered by driving CS# to the logic low state, followed by the instruction and two data bytes on SI, least significant byte first. The ASP Register is two data bytes in length.

The ASPP command affects the P\_ERR and WIP bits of the Status and Configuration Registers in the same manner as any other programming operation.

CS# input must be driven to the logic high state after the sixteenth bit of data has been latched in. If not, the ASPP command is not executed. As soon as CS# is driven to the logic high state, the self-timed ASPP operation is initiated. While the ASPP operation is in progress, the Status Register may be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed ASPP operation, and is a 0 when it is completed. When the ASPP operation is completed, the Write Enable Latch (WEL) is set to a 0.


Figure 9.62 ASPP (2Fh) Command

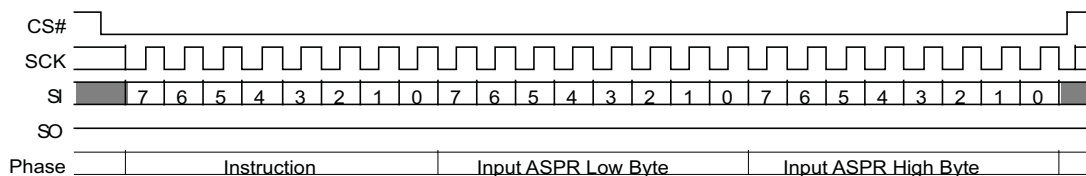

### 9.8.3 DYB Read (DYBRD E0h)

The instruction E0h is latched into SI by the rising edge of the SCK signal. Followed by the 32-bit address selecting location zero within the desired sector (note, the high order address bits not used by a particular density device must be zero). Then the 8-bit DYB access register contents are shifted out on the serial output SO. Each bit is shifted out at the SCK frequency by the falling edge of the SCK signal. It is possible to read the same DYB access register continuously by providing multiples of eight clock cycles. The address of the DYB register does not increment so this is not a means to read the entire DYB array. Each location must be read with a separate DYB Read command. The maximum operating clock frequency for READ command is 133 MHz.

Figure 9.63 DYBRD Command Sequence

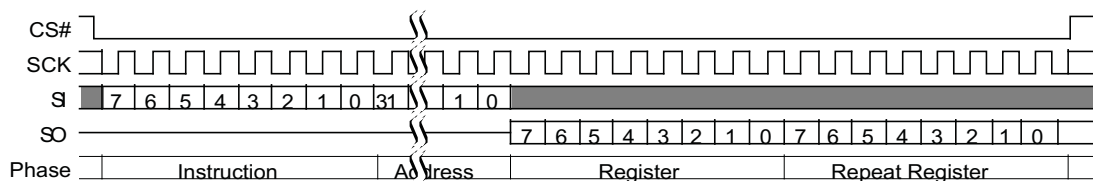

### 9.8.4 DYB Write (DYBWR E1h)


Before the DYB Write (DYBWR) command can be accepted by the device, a Write Enable (WREN) command must be issued. After the Write Enable (WREN) command has been decoded, the device will set the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The DYBWR command is entered by driving CS# to the logic low state, followed by the instruction, the 32-bit address selecting location zero within the desired sector (note, the high order address bits not used by a particular density device must be zero), then the data byte on SI. The DYB Access Register is one data byte in length.

The DYBWR command affects the P\_ERR and WIP bits of the Status and Configuration Registers in the same manner as any other programming operation. CS# must be driven to the logic high state after the eighth bit of data has been latched in. If not, the DYBWR command is not executed. As soon as CS# is driven to the logic high state, the self-timed DYBWR operation is initiated. While the DYBWR operation is in progress, the Status Register may be read to check the value of the Write-In Progress (WIP) bit. The Write-

In Progress (WIP) bit is a 1 during the self-timed DYBWR operation, and is a 0 when it is completed. When the DYBWR operation is completed, the Write Enable Latch (WEL) is set to a 0.

**Figure 9.64 DYBWR (E1h) Command Sequence**

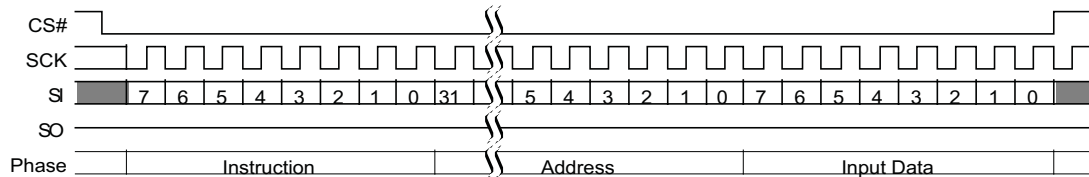


### 9.8.5 PPB Read (PPBRD E2h)

The instruction E2h is shifted into SI by the rising edges of the SCK signal, followed by the 32-bit address selecting location zero within the desired sector (note, the high order address bits not used by a particular density device must be zero) Then the 8-bit PPB access register contents are shifted out on SO.

It is possible to read the same PPB access register continuously by providing multiples of eight clock cycles. The address of the PPB register does not increment so this is not a means to read the entire PPB array. Each location must be read with a separate PPB Read command. The maximum operating clock frequency for the PPB Read command is 133 MHz.

**Figure 9.65 PPBRD (E2h) Command Sequence**

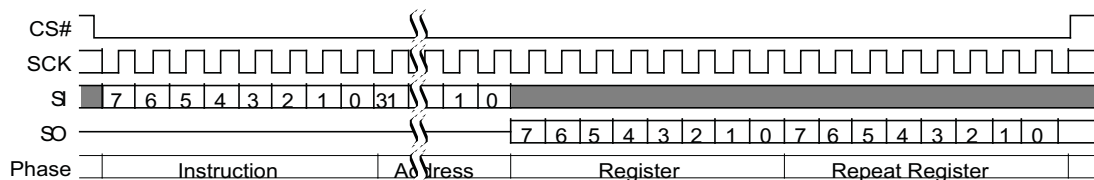

### 9.8.6 PPB Program (PPBP E3h)


Before the PPB Program (PPBP) command can be accepted by the device, a Write Enable (WREN) command must be issued. After the Write Enable (WREN) command has been decoded, the device will set the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The PPBP command is entered by driving CS# to the logic low state, followed by the instruction, followed by the 32-bit address selecting location zero within the desired sector (note, the high order address bits not used by a particular density device must be zero).

The PPBP command affects the P\_ERR and WIP bits of the Status and Configuration Registers in the same manner as any other programming operation.

CS# must be driven to the logic high state after the last bit of address has been latched in. If not, the PPBP command is not executed. As soon as CS# is driven to the logic high state, the self-timed PPBP operation is initiated. While the PPBP operation is in progress, the Status Register may be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed PPBP operation, and is a 0 when it is completed. When the PPBP operation is completed, the Write Enable Latch (WEL) is set to a 0.

**Figure 9.66 PPBP (E3h) Command Sequence**

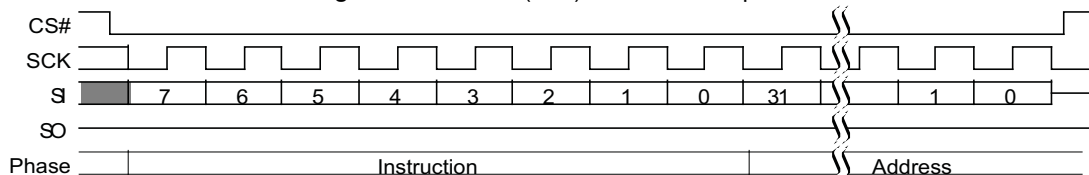

### 9.8.7 PPB Erase (PPBE E4h)


The PPB Erase (PPBE) command sets all PPB bits to 1. Before the PPB Erase command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device, which sets the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The instruction E4h is shifted into SI by the rising edges of the SCK signal.

CS# must be driven into the logic high state after the eighth bit of the instruction byte has been latched in on SI. This will initiate the beginning of internal erase cycle, which involves the pre-programming and erase of the entire PPB memory array. Without CS# being driven to the logic high state after the eighth bit of the instruction, the PPB erase operation will not be executed.

With the internal erase cycle in progress, the user can read the value of the Write-In Progress (WIP) bit to check if the operation has been completed. The WIP bit will indicate a 1 when the erase cycle is in progress and a 0 when the erase cycle has been completed. Erase suspend is not allowed during PPB Erase.


**Figure 9.67** PPB Erase (PPBE E4h) Command Sequence

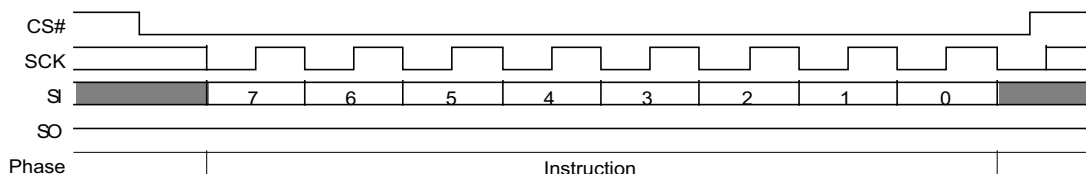

### 9.8.8 PPB Lock Bit Read (PLBRD A7h)

The PPB Lock Bit Read (PLBRD) command allows the PPB Lock Register contents to be read out of SO. It is possible to read the PPB lock register continuously by providing multiples of eight clock cycles. The PPB Lock Register contents may only be read when the device is in standby state with no other operation in progress. It is recommended to check the Write-In Progress (WIP) bit of the Status Register before issuing a new command to the device.

**Figure 9.68** PPB Lock Register Read Command Sequence

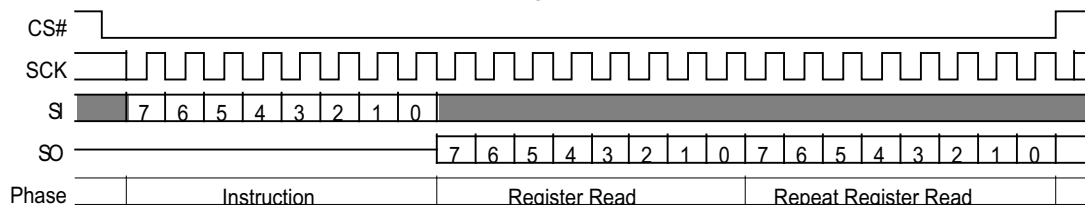


### 9.8.9 PPB Lock Bit Write (PLBWR A6h)

The PPB Lock Bit Write (PLBWR) command clears the PPB Lock Register to zero. Before the PLBWR command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device, which sets the Write Enable Latch (WEL) in the Status Register to enable any write operations.

The PLBWR command is entered by driving CS# to the logic low state, followed by the instruction.

CS# must be driven to the logic high state after the eighth bit of instruction has been latched in. If not, the PLBWR command is not executed. As soon as CS# is driven to the logic high state, the self-timed PLBWR operation is initiated. While the PLBWR operation is in progress, the Status Register may still be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed PLBWR operation, and is a 0 when it is completed. When the PLBWR operation is completed, the Write Enable Latch (WEL) is set to a 0. The maximum clock frequency for the PLBWR command is 133 MHz.

Figure 9.69 PPB Lock Bit Write (PLBWR A6h) Command Sequence

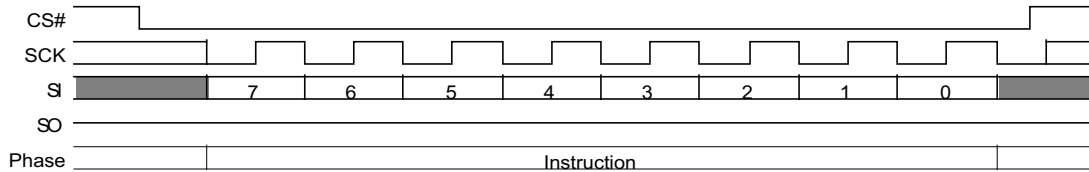

### 9.8.10 Password Read (PASSRD E7h)

The correct password value may be read only after it is programmed and before the Password Mode has been selected by programming the Password Protection Mode bit to 0 in the ASP Register (ASP[2]). After the Password Protection Mode is selected the PASSRD command is ignored.

The PASSRD command is shifted into SI. Then the 64-bit Password is shifted out on the serial output SO, least significant byte first, most significant bit of each byte first. Each bit is shifted out at the SCK frequency by the falling edge of the SCK signal. It is possible to read the Password continuously by providing multiples of 64 clock cycles. The maximum operating clock frequency for the PASSRD command is 133 MHz.

Figure 9.70 Password Read (PASSRD E7h) Command Sequence



### 9.8.11 Password Program (PASSP E8h)


Before the Password Program (PASSP) command can be accepted by the device, a Write Enable (WREN) command must be issued and decoded by the device. After the Write Enable (WREN) command has been decoded, the device sets the Write Enable Latch (WEL) to enable the PASSP operation.

The password can only be programmed before the Password Mode is selected by programming the Password Protection Mode bit to 0 in the ASP Register (ASP[2]). After the Password Protection Mode is selected the PASSP command is ignored.

The PASSP command is entered by driving CS# to the logic low state, followed by the instruction and the password data bytes on SI, least significant byte first, most significant bit of each byte first. The password is sixty-four (64) bits in length.

CS# must be driven to the logic high state after the sixty-fourth (64<sup>th</sup>) bit of data has been latched. If not, the PASSP command is not executed. As soon as CS# is driven to the logic high state, the self-timed PASSP operation is initiated. While the PASSP operation is in progress, the Status Register may be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed PASSP cycle, and is a 0 when it is completed. The PASSP command can report a program error in the P\_ERR bit of the status register. When the PASSP operation is completed, the Write Enable Latch (WEL) is set to a 0. The maximum clock frequency for the PASSP command is 133 MHz.

Figure 9.71 Password Program (PASSP E8h) Command Sequence

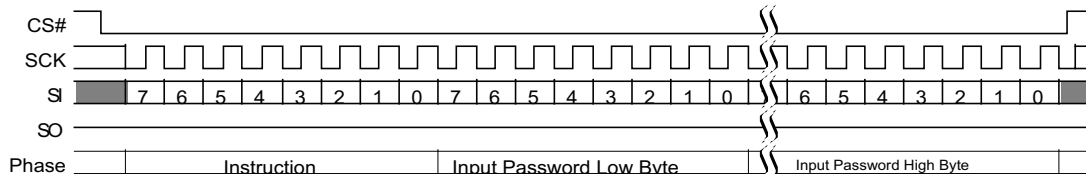

### 9.8.12 Password Unlock (PASSU E9h)


The PASSU command is entered by driving CS# to the logic low state, followed by the instruction and the password data bytes on SI, least significant byte first, most significant bit of each byte first. The password is sixty-four (64) bits in length.

CS# must be driven to the logic high state after the sixty-fourth (64<sup>th</sup>) bit of data has been latched. If not, the PASSU command is not executed. As soon as CS# is driven to the logic high state, the self-timed PASSU operation is initiated. While the PASSU operation is in progress, the Status Register may be read to check the value of the Write-In Progress (WIP) bit. The Write-In Progress (WIP) bit is a 1 during the self-timed PASSU cycle, and is a 0 when it is completed.

If the PASSU command supplied password does not match the hidden password in the Password Register, an error is reported by setting the P\_ERR bit to 1. The WIP bit of the status register also remains set to 1. It is necessary to use the CLSR command to clear the status register, the RESET command to software reset the device, or drive the RESET# input low to initiate a hardware reset, in order to return the P\_ERR and WIP bits to 0. This returns the device to standby state, ready for new commands such as a retry of the PASSU command.

If the password does match, the PPB Lock bit is set to 1. The maximum clock frequency for the PASSU command is 133 MHz.

**Figure 9.72 Password Unlock (PASSU E9h) Command Sequence**

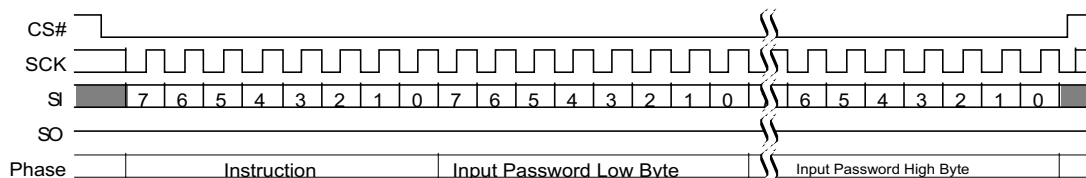


## 9.9 Reset Commands

### 9.9.1 Software Reset Command (RESET F0h)

The Software Reset command (RESET) restores the device to its initial power up state, except for the volatile FREEZE bit in the Configuration register CR1[1] and the volatile PPB Lock bit in the PPB Lock Register. The Freeze bit and the PPB Lock bit will remain set at their last value prior to the software reset. To clear the FREEZE bit and set the PPB Lock bit to its protection mode selected power on state, a full power-on-reset sequence or hardware reset must be done. Note that the non-volatile bits in the configuration register, TBPROT, TBPARM, and BPNV, retain their previous state after a Software Reset. The Block Protection bits BP2, BP1, and BP0, in the status register will only be reset if they are configured as volatile via the BPNV bit in the Configuration Register (CR1[3]) and FREEZE is cleared to zero. The software reset cannot be used to circumvent the FREEZE or PPB Lock bit protection mechanisms for the other security configuration bits. The reset command is executed when CS# is brought to high state and requires  $t_{RPH}$  time to execute.

**Figure 9.73 Software Reset (RESET F0h) Command Sequence**

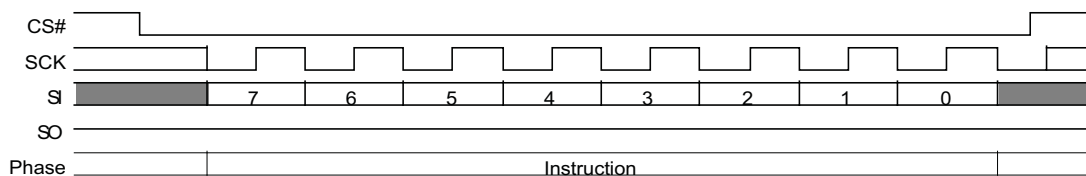


### 9.9.2 Mode Bit Reset (MBR FFh)

The Mode Bit Reset (MBR) command can be used to return the device from continuous high performance read mode back to normal standby awaiting any new command. Because some device packages lack a hardware RESET# input and a device that is in a continuous high performance read mode may not recognize any normal SPI command, a system hardware reset or software reset command may not be recognized by the device. It is recommended to use the MBR command after a system reset when the RESET# signal is not available or, before sending a software reset, to ensure the device is released from continuous high performance read mode.



The MBR command sends Ones on SI or IO0 for 8 SCK cycles. IO1 to IO3 are “don’t care” during these cycles.

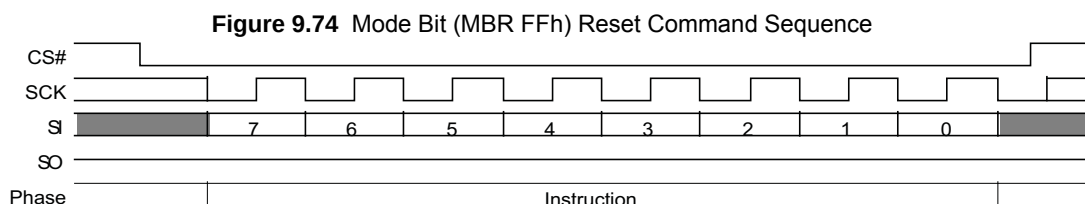

## 9.10 Embedded Algorithm Performance Tables

**Table 9.7** Program and Erase Performance

| Symbol   | Parameter                                                                  | Min | Typ (1) | Max (2)      | Unit    |
|----------|----------------------------------------------------------------------------|-----|---------|--------------|---------|
| $t_W$    | WRR Write Time                                                             |     | 560     | 2000         | ms      |
| $t_{PP}$ | Page Programming (512 bytes)                                               |     | 340     | 750/1300 (3) | $\mu$ s |
| $t_{SE}$ | Sector Erase Time<br>(256-kB logical sectors = 4 x 64 kB physical sectors) |     | 520     | 2600         | ms      |
| $t_{BE}$ | Bulk Erase Time (S25FL512S)                                                |     | 103     | 460          | sec     |

**Notes:**

1. Typical program and erase times assume the following conditions: 25°C,  $V_{CC} = 3.0V$ ; 10,000 cycles; checkerboard data pattern.
2. Under worst case conditions of 90°C; 100,000 cycles max.
3. Industrial temperature range / Industrial Plus temperature range.

**Table 9.8** Program Suspend AC Parameters

| Parameter                                            | Min  | Typical | Max | Unit    | Comments                                                                                                                                         |
|------------------------------------------------------|------|---------|-----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Program Suspend Latency ( $t_{PSL}$ )                |      |         | 40  | $\mu$ s | The time from Program Suspend command until the WIP bit is 0                                                                                     |
| Program Resume to next Program Suspend ( $t_{PRS}$ ) | 0.06 | 100     |     | $\mu$ s | Minimum is the time needed to issue the next Program Suspend command but $\geq$ typical periods are needed for Program to progress to completion |

**Table 9.9** Erase Suspend AC Parameters

| Parameter                                        | Min  | Typical | Max | Unit    | Comments                                                                                                                                         |
|--------------------------------------------------|------|---------|-----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Erase Suspend Latency ( $t_{ESL}$ )              |      |         | 45  | $\mu$ s | The time from Erase Suspend command until the WIP bit is 0                                                                                       |
| Erase Resume to next Erase Suspend ( $t_{ERS}$ ) | 0.06 | 100     |     | $\mu$ s | Minimum is the time needed to issue the next Erase Suspend command but $\geq$ typical periods are needed for the Erase to progress to completion |



## 10. Software Interface Reference

### 10.1 Command Summary

**Table 10.1** S25FL512S Instruction Set (sorted by instruction)

| Instruction (Hex) | Command Name | Command Description                              | Maximum Frequency (MHz) |
|-------------------|--------------|--------------------------------------------------|-------------------------|
| 01                | WRR          | Write Register (Status-1, Configuration-1)       | 133                     |
| 02                | PP           | Page Program (3- or 4-byte address)              | 133                     |
| 03                | READ         | Read (3- or 4-byte address)                      | 50                      |
| 04                | WRDI         | Write Disable                                    | 133                     |
| 05                | RDSR1        | Read Status Register-1                           | 133                     |
| 06                | WREN         | Write Enable                                     | 133                     |
| 07                | RDSR2        | Read Status Register-2                           | 133                     |
| 0B                | FAST_READ    | Fast Read (3- or 4-byte address)                 | 133                     |
| 0C                | 4FAST_READ   | Fast Read (4-byte address)                       | 133                     |
| 0D                | DDRF         | DDR Fast Read (3- or 4-byte address)             | 80                      |
| 0E                | 4DDRF        | DDR Fast Read (4-byte address)                   | 80                      |
| 12                | 4PP          | Page Program (4-byte address)                    | 133                     |
| 13                | 4READ        | Read (4-byte address)                            | 50                      |
| 14                | ABRD         | AutoBoot Register Read                           | 133                     |
| 15                | ABWR         | AutoBoot Register Write                          | 133                     |
| 16                | BRRD         | Bank Register Read                               | 133                     |
| 17                | BRWR         | Bank Register Write                              | 133                     |
| 18                | Reserved-18  | Reserved                                         |                         |
| 2B                | ASPRD        | ASP Read                                         | 133                     |
| 2F                | ASPP         | ASP Program                                      | 133                     |
| 30                | CLSR         | Clear Status Register - Erase/Program Fail Reset | 133                     |
| 32                | QPP          | Quad Page Program (3- or 4-byte address)         | 80                      |
| 34                | 4QPP         | Quad Page Program (4-byte address)               | 80                      |
| 35                | RDCR         | Read Configuration Register-1                    | 133                     |
| 38                | QPP          | Quad Page Program (3- or 4-byte address)         | 80                      |
| 3B                | DOR          | Read Dual Out (3- or 4-byte address)             | 104                     |
| 3C                | 4DOR         | Read Dual Out (4-byte address)                   | 104                     |
| 41                | DLPRD        | Data Learning Pattern Read                       | 133                     |
| 42                | OTPP         | OTP Program                                      | 133                     |
| 43                | PNVDLR       | Program NV Data Learning Register                | 133                     |
| 4A                | WVDLR        | Write Volatile Data Learning Register            | 133                     |
| 4B                | OTPR         | OTP Read                                         | 133                     |
| 5A                | RSFDP        | Read Serial Flash Discoverable Parameters        | 133                     |
| 60                | BE           | Bulk Erase                                       | 133                     |
| 6B                | QOR          | Read Quad Out (3- or 4-byte address)             | 104                     |
| 6C                | 4QOR         | Read Quad Out (4-byte address)                   | 104                     |
| 75                | ERSP         | Erase Suspend                                    | 133                     |
| 7A                | ERRS         | Erase Resume                                     | 133                     |

**Table 10.1** S25FL512S Instruction Set (sorted by instruction) (Continued)

| Instruction (Hex) | Command Name   | Command Description                                                        | Maximum Frequency (MHz) |
|-------------------|----------------|----------------------------------------------------------------------------|-------------------------|
| 85                | PGSP           | Program Suspend                                                            | 133                     |
| 8A                | PGRS           | Program Resume                                                             | 133                     |
| 90                | READ_ID (REMS) | Read Electronic Manufacturer Signature                                     | 133                     |
| 9F                | RDID           | Read ID (JEDEC Manufacturer ID and JEDEC CFI)                              | 133                     |
| A3                | MPM            | Reserved for Multi-I/O-High Perf Mode (MPM)                                | 133                     |
| A6                | PLBWR          | PPB Lock Bit Write                                                         | 133                     |
| A7                | PLBRD          | PPB Lock Bit Read                                                          | 133                     |
| AB                | RES            | Read Electronic Signature                                                  | 50                      |
| B9                | BRAC           | Bank Register Access<br>(Legacy Command formerly used for Deep Power Down) | 133                     |
| BB                | DIOR           | Dual I/O Read (3- or 4-byte address)                                       | 104                     |
| BC                | 4DIOR          | Dual I/O Read (4-byte address)                                             | 104                     |
| BD                | DDRDIOR        | DDR Dual I/O Read (3- or 4-byte address)                                   | 80                      |
| BE                | 4DDRDIOR       | DDR Dual I/O Read (4-byte address)                                         | 80                      |
| C7                | BE             | Bulk Erase (alternate command)                                             | 133                     |
| D8                | SE             | Erase 256 kB (3- or 4-byte address)                                        | 133                     |
| DC                | 4SE            | Erase 256 kB (4-byte address)                                              | 133                     |
| E0                | DYBRD          | DYB Read                                                                   | 133                     |
| E1                | DYBWR          | DYB Write                                                                  | 133                     |
| E2                | PPBRD          | PPB Read                                                                   | 133                     |
| E3                | PPBP           | PPB Program                                                                | 133                     |
| E4                | PPBE           | PPB Erase                                                                  | 133                     |
| E5                | Reserved-E5    | Reserved                                                                   |                         |
| E6                | Reserved-E6    | Reserved                                                                   |                         |
| E7                | PASSRD         | Password Read                                                              | 133                     |
| E8                | PASSP          | Password Program                                                           | 133                     |
| E9                | PASSU          | Password Unlock                                                            | 133                     |
| EB                | QIOR           | Quad I/O Read (3- or 4-byte address)                                       | 104                     |
| EC                | 4QIOR          | Quad I/O Read (4-byte address)                                             | 104                     |
| ED                | DDRQIOR        | DDR Quad I/O Read (3- or 4-byte address)                                   | 80                      |
| EE                | 4DDRQIOR       | DDR Quad I/O Read (4-byte address)                                         | 80                      |
| F0                | RESET          | Software Reset                                                             | 133                     |
| FF                | MBR            | Mode Bit Reset                                                             | 133                     |

## **10.2 Serial Flash Discoverable Parameters (SFDP) Address Map**

The SFDP address space has a header starting at address zero that identifies the SFDP data structure and provides a pointer to each parameter. One Basic Flash parameter is mandated by the JEDEC JESD216B standard. Two optional parameter tables for Sector Map and 4 Byte Address Instructions follow the Basic Flash table. Cypress provides an additional parameter by pointing to the ID-CFI address space i.e. the ID-CFI address space is a sub-set of the SFDP address space. The parameter tables portion of

the SFDP data structure are located within the ID-CFI address space and is thus both a CFI parameter and an SFDP parameter. In this way both SFDP and ID-CFI information can be accessed by either the RSFDP or RDID commands.

**Table 10.2** SFDP Overview Map

| Byte Address | Description                                                                                  |
|--------------|----------------------------------------------------------------------------------------------|
| 0000h        | Location zero within JEDEC JESD216B SFDP space – start of SFDP header                        |
| ...          | Remainder of SFDP header followed by undefined space                                         |
| 1000h        | Location zero within ID-CFI space – start of ID-CFI parameter tables                         |
| ...          | ID-CFI parameters                                                                            |
| 1120h        | Start of SFDP parameter which is also one of the CFI parameter tables                        |
| ...          | Remainder of SFDP parameter tables followed by either more CFI parameters or undefined space |

## 10.2.1 Field Definitions

**Table 10.3** SFDP Header

| Relative Byte Address | SFDP Dword Address           | Data | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------|------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                   | SFDP Header 1st DWORD        | 53h  | This is the entry point for Read SFDP (5Ah) command i.e. location zero within SFDP space ASCII "S"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 01h                   |                              | 46h  | ASCII "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 02h                   |                              | 44h  | ASCII "D"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 03h                   |                              | 50h  | ASCII "P"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 04h                   | SFDP Header 2nd DWORD        | 06h  | SFDP Minor Revision (06h = JEDEC JESD216 Revision B) This revision is backward compatible with all prior minor revisions. Minor revisions are changes that define previously reserved fields, add fields to the end, or that clarify definitions of existing fields. Increments of the minor revision value indicate that previously reserved parameter fields may have been assigned a new definition or entire Dwords may have been added to the parameter table. However, the definition of previously existing fields is unchanged and therefore remain backward compatible with earlier SFDP parameter table revisions. Software can safely ignore increments of the minor revision number, as long as only those parameters the software was designed to support are used i.e. previously reserved fields and additional Dwords must be masked or ignored. Do not do a simple compare on the minor revision number, looking only for a match with the revision number that the software is designed to handle. There is no problem with using a higher number minor revision. |
| 05h                   |                              | 01h  | SFDP Major Revision This is the original major revision. This major revision is compatible with all SFDP reading and parsing software.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 06h                   |                              | 05h  | Number of Parameter Headers (zero based, 05h = 6 parameters)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 07h                   |                              | FFh  | Unused                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 08h                   | Parameter Header 0 1st DWORD | 00h  | Parameter ID LSB (00h = JEDEC SFDP Basic SPI Flash Parameter)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 09h                   |                              | 00h  | Parameter Minor Revision (00h = JESD216) - This older revision parameter header is provided for any legacy SFDP reading and parsing software that requires seeing a minor revision 0 parameter header. SFDP software designed to handle later minor revisions should continue reading parameter headers looking for a higher numbered minor revision that contains additional parameters for that software revision.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 0Ah                   |                              | 01h  | Parameter Major Revision (01h = The original major revision - all SFDP software is compatible with this major revision.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 0Bh                   |                              | 09h  | Parameter Table Length (in double words = Dwords = 4 byte units) 09h = 9 Dwords                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 0Ch                   | Parameter Header 0 2nd DWORD | 20h  | Parameter Table Pointer Byte 0 (Dword = 4 byte aligned) JEDEC Basic SPI Flash parameter byte offset = 1120h                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 0Dh                   |                              | 11h  | Parameter Table Pointer Byte 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0Eh                   |                              | 00h  | Parameter Table Pointer Byte 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0Fh                   |                              | FFh  | Parameter ID MSB (FFh = JEDEC defined legacy Parameter ID)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Table 10.3** SFDP Header (Continued)

| Relative Byte Address | SFDP Dword Address           | Data | Description                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------|------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10h                   | Parameter Header 1 1st DWORD | 00h  | Parameter ID LSB (00h = JEDEC SFDP Basic SPI Flash Parameter)                                                                                                                                                                                                                                                                                                                              |
| 11h                   |                              | 05h  | Parameter Minor Revision (05h = JESD216 Revision A) - This older revision parameter header is provided for any legacy SFDP reading and parsing software that requires seeing a minor revision 5 parameter header. SFDP software designed to handle later minor revisions should continue reading parameter headers looking for a later minor revision that contains additional parameters. |
| 12h                   |                              | 01h  | Parameter Major Revision (01h = The original major revision - all SFDP software is compatible with this major revision.                                                                                                                                                                                                                                                                    |
| 13h                   |                              | 10h  | Parameter Table Length (in double words = Dwords = 4 byte units) 10h = 16 Dwords                                                                                                                                                                                                                                                                                                           |
| 14h                   | Parameter Header 1 2nd DWORD | 20h  | Parameter Table Pointer Byte 0 (Dword = 4 byte aligned) JEDEC Basic SPI Flash parameter byte offset = 1120h address                                                                                                                                                                                                                                                                        |
| 15h                   |                              | 11h  | Parameter Table Pointer Byte 1                                                                                                                                                                                                                                                                                                                                                             |
| 16h                   |                              | 00h  | Parameter Table Pointer Byte 2                                                                                                                                                                                                                                                                                                                                                             |
| 17h                   |                              | FFh  | Parameter ID MSB (FFh = JEDEC defined Parameter)                                                                                                                                                                                                                                                                                                                                           |
| 18h                   | Parameter Header 2 1st DWORD | 00h  | Parameter ID LSB (00h = JEDEC SFDP Basic SPI Flash Parameter)                                                                                                                                                                                                                                                                                                                              |
| 19h                   |                              | 06h  | Parameter Minor Revision (06h = JESD216 Revision B)                                                                                                                                                                                                                                                                                                                                        |
| 1Ah                   |                              | 01h  | Parameter Major Revision (01h = The original major revision - all SFDP software is compatible with this major revision.                                                                                                                                                                                                                                                                    |
| 1Bh                   |                              | 10h  | Parameter Table Length (in double words = Dwords = 4 byte units) 10h = 16 Dwords                                                                                                                                                                                                                                                                                                           |
| 1Ch                   | Parameter Header 2 2nd DWORD | 20h  | Parameter Table Pointer Byte 0 (Dword = 4 byte aligned) JEDEC Basic SPI Flash parameter byte offset = 1120h address                                                                                                                                                                                                                                                                        |
| 1Dh                   |                              | 11h  | Parameter Table Pointer Byte 1                                                                                                                                                                                                                                                                                                                                                             |
| 1Eh                   |                              | 00h  | Parameter Table Pointer Byte 2                                                                                                                                                                                                                                                                                                                                                             |
| 1Fh                   |                              | FFh  | Parameter ID MSB (FFh = JEDEC defined Parameter)                                                                                                                                                                                                                                                                                                                                           |
| 20h                   | Parameter Header 3 1st DWORD | 81h  | Parameter ID LSB (81h = SFDP Sector Map Parameter)                                                                                                                                                                                                                                                                                                                                         |
| 21h                   |                              | 00h  | Parameter Minor Revision (00h = Initial version as defined in JESD216 Revision B)                                                                                                                                                                                                                                                                                                          |
| 22h                   |                              | 01h  | Parameter Major Revision (01h = The original major revision - all SFDP software that recognizes this parameter's ID is compatible with this major revision.                                                                                                                                                                                                                                |
| 23h                   |                              | 02h  | Parameter Table Length (in double words = Dwords = 4 byte units) 02h = 2 Dwords                                                                                                                                                                                                                                                                                                            |
| 24h                   | Parameter Header 3 2nd DWORD | 60h  | Parameter Table Pointer Byte 0 (Dword = 4 byte aligned) JEDEC parameter byte offset = 1160h                                                                                                                                                                                                                                                                                                |
| 25h                   |                              | 11h  | Parameter Table Pointer Byte 1                                                                                                                                                                                                                                                                                                                                                             |
| 26h                   |                              | 00h  | Parameter Table Pointer Byte 2                                                                                                                                                                                                                                                                                                                                                             |
| 27h                   |                              | FFh  | Parameter ID MSB (FFh = JEDEC defined Parameter)                                                                                                                                                                                                                                                                                                                                           |
| 28h                   | Parameter Header 4 1st DWORD | 84h  | Parameter ID LSB (00h = SFDP 4 Byte Address Instructions Parameter)                                                                                                                                                                                                                                                                                                                        |
| 29h                   |                              | 00h  | Parameter Minor Revision (00h = Initial version as defined in JESD216 Revision B)                                                                                                                                                                                                                                                                                                          |
| 2Ah                   |                              | 01h  | Parameter Major Revision (01h = The original major revision - all SFDP software that recognizes this parameter's ID is compatible with this major revision.                                                                                                                                                                                                                                |
| 2Bh                   |                              | 02h  | Parameter Table Length (in double words = Dwords = 4 byte units) (2h = 2 Dwords)                                                                                                                                                                                                                                                                                                           |
| 2Ch                   | Parameter Header 4 2nd DWORD | 68h  | Parameter Table Pointer Byte 0 (Dword = 4 byte aligned) JEDEC parameter byte offset = 1168h                                                                                                                                                                                                                                                                                                |
| 2Dh                   |                              | 11h  | Parameter Table Pointer Byte 1                                                                                                                                                                                                                                                                                                                                                             |
| 2Eh                   |                              | 00h  | Parameter Table Pointer Byte 2                                                                                                                                                                                                                                                                                                                                                             |
| 2Fh                   |                              | FFh  | Parameter ID MSB (FFh = JEDEC defined Parameter)                                                                                                                                                                                                                                                                                                                                           |
| 30h                   | Parameter Header 5 1st DWORD | 01h  | Parameter ID LSB (Spansion Vendor Specific ID-CFI parameter) Legacy Manufacturer ID 01h = AMD / Spansion                                                                                                                                                                                                                                                                                   |
| 31h                   |                              | 01h  | Parameter Minor Revision (01h = ID-CFI updated with SFDP Rev B table)                                                                                                                                                                                                                                                                                                                      |
| 32h                   |                              | 01h  | Parameter Major Revision (01h = The original major revision - all SFDP software that recognizes this parameter's ID is compatible with this major revision.                                                                                                                                                                                                                                |
| 33h                   |                              | 5Ch  | Parameter Table Length (in double words = Dwords = 4 byte units) CFI starts at 1000h, the final SFDP parameter (CFI ID = A5) starts at 111Eh (SFDP starting point of 1120h -2hB of CFI parameter header), for a length of 11EhB excluding the CFI A5 parameter. The final CFI A5 parameter adds an additional 52hB for a total of 11Eh + 82h = 170hB. 170hB/4 = 5Ch Dwords.                |

**Table 10.3** SFDP Header (Continued)

| Relative Byte Address | SFDP Dword Address              | Data | Description                                                                                                                                     |
|-----------------------|---------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 34h                   | Parameter Header<br>5 2nd DWORD | 00h  | Parameter Table Pointer Byte 0 (Dword = 4 byte aligned) Entry point for ID-CFI parameter is byte offset = 1000h relative to SFDP location zero. |
| 35h                   |                                 | 10h  | Parameter Table Pointer Byte 1                                                                                                                  |
| 36h                   |                                 | 00h  | Parameter Table Pointer Byte 2                                                                                                                  |
| 37h                   |                                 | 01h  | Parameter ID MSB (01h = JEDEC JEP106 Bank Number 1)                                                                                             |

## 10.3 Device ID and Common Flash Interface (ID-CFI) Address Map

### 10.3.1 Field Definitions

**Table 10.4** Manufacturer and Device ID

| Byte Address | Data                         | Description                                                                                                                                                                                                                                                                                                                                                                               |
|--------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h          | 01h                          | Manufacturer ID for Spansion                                                                                                                                                                                                                                                                                                                                                              |
| 01h          | 02h (512 Mb)                 | Device ID Most Significant Byte - Memory Interface Type                                                                                                                                                                                                                                                                                                                                   |
| 02h          | 20h (512 Mb)                 | Device ID Least Significant Byte - Density                                                                                                                                                                                                                                                                                                                                                |
| 03h          | xxh                          | ID-CFI Length - number bytes following. Adding this value to the current location of 03h gives the address of the last valid location in the ID-CFI address map. A value of 00h indicates the entire 512-byte ID-CFI space must be read because the actual length of the ID-CFI information is longer than can be indicated by this legacy single byte field. The value is OPN dependent. |
| 04h          | 00h (Uniform 256-kB sectors) | Sector Architecture                                                                                                                                                                                                                                                                                                                                                                       |
| 05h          | 80h (FL-S Family)            | Family ID                                                                                                                                                                                                                                                                                                                                                                                 |
| 06h          | xxh                          | ASCII characters for Model<br>Refer to <i>Ordering Information</i> on <a href="#">page 129</a> for the model number definitions.                                                                                                                                                                                                                                                          |
| 07h          | xxh                          |                                                                                                                                                                                                                                                                                                                                                                                           |
| 08h          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |
| 09h          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |
| 0Ah          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |
| 0Bh          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |
| 0Ch          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |
| 0Dh          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |
| 0Eh          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |
| 0Fh          | xxh                          | Reserved                                                                                                                                                                                                                                                                                                                                                                                  |

**Table 10.5** CFI Query Identification String

| Byte Address      | Data              | Description                                                                            |
|-------------------|-------------------|----------------------------------------------------------------------------------------|
| 10h<br>11h<br>12h | 51h<br>52h<br>59h | Query Unique ASCII string "QRY"                                                        |
| 13h<br>14h        | 02h<br>00h        | Primary OEM Command Set<br>FL-P backward compatible command set ID                     |
| 15h<br>16h        | 40h<br>00h        | Address for Primary Extended Table                                                     |
| 17h<br>18h        | 53h<br>46h        | Alternate OEM Command Set<br>ASCII characters "FS" for SPI (F) interface, S Technology |
| 19h<br>1Ah        | 51h<br>00h        | Address for Alternate OEM Extended Table                                               |

**Table 10.6** CFI System Interface String

| Byte Address | Data            | Description                                                                         |
|--------------|-----------------|-------------------------------------------------------------------------------------|
| 1Bh          | 27h             | V <sub>CC</sub> Min. (erase/program): 100 millivolts                                |
| 1Ch          | 36h             | V <sub>CC</sub> Max. (erase/program): 100 millivolts                                |
| 1Dh          | 00h             | V <sub>PP</sub> Min. voltage (00h = no V <sub>PP</sub> present)                     |
| 1Eh          | 00h             | V <sub>PP</sub> Max. voltage (00h = no V <sub>PP</sub> present)                     |
| 1Fh          | 06h             | Typical timeout per single byte program 2 <sup>N</sup> μs                           |
| 20h          | 09h (512B page) | Typical timeout for Min. size Page program 2 <sup>N</sup> μs (00h = not supported)  |
| 21h          | 09h (256 kB)    | Typical timeout per individual sector erase 2 <sup>N</sup> ms                       |
| 22h          | 11h (512 Mb)    | Typical timeout for full chip erase 2 <sup>N</sup> ms (00h = not supported)         |
| 23h          | 02h             | Max. timeout for byte program 2 <sup>N</sup> times typical                          |
| 24h          | 02h             | Max. timeout for page program 2 <sup>N</sup> times typical                          |
| 25h          | 03h             | Max. timeout per individual sector erase 2 <sup>N</sup> times typical               |
| 26h          | 03h             | Max. timeout for full chip erase 2 <sup>N</sup> times typical (00h = not supported) |

**Table 10.7** Device Geometry Definition for 512-Mbit Device

| Byte Address | Data         | Description                                                                                                                                                                                                         |
|--------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 27h          | 1Ah (512 Mb) | Device Size = 2 <sup>N</sup> bytes;                                                                                                                                                                                 |
| 28h          | 02h          | Flash Device Interface Description;                                                                                                                                                                                 |
| 29h          | 01h          | 0000h = x8 only<br>0001h = x16 only<br>0002h = x8/x16 capable<br>0003h = x32 only<br>0004h = Single I/O SPI, 3-byte address<br>0005h = Multi I/O SPI, 3-byte address<br>0102h = Multi I/O SPI, 3- or 4-byte address |
| 2Ah          | 09h          | Max. number of bytes in multi-byte write = 2 <sup>N</sup><br>(0000 = not supported<br>0009h = 512B page)                                                                                                            |
| 2Bh          | 00h          |                                                                                                                                                                                                                     |
| 2Ch          | 01h          | Number of Erase Block Regions within device<br>1 = Uniform Device, 2 = Boot Device                                                                                                                                  |
| 2Dh          | FFh          |                                                                                                                                                                                                                     |
| 2Eh          | 00h          | Erase Block Region 1 Information (refer to JEDEC JEP137)                                                                                                                                                            |
| 2Fh          | 00h          | 32 sectors = 32-1 = 001Fh<br>4-kB sectors = 256 bytes x 0010h                                                                                                                                                       |
| 30h          | 04h          |                                                                                                                                                                                                                     |
| 31h thru 3Fh | FFh          | RFU                                                                                                                                                                                                                 |

**Table 10.8** CFI Primary Vendor-Specific Extended Query

| Byte Address | Data | Description                                                                                                                                                                                                                                                                                                                                                             |
|--------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 40h          | 50h  | Query-unique ASCII string "PRI"                                                                                                                                                                                                                                                                                                                                         |
| 41h          | 52h  |                                                                                                                                                                                                                                                                                                                                                                         |
| 42h          | 49h  |                                                                                                                                                                                                                                                                                                                                                                         |
| 43h          | 31h  | Major version number = 1, ASCII                                                                                                                                                                                                                                                                                                                                         |
| 44h          | 33h  | Minor version number = 3, ASCII                                                                                                                                                                                                                                                                                                                                         |
| 45h          | 21h  | Address Sensitive Unlock (Bits 1-0)<br>00b = Required<br>01b = Not Required<br>Process Technology (Bits 5-2)<br>0000b = 0.23 $\mu$ m Floating Gate<br>0001b = 0.17 $\mu$ m Floating Gate<br>0010b = 0.23 $\mu$ m MirrorBit<br>0011b = 0.11 $\mu$ m Floating Gate<br>0100b = 0.11 $\mu$ m MirrorBit<br>0101b = 0.09 $\mu$ m MirrorBit<br>1000b = 0.065 $\mu$ m MirrorBit |
| 46h          | 02h  | Erase Suspend<br>0 = Not Supported<br>1 = Read Only<br>2 = Read and Program                                                                                                                                                                                                                                                                                             |
| 47h          | 01h  | Sector Protect<br>00 = Not Supported<br>X = Number of sectors in group                                                                                                                                                                                                                                                                                                  |
| 48h          | 00h  | Temporary Sector Unprotect<br>00 = Not Supported<br>01 = Supported                                                                                                                                                                                                                                                                                                      |
| 49h          | 08h  | Sector Protect/Unprotect Scheme<br>04 = High Voltage Method<br>05 = Software Command Locking Method<br>08 = Advanced Sector Protection Method<br>09 = Secure                                                                                                                                                                                                            |
| 4Ah          | 00h  | Simultaneous Operation<br>00 = Not Supported<br>X = Number of Sectors                                                                                                                                                                                                                                                                                                   |
| 4Bh          | 01h  | Burst Mode (Synchronous sequential read) support<br>00 = Not Supported<br>01 = Supported                                                                                                                                                                                                                                                                                |
| 4Ch          | xxh  | Page Mode Type, model dependent<br>00 = Not Supported<br>01 = 4 Word Read Page<br>02 = 8 Read Word Page<br>03 = 256-Byte Program Page<br>04 = 512-Byte Program Page                                                                                                                                                                                                     |
| 4Dh          | 00h  | ACC (Acceleration) Supply Minimum<br>00 = Not Supported, 100 mV                                                                                                                                                                                                                                                                                                         |
| 4Eh          | 00h  | ACC (Acceleration) Supply Maximum<br>00 = Not Supported, 100 mV                                                                                                                                                                                                                                                                                                         |
| 4Fh          | 07h  | WP# Protection<br>01 = Whole Chip<br>04 = Uniform Device with Bottom WP Protect<br>05 = Uniform Device with Top WP Protect<br>07 = Uniform Device with Top or Bottom Write Protect (user select)                                                                                                                                                                        |
| 50h          | 01h  | Program Suspend<br>00 = Not Supported<br>01 = Supported                                                                                                                                                                                                                                                                                                                 |



The Alternate Vendor-Specific Extended Query provides information related to the expanded command set provided by the FL-S family. The alternate query parameters use a format in which each parameter begins with an identifier byte and a parameter length byte. Driver software can check each parameter ID and can use the length value to skip to the next parameter if the parameter is not needed or not recognized by the software.

**Table 10.9** CFI Alternate Vendor-Specific Extended Query Header

| Byte Address | Data | Description                     |
|--------------|------|---------------------------------|
| 51h          | 41h  | Query-unique ASCII string "ALT" |
| 52h          | 4Ch  |                                 |
| 53h          | 54h  |                                 |
| 54h          | 32h  | Major version number = 2, ASCII |
| 55h          | 30h  | Minor version number = 0, ASCII |

**Table 10.10** CFI Alternate Vendor-Specific Extended Query Parameter 0

| Parameter Relative Byte Address Offset | Data         | Description                                                                                                                                                   |
|----------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 00h          | Parameter ID (Ordering Part Number)                                                                                                                           |
| 01h                                    | 10h          | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 53h          | ASCII "S" for manufacturer (Spansion)                                                                                                                         |
| 03h                                    | 32h          | ASCII "25" for Product Characters (Single Die SPI)                                                                                                            |
| 04h                                    | 35h          |                                                                                                                                                               |
| 05h                                    | 46h          | ASCII "FL" for Interface Characters (SPI 3 Volt)                                                                                                              |
| 06h                                    | 4Ch          |                                                                                                                                                               |
| 07h                                    | 35h (512 Mb) | ASCII characters for density                                                                                                                                  |
| 08h                                    | 31h (512 Mb) |                                                                                                                                                               |
| 09h                                    | 32h (512 Mb) |                                                                                                                                                               |
| 0Ah                                    | 53h          | ASCII "S" for Technology (65nm MirrorBit)                                                                                                                     |
| 0Bh                                    | xxh          | Reserved for Future Use (RFU)                                                                                                                                 |
| 0Ch                                    | xxh          |                                                                                                                                                               |
| 0Dh                                    | xxh          |                                                                                                                                                               |
| 0Eh                                    | xxh          |                                                                                                                                                               |
| 0Fh                                    | xxh          |                                                                                                                                                               |
| 10h                                    | xxh          |                                                                                                                                                               |
| 11h                                    | xxh          |                                                                                                                                                               |

**Table 10.11** CFI Alternate Vendor-Specific Extended Query Parameter 80h Address Options

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                                                                                                                                                               |
|----------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 80h  | Parameter ID (Ordering Part Number)                                                                                                                                                                                                                                                                       |
| 01h                                    | 01h  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter)                                                                                                                                             |
| 02h                                    | F0h  | Bits 7:4 - Reserved = 1111b<br>Bit 3 - AutoBoot support - Yes = 0b, No = 1b<br>Bit 2 - 4-byte address instructions supported - Yes = 0b, No = 1b<br>Bit 1 - Bank address + 3-byte address instructions supported - Yes = 0b, No = 1b<br>Bit 0 - 3-byte address instructions supported - Yes = 0b, No = 1b |

**Table 10.12** CFI Alternate Vendor-Specific Extended Query Parameter 84h Suspend Commands

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 84h  | Parameter ID (Suspend Commands)                                                                                                                               |
| 01h                                    | 08h  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 85h  | Program suspend instruction code                                                                                                                              |
| 03h                                    | 28h  | Program suspend latency maximum ( $\mu$ s)                                                                                                                    |
| 04h                                    | 8Ah  | Program resume instruction code                                                                                                                               |
| 05h                                    | 64h  | Program resume to next suspend typical ( $\mu$ s)                                                                                                             |
| 06h                                    | 75h  | Erase suspend instruction code                                                                                                                                |
| 07h                                    | 28h  | Erase suspend latency maximum ( $\mu$ s)                                                                                                                      |
| 08h                                    | 7Ah  | Erase resume instruction code                                                                                                                                 |
| 09h                                    | 64h  | Erase resume to next suspend typical ( $\mu$ s)                                                                                                               |

**Table 10.13** CFI Alternate Vendor-Specific Extended Query Parameter 88h Data Protection

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 88h  | Parameter ID (Data Protection)                                                                                                                                |
| 01h                                    | 04h  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 0Ah  | OTP size $2^N$ bytes, FFh = not supported                                                                                                                     |
| 03h                                    | 01h  | OTP address map format, 01h = FL-S format, FFh = not supported                                                                                                |
| 04h                                    | xxh  | Block Protect Type, model dependent<br>00h = FL-P, FL-S, FFh = not supported                                                                                  |
| 05h                                    | xxh  | Advanced Sector Protection type, model dependent<br>01h = FL-S ASP                                                                                            |

**Table 10.14** CFI Alternate Vendor-Specific Extended Query Parameter 8Ch Reset Timing

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 8Ch  | Parameter ID (Reset Timing)                                                                                                                                   |
| 01h                                    | 06h  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 96h  | POR maximum value                                                                                                                                             |
| 03h                                    | 01h  | POR maximum exponent $2^N$ $\mu$ s                                                                                                                            |
| 04h                                    | 23h  | Hardware Reset maximum value, FFh = not supported                                                                                                             |
| 05h                                    | 00h  | Hardware Reset maximum exponent $2^N$ $\mu$ s                                                                                                                 |
| 06h                                    | 23h  | Software Reset maximum value, FFh = not supported                                                                                                             |
| 07h                                    | 00h  | Software Reset maximum exponent $2^N$ $\mu$ s                                                                                                                 |

**Table 10.15** CFI Alternate Vendor-Specific Extended Query Parameter 90h - HPLC(SDR)

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 90h  | Parameter ID (Latency Code Table)                                                                                                                             |
| 01h                                    | 56h  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 06h  | Number of rows                                                                                                                                                |
| 03h                                    | 0Eh  | Row length in bytes                                                                                                                                           |
| 04h                                    | 46h  | Start of header (row 1), ASCII "F" for frequency column header                                                                                                |
| 05h                                    | 43h  | ASCII "C" for Code column header                                                                                                                              |
| 06h                                    | 03h  | Read 3-byte address instruction                                                                                                                               |
| 07h                                    | 13h  | Read 4-byte address instruction                                                                                                                               |
| 08h                                    | 0Bh  | Read Fast 3-byte address instruction                                                                                                                          |
| 09h                                    | 0Ch  | Read Fast 4-byte address instruction                                                                                                                          |
| 0Ah                                    | 3Bh  | Read Dual Out 3-byte address instruction                                                                                                                      |
| 0Bh                                    | 3Ch  | Read Dual Out 4-byte address instruction                                                                                                                      |
| 0Ch                                    | 6Bh  | Read Quad Out 3-byte address instruction                                                                                                                      |
| 0Dh                                    | 6Ch  | Read Quad Out 4-byte address instruction                                                                                                                      |
| 0Eh                                    | BBh  | Dual I/O Read 3-byte address instruction                                                                                                                      |
| 0Fh                                    | BCh  | Dual I/O Read 4-byte address instruction                                                                                                                      |
| 10h                                    | EBh  | Quad I/O Read 3-byte address instruction                                                                                                                      |
| 11h                                    | ECh  | Quad I/O Read 4-byte address instruction                                                                                                                      |
| 12h                                    | 32h  | Start of row 2, SCK frequency limit for this row (50 MHz)                                                                                                     |
| 13h                                    | 03h  | Latency Code for this row (11b)                                                                                                                               |
| 14h                                    | 00h  | Read mode cycles                                                                                                                                              |
| 15h                                    | 00h  | Read latency cycles                                                                                                                                           |
| 16h                                    | 00h  | Read Fast mode cycles                                                                                                                                         |
| 17h                                    | 00h  | Read Fast latency cycles                                                                                                                                      |
| 18h                                    | 00h  | Read Dual Out mode cycles                                                                                                                                     |
| 19h                                    | 00h  | Read Dual Out latency cycles                                                                                                                                  |
| 1Ah                                    | 00h  | Read Quad Out mode cycles                                                                                                                                     |
| 1Bh                                    | 00h  | Read Quad Out latency cycles                                                                                                                                  |
| 1Ch                                    | 00h  | Dual I/O Read mode cycles                                                                                                                                     |
| 1Dh                                    | 04h  | Dual I/O Read latency cycles                                                                                                                                  |
| 1Eh                                    | 02h  | Quad I/O Read mode cycles                                                                                                                                     |
| 1Fh                                    | 01h  | Quad I/O Read latency cycles                                                                                                                                  |
| 20h                                    | 50h  | Start of row 3, SCK frequency limit for this row (80 MHz)                                                                                                     |
| 21h                                    | 00h  | Latency Code for this row (00b)                                                                                                                               |
| 22h                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency)                                                                                              |
| 23h                                    | FFh  | Read latency cycles                                                                                                                                           |
| 24h                                    | 00h  | Read Fast mode cycles                                                                                                                                         |
| 25h                                    | 08h  | Read Fast latency cycles                                                                                                                                      |
| 26h                                    | 00h  | Read Dual Out mode cycles                                                                                                                                     |
| 27h                                    | 08h  | Read Dual Out latency cycles                                                                                                                                  |
| 28h                                    | 00h  | Read Quad Out mode cycles                                                                                                                                     |
| 29h                                    | 08h  | Read Quad Out latency cycles                                                                                                                                  |
| 2Ah                                    | 00h  | Dual I/O Read mode cycles                                                                                                                                     |
| 2Bh                                    | 04h  | Dual I/O Read latency cycles                                                                                                                                  |

**Table 10.15** CFI Alternate Vendor-Specific Extended Query Parameter 90h - HPLC(SDR) (Continued)

| Parameter Relative Byte Address Offset | Data | Description                                                      |
|----------------------------------------|------|------------------------------------------------------------------|
| 2Ch                                    | 02h  | Quad I/O Read mode cycles                                        |
| 2Dh                                    | 04h  | Quad I/O Read latency cycles                                     |
| 2Eh                                    | 5Ah  | Start of row 4, SCK frequency limit for this row (90 MHz)        |
| 2Fh                                    | 01h  | Latency Code for this row (01b)                                  |
| 30h                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency) |
| 31h                                    | FFh  | Read latency cycles                                              |
| 32h                                    | 00h  | Read Fast mode cycles                                            |
| 33h                                    | 08h  | Read Fast latency cycles                                         |
| 34h                                    | 00h  | Read Dual Out mode cycles                                        |
| 35h                                    | 08h  | Read Dual Out latency cycles                                     |
| 36h                                    | 00h  | Read Quad Out mode cycles                                        |
| 37h                                    | 08h  | Read Quad Out latency cycles                                     |
| 38h                                    | 00h  | Dual I/O Read mode cycles                                        |
| 39h                                    | 05h  | Dual I/O Read latency cycles                                     |
| 3Ah                                    | 02h  | Quad I/O Read mode cycles                                        |
| 3Bh                                    | 04h  | Quad I/O Read latency cycles                                     |
| 3Ch                                    | 68h  | Start of row 5, SCK frequency limit for this row (104 MHz)       |
| 3Dh                                    | 02h  | Latency Code for this row (10b)                                  |
| 3Eh                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency) |
| 3Fh                                    | FFh  | Read latency cycles                                              |
| 40h                                    | 00h  | Read Fast mode cycles                                            |
| 41h                                    | 08h  | Read Fast latency cycles                                         |
| 42h                                    | 00h  | Read Dual Out mode cycles                                        |
| 43h                                    | 08h  | Read Dual Out latency cycles                                     |
| 44h                                    | 00h  | Read Quad Out mode cycles                                        |
| 45h                                    | 08h  | Read Quad Out latency cycles                                     |
| 46h                                    | 00h  | Dual I/O Read mode cycles                                        |
| 47h                                    | 06h  | Dual I/O Read latency cycles                                     |
| 48h                                    | 02h  | Quad I/O Read mode cycles                                        |
| 49h                                    | 05h  | Quad I/O Read latency cycles                                     |
| 4Ah                                    | 85h  | Start of row 6, SCK frequency limit for this row (133 MHz)       |
| 4Bh                                    | 02h  | Latency Code for this row (10b)                                  |
| 4Ch                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency) |
| 4Dh                                    | FFh  | Read latency cycles                                              |
| 4Eh                                    | 00h  | Read Fast mode cycles                                            |
| 4Fh                                    | 08h  | Read Fast latency cycles                                         |
| 50h                                    | FFh  | Read Dual Out mode cycles                                        |
| 51h                                    | FFh  | Read Dual Out latency cycles                                     |
| 52h                                    | FFh  | Read Quad Out mode cycles                                        |
| 53h                                    | FFh  | Read Quad Out latency cycles                                     |
| 54h                                    | FFh  | Dual I/O Read mode cycles                                        |
| 55h                                    | FFh  | Dual I/O Read latency cycles                                     |
| 56h                                    | FFh  | Quad I/O Read mode cycles                                        |
| 57h                                    | FFh  | Quad I/O Read latency cycles                                     |

**Table 10.16** CFI Alternate Vendor-Specific Extended Query Parameter 9Ah - HPLC DDR

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 9Ah  | Parameter ID (Latency Code Table)                                                                                                                             |
| 01h                                    | 2Ah  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 05h  | Number of rows                                                                                                                                                |
| 03h                                    | 08h  | Row length in bytes                                                                                                                                           |
| 04h                                    | 46h  | Start of header (row 1), ASCII "F" for frequency column header                                                                                                |
| 05h                                    | 43h  | ASCII "C" for Code column header                                                                                                                              |
| 06h                                    | 0Dh  | Read Fast DDR 3-byte address instruction                                                                                                                      |
| 07h                                    | 0Eh  | Read Fast DDR 4-byte address instruction                                                                                                                      |
| 08h                                    | BDh  | DDR Dual I/O Read 3-byte address instruction                                                                                                                  |
| 09h                                    | BEh  | DDR Dual I/O Read 4-byte address instruction                                                                                                                  |
| 0Ah                                    | EDh  | Read DDR Quad I/O 3-byte address instruction                                                                                                                  |
| 0Bh                                    | EEh  | Read DDR Quad I/O 4-byte address instruction                                                                                                                  |
| 0Ch                                    | 32h  | Start of row 2, SCK frequency limit for this row (50 MHz)                                                                                                     |
| 0Dh                                    | 03h  | Latency Code for this row (11b)                                                                                                                               |
| 0Eh                                    | 00h  | Read Fast DDR mode cycles                                                                                                                                     |
| 0Fh                                    | 04h  | Read Fast DDR latency cycles                                                                                                                                  |
| 10h                                    | 00h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 11h                                    | 04h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 12h                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 13h                                    | 03h  | Read DDR Quad I/O latency cycles                                                                                                                              |
| 14h                                    | 42h  | Start of row 3, SCK frequency limit for this row (66 MHz)                                                                                                     |
| 15h                                    | 00h  | Latency Code for this row (00b)                                                                                                                               |
| 16h                                    | 00h  | Read Fast DDR mode cycles                                                                                                                                     |
| 17h                                    | 05h  | Read Fast DDR latency cycles                                                                                                                                  |
| 18h                                    | 00h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 19h                                    | 06h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 1Ah                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 1Bh                                    | 06h  | Read DDR Quad I/O latency cycles                                                                                                                              |
| 1Ch                                    | 42h  | Start of row 4, SCK frequency limit for this row (66 MHz)                                                                                                     |
| 1Dh                                    | 01h  | Latency Code for this row (01b)                                                                                                                               |
| 1Eh                                    | 00h  | Read Fast DDR mode cycles                                                                                                                                     |
| 1Fh                                    | 06h  | Read Fast DDR latency cycles                                                                                                                                  |
| 20h                                    | 00h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 21h                                    | 07h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 22h                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 23h                                    | 07h  | Read DDR Quad I/O latency cycles                                                                                                                              |
| 24h                                    | 42h  | Start of row 5, SCK frequency limit for this row (66 MHz)                                                                                                     |
| 25h                                    | 02h  | Latency Code for this row (10b)                                                                                                                               |
| 26h                                    | 00h  | Read Fast DDR mode cycles                                                                                                                                     |
| 27h                                    | 07h  | Read Fast DDR latency cycles                                                                                                                                  |
| 28h                                    | 00h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 29h                                    | 08h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 2Ah                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 2Bh                                    | 08h  | Read DDR Quad I/O latency cycles                                                                                                                              |

**Table 10.17** CFI Alternate Vendor-Specific Extended Query Parameter 90h - EHPLC (SDR)

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 90h  | Parameter ID (Latency Code Table)                                                                                                                             |
| 01h                                    | 56h  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 06h  | Number of rows                                                                                                                                                |
| 03h                                    | 0Eh  | Row length in bytes                                                                                                                                           |
| 04h                                    | 46h  | Start of header (row 1), ASCII "F" for frequency column header                                                                                                |
| 05h                                    | 43h  | ASCII "C" for Code column header                                                                                                                              |
| 06h                                    | 03h  | Read 3-byte address instruction                                                                                                                               |
| 07h                                    | 13h  | Read 4-byte address instruction                                                                                                                               |
| 08h                                    | 0Bh  | Read Fast 3-byte address instruction                                                                                                                          |
| 09h                                    | 0Ch  | Read Fast 4-byte address instruction                                                                                                                          |
| 0Ah                                    | 3Bh  | Read Dual Out 3-byte address instruction                                                                                                                      |
| 0Bh                                    | 3Ch  | Read Dual Out 4-byte address instruction                                                                                                                      |
| 0Ch                                    | 6Bh  | Read Quad Out 3-byte address instruction                                                                                                                      |
| 0Dh                                    | 6Ch  | Read Quad Out 4-byte address instruction                                                                                                                      |
| 0Eh                                    | BBh  | Dual I/O Read 3-byte address instruction                                                                                                                      |
| 0Fh                                    | BCh  | Dual I/O Read 4-byte address instruction                                                                                                                      |
| 10h                                    | EBh  | Quad I/O Read 3-byte address instruction                                                                                                                      |
| 11h                                    | ECh  | Quad I/O Read 4-byte address instruction                                                                                                                      |
| 12h                                    | 32h  | Start of row 2, SCK frequency limit for this row (50 MHz)                                                                                                     |
| 13h                                    | 03h  | Latency Code for this row (11b)                                                                                                                               |
| 14h                                    | 00h  | Read mode cycles                                                                                                                                              |
| 15h                                    | 00h  | Read latency cycles                                                                                                                                           |
| 16h                                    | 00h  | Read Fast mode cycles                                                                                                                                         |
| 17h                                    | 00h  | Read Fast latency cycles                                                                                                                                      |
| 18h                                    | 00h  | Read Dual Out mode cycles                                                                                                                                     |
| 19h                                    | 00h  | Read Dual Out latency cycles                                                                                                                                  |
| 1Ah                                    | 00h  | Read Quad Out mode cycles                                                                                                                                     |
| 1Bh                                    | 00h  | Read Quad Out latency cycles                                                                                                                                  |
| 1Ch                                    | 04h  | Dual I/O Read mode cycles                                                                                                                                     |
| 1Dh                                    | 00h  | Dual I/O Read latency cycles                                                                                                                                  |
| 1Eh                                    | 02h  | Quad I/O Read mode cycles                                                                                                                                     |
| 1Fh                                    | 01h  | Quad I/O Read latency cycles                                                                                                                                  |
| 20h                                    | 50h  | Start of row 3, SCK frequency limit for this row (80 MHz)                                                                                                     |
| 21h                                    | 00h  | Latency Code for this row (00b)                                                                                                                               |
| 22h                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency)                                                                                              |
| 23h                                    | FFh  | Read latency cycles                                                                                                                                           |
| 24h                                    | 00h  | Read Fast mode cycles                                                                                                                                         |
| 25h                                    | 08h  | Read Fast latency cycles                                                                                                                                      |
| 26h                                    | 00h  | Read Dual Out mode cycles                                                                                                                                     |
| 27h                                    | 08h  | Read Dual Out latency cycles                                                                                                                                  |
| 28h                                    | 00h  | Read Quad Out mode cycles                                                                                                                                     |
| 29h                                    | 08h  | Read Quad Out latency cycles                                                                                                                                  |
| 2Ah                                    | 04h  | Dual I/O Read mode cycles                                                                                                                                     |
| 2Bh                                    | 00h  | Dual I/O Read latency cycles                                                                                                                                  |

**Table 10.17** CFI Alternate Vendor-Specific Extended Query Parameter 90h - EHPLC (SDR) (Continued)

| Parameter Relative Byte Address Offset | Data | Description                                                      |
|----------------------------------------|------|------------------------------------------------------------------|
| 2Ch                                    | 02h  | Quad I/O Read mode cycles                                        |
| 2Dh                                    | 04h  | Quad I/O Read latency cycles                                     |
| 2Eh                                    | 5Ah  | Start of row 4, SCK frequency limit for this row (90 MHz)        |
| 2Fh                                    | 01h  | Latency Code for this row (01b)                                  |
| 30h                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency) |
| 31h                                    | FFh  | Read latency cycles                                              |
| 32h                                    | 00h  | Read Fast mode cycles                                            |
| 33h                                    | 08h  | Read Fast latency cycles                                         |
| 34h                                    | 00h  | Read Dual Out mode cycles                                        |
| 35h                                    | 08h  | Read Dual Out latency cycles                                     |
| 36h                                    | 00h  | Read Quad Out mode cycles                                        |
| 37h                                    | 08h  | Read Quad Out latency cycles                                     |
| 38h                                    | 04h  | Dual I/O Read mode cycles                                        |
| 39h                                    | 01h  | Dual I/O Read latency cycles                                     |
| 3Ah                                    | 02h  | Quad I/O Read mode cycles                                        |
| 3Bh                                    | 04h  | Quad I/O Read latency cycles                                     |
| 3Ch                                    | 68h  | Start of row 5, SCK frequency limit for this row (104 MHz)       |
| 3Dh                                    | 02h  | Latency Code for this row (10b)                                  |
| 3Eh                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency) |
| 3Fh                                    | FFh  | Read latency cycles                                              |
| 40h                                    | 00h  | Read Fast mode cycles                                            |
| 41h                                    | 08h  | Read Fast latency cycles                                         |
| 42h                                    | 00h  | Read Dual Out mode cycles                                        |
| 43h                                    | 08h  | Read Dual Out latency cycles                                     |
| 44h                                    | 00h  | Read Quad Out mode cycles                                        |
| 45h                                    | 08h  | Read Quad Out latency cycles                                     |
| 46h                                    | 04h  | Dual I/O Read mode cycles                                        |
| 47h                                    | 02h  | Dual I/O Read latency cycles                                     |
| 48h                                    | 02h  | Quad I/O Read mode cycles                                        |
| 49h                                    | 05h  | Quad I/O Read latency cycles                                     |
| 4Ah                                    | 85h  | Start of row 6, SCK frequency limit for this row (133 MHz)       |
| 4Bh                                    | 02h  | Latency Code for this row (10b)                                  |
| 4Ch                                    | FFh  | Read mode cycles (FFh = command not supported at this frequency) |
| 4Dh                                    | FFh  | Read latency cycles                                              |
| 4Eh                                    | 00h  | Read Fast mode cycles                                            |
| 4Fh                                    | 08h  | Read Fast latency cycles                                         |
| 50h                                    | FFh  | Read Dual Out mode cycles                                        |
| 51h                                    | FFh  | Read Dual Out latency cycles                                     |
| 52h                                    | FFh  | Read Quad Out mode cycles                                        |
| 53h                                    | FFh  | Read Quad Out latency cycles                                     |
| 54h                                    | FFh  | Dual I/O Read mode cycles                                        |
| 55h                                    | FFh  | Dual I/O Read latency cycles                                     |
| 56h                                    | FFh  | Quad I/O Read mode cycles                                        |
| 57h                                    | FFh  | Quad I/O Read latency cycles                                     |

**Table 10.18** CFI Alternate Vendor-Specific Extended Query Parameter 9Ah - EHPLC DDR

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | 9Ah  | Parameter ID (Latency Code Table)                                                                                                                             |
| 01h                                    | 2Ah  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | 05h  | Number of rows                                                                                                                                                |
| 03h                                    | 08h  | Row length in bytes                                                                                                                                           |
| 04h                                    | 46h  | Start of header (row 1), ASCII "F" for frequency column header                                                                                                |
| 05h                                    | 43h  | ASCII "C" for Code column header                                                                                                                              |
| 06h                                    | 0Dh  | Read Fast DDR 3-byte address instruction                                                                                                                      |
| 07h                                    | 0Eh  | Read Fast DDR 4-byte address instruction                                                                                                                      |
| 08h                                    | BDh  | DDR Dual I/O Read 3-byte address instruction                                                                                                                  |
| 09h                                    | BEh  | DDR Dual I/O Read 4-byte address instruction                                                                                                                  |
| 0Ah                                    | EDh  | Read DDR Quad I/O 3-byte address instruction                                                                                                                  |
| 0Bh                                    | EEh  | Read DDR Quad I/O 4-byte address instruction                                                                                                                  |
| 0Ch                                    | 32h  | Start of row 2, SCK frequency limit for this row (50 MHz)                                                                                                     |
| 0Dh                                    | 03h  | Latency Code for this row (11b)                                                                                                                               |
| 0Eh                                    | 04h  | Read Fast DDR mode cycles                                                                                                                                     |
| 0Fh                                    | 01h  | Read Fast DDR latency cycles                                                                                                                                  |
| 10h                                    | 02h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 11h                                    | 02h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 12h                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 13h                                    | 03h  | Read DDR Quad I/O latency cycles                                                                                                                              |
| 14h                                    | 42h  | Start of row 3, SCK frequency limit for this row (66 MHz)                                                                                                     |
| 15h                                    | 00h  | Latency Code for this row (00b)                                                                                                                               |
| 16h                                    | 04h  | Read Fast DDR mode cycles                                                                                                                                     |
| 17h                                    | 02h  | Read Fast DDR latency cycles                                                                                                                                  |
| 18h                                    | 02h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 19h                                    | 04h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 1Ah                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 1Bh                                    | 06h  | Read DDR Quad I/O latency cycles                                                                                                                              |
| 1Ch                                    | 42h  | Start of row 4, SCK frequency limit for this row (66 MHz)                                                                                                     |
| 1Dh                                    | 01h  | Latency Code for this row (01b)                                                                                                                               |
| 1Eh                                    | 04h  | Read Fast DDR mode cycles                                                                                                                                     |
| 1Fh                                    | 04h  | Read Fast DDR latency cycles                                                                                                                                  |
| 20h                                    | 02h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 21h                                    | 05h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 22h                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 23h                                    | 07h  | Read DDR Quad I/O latency cycles                                                                                                                              |
| 24h                                    | 42h  | Start of row 5, SCK frequency limit for this row (66 MHz)                                                                                                     |
| 25h                                    | 02h  | Latency Code for this row (10b)                                                                                                                               |
| 26h                                    | 04h  | Read Fast DDR mode cycles                                                                                                                                     |
| 27h                                    | 05h  | Read Fast DDR latency cycles                                                                                                                                  |
| 28h                                    | 02h  | DDR Dual I/O Read mode cycles                                                                                                                                 |
| 29h                                    | 06h  | DDR Dual I/O Read latency cycles                                                                                                                              |
| 2Ah                                    | 01h  | Read DDR Quad I/O mode cycles                                                                                                                                 |
| 2Bh                                    | 08h  | Read DDR Quad I/O latency cycles                                                                                                                              |



**Table 10.19** CFI Alternate Vendor-Specific Extended Query Parameter F0h RFU

| Parameter Relative Byte Address Offset | Data | Description                                                                                                                                                   |
|----------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                    | F0h  | Parameter ID (RFU)                                                                                                                                            |
| 01h                                    | 0Fh  | Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter) |
| 02h                                    | FFh  | RFU                                                                                                                                                           |
| ...                                    | FFh  | RFU                                                                                                                                                           |
| 10h                                    | FFh  | RFU                                                                                                                                                           |

**Table 10.20** CFI Alternate Vendor-Specific Extended Query Parameter A5h, JEDEC SFDP Rev B

| CFI Parameter Relative Byte Address Offset | SFDP Parameter Relative Byte Address Offset | SFDP Dword Name                     | Data                             | Description                                                                                                                                                                                                                                                                                       |
|--------------------------------------------|---------------------------------------------|-------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h                                        | —                                           | N/A                                 | A5h                              | CFI Parameter ID (JEDEC SFDP)                                                                                                                                                                                                                                                                     |
| 01h                                        | —                                           | N/A                                 | 50h                              | CFI Parameter Length (The number of following bytes in this parameter. Adding this value to the current location value +1 = the first byte of the next parameter)                                                                                                                                 |
| 02h                                        | 00h                                         | JEDEC Basic Flash Parameter Dword-1 | E7h                              | Start of SFDP JEDEC parameter, located at 1120h in the overall SFDP address space. Bits 7:5 = unused = 111b Bit 4:3 = 06h is status register write instruction & status register is default non-volatile= 00b Bit 2 = Program Buffer > 64Bytes = 1 Bits 1:0 = Uniform 4KB erase unavailable = 11b |
| 03h                                        | 01h                                         |                                     | FFh                              | Bits 15:8 = Uniform 4KB erase opcode = not supported = FFh                                                                                                                                                                                                                                        |
| 04h                                        | 02h                                         |                                     | F3h (FLxxxSAG)<br>F7h (FLxxxSDP) | Bit 23 = Unused = 1b Bit 22 = Supports Quad Out Read = Yes = 1b Bit 21 = Supports Quad I/O Read = Yes = 1b Bit 20 = Supports Dual I/O Read = Yes = 1b Bit 19 = Supports DDR 0= No, 1 = Yes Bit 18:17 = Number of Address Bytes, 3 or 4 = 01b Bit 16 = Supports Dual Out Read = Yes = 1b           |
| 05h                                        | 03h                                         |                                     | FFh                              | Bits 31:24 = Unused = FFh                                                                                                                                                                                                                                                                         |
| 06h                                        | 04h                                         | JEDEC Basic Flash Parameter Dword-2 | FFh                              | Density in bits, zero based, 512Mb = 1FFFFFFFh                                                                                                                                                                                                                                                    |
| 07h                                        | 05h                                         |                                     | FFh                              |                                                                                                                                                                                                                                                                                                   |
| 08h                                        | 06h                                         |                                     | FFh                              |                                                                                                                                                                                                                                                                                                   |
| 09h                                        | 07h                                         |                                     | 1Fh                              |                                                                                                                                                                                                                                                                                                   |
| 0Ah                                        | 08h                                         | JEDEC Basic Flash Parameter Dword-3 | 44h                              | Bits 7:5 = number of Quad I/O Mode cycles = 010b Bits 4:0 = number of Quad I/O Dummy cycles = 00100b for default latency code 00b                                                                                                                                                                 |
| 0Bh                                        | 09h                                         |                                     | EBh                              | Quad I/O instruction code                                                                                                                                                                                                                                                                         |
| 0Ch                                        | 0Ah                                         |                                     | 08h                              | Bits 23:21 = number of Quad Out Mode cycles = 000b Bits 20:16 = number of Quad Out Dummy cycles = 01000b                                                                                                                                                                                          |
| 0Dh                                        | 0Bh                                         |                                     | 6Bh                              | Quad Out instruction code                                                                                                                                                                                                                                                                         |
| 0Eh                                        | 0Ch                                         | JEDEC Basic Flash Parameter Dword-4 | 08h                              | Bits 7:5 = number of Dual Out Mode cycles = 000b Bits 4:0 = number of Dual Out Dummy cycles = 01000b for default latency code                                                                                                                                                                     |
| 0Fh                                        | 0Dh                                         |                                     | 3Bh                              | Dual Out instruction code                                                                                                                                                                                                                                                                         |
| 10h                                        | 0Eh                                         |                                     | 04h (HPLC) 80h (EHPLC)           | Bits 23:21 = number of Dual I/O Mode cycles = 100b for EHPLC or 000b for HPLC Bits 20:16 = number of Dual I/O Dummy cycles = 00000b for EHPLC or 00100b for HPLC Default Latency code = 00b                                                                                                       |
| 11h                                        | 0Fh                                         |                                     | BBh                              | Dual I/O instruction code                                                                                                                                                                                                                                                                         |
| 12h                                        | 10h                                         | JEDEC Basic Flash Parameter Dword-5 | EEh                              | Bits 7:5 RFU = 111b Bit 4 = Quad All supported = No = 0b Bits 3:1 RFU = 111b Bit 0 = Dual All not supported = 0b                                                                                                                                                                                  |
| 13h                                        | 11h                                         |                                     | FFh                              | Bits 15:8 = RFU = FFh                                                                                                                                                                                                                                                                             |
| 14h                                        | 12h                                         |                                     | FFh                              | Bits 23:16 = RFU = FFh                                                                                                                                                                                                                                                                            |
| 15h                                        | 13h                                         |                                     | FFh                              | Bits 31:24 = RFU = FFh                                                                                                                                                                                                                                                                            |

**Table 10.20** CFI Alternate Vendor-Specific Extended Query Parameter A5h, JEDEC SFDP Rev B (Continued)

| CFI Parameter<br>Relative Byte<br>Address Offset | SFDP<br>Parameter<br>Relative Byte<br>Address Offset | SFDP Dword<br>Name                         | Data | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------|------------------------------------------------------|--------------------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16h                                              | 14h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-6  | FFh  | Bits 7:0 = RFU = FFh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 17h                                              | 15h                                                  |                                            | FFh  | Bits 15:8 = RFU = FFh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 18h                                              | 16h                                                  |                                            | FFh  | Bits 23:21 = number of Dual All Mode cycles = 111b Bits 20:16 = number of Dual All Dummy cycles = 11111b                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 19h                                              | 17h                                                  |                                            | FFh  | Dual All instruction code                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 1Ah                                              | 18h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-7  | FFh  | Bits 7:0 = RFU = FFh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 1Bh                                              | 19h                                                  |                                            | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 1Ch                                              | 1Ah                                                  |                                            | FFh  | Bits 15:8 = RFU = FFh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 1Dh                                              | 1Bh                                                  |                                            | EBh  | Bits 23:21 = number of Quad All Mode cycles = 111b Bits 20:16 = number of Quad All Dummy cycles = 11111b                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 1Eh                                              | 1Ch                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-8  | 00h  | Quad All mode Quad I/O (4-4-4) instruction code                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 1Fh                                              | 1Dh                                                  |                                            | FFh  | Erase type 1 instruction = not supported = FFh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 20h                                              | 1Eh                                                  |                                            | 00h  | Erase type 2 size $2^N$ Bytes = not supported = 00h                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 21h                                              | 1Fh                                                  |                                            | FFh  | Erase type 2 instruction = not supported = FFh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 22h                                              | 20h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-9  | 12h  | Erase type 3 size $2^N$ Bytes = 256KB = 12h                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 23h                                              | 21h                                                  |                                            | D8h  | Erase type 3 instruction                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 24h                                              | 22h                                                  |                                            | 00h  | Erase type 4 size $2^N$ Bytes = not supported = 00h                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 25h                                              | 23h                                                  |                                            | FFh  | Erase type 4 instruction = not supported = FFh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 26h                                              | 24h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-10 | F2h  | Bits 31:30 = Erase type 4 Erase, Typical time units (00b: 1 ms, 01b: 16 ms, 10b: 128 ms, 11b: 1 s) = RFU = 11b Bits 29:25 = Erase type 4 Erase, Typical time count = RFU = 11111b                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 27h                                              | 25h                                                  |                                            | FFh  | ( typ erase time = count +1 * units = RFU ) Bits 24:23 = Erase type 3 Erase, Typical time units (00b: 1 ms, 01b: 16 ms, 10b: 128 ms, 11b: 1 s) = 128mS = 10b Bits 22:18 = Erase type 3 Erase, Typical time count = 00011b ( typ erase time = count +1 * units = 4*128mS = 512mS) Bits 17:16 = Erase type 2 Erase, Typical time units (00b: 1 ms, 01b: 16 ms, 10b: 128 ms, 11b: 1 s) = RFU = 11b Bits 15:11 = Erase type 2 Erase, Typical time count = RFU = 11111b ( typ erase time = count +1 * units = RFU ) Bits 10:9 = Erase type 1 Erase, Typical time units (00b: 1 ms, 01b: 16 ms, 10b: 128 ms, 11b: 1 s) = RFU = 11b Bits 8:4 = Erase type 1 Erase, Typical time count = RFU = 11111b ( typ erase time = count +1 * units = RFU ) Bits 3:0 = Multiplier from typical erase time to maximum erase time = $2^*(N+1)$ , N=2h = 6x multiplier Binary Fields: 11-11111-10-00011-11-11111-11-11111-0010 Nibble Format: 1111_1111_0000_1111_1111_1111_1111_0010 Hex Format: FF_0F_FF_F2                                                                                                                                                                                                                                                                          |
| 28h                                              | 26h                                                  |                                            | 0Fh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 29h                                              | 27h                                                  |                                            | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 2Ah                                              | 28h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-11 | 91h  | Bit 31 Reserved = 1b Bits 30:29 = Chip Erase, Typical time units (00b: 16 ms, 01b: 256 ms, 10b: 4 s, 11b: 64 s) = 4s = 10b Bits 28:24 = Chip Erase, Typical time count, (count+1)*units, count = 11001b, ( typ Program time = count +1 * units = 26*4uS = 104S Bits 23 = Byte Program Typical time, additional byte units (0b:1uS, 1b:8uS) = 1uS = 0b Bits 22:19 = Byte Program Typical time, additional byte count, (count+1)*units, count = 0000b, ( typ Program time = count +1 * units = 1*1uS = 1uS Bits 18 = Byte Program Typical time, first byte units (0b:1uS, 1b:8uS) = 8uS = 1b Bits 17:14 = Byte Program Typical time, first byte count, (count+1)*units, count = 1100b, ( typ Program time = count +1 * units = 13*8uS = 104uS Bits 13 = Page Program Typical time units (0b:8uS, 1b:64uS) = 64uS = 1b Bits 12:8 = Page Program Typical time count, (count+1)*units, count = 00101b, ( typ Program time = count +1 * units = 6*64uS = 384uS) Bits 7:4 = Page size $2^N$ , N=9h, = 512B page Bits 3:0 = Multiplier from typical time to maximum for Page or Byte program = $2^*(N+1)$ , N=1h = 4x multiplier Binary Fields: 1-10-11001-0-0000-1-1100-1-00101-1001-0001 Nibble Format: 1101_1001_0000_0111_0010_0101_1001_0001 Hex Format: D9_07_25_91 |
| 2Bh                                              | 29h                                                  |                                            | 25h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 2Ch                                              | 2Ah                                                  |                                            | 07h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 2Dh                                              | 2Bh                                                  |                                            | D9h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 10.20** CFI Alternate Vendor-Specific Extended Query Parameter A5h, JEDEC SFDP Rev B (Continued)

| CFI Parameter<br>Relative Byte<br>Address Offset | SFDP<br>Parameter<br>Relative Byte<br>Address Offset | SFDP Dword<br>Name                         | Data | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------|------------------------------------------------------|--------------------------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2Eh                                              | 2Ch                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-12 | ECh  | Bit 31 = Suspend and Resume supported = 0b Bits 30:29 = Suspend in-progress erase max latency units (00b: 128ns, 01b: 1us, 10b: 8us, 11b: 64us) = 8us= 10b Bits 28:24 = Suspend in-progress erase max latency count = 00101b, max erase suspend latency = count +1 * units = 6*8uS = 48uS Bits 23:20 = Erase resume to suspend interval count = 0001b, interval = count +1 * 64us = 2 * 64us = 128us Bits 19:18 = Suspend in-progress program max latency units (00b: 128ns, 01b: 1us, 10b: 8us, 11b: 64us) = 8us= 10b Bits 17:13 = Suspend in-progress program max latency count = 00100b, max erase suspend latency = count +1 * units = 5*8uS = 40uS Bits 12:9 = Program resume to suspend interval count = 0001b, interval = count +1 * 64us = 2 * 64us = 128us Bit 8 = RFU = 1b Bits 7:4 = Prohibited operations during erase suspend = xxx0b: May not initiate a new erase anywhere (erase nesting not permitted) + xx1xb: May not initiate a page program in the erase suspended sector size + x1xxb: May not initiate a read in the erase suspended sector size + 1xxxb: The erase and program restrictions in bits 5:4 are sufficient = 1110b Bits 3:0 = Prohibited Operations During Program Suspend = xxx0b: May not initiate a new erase anywhere (erase nesting not permitted) + xx0xb: May not initiate a new page program anywhere (program nesting not permitted) + x1xxb: May not initiate a read in the program suspended page size + 1xxxb: The erase and program restrictions in bits 1:0 are sufficient = 1100b Binary Fields: 0-10-00101-0001-10-00100-0001-1-1110-1100 Nibble Format: 0100_0101_0001_1000_1000_0011_1110_1100 Hex Format: 45_18_83_EC |
| 2Fh                                              | 2Dh                                                  |                                            | 83h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 30h                                              | 2Eh                                                  |                                            | 18h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 31h                                              | 2Fh                                                  |                                            | 45h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 32h                                              | 30h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-13 | 8Ah  | Bits 31:24 = Erase Suspend Instruction = 75h Bits 23:16 = Erase Resume Instruction = 7Ah Bits 15:8 = Program Suspend Instruction = 85h Bits 7:0 = Program Resume Instruction = 8Ah                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 33h                                              | 31h                                                  |                                            | 85h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 34h                                              | 32h                                                  |                                            | 7Ah  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 35h                                              | 33h                                                  |                                            | 75h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 36h                                              | 34h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-14 | F7h  | Bit 31 = Deep Power Down Supported = not supported = 1 Bits 30:23 = Enter Deep Power Down Instruction = not supported = FFh Bits 22:15 = Exit Deep Power Down Instruction = not supported = FFh Bits 14:13 = Exit Deep Power Down to next operation delay units = (00b: 128ns, 01b: 1us, 10b: 8us, 11b: 64us) = 64us = 11b Bits 12:8 = Exit Deep Power Down to next operation delay count = 11111b, Exit Deep Power Down to next operation delay = (count+1)*units = not supported Bits 7:4 = RFU = Fh Bit 3:2 = Status Register Polling Device Busy = 01b: Legacy status polling supported = Use legacy polling by reading the Status Register with 05h instruction and checking WIP bit[0] (0=ready; 1=busy). Bits 1:0 = RFU = 11b Binary Fields: 1-11111111-11111111-11-11111-1111-01-11 Nibble Format: 1111_1111_1111_1111_1111_1111_0111 Hex Format: FF_FF_FF_F7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 37h                                              | 35h                                                  |                                            | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 38h                                              | 36h                                                  |                                            | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 39h                                              | 37h                                                  |                                            | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 3Ah                                              | 38h                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-15 | 00h  | Bits 31:24 = RFU = FFh Bit 23 = Hold and WP Disable = not supported = 0b Bits 22:20 = Quad Enable Requirements = 101b: QE is bit 1 of the status register 2. Status register 1 is read using Read Status instruction 05h. Status register 2 is read using instruction 35h. QE is set via Write Status instruction 01h with two data bytes where bit 1 of the second byte is one. It is cleared via Write Status with two data bytes where bit 1 of the second byte is zero. Bits 19:16 0-4-4 Mode Entry Method = xxx1b: Mode Bits[7:0] = A5h Note: QE must be set prior to using this mode + x1xxb: Mode Bits[7:0] = Axxh + 1xxxb: RFU = 1101b Bits 15:10 0-4-4 Mode Exit Method = xx_1xxb: Mode Bits[7:0] = 00h will terminate this mode at the end of the current read operation + xx_1xxb: Input Fh (mode bit reset) on DQ0-DQ3 for 8 clocks. This will terminate the mode prior to the next read operation. + x1_1xxb: Mode Bit[7:0] != Axxh + 1x_11xx: RFU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 3Bh                                              | 39h                                                  |                                            | F6h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 3Ch                                              | 3Ah                                                  |                                            | 5Dh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 3Dh                                              | 3Bh                                                  |                                            | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

**Table 10.20** CFI Alternate Vendor-Specific Extended Query Parameter A5h, JEDEC SFDP Rev B (Continued)

| CFI Parameter<br>Relative Byte<br>Address Offset | SFDP<br>Parameter<br>Relative Byte<br>Address Offset | SFDP Dword<br>Name                                               | Data | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------|------------------------------------------------------|------------------------------------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3Eh                                              | 3Ch                                                  | JEDEC Basic<br>Flash Parameter<br>Dword-16                       | F0h  | Bits 31:24 = Enter 4-Byte Addressing = xxxx_1xxx: 8-bit volatile bank register used to define A[30:A24] bits. MSB (bit[7]) is used to enable/disable 4-byte address mode. When MSB is set to '1', 4-byte address mode is active and A[30:24] bits are don't care. Read with instruction 16h. Write instruction is 17h with 1 byte of data. When MSB is cleared to '0', select the active 128 Mbit segment by setting the appropriate A[30:24] bits and use 3-Byte addressing. + xx1x_xxxx: Supports dedicated 4-Byte address instruction set. Consult vendor data sheet for the instruction set definition or look for 4 Byte Address Parameter Table. + 1xxx_xxxx: Reserved = 10101000b Bits 23:14 = Exit 4-Byte Addressing = xx_xxxx_1xxx: 8-bit volatile bank register used to define A[30:A24] bits. MSB (bit[7]) is used to enable/disable 4-byte address mode. When MSB is cleared to '0', 3-byte address mode is active and A30:A24 are used to select the active 128 Mbit memory segment. Read with instruction 16h. Write instruction is 17h, data length is 1 byte. + xx_xx1x_xxxx: Hardware reset + xx_x1xx_xxxx: Software reset (see bits 13:8 in this DWORD) + xx_1xxx_xxxx: Power cycle + x1_xxxx_xxxx: Reserved + 1x_xxxx_xxxx: Reserved = 111101000b Bits 13:8 = Soft Reset and Rescue Sequence Support = x0_1xxx: issue instruction F0h + 1x_xxxx: exit 0-4-4 mode is required prior to other reset sequences above if the device may be operating in this mode. = 101000b Bit 7 = RFU = 1 Bits 6:0 = Volatile or Non-Volatile Register and Write Enable Instruction for Status Register 1 = xx1_xxxx: Status Register 1 contains a mix of volatile and non-volatile bits. The 06h instruction is used to enable writing of the register. + x1x_xxxx: Reserved + 1xx_xxxx: Reserved = 1110000b Binary Fields: 10101000-111101000-101000-1-1110000 Nibble Format: 1010_1000_1111_1010_0010_1000_1111_0000 Hex Format: A8_FA_28_F0 |
| 3Fh                                              | 3Dh                                                  |                                                                  | 28h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 40h                                              | 3Eh                                                  |                                                                  | FAh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 41h                                              | 3Fh                                                  |                                                                  | A8h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 42h                                              | 40h                                                  | JEDEC Sector<br>Map Parameter<br>Dword-1 Config-0<br>Header      | FFh  | Bits 31:24 = RFU = FFh Bits 23:16 = Region count (Dwords -1) = 00h: One region Bits 15:8 = Configuration ID = 00h: Uniform 256KB sectors Bits 7:2 = RFU = 111111b Bit 1 = Map Descriptor = 1 Bit 0 = The end descriptor = 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 43h                                              | 41h                                                  |                                                                  | 00h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 44h                                              | 42h                                                  |                                                                  | 00h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 45h                                              | 43h                                                  |                                                                  | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 46h                                              | 44h                                                  | JEDEC Sector<br>Map Parameter<br>Dword-2 Config-0<br>Region-0    | F4h  | Bits 31:8 = Region size = 00FFFFh: Region size as count-1 of 256 Byte units = 64MB/256 = 256K Count = 262144, value = count -1 = 262144 -1 = 262143 = 3FFFFh Bits 4:7 = RFU = Fh Erase Type not supported = 0/ supported = 1 Bits 3 = Erase Type 4 support = 0b --- Erase Type 4 is not defined Bits 2 = Erase Type 3 support = 1b --- Erase Type 3 is 256KB erase and is supported in the 256KB sector region Bits 1 = Erase Type 2 support = 0b --- Erase Type 2 is 64KB erase and is not supported in the 256KB sector region Bits 0 = Erase Type 1 support = 0b --- Erase Type 1 is 4KB erase and is not supported in the 256KB sector region                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 47h                                              | 45h                                                  |                                                                  | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 48h                                              | 46h                                                  |                                                                  | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 49h                                              | 47h                                                  |                                                                  | 3Fh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4Ah                                              | 48h                                                  | JEDEC 4 Byte<br>Address<br>Instructions<br>Parameter Dword-<br>1 | FFh  | Supported = 1, Not Supported = 0 Bits 31:20 = RFU = FFh Bit 19 = Support for non-volatile individual sector lock write command, Instruction=E3h = 1 Bit 18 = Support for non-volatile individual sector lock read command, Instruction=E2h = 1 Bit 17 = Support for volatile individual sector lock Write command, Instruction=E1h = 1 Bit 16 = Support for volatile individual sector lock Read command, Instruction=E0h = 1 Bit 15 = Support for (1-4-4) DTR_Read Command, Instruction=EEh = 1 Bit 14 = Support for (1-2-2) DTR_Read Command, Instruction=BEh = 1 Bit 13 = Support for (1-1-1) DTR_Read Command, Instruction=0Eh = 1 Bit 12 = Support for Erase Command – Type 4 = 0 Bit 11 = Support for Erase Command – Type 3 = 1 Bit 10 = Support for Erase Command – Type 2 = 0 Bit 9 = Support for Erase Command – Type 1 = 0 Bit 8 = Support for (1-4-4) Page Program Command, Instruction=3Eh = 0 Bit 7 = Support for (1-1-4) Page Program Command, Instruction=34h = 1 Bit 6 = Support for (1-1-1) Page Program Command, Instruction=12h = 1 Bit 5 = Support for (1-4-4) FAST_READ Command, Instruction=ECh = 1 Bit 4 = Support for (1-1-4) FAST_READ Command, Instruction=6Ch = 1 Bit 3 = Support for (1-2-2) FAST_READ Command, Instruction=BCh = 1 Bit 2 = Support for (1-1-2) FAST_READ Command, Instruction=3Ch = 1 Bit 1 = Support for (1-1-1) FAST_READ Command, Instruction=0Ch = 1 Bit 0 = Support for (1-1-1) READ Command, Instruction=13h = 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 4Bh                                              | 49h                                                  |                                                                  | E8h  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4Ch                                              | 4Ah                                                  |                                                                  | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4Dh                                              | 4Bh                                                  |                                                                  | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4Eh                                              | 4Ch                                                  | JEDEC 4 Byte<br>Address<br>Instructions<br>Parameter Dword-<br>2 | FFh  | Bits 31:24 = FFh = Instruction for Erase Type 4: RFU Bits 23:16 = DCh = Instruction for Erase Type 3 Bits 15:8 = FFh = Instruction for Erase Type 2: RFU Bits 7:0 = FFh = Instruction for Erase Type 1: RFU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 4Fh                                              | 4Dh                                                  |                                                                  | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 50h                                              | 4Eh                                                  |                                                                  | DCh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 51h                                              | 4Fh                                                  |                                                                  | FFh  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

This parameter type (Parameter ID F0h) may appear multiple times and have a different length each time. The parameter is used to reserve space in the ID-CFI map or to force space (pad) to align a following parameter to a required boundary.

## 10.4 Registers

The register maps are copied in this section as a quick reference. See *Registers on page 47* for the full description of the register contents.

**Table 10.21** Status Register-1 (SR1)

| Bits | Field Name | Function                      | Type                                           | Default State                                 | Description                                                                                                                                                                                                                 |
|------|------------|-------------------------------|------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | SRWD       | Status Register Write Disable | Non-Volatile                                   | 0                                             | 1 = Locks state of SRWD, BP, and configuration register bits when WP# is low by ignoring WRR command<br>0 = No protection, even when WP# is low                                                                             |
| 6    | P_ERR      | Programming Error Occurred    | Volatile, Read only                            | 0                                             | 1 = Error occurred<br>0 = No Error                                                                                                                                                                                          |
| 5    | E_ERR      | Erase Error Occurred          | Volatile, Read only                            | 0                                             | 1 = Error occurred<br>0 = No Error                                                                                                                                                                                          |
| 4    | BP2        | Block Protection              | Volatile if CR1[3]=1, Non-Volatile if CR1[3]=0 | 1 if CR1[3]=1,<br>0 when shipped from Cypress | Protects selected range of sectors (Block) from Program or Erase                                                                                                                                                            |
| 3    | BP1        |                               |                                                |                                               |                                                                                                                                                                                                                             |
| 2    | BP0        |                               |                                                |                                               |                                                                                                                                                                                                                             |
| 1    | WEL        | Write Enable Latch            | Volatile                                       | 0                                             | 1 = Device accepts Write Registers (WRR), program or erase commands<br>0 = Device ignores Write Registers (WRR), program or erase commands<br>This bit is not affected by WRR, only WREN and WRDI commands affect this bit. |
| 0    | WIP        | Write in Progress             | Volatile, Read only                            | 0                                             | 1 = Device Busy, a Write Registers (WRR), program, erase or other operation is in progress<br>0 = Ready Device is in standby mode and can accept commands                                                                   |

**Table 10.22** Configuration Register (CR1)

| Bits | Field Name | Function                                                                                               | Type         | Default State | Description                                                                   |
|------|------------|--------------------------------------------------------------------------------------------------------|--------------|---------------|-------------------------------------------------------------------------------|
| 7    | LC1        | Latency Code                                                                                           | Non-Volatile | 0             | Selects number of initial read latency cycles<br>See Latency Code Tables      |
| 6    | LC0        |                                                                                                        |              | 0             |                                                                               |
| 5    | TBPROT     | Configures Start of Block Protection                                                                   | OTP          | 0             | 1 = BP starts at bottom (Low address)<br>0 = BP starts at top (High address)  |
| 4    | RFU        | RFU                                                                                                    | RFU          | 0             | Reserved for Future Use                                                       |
| 3    | BPNV       | Configures BP2-0 in Status Register                                                                    | OTP          | 0             | 1 = Volatile<br>0 = Non-Volatile                                              |
| 2    | RFU        | RFU                                                                                                    | RFU          | 0             | Reserved for Future Use                                                       |
| 1    | QUAD       | Puts the device into Quad I/O operation                                                                | Non-Volatile | 0             | 1 = Quad<br>0 = Dual or Serial                                                |
| 0    | FREEZE     | Lock current state of BP2-0 bits in Status Register, TBPROT in Configuration Register, and OTP regions | Volatile     | 0             | 1 = Block Protection and OTP locked<br>0 = Block Protection and OTP un-locked |

**Table 10.23** Status Register-2 (SR2)

| Bits | Field Name | Function        | Type                | Default State | Description                                                      |
|------|------------|-----------------|---------------------|---------------|------------------------------------------------------------------|
| 7    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                          |
| 6    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                          |
| 5    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                          |
| 4    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                          |
| 3    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                          |
| 2    | RFU        | Reserved        |                     | 0             | Reserved for Future Use                                          |
| 1    | ES         | Erase Suspend   | Volatile, Read only | 0             | 1 = In erase suspend mode.<br>0 = Not in erase suspend mode.     |
| 0    | PS         | Program Suspend | Volatile, Read only | 0             | 1 = In program suspend mode.<br>0 = Not in program suspend mode. |

**Table 10.24** Bank Address Register (BAR)

| Bits   | Field Name | Function                | Type     | Default State | Description                                                                                                           |
|--------|------------|-------------------------|----------|---------------|-----------------------------------------------------------------------------------------------------------------------|
| 7      | EXTADD     | Extended Address Enable | Volatile | 0b            | 1 = 4-byte (32-bits) addressing required from command.<br>0 = 3-byte (24-bits) addressing from command + Bank Address |
| 6 to 2 | RFU        | Reserved                | Volatile | 00000b        | Reserved for Future Use                                                                                               |
| 1      | BA25       | Bank Address            | Volatile | 0             | A25 for 512 Mb device                                                                                                 |
| 0      | RFU        | Bank Address            | Volatile | 0             | RFU for lower density device                                                                                          |

**Table 10.25** ASP Register (ASPR)

| Bits    | Field Name | Function                            | Type | Default State | Description                                                                                                    |
|---------|------------|-------------------------------------|------|---------------|----------------------------------------------------------------------------------------------------------------|
| 15 to 9 | RFU        | Reserved                            | OTP  | 1             | Reserved for Future Use                                                                                        |
| 8       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 7       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 6       | RFU        | Reserved                            | OTP  | 1             | Reserved for Future Use                                                                                        |
| 5       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 4       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 3       | RFU        | Reserved                            | OTP  | (Note 1)      | Reserved for Future Use                                                                                        |
| 2       | PWDMLB     | Password Protection Mode Lock Bit   | OTP  | 1             | 0 = Password Protection Mode permanently enabled.<br>1 = Password Protection Mode not permanently enabled.     |
| 1       | PSTMLB     | Persistent Protection Mode Lock Bit | OTP  | 1             | 0 = Persistent Protection Mode permanently enabled.<br>1 = Persistent Protection Mode not permanently enabled. |
| 0       | RFU        | Reserved                            | OTP  | 1             | Reserved for Future Use                                                                                        |

**Note:**

1. Default value depends on ordering part number, see Initial Delivery State on page 128.

**Table 10.26** Password Register (PASS)

| Bits    | Field Name | Function        | Type | Default State     | Description                                                                                                                                                               |
|---------|------------|-----------------|------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 63 to 0 | PWD        | Hidden Password | OTP  | FFFFFFFFFFFFFFFFh | Non-volatile OTP storage of 64-bit password. The password is no longer readable after the password protection mode is selected by programming ASP register bit 2 to zero. |

**Table 10.27** PPB Lock Register (PPBL)

| Bits   | Field Name | Function          | Type     | Default State                                                  | Description                                                                                                   |
|--------|------------|-------------------|----------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| 7 to 1 | RFU        | Reserved          | Volatile | 00h                                                            | Reserved for Future Use                                                                                       |
| 0      | PPBLOCK    | Protect PPB Array | Volatile | Persistent Protection Mode = 1<br>Password Protection Mode = 0 | 0 = PPB array protected until next power cycle or hardware reset<br>1 = PPB array may be programmed or erased |

**Table 10.28** PPB Access Register (PPBAR)

| Bits   | Field Name | Function                       | Type         | Default State | Description                                                                                                                                                                                                                                                                                      |
|--------|------------|--------------------------------|--------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | PPB        | Read or Program per sector PPB | Non-volatile | FFh           | 00h = PPB for the sector addressed by the PPBRD or PPBP command is programmed to '0', protecting that sector from program or erase operations.<br>FFh = PPB for the sector addressed by the PPBRD or PPBP command is erased to '1', not protecting that sector from program or erase operations. |

**Table 10.29** DYB Access Register (DYBAR)

| Bits   | Field Name | Function                     | Type     | Default State | Description                                                                                                                                                                                                                                                                                |
|--------|------------|------------------------------|----------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | DYB        | Read or Write per sector DYB | Volatile | FFh           | 00h = DYB for the sector addressed by the DYBRD or DYBP command is cleared to '0', protecting that sector from program or erase operations.<br>FFh = DYB for the sector addressed by the DYBRD or DYBP command is set to '1', not protecting that sector from program or erase operations. |

**Table 10.30** Non-Volatile Data Learning Register (NVDLR)

| Bits   | Field Name | Function                           | Type | Default State | Description                                                                                                                                                                                                          |
|--------|------------|------------------------------------|------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | NVDLP      | Non-Volatile Data Learning Pattern | OTP  | 00h           | OTP value that may be transferred to the host during DDR read command latency (dummy) cycles to provide a training pattern to help the host more accurately center the data capture point in the received data bits. |

**Table 10.31** Volatile Data Learning Register (NVDLR)

| Bits   | Field Name | Function                       | Type     | Default State                                | Description                                                                                                                                                        |
|--------|------------|--------------------------------|----------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 0 | VDLP       | Volatile Data Learning Pattern | Volatile | Takes the value of NVDLR during POR or Reset | Volatile copy of the NVDLP used to enable and deliver the Data Learning Pattern (DLP) to the outputs. The VDLP may be changed by the host during system operation. |

## 10.5 Initial Delivery State

The device is shipped from Cypress with non-volatile bits set as follows:

- The entire memory array is erased: i.e. all bits are set to 1 (each byte contains FFh).
- The OTP address space has the first 16 bytes programmed to a random number. All other bytes are erased to FFh.
- The SFDP address space contains the values as defined in the description of the SFDP address space.
- The ID-CFI address space contains the values as defined in the description of the ID-CFI address space.
- The Status Register 1 contains 00h (all SR1 bits are cleared to 0's).
- The Configuration Register 1 contains 00h.
- The Autoboot register contains 00h.
- The Password Register contains FFFFFFFF-FFFFFFFh
- All PPB bits are 1.
- The ASP Register contents depend on the ordering options selected:

**Table 10.32** ASP Register Content

| Ordering Part Number Model                         | ASPR Default Value |
|----------------------------------------------------|--------------------|
| 01, 21, 31, R1, A1, B1, C1, D1, 91, Q1, 71, 61, 81 | FE7Fh              |
| K1, L1, S1, T1, Y1, Z1, M1, N1, U1, V1, W1, X1     | FE4Fh              |



## Ordering Information

### 11 Ordering Information FL512S

The ordering part number is formed by a valid combination of the following:

| S25FL | 512 | S | AG | M | F | I | 0 | 0 | 1 |                                                                                        |
|-------|-----|---|----|---|---|---|---|---|---|----------------------------------------------------------------------------------------|
|       |     |   |    |   |   |   |   |   |   | <b>Packing Type</b>                                                                    |
|       |     |   |    |   |   |   |   |   |   | 0 = Tray                                                                               |
|       |     |   |    |   |   |   |   |   |   | 1 = Tube                                                                               |
|       |     |   |    |   |   |   |   |   |   | 3 = 13" Tape and Reel                                                                  |
|       |     |   |    |   |   |   |   |   |   | <b>Model Number (Sector Type)</b>                                                      |
|       |     |   |    |   |   |   |   |   |   | 1 = Uniform 256-kB sectors                                                             |
|       |     |   |    |   |   |   |   |   |   | <b>Model Number (Latency Type, Package Details, RESET# and V<sub>IO</sub> Support)</b> |
|       |     |   |    |   |   |   |   |   |   | 0 = EHPLC, SO footprint                                                                |
|       |     |   |    |   |   |   |   |   |   | 2 = EHPLC, 5 x 5 ball BGA footprint                                                    |
|       |     |   |    |   |   |   |   |   |   | 3 = EHPLC, 4 x 6 ball BGA footprint                                                    |
|       |     |   |    |   |   |   |   |   |   | G = EHPLC, SO footprint with RESET#                                                    |
|       |     |   |    |   |   |   |   |   |   | R = EHPLC, SO footprint with RESET# and V <sub>IO</sub>                                |
|       |     |   |    |   |   |   |   |   |   | A = EHPLC, 5 x 5 ball BGA footprint with RESET# and V <sub>IO</sub>                    |
|       |     |   |    |   |   |   |   |   |   | B = EHPLC, 4 x 6 ball BGA footprint with RESET# and V <sub>IO</sub>                    |
|       |     |   |    |   |   |   |   |   |   | C = EHPLC, 5 x 5 ball BGA footprint with RESET#                                        |
|       |     |   |    |   |   |   |   |   |   | D = EHPLC, 4 x 6 ball BGA footprint with RESET#                                        |
|       |     |   |    |   |   |   |   |   |   | 9 = HPLC, SO footprint                                                                 |
|       |     |   |    |   |   |   |   |   |   | 4 = HPLC, 5 x 5 ball BGA footprint                                                     |
|       |     |   |    |   |   |   |   |   |   | 8 = HPLC, 4 x 6 ball BGA footprint                                                     |
|       |     |   |    |   |   |   |   |   |   | H = HPLC, SO footprint with RESET#                                                     |
|       |     |   |    |   |   |   |   |   |   | Q = HPLC, SO footprint with RESET# and V <sub>IO</sub>                                 |
|       |     |   |    |   |   |   |   |   |   | 7 = HPLC, 5 x 5 ball BGA footprint with RESET# and V <sub>IO</sub>                     |
|       |     |   |    |   |   |   |   |   |   | 6 = HPLC, 4 x 6 ball BGA footprint with RESET# and V <sub>IO</sub>                     |
|       |     |   |    |   |   |   |   |   |   | E = HPLC, 5 x 5 ball BGA footprint with RESET#                                         |
|       |     |   |    |   |   |   |   |   |   | F = HPLC, 4 x 6 ball BGA footprint with RESET#                                         |
|       |     |   |    |   |   |   |   |   |   | <b>Temperature Range</b>                                                               |
|       |     |   |    |   |   |   |   |   |   | I = Industrial (–40°C to + 85°C)                                                       |
|       |     |   |    |   |   |   |   |   |   | V = Industrial Plus (–40°C to + 105°C)                                                 |
|       |     |   |    |   |   |   |   |   |   | <b>Package Materials</b>                                                               |
|       |     |   |    |   |   |   |   |   |   | F = Lead (Pb)-free                                                                     |
|       |     |   |    |   |   |   |   |   |   | H = Low-Halogen, Lead (Pb)-free                                                        |
|       |     |   |    |   |   |   |   |   |   | <b>Package Type</b>                                                                    |
|       |     |   |    |   |   |   |   |   |   | M = 16-pin SO package                                                                  |
|       |     |   |    |   |   |   |   |   |   | B = 24-ball BGA 6 x 8 mm package, 1.00 mm pitch                                        |
|       |     |   |    |   |   |   |   |   |   | <b>Speed</b>                                                                           |
|       |     |   |    |   |   |   |   |   |   | AG= 133 MHz                                                                            |
|       |     |   |    |   |   |   |   |   |   | DP= 66 MHz DDR                                                                         |
|       |     |   |    |   |   |   |   |   |   | DS= 80 MHz DDR                                                                         |
|       |     |   |    |   |   |   |   |   |   | <b>Device Technology</b>                                                               |
|       |     |   |    |   |   |   |   |   |   | S = 0.065 μm MirrorBit Process Technology                                              |
|       |     |   |    |   |   |   |   |   |   | <b>Density</b>                                                                         |
|       |     |   |    |   |   |   |   |   |   | 512= 512 Mbit                                                                          |
|       |     |   |    |   |   |   |   |   |   | <b>Device Family</b>                                                                   |
|       |     |   |    |   |   |   |   |   |   | S25FL                                                                                  |
|       |     |   |    |   |   |   |   |   |   | Cypress Memory 3.0 Volt-Only, Serial Peripheral Interface (SPI) Flash Memory           |

#### Notes:

1. EHPLC = Enhanced High Performance Latency Code table.
2. HPLC = High Performance Latency Code table.
3. Uniform 256-kB sectors = All sectors are uniform 256-kB with a 512B programming buffer.

## Valid Combinations

Valid Combinations list configurations planned to be supported in volume for this device. Consult your local sales office to confirm availability of specific valid combinations and to check on newly released combinations.

| Valid Combinations        |              |                         |                        |              |                                          |
|---------------------------|--------------|-------------------------|------------------------|--------------|------------------------------------------|
| Base Ordering Part Number | Speed Option | Package and Temperature | Model Number           | Packing Type | Package Marking (1)                      |
| S25FL512S                 | AG           | MFI, MFV                | 01, G1, R1             | 0, 1, 3      | FL512S + A + (Temp) + F + (Model Number) |
|                           | DP           | MFI, MFV                | 01, G1                 |              | FL512S + D + (Temp) + F + (Model Number) |
|                           | DS           | MFV, MFI                | 01                     | 0, 1, 3      | FL512S + S + (Temp) + F + (Model Number) |
|                           | AG           | BHI, BHV                | 21, 31, A1, B1, C1, D1 | 0, 3         | FL512S + A + (Temp) + H + (Model Number) |
|                           | DP           | BHI, BHV                | 21, 31, C1, D1         |              | FL512S + D + (Temp) + H + (Model Number) |
|                           | DS           | MFV, MFI                | 01                     | 0, 1, 3      | FL512S + S + (Temp) + F + (Model Number) |
|                           |              | BHI, BHV                | 21                     | 0, 3         | FL512S + S + (Temp) + H + (Model Number) |

**Note:**

- Example, S25FL512SAGMFI000 package marking would be FL512SAIF00.

## 12. Contacting Cypress

Obtain the latest list of company locations and contact information at: <http://www.spansion.com/About/Pages/Locations.aspx>

## 13. Revision History

Spanion Publication Number: S25FL512S\_00

| Section                                                   | Description                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Revision 01 (December 20, 2011)</b>                    |                                                                                                                                                                                                                                                                         |
|                                                           | Initial release                                                                                                                                                                                                                                                         |
| <b>Revision 02 (March 2, 2012)</b>                        |                                                                                                                                                                                                                                                                         |
| General                                                   | Changed data sheet designation from Advance Information to Preliminary                                                                                                                                                                                                  |
| Performance Summary                                       | Current Consumption table: corrected Serial Read 50 MHz and Serial Read 133 MHz values                                                                                                                                                                                  |
| DC Characteristics                                        | DC Characteristics table: corrected $I_{CC1}$ values                                                                                                                                                                                                                    |
| SDR AC Characteristics                                    | AC Characteristics (Single Die Package, $V_{IO} = V_{CC}$ 2.7V to 3.6V) table: corrected $T_{CSH}$ and $T_{SU}$ Max values<br>AC Characteristics (Single Die Package, $V_{IO}$ 1.65V to 2.7V, $V_{CC}$ 2.7V to 3.6V) table: corrected $T_{CSH}$ and $T_{SU}$ Max values |
| Embedded Algorithm Performance Tables                     | Program and Erase Performance table: corrected $T_W$ Typ and Max values                                                                                                                                                                                                 |
| Device ID and Common Flash Interface (ID-CFI) Address Map | Updated table: CFI Alternate Vendor-Specific Extended Query Parameter 0                                                                                                                                                                                                 |
| <b>Revision 03 (May 2, 2012)</b>                          |                                                                                                                                                                                                                                                                         |
| Global                                                    | Added 105°C updates                                                                                                                                                                                                                                                     |
| Ordering Information                                      | Updated Valid Combinations table                                                                                                                                                                                                                                        |
| Embedded Algorithm Performance Tables                     | Updated table: Program and Erase Performance                                                                                                                                                                                                                            |
| <b>Revision 04 (June 13, 2012)</b>                        |                                                                                                                                                                                                                                                                         |
| SDR AC Characteristics                                    | Updated $t_{HO}$ value from 0 Min to 2 ns Min                                                                                                                                                                                                                           |
| <b>Revision 05 (April 12, 2013)</b>                       |                                                                                                                                                                                                                                                                         |
| Global                                                    | Data Sheet designation updated from Preliminary to Full Production                                                                                                                                                                                                      |
| <b>Revision 06 (December 20, 2013)</b>                    |                                                                                                                                                                                                                                                                         |
| Global                                                    | 80 MHz DDR Read operation added                                                                                                                                                                                                                                         |
| Performance Summary                                       | Updated Maximum Read Rates DDR ( $V_{IO} = V_{CC} = 3V$ to 3.6V) table<br>Current Consumption table: added Quad DDR Read 80 MHz                                                                                                                                         |
| Migration Notes                                           | FL Generations Comparison table: updated DDR values for FL-S                                                                                                                                                                                                            |
| SDR AC Characteristics                                    | Updated Clock Timing figure                                                                                                                                                                                                                                             |
| DDR AC Characteristics                                    | Updated AC Characteristics — DDR Operation table                                                                                                                                                                                                                        |
| DDR Output Timing                                         | Updated SPI DDR Data Valid Window figure and Notes                                                                                                                                                                                                                      |
| Ordering Information                                      | Added 80 MHz to Speed option<br>Valid Combinations table: added DS to Speed Option                                                                                                                                                                                      |
| <b>Revision 07 (January 8, 2014)</b>                      |                                                                                                                                                                                                                                                                         |
| DDR AC Characteristics                                    | Removed AC Characteristics 80 MHz Operation table                                                                                                                                                                                                                       |
| <b>Revision 08 (December 18, 2014)</b>                    |                                                                                                                                                                                                                                                                         |
| SDR AC Characteristics                                    | AC Characteristics (Single Die Package, $V_{IO} = V_{CC}$ 2.7V to 3.6V) table: removed $t_V$ (Min) value<br>AC Characteristics (Single Die Package, $V_{IO}$ 1.65V to 2.7V, $V_{CC}$ 2.7V to 3.6V) table: removed $t_V$ (Min) value                                     |
| Bank Address Register                                     | Bank Address Register (BAR) table: corrected Bit 0                                                                                                                                                                                                                      |
| Serial Flash Discoverable Parameters (SFDP) Address Map   | Updated section<br>SFDP Overview Map table: updated<br>Field Definitions: updated SFDP Header table                                                                                                                                                                     |

| Section                                                   | Description                                                                                                                    |
|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Device ID and Common Flash Interface (ID-CFI) Address Map | Field Definitions: added CFI Alternate Vendor-Specific Extended Query Parameter A5h, JEDEC SFDP Rev B table                    |
| <b>Revision 09 (January 21, 2015)</b>                     |                                                                                                                                |
| Capacitance Characteristics                               | Capacitance table: added $T_A = 25^\circ\text{C}$ under Test Conditions                                                        |
| SDR AC Characteristics                                    | AC Characteristics (Single Die Package, $V_{IO} = V_{CC} 2.7\text{V to } 3.6\text{V}$ ) table: changed $t_{SU}$ (Min)          |
| Configuration Register 1 (CR1)                            | Latency Codes for DDR Enhanced High Performance table: added 80 MHz                                                            |
| Command Set Summary                                       | S25FL512S Command Set (sorted by function) table: updated Maximum Frequency (MHz) of DDR Command Descriptions to 80 MHz        |
| Read Memory Array Commands                                | Changed 66 MHz to 80 MHz throughout section                                                                                    |
| Software Interface Reference                              | S25FL512S Instruction Set (sorted by instruction) table: updated Maximum Frequency (MHz) of DDR Command Descriptions to 80 MHz |

## Document History Page

| Document Title: S25FL512S 512 Mbit (64 Mbyte) 3.0V SPI Flash Memory<br>Document Number: 001-98284 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                              | ECN No. | Orig. of Change | Submission Date | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| **                                                                                                | —       | BWHA            | 12/20/2011      | Initial release                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| *A                                                                                                | —       | BWHA            | 03/02/2012      | General: Changed data sheet designation from Advance Information to Preliminary<br>Performance Summary: Current Consumption table: corrected Serial Read 50 MHz and Serial Read 133 MHz values<br>DC Characteristics: DC Characteristics table: corrected ICC1 values<br>SDR AC Characteristics: AC Characteristics (Single Die Package, $V_{IO} = V_{CC} 2.7\text{V to } 3.6\text{V}$ ) table: corrected TCSH and TSU Max values<br>AC Characteristics (Single Die Package, $V_{IO} 1.65\text{V to } 2.7\text{V}$ , $V_{CC} 2.7\text{V to } 3.6\text{V}$ ) table: corrected TCSH and TSU Max values<br>Embedded Algorithm Performance Tables: Program and Erase Performance table: corrected TW Typ and Max values<br>Device ID and Common Flash Interface (ID-CFI) Address Map: Updated table: CFI Alternate Vendor-Specific Extended Query Parameter 0 |
| *B                                                                                                | —       | BWHA            | 05/02/2012      | Global: Added $105^\circ\text{C}$ updates<br>Ordering Information: Updated Valid Combinations table<br>Embedded Algorithm Performance Tables: Updated table: Program and Erase Performance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| *C                                                                                                | —       | BWHA            | 06/13/2012      | SDR AC Characteristics Updated tHO value from 0 Min to 2 ns Min                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| *D                                                                                                | —       | BWHA            | 04/12/2013      | Global: Data Sheet designation updated from Preliminary to Full Production                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| *E                                                                                                | —       | BWHA            | 12/20//2013     | Global 80 MHz DDR Read operation added<br>Performance Summary:<br>Updated Maximum Read Rates DDR ( $V_{IO} = V_{CC} = 3\text{V to } 3.6\text{V}$ ) table<br>Current Consumption table: added Quad DDR Read 80 MHz<br>Migration Notes: FL Generations Comparison table: updated DDR values for FL-S<br>SDR AC Characteristics: Updated Clock Timing figure<br>DDR AC Characteristics: Updated AC Characteristics — DDR Operation table<br>DDR Output Timing: Updated SPI DDR Data Valid Window figure and Notes<br>Ordering Information:<br>Added 80 MHz to Speed option<br>Valid Combinations table: added DS to Speed Option                                                                                                                                                                                                                             |

**Document History Page (Continued)**

| Document Title: S25FL512S 512 Mbit (64 Mbyte) 3.0V SPI Flash Memory<br>Document Number: 001-98284 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                                                                                              | ECN No. | Orig. of Change | Submission Date | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| *F                                                                                                | —       | BWHA            | 01/08/2014      | DDR AC Characteristics: Removed AC Characteristics 80 MHz Operation table                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| *G                                                                                                | —       | BWHA            | 12/18/2014      | SDR AC Characteristics: AC Characteristics (Single Die Package, $V_{IO} = V_{CC}$ 2.7V to 3.6V) table: removed $t_V$ (Min) value<br>AC Characteristics (Single Die Package, $V_{IO}$ 1.65V to 2.7V, $V_{CC}$ 2.7V to 3.6V) table: removed $t_V$ (Min) value<br>Bank Address Register: Bank Address Register (BAR) table: corrected Bit 0<br>Serial Flash Discoverable Parameters (SFDP) Address Map:<br>Updated section<br>SFDP Overview Map table: updated<br>Field Definitions: updated SFDP Header table<br>Device ID and Common Flash Interface (ID-CFI) Address Map: Field Definitions: added CFI Alternate Vendor-Specific Extended Query Parameter A5h, JEDEC SFDP Rev B table                                                   |
| *H                                                                                                | —       | BWHA            | 01/21/2015      | Capacitance Characteristics: Capacitance table: added $T_A = 25^\circ\text{C}$ under Test Conditions<br>SDR AC Characteristics: AC Characteristics (Single Die Package, $V_{IO} = V_{CC}$ 2.7V to 3.6V) table: changed $t_{SU}$ (Min)<br>Configuration Register 1 (CR1): Latency Codes for DDR Enhanced High Performance table: added 80 MHz<br>Command Set Summary: S25FL512S Command Set (sorted by function) table: updated Maximum Frequency (MHz) of DDR Command Descriptions to 80 MHz<br>Read Memory Array Commands: Changed 66 MHz to 80 MHz throughout section<br>Software Interface Reference: S25FL512S Instruction Set (sorted by instruction) table: updated Maximum Frequency (MHz) of DDR Command Descriptions to 80 MHz |
| *I                                                                                                | 4871631 | BWHA            | 08/24/2015      | Updated to Cypress template<br>Change Automotive Temperature Range to Industrial Plus Temperature Range in <a href="#">Performance Summary</a> , <a href="#">Section 4.2.1</a> , <a href="#">Table 4.3</a> , <a href="#">Table 5.4</a> through <a href="#">Table 5.6</a> , <a href="#">Table 9.2</a> , <a href="#">Table 9.7</a> , and <a href="#">Section 11</a> .<br>Remove VIO power-up restriction of to be above VCC -200 mV until the VIO supply voltage is > 1.65V in <a href="#">Section 2.11</a> .                                                                                                                                                                                                                             |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

#### Products

Automotive.....[cypress.com/go/automotive](#)  
Clocks & Buffers ..... [cypress.com/go/clocks](#)  
Interface..... [cypress.com/go/interface](#)  
Lighting & Power Control..... [cypress.com/go/powerpsoc](#)  
Memory..... [cypress.com/go/memory](#)  
PSoC ..... [cypress.com/go/psoc](#)  
Touch Sensing ..... [cypress.com/go/touch](#)  
USB Controllers..... [cypress.com/go/USB](#)  
Wireless/RF ..... [cypress.com/go/wireless](#)

#### PSoC® Solutions

[psoc.cypress.com/solutions](#)  
PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP

#### Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

#### Technical Support

[cypress.com/go/support](#)

© Cypress Semiconductor Corporation, 2011-2015. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Spanion Inc.:

|                                          |                                          |                                          |                                          |                                          |
|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
| <a href="#"><u>S25FL512SAGBHI210</u></a> | <a href="#"><u>S25FL512SAGBHI213</u></a> | <a href="#"><u>S25FL512SAGBHI310</u></a> | <a href="#"><u>S25FL512SAGBHI313</u></a> | <a href="#"><u>S25FL512SAGBHID10</u></a> |
| <a href="#"><u>S25FL512SAGBHID13</u></a> | <a href="#"><u>S25FL512SAGMFI010</u></a> | <a href="#"><u>S25FL512SAGMFI011</u></a> | <a href="#"><u>S25FL512SAGMFI013</u></a> |                                          |
| <a href="#"><u>S25FL512SAGMFIG10</u></a> | <a href="#"><u>S25FL512SAGMFIG11</u></a> | <a href="#"><u>S25FL512SAGMFIG13</u></a> | <a href="#"><u>S25FL512SDPBHI210</u></a> | <a href="#"><u>S25FL512SDPBHI213</u></a> |
| <a href="#"><u>S25FL512SDPBHI310</u></a> | <a href="#"><u>S25FL512SDPBHI313</u></a> | <a href="#"><u>S25FL512SDPMFI010</u></a> | <a href="#"><u>S25FL512SDPMFI011</u></a> | <a href="#"><u>S25FL512SDPMFI013</u></a> |
| <a href="#"><u>S25FL512SAGBHIC13</u></a> | <a href="#"><u>S25FL512SAGBHIC10</u></a> | <a href="#"><u>S25FL512SAGMFIR10</u></a> | <a href="#"><u>S25FL512SAGMFIR13</u></a> |                                          |
| <a href="#"><u>S25FL512SAGMFIR11</u></a> | <a href="#"><u>S25FL512SDSBHI210</u></a> |                                          |                                          |                                          |