



0225240

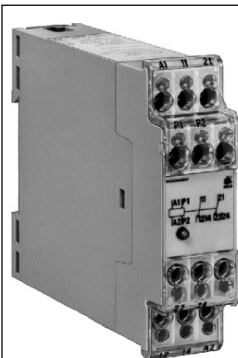


- According to IEC 255, EN 60 255, VDE 0435 part 303
- 1 input for PTC-resistors or bimetal contacts
- Broken wire detection in sensor circuit
- Optionally with no voltage reclosing interlock to VDE 0113 § 5.4.2
- Closed circuit operation
- 1 or 2 changeover contacts
- Width 22,5 mm

Function diagram

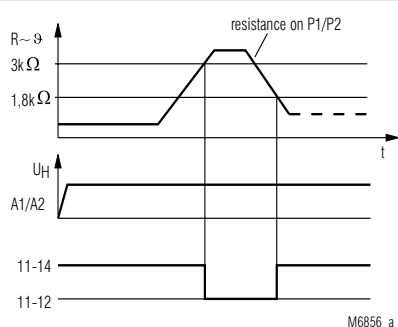

Circuit diagram



Approvals and marking



* see variants

Applications

To protect against thermal overload of motors caused by high switching frequency, heavy duty starting, phase failure on one phase, bad cooling, high ambient temperature.

Function

The motor protection relay MK 9052 is used to detect thermal overload. Special PTC-resistors are used as sensors for motor protection. Up to 6 sensors can be connected in series. When reaching a certain resistance the output relay of the MK 9052 is switched off.

An LED indicates the contact state. The motor protection relay works with open circuit operation and also detects broken wire in the sensor circuit.

Technical data

Input

Response value:	≥ 3 kΩ
Release value:	≤ 1,8 kΩ
Number of sensors:	1 ... 6 pcs
Loading of measuring circuit:	approx. 1 mW (at R = 1,5 kΩ)
Measuring voltage:	approx. 1,2 V (at R = 1,5 kΩ)

Auxiliary circuit

Auxiliary voltage U_H:	AC 24, 42, 110, 127, 230, 240 V
Voltage range of U_H:	0,9 ... 1,1 U_H
Nominal consumption:	1,8 VA
Nominal frequency of U_H:	50 / 60 Hz

Output

Contacts

MK 9052.11:	1 changeover contact
MK 9052.12:	2 changeover contacts
Operate delay:	< 20 ms
Release delay:	< 15 ms
Thermal current I_{th}:	5 A

Switching capacity

to AC 15		
NO contact:	3 A / AC 230 V	EN 60 947-5-1
NC contact:	1 A / AC 230 V	EN 60 947-5-1

Electrical life

to AC 15 at 3 A, AC 230 V:	8 x 10 ⁵ switching cycles
----------------------------	--------------------------------------

Short-circuit strength

max. fuse rating:	4 A gL
--------------------------	--------

Mechanical life:

> 20 x 10 ⁶ switching cycles

Technical data

General data

Operating mode:	Continuous operation	
Temperature range:	- 20 ... + 60°C	
Clearance and creepage distances		
overvoltage category / contamination level:	4 kV / 2	IEC 60 664-1
EMC		
Electrostatic discharge:	8 kV (air)	EN 61 000-4-2
Fast transients:	2 kV	EN 61 000-4-4
Surge voltages between		
wires for power supply:	1 kV	EN 61 000-4-5
between wire and ground:	2 kV	EN 61 000-4-5
Interference suppressions:	Limit value class B	EN 55 011
Degree of protection:	Housing: IP 40	EN 60 529
	Terminals: IP 20	EN 60 529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0,35 mm, frequency 10 ... 55 Hz, EN 60 068-2-6	
Climate resistance:	20 / 060 / 04 EN 60 068-1	
Terminal designation:	EN 50 005	
Wire connection:	2 x 2,5 mm ² solid or 2 x 1,5 mm ² stranded wire with sleeve DIN 46 228-1/-2/-3/-4	
Wire fixing:	Flat terminals with self-lifting clamping piece EN 60 999	
Mounting:	DIN rail EN 50 022	
Weight:	145 g	

Dimensions

Width x height x depth: 22,5 x 82 x 99 mm

Standard type

MK 9052.11 AC 230 V 50 / 60 Hz	
Article number:	0023171 stock item
• Output:	1 changeover contact
• Nominal voltage U_N :	AC 230 V
• Width:	22,5 mm

Variants

MK 9052.__/60:	with CSA approval
MK 9052.__/100:	with electro-magnetic reclosing interlock (manual reset function). When the response temperature is reached the output relay deenergizes and the push button on the relay front comes out immediately.

Ordering example for Variants

MK 9052 .11 / _ _ _ AC 230 V 50 / 60 Hz	
	Nominal frequency
	Auxiliary voltage
	Variant, if required
	Contacts
	Type

Application example

