


LUMINESTRA LED 13 W/840

LED under cabinet lights, low profile

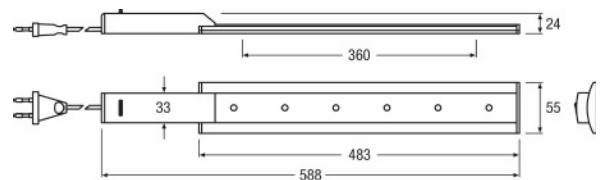

Product datasheet

Technical data

Electrical data

Operating mode	Electronic control gear
Nominal wattage	13 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz

Light technical data

Color temperature	4000 K
Luminous intensity	360 cd
Light color as per EN 12464-1	Cool white
Color rendering index Ra	>80
Color rendering group	1B

Dimensions & weight


Length	588.0 mm
Width	55.0 mm
Height	24.0 mm
Mounting hole spacing, length	360.0 mm

Colors & materials

Body material	Aluminium
Product color	Silver
Cover material	PMMA

Additional product data

Product datasheet

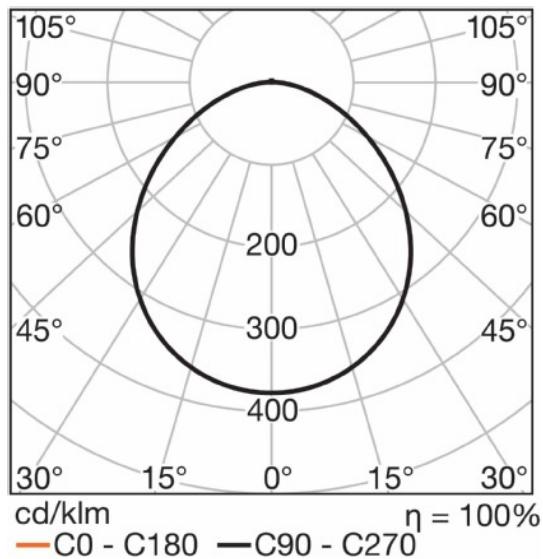

LDC typ polar

Number of lighting outlets	1
Equipment	LED
Equipped with lamp	Yes

Capabilities

Type of installation	Surface-mounted
Type of connection	Cable EU plug

Certificates & standards

Glow Wire Test according to IEC 695-2-1	650 °C
Protection class	II
Type of protection	IP20
Protection against ignition and fire	F,MM

Country specific categorizations

Order reference	73097
------------------------	-------

Country specific information

Product code	METEL-Code	SEG-No.	STK number	UK Org
4008321710604	-	-	4283434	-

Product datasheet

Equipment / Accessories

- Opaque cover for a glare-free illumination
- Equipped with 1.6 m cable and plug
- OSRAM control gear tailored to OSLON LED

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Volume	Gross weight
4008321710604	LUMINESTRA LED 13 W/840	Folding carton box 1	63 mm x 30 mm x 760 mm	1.44 dm ³	493.48 g
4008321710611	LUMINESTRA LED 13 W/840	Shipping carton box 4	128 mm x 78 mm x 771 mm	7.70 dm ³	2125.92 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.