


5x20 mm/No. 311



Indicator, 250 V

Time-Current Characteristic
Mittelträge (M)

Standard
DIN 41577, T.2

Approvals
None

Specifications

Packaging

002: Pack (20 x 10 pcs.)

Materials

Tube: Ceramic
End Caps: Nickel-plated brass

Operating Temperature

-40 °C to +85 °C (consider de-rating)

Climatic Category

-40 °C / +85 °C / 21 days
(IEC 60068-1,-2-1,-2-2,-2-78)

Stock Conditions

+10 °C to +60 °C
relative humidity ≤ 75 % yearly average,
without dew


Vibration Resistance

24 cycles at 15 min. each (EN 60068-2-6)
10 - 60 Hz at 0.75 mm amplitude
60 - 2000 Hz at 10 g acceleration

Marking

Ⓜ, M, Current Rating, 250 V, G

Dimensions (mm)

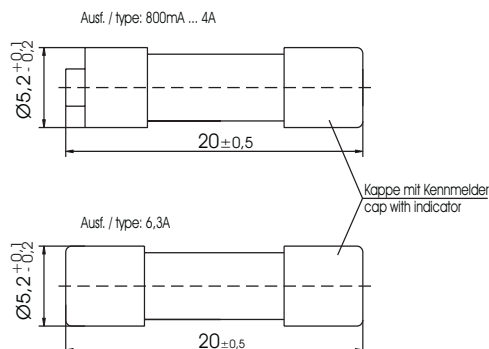

Limits for Pre-arcing Time

Rated Current	$1.5 \times I_N$	$2.1 \times I_N$	$2.75 \times I_N$	$4 \times I_N$	$10 \times I_N$
800 mA ... 6.30 A	> 1 h	< 30 min	-	60 ms ... 2 s	5 ms ... 70 ms

Permissible continuous operating current is ≤ 80 % at ambient temperature of 23 °C (73.4 °F).

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop $1.0 \times I_N$ Ⓜ max. (mV)	Power Dissipation $1.5 \times I_N$ Ⓜ max. (W)	Melting Integral $10 \times I_N$ Ⓜ min. (A²s)	Approvals
800 mA	0800	250 V ²	1500 A @ 250 V AC 50 Hz cos φ = 0.7	400	on request	1.0	None
1 A	1100	250 V ²		350		1.2	
1.25 A	1125	250 V ²		310		1.7	
1.6 A	1160	250 V ²		480		2.5	
2 A	1200	250 V ²		360		4.5	
2.5 A	1250	250 V ²		300		8.2	
4 A	1400	250 V ²		180		30.0	
6.3 A ¹	1630	250 V ²		160		94.0	

¹ without gauge stud


² operating voltage ≥ 10 V

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

Order Information

Qty.	Order-Number	Series	Amp Code	Packaging
		311		

5x20mm/ No. 311

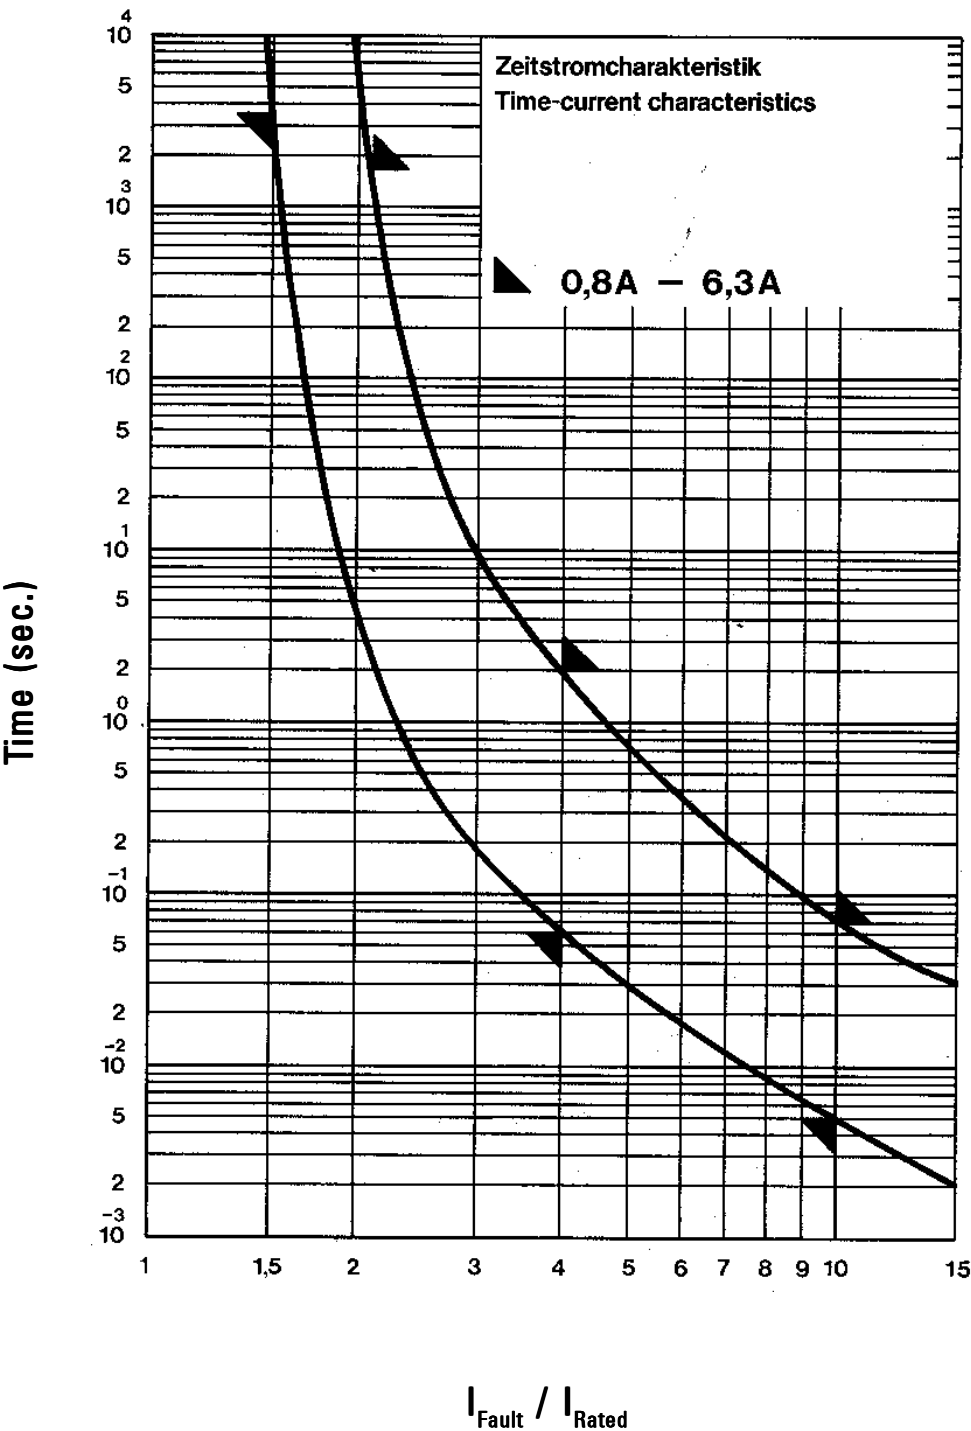

Contact Littelfuse for individual I-t curves

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[0311005.TXN](#) [0311015.TXN](#) [31114000021](#) [0311035.TXN](#) [0311025.TXN](#) [0311030.TXN](#) [0311010.TXN](#)