

**SINGLE-PHASE GLASS PASSIVATED
 SILICON BRIDGE RECTIFIER**

MDA100G
THRU
MDA110G

VOLTAGE RANGE 50 to 1000 Volts CURRENT 1.0 Ampere


FEATURES

- * Low cost
- * Low leakage
- * Low forward voltage
- * Mounting position: Any
- * Weight: 1.26 grams

MECHANICAL DATA

- * UL listed the recognized component directory, file #E94233
- * Epoxy: Device has UL flammability classification 94V-O

RS-1

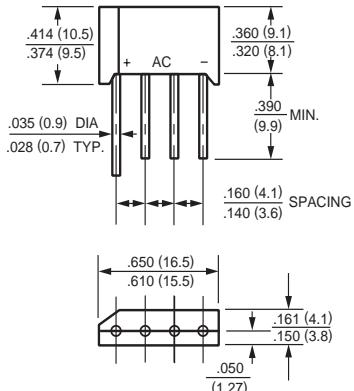

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	MDA100G	MDA101G	MDA102G	MDA104G	MDA106G	MDA108G	MDA110G	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Current at TA = 75°C	I _O				1.0				Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}				30				Amps
Operating Temperature Range	T _J				-55 to + 125				°C
Storage Temperature Range	T _{STG}				-55 to + 150				°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	MDA100G	MDA101G	MDA102G	MDA104G	MDA106G	MDA108G	MDA110G	UNITS
Maximum Forward Voltage Drop per Bridge Element at 1.57A DC	V _F				1.3				Volts
Maximum Reverse Current at Rated DC Blocking Voltage per element	I _R	@ TA = 25°C			10				uAmps
		@ TA = 100°C			1				mAmps

RATING AND CHARACTERISTIC CURVES (MDA100G THRU MDA110G)

FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

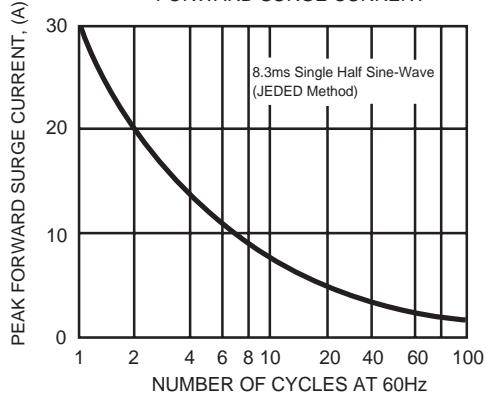


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

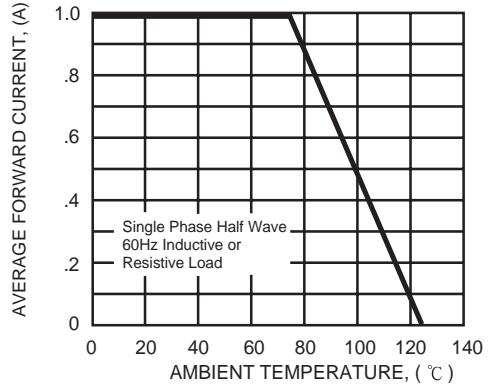


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

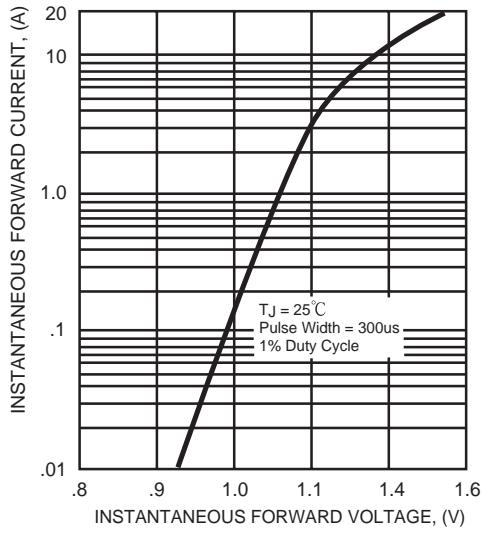


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

