


- NOTES:
1. PACKAGE CABLE ASSEMBLY IN BAG.TAG IN BAG WITH "AMPHENOL CONNEX, 336303-13-XXXX AND DATE CODE".
 2. CABLE ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, SHORTS AND OPEN.

336303-13-XXXX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	24-Dec-10	--	KR

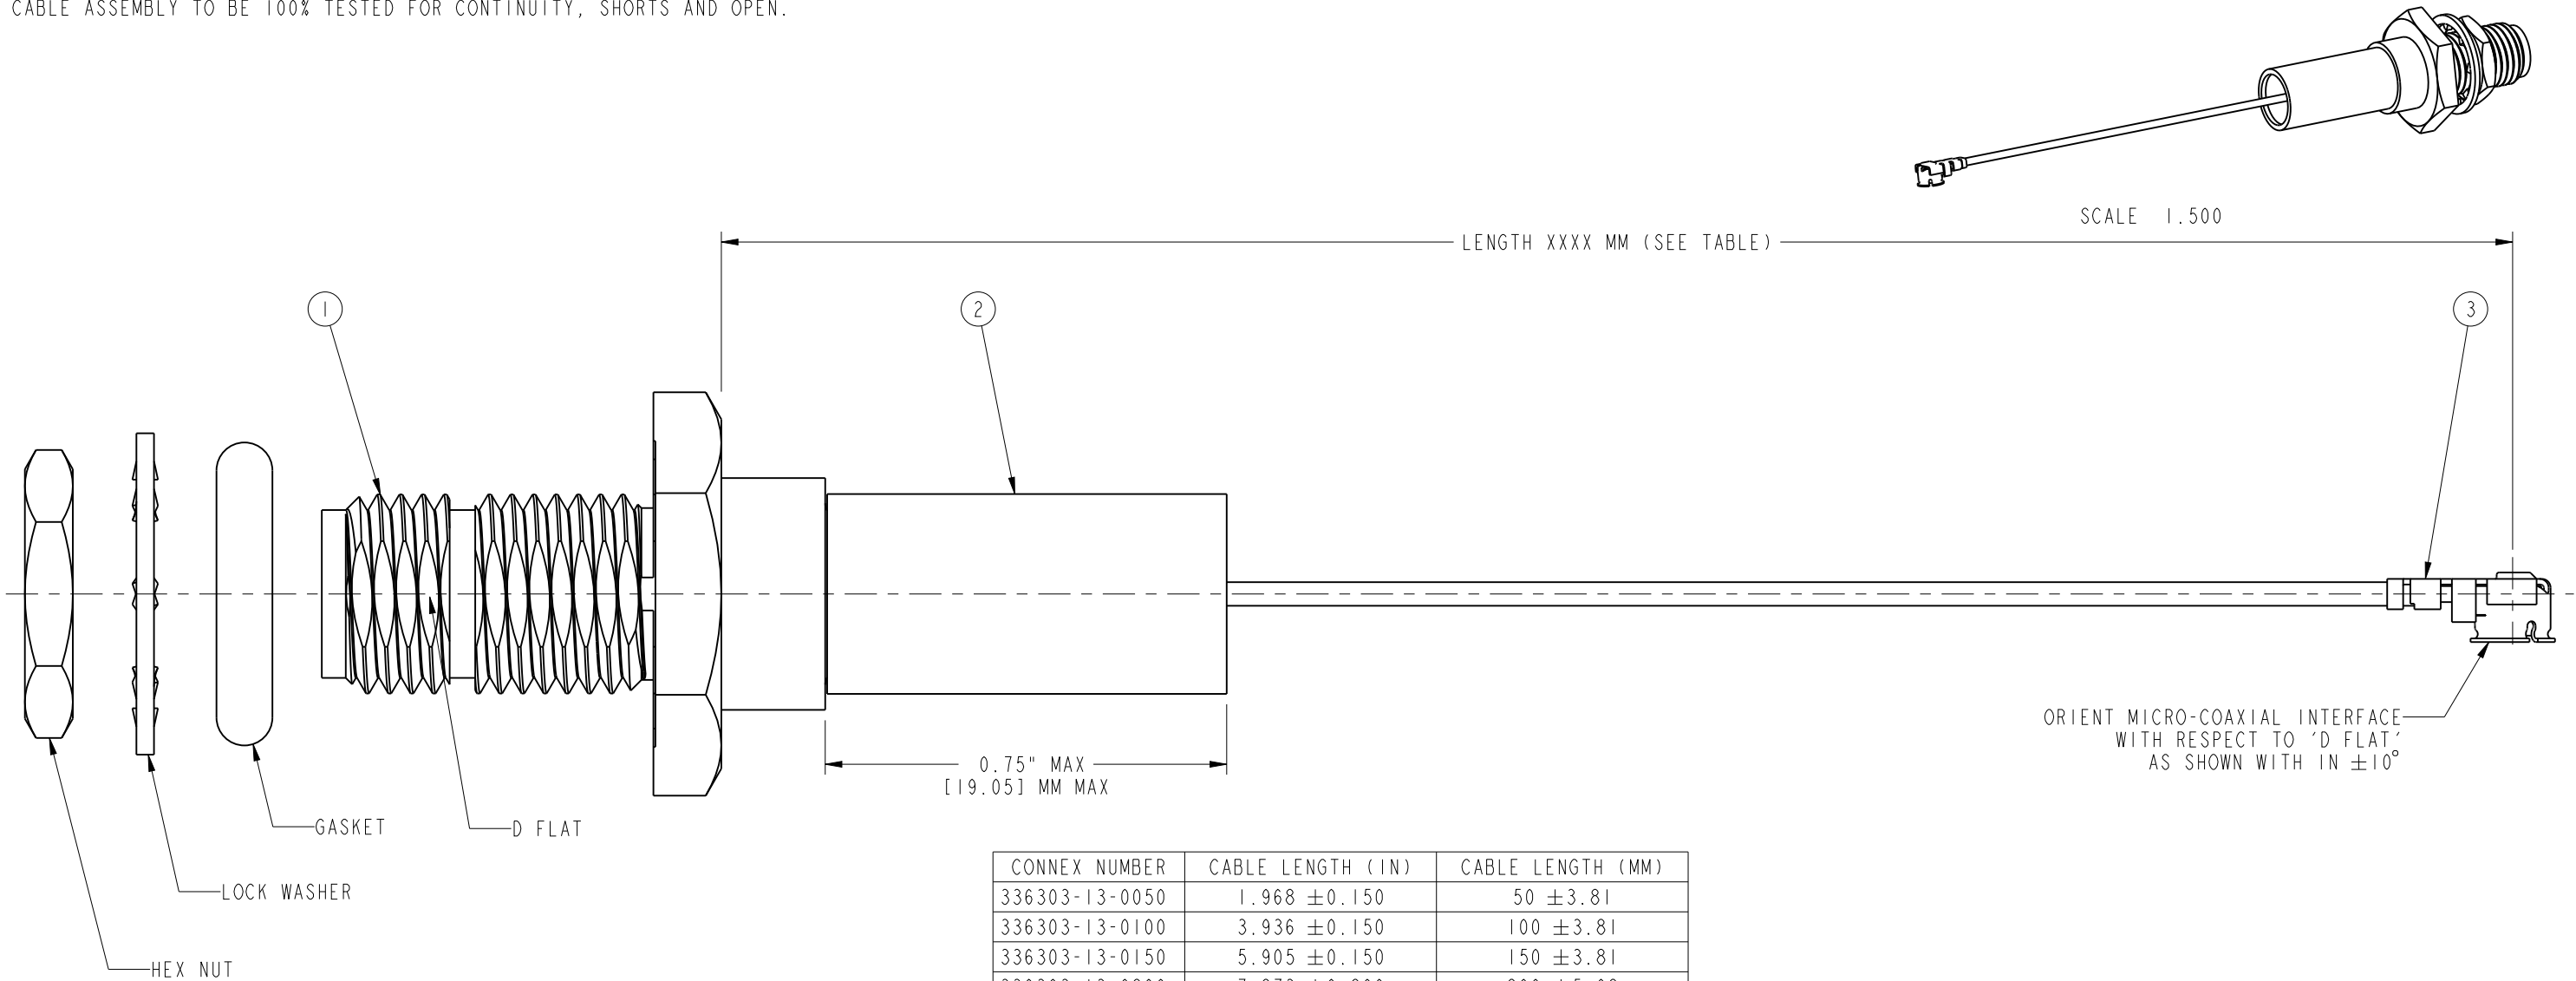

CONNEX NUMBER	CABLE LENGTH (IN)	CABLE LENGTH (MM)
336303-13-0050	1.968 ±0.150	50 ±3.81
336303-13-0100	3.936 ±0.150	100 ±3.81
336303-13-0150	5.905 ±0.150	150 ±3.81
336303-13-0200	7.873 ±0.200	200 ±5.08
336303-13-0250	9.842 ±0.200	250 ±5.08
336303-13-0300	11.810 ±0.200	300 ±5.08

* ADDITIONAL LENGTHS CAN BE PROVIDED
BY CHANGING XXXX TO DESIRED LENGTH IN MM
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

- ☐ FREQUENCY _____ TO _____ GHz
- ☒ CONTINUITY
- ☐ VSWR _____ : 1 MAX
- ☒ HI-POT :200 VRMS
- ☐ INS. LOSS _____ dB MAX
- ☐ OTHER

100910-01	1	3	MICRO COAX R/A PLUG TERMINATED TO 1.32 MM CABLE	
009-954-458	A/R	2	HEAT SHRINK TUBE	
132389	1	1	SMA BLKHD CRIMP JACK	
PART NUMBER	QTY	ITEM	DESCRIPTION	FINISH

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ±.015 (0,381 mm) ±.005 (0,127 mm) ANGLES ± 1°	MATERIAL	DRAWN KARTHIK R	DATE 24-Dec-10	TITLE SMA BLKHD CRIMP JACK TO MICRO COAX R/A PLUG TERMINATED USING 1.32MM CABLE, XXXX MM,LENGTH	Amphenol Connex	
		ENGINEER KARTHIK R	DATE 24-Dec-10			
	REFERENCE TASK - 524	APPROVED	DATE		SCALE: 4.8:1 SHEET 1 OF 1	
		CAD FILE Root folder:/Cable assembly/336303-13-XXXX		DWG SIZE B	DRAWING NO. 336303-13-XXXX	REV A