


3mm Discrete LED

High Efficiency

Diffused

Dialight

521-9210, -9211, -9216, -9498, -9636

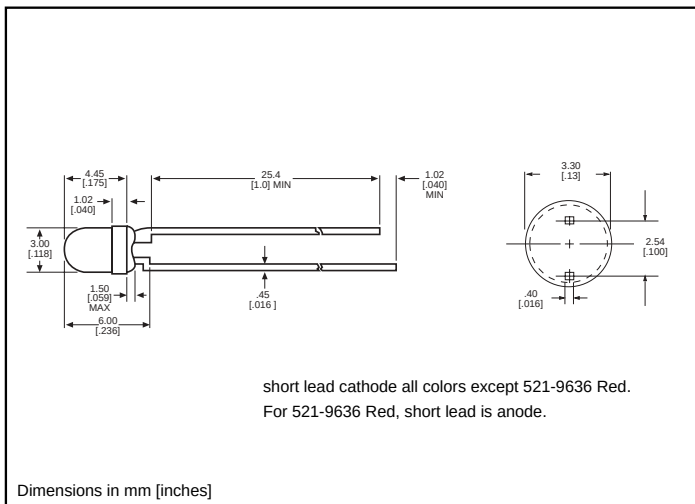

PART NO. COLOR

521-9210 Green

521-9211 Yellow

521-9216 Red

521-9498 Orange

521-9636 Red



MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)	Green -9210	Yellow -9211	Red -9216	Orange -9498	Red -9636
Power Dissipation (mW)	100	60	100	135	100
Forward Current (mA)	30	20	30	25	40
Derating (mA/ $^{\circ}\text{C}$) From 50 $^{\circ}\text{C}$ ¹ from 25 $^{\circ}\text{C}$	.4	.25	.4	.5	.5 ¹
Operating Temperature ($^{\circ}\text{C}$)	-55/+100	-55/+100	-55/+100	-55/+100	-55/+100
Storage Temperature ($^{\circ}\text{C}$)	-55/+100	-55/+100	-55/+100	-55/+100	-55/+100
Soldering Temperature	260 $^{\circ}\text{C}$, 5 seconds, 1.6 mm from body				

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS ($T_A=25^{\circ}\text{C}$)		Green -9210	Yellow -9211	Red -9216	Orange -9498	Red -9636
Luminous Intensity (mcd)	Min.	4.7	7.4	7.4	3.4	8.7 ¹
	Typical	12.6	10	10	7	48 ¹
Peak Wavelength (nm)	Typical	565	585	635	600	660
	λ_{Peak}					
Viewing Angle ($2\theta^{\circ}$)	Typical	60 $^{\circ}$	60 $^{\circ}$	60 $^{\circ}$	60 $^{\circ}$	60 $^{\circ}$
Forward Voltage (V)	Typical	2.1 ¹	2.1 ¹	2 ¹	2.2	1.8 ¹
	Max.	2.8 ¹	2.8 ¹	2.8 ¹	3	2.4 ¹
Reverse Voltage (V), $I_R=100\mu\text{A}$	Max.	5	5	5	5	4

θ° is the off axis angle at which the luminous intensity is half the axial luminous intensity