
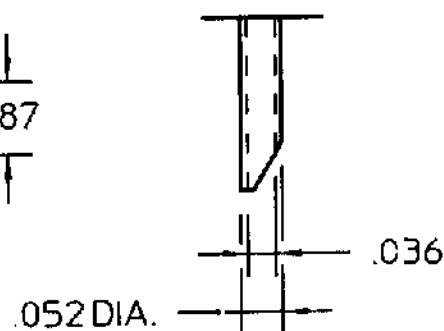
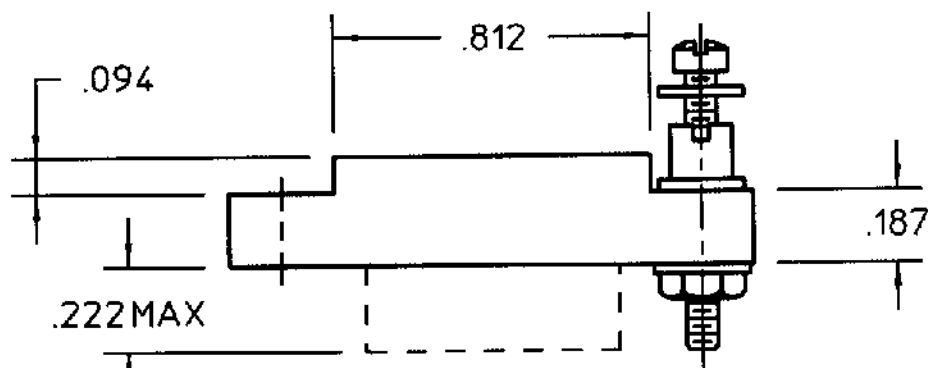


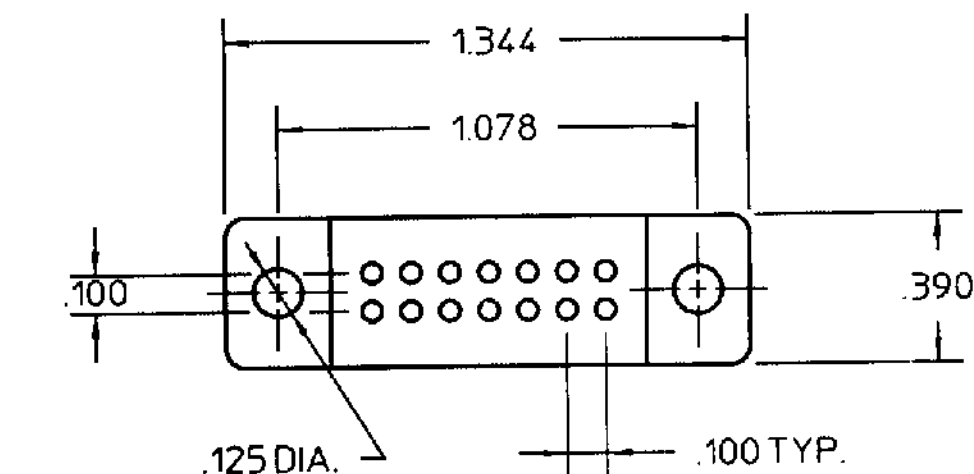

SOLDER CUP
TERMINAL

COIL

RESISTANCE

NOMINAL VOLTAGE

MUST OPERATE

MUST RELEASE

ENVIRONMENT:

VIBRATION — CPS TO — CPS @ — g's

SHOCK — g's — MS. DURATION

TEMPERATURE —65 °C TO +125 °C

NOTES: TERMINAL MATERIAL IS GOLD PLATED
BERYLLIUM COPPER DIELECTRIC- 500 VRMS

CUSTOMER DATA SHEET

BELOW MOUNTING SOCKET
FOR USE WITH .062 CHASSIS

MEETS MIL-C-8384 AND
MIL-M-19833 PERTAINING
TO INSULATING MATERIALS

CONTACT RATING: 2 AMP/28 VDC

DR. R.B. 11/23/94 CK. *AW* 11-23-94

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. _____
CUST. NO. _____

TYPE "SR" RELAY

3050

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3050](#)