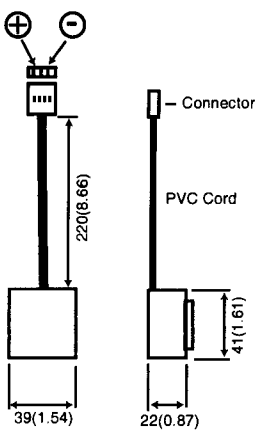
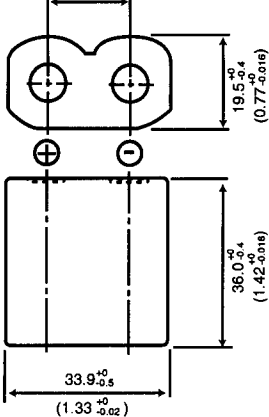



DIMENSIONS - CONTINUED

Bare cell Model No.	Dimensions / mm (inch)	
BR-2/3A Two batteries in series (6V, 1200mAh)	 Connector: made by Bahgu Housing: P/N65039-033 Terminal: P/N47565 BR-E3C3C	 BR-P2


INDIVIDUAL DATA SHEETS

BR-2/3A


Discharging under 30 k Ω
(equivalent to approx. 100 μ A)

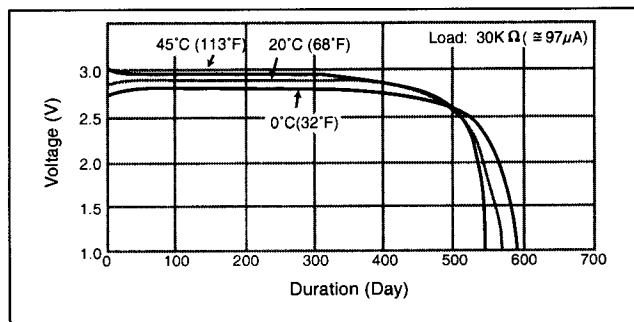


Discharging under 150 k Ω
(equivalent to approx. 20 μ A)

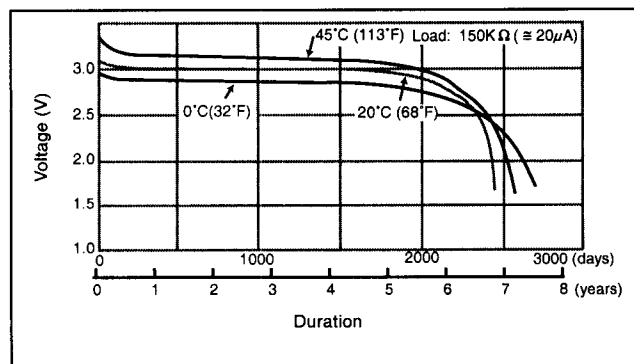

High temperature discharge under 150 k Ω
(equivalent to approx. 20 μ A)

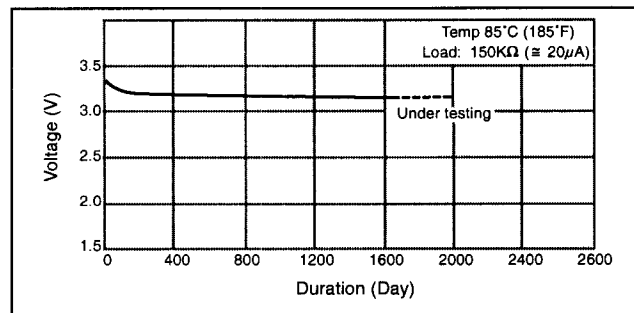


Operational voltage vs. Discharge current

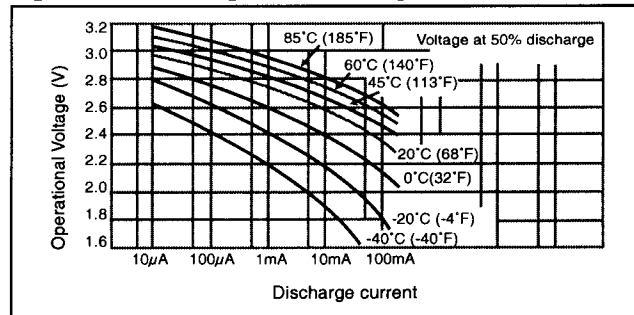


BR-E3C3C, BR-P2

(BR-2/3A Two batteries in series)
Discharge characteristics

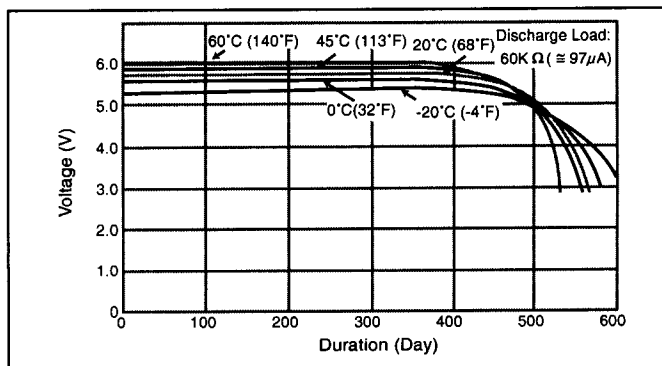

Discharge characteristics

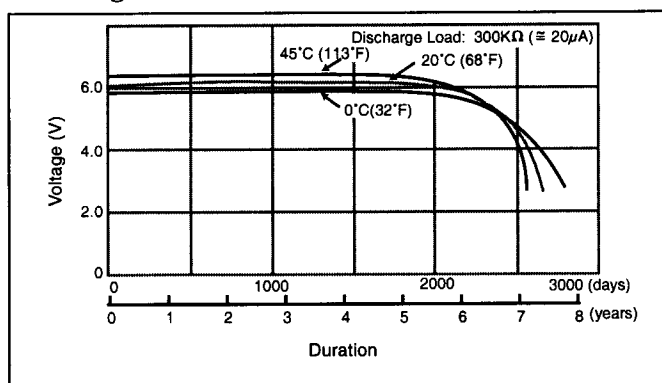

Operational voltage vs. Discharge current

