

UF100G THRU UF108G

GLASS PASSIVATED JUNCTION ULTRAFAST SWITCHING RECTIFIER VOLTAGE - 50 to 800 Volts CURRENT - 1.0 Ampere


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- Glass passivated junction in DO-41 package
- 1.0 ampere operation at $T_A=55\text{ }^\circ\text{C}$ with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Ultra Fast switching for high efficiency

MECHANICAL DATA

Case: Molded plastic, DO-41

Terminals: axial leads, solderable per MIL-STD-202,

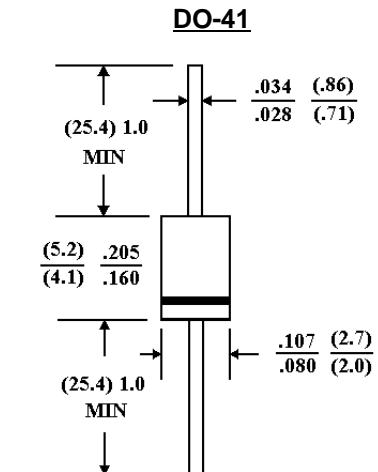

Dimensions in inches and (millimeters)

Method 208

Polarity: Band denotes cathode

Mounting Position: Any

Weight: 0.013 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 $^\circ\text{C}$ ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

	UF100G	UF101G	UF102G	UF104G	UF106G	UF108G	UNITS
Peak Reverse Voltage, Repetitive; V_{RM} :	50	100	200	400	600	800	V
Maximum RMS Voltage	35	70	140	280	420	560	V
DC Reverse Voltage; V_R	50	100	200	400	600	800	V
Average Forward Current, I_o @ $T_A=55\text{ }^\circ\text{C}$ 3/8" lead length, 60 Hz, resistive or inductive load				1.0			A
Peak Forward Surge Current, I_{FM} (surge) 8.3msec. single half sine wave superimposed on rated load(JECEC method)				30			A
Maximum Forward Voltage VF @ 1.0A, 25 $^\circ\text{C}$	1.00		1.30	1.70			V
Maximum Reverse Current, @ Rated $T_J=25\text{ }^\circ\text{C}$			10.0				A
Reverse Voltage $T_J=100\text{ }^\circ\text{C}$			150				A
Typical Junction capacitance (Note 1) C_J			17				pF
Typical Junction Resistance (Note 2) R_{fKJA}			60				$\text{m}\Omega$
Reverse Recovery Time $I_F=5\text{A}$, $I_R=1\text{A}$, $I_{rr}=25\text{A}$	50	50	50	50	100	100	ns
Operating and Storage Temperature Range				-55 to +150			$^\circ\text{C}$

NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC
- Thermal resistance from junction to ambient and from junction to lead length at 0.375"(9.5mm) P.C.B. mounted

RATING AND CHARACTERISTIC CURVES

UF100G THRU UF108G

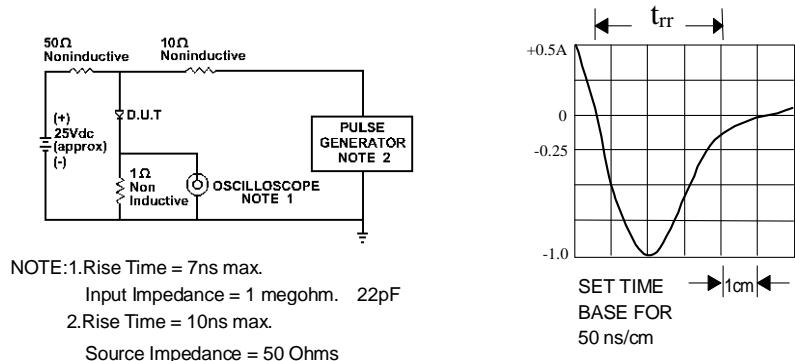


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

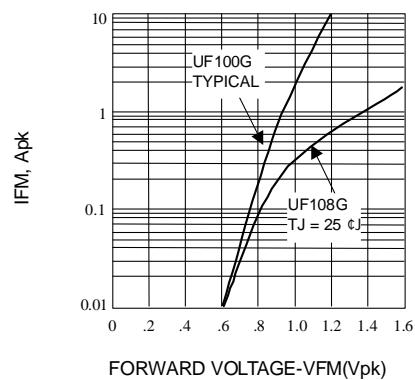


Fig. 2-FORWARD CHARACTERISTICS

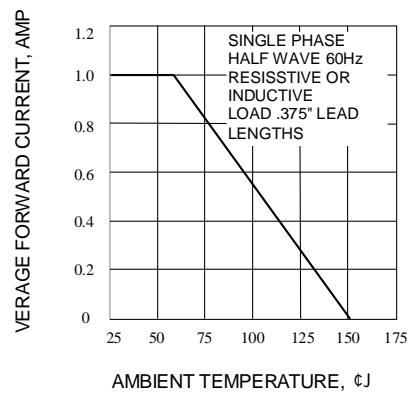


Fig. 3-FORWARD CURRENT DERATING CURVE

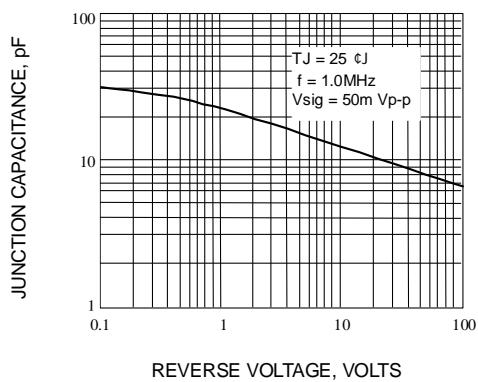


Fig. 4-TYPICAL JUNCTION CAPACITANCE

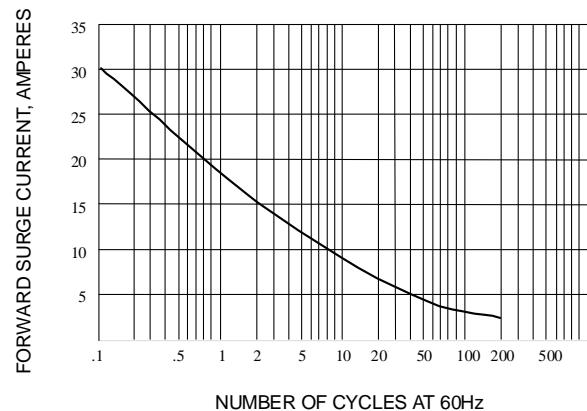


Fig. 5-PEAK FORWARD SURGE CURRENT