

GR731AW0BB103KW01#

" # " indicates a package specification code.

Recommended

Available

General

125℃


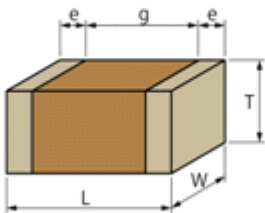
Reflow OK

Flow OK

RoHS

< List of part numbers with package codes >
GR731AW0BB103KW01D

Shape



L size	3.2 ± 0.2mm
W size	1.6 ± 0.2mm
T size	1.0 +0/-0.3mm
External terminal width e	0.3mm min.
Distance between external terminals g	1.2mm min.
Size code in inch(mm)	1206 (3216)

Notes

Flash Circuits only

References

Packaging	Specifications	Minimum quantity
D	180mm Paper taping	4000


Specifications

Capacitance	10000pF ± 10%
Rated voltage	350Vdc
Temperature characteristics (complied standard)	X7T(EIA)
Temperature range of temperature characteristics	-55 to 125
Operating temperature range	-55 to 125


⚠ Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


Frequency characteristics (ESR, Impedance)

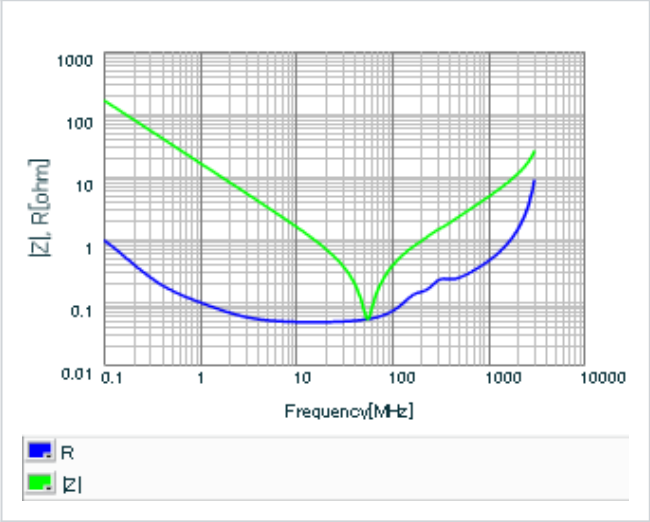


S parameter (Smith chart S11)

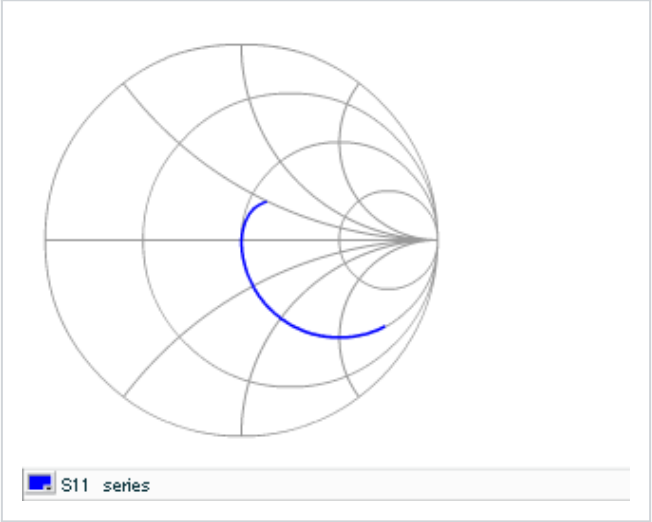

DC bias characteristics

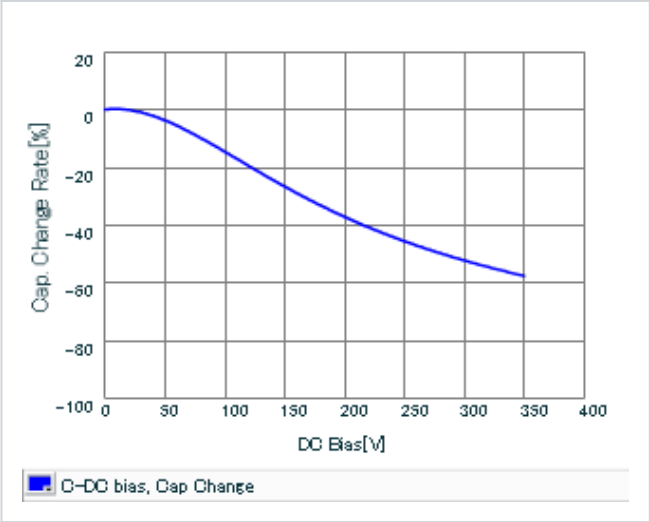

Capacitance - temperature characteristics

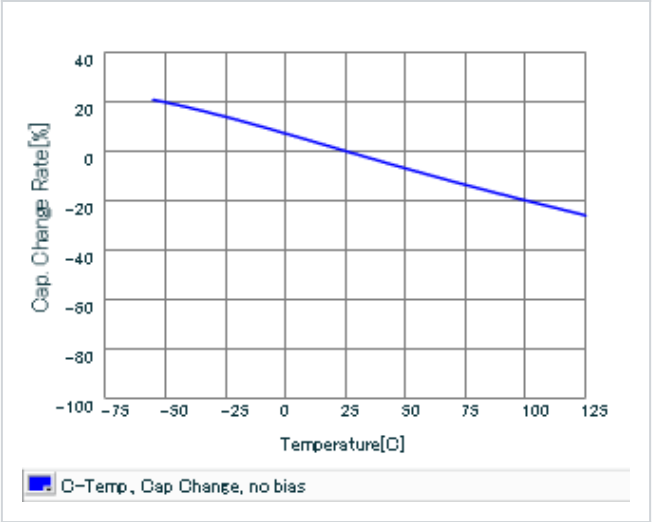

This PDF data has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.