


FEATURES



- LOW COST
- BUILT-IN CAPACITORS

SPECIFICATIONS

SPECIFICATIONS			
FREQUENCY	1.80-6.00 MHZ	6.01-13.00 MHZ	13.01-50.00 MHZ
DIMENSIONS	FIGURE 1	FIGURE 2	
FREQUENCY TOLERANCE	± 0.5 % MAX		
RESONANT IMPEDANCE	30 OHMS MAX	25 OHMS MAX	30 OHMS MAX
FREQUENCY STABILITY OVER TEMPERATURE	± 0.3 % MAX		
OPERATING TEMPERATURE RANGE	-20°C TO +80°C		
ISOLATION RESISTANCE	100 M OHM MIN		
FREQUENCY AGING (10 YEARS)	± 0.3 % MAX		
WITHSTANDING VOLTAGE	100 VDC, 5 sec. MAX		
BUILT-IN CAPACITANCE	30 pF ± 20 % MAX		
MAX VOLTAGE	6 VDC, 15Vp-p AC		
STORAGE TEMPERATURE RANGE	35°C TO +85°C		

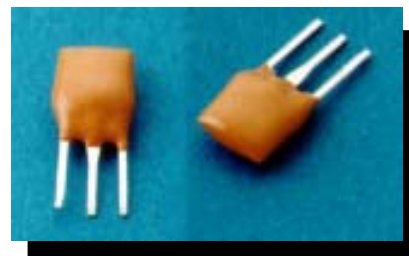

OUTLINE DRAWINGS

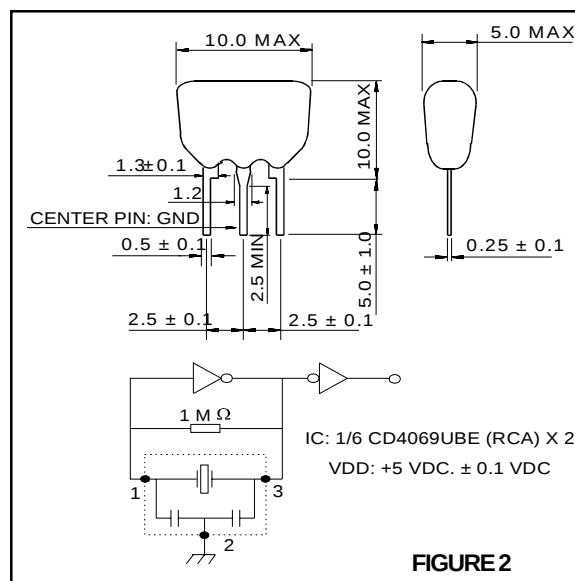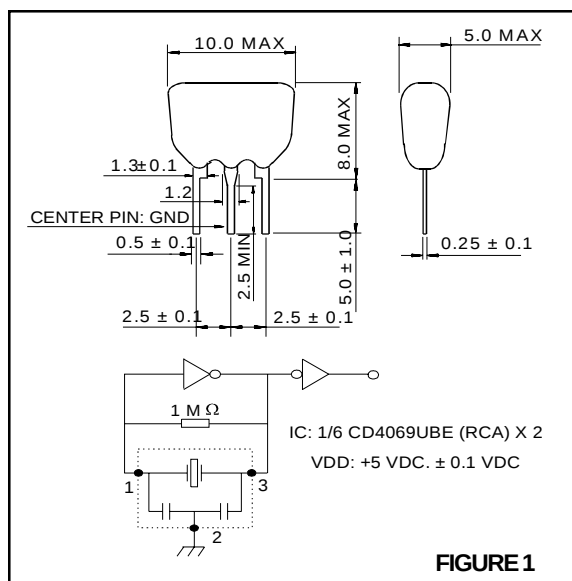

PART NUMBERING SYSTEM

SERIES	-	FREQUENCY
POC		IN MHz

EXAMPLE: POC - 5.00