


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA, USA.

NOTES:

1. INSULATOR DESIGNED TO BE USED WITH LOW INSERTION FORCE RECEPTACLE SERIES, PART Nos: 1659251, 1659252, 1659253, 1659254, 279509 & 279256.

	ALL DIMENSIONS IN mm:	TOLERANCES UNLESS OTHERWISE SPECIFIED: DIMENSION (mm) TOLERANCE(±mm) LESS THAN 10 0.4 OVER 10 TO 30 0.5 OVER 30 TO 80 0.7 OVER 80 TO 250 1.0 ANGLES ±2°	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: W.RIEDE 30.3.03	Tyco Electronics Corporation AUSTRALIA NAME: INSULATOR, POST FIT			
			CHK: H.THA1 30.3.03	APVD: W.RIEDE 30.3.03	PRODUCT SPEC: -				
			APPLICATION SPEC: -	WEIGHT: -	SIZE A3				
	MATERIAL REF BLOCK		FINISH -	CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1	REV A

NYLON 66	BLACK	INSULATOR, POST FIT BLACK (H30013)	1-1659321-1
NYLON 66	NATURAL	INSULATOR, POST FIT NATURAL (H30013)	1-1659321-0
MATERIAL DESC.	COLOUR	DESCRIPTION (UTX P/N)	PART No.

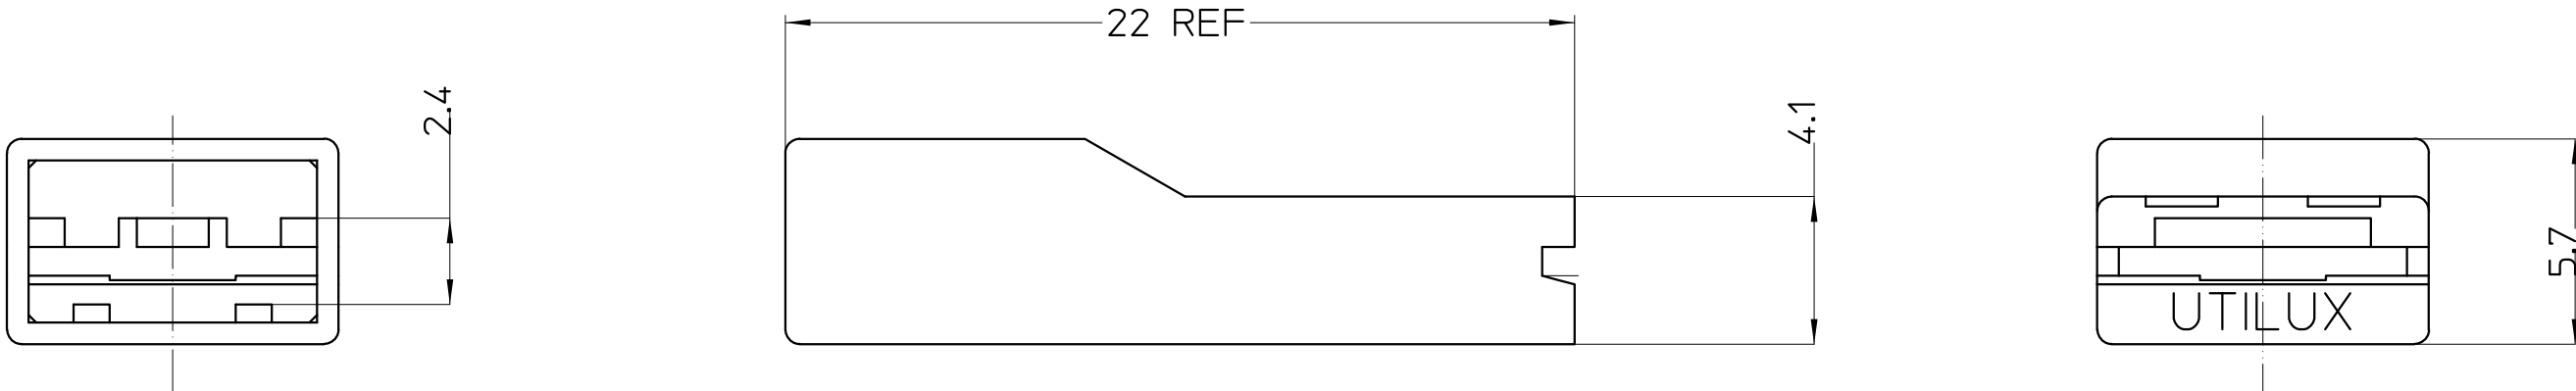

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC U		DIST -		REVISIONS					
COPYRIGHT - BY TYCO ELECTRONICS CORPORATION.		ALL RIGHTS RESERVED.						P	LTR	DESCRIPTION	DATE	DWN	APVD
									A	ECR-10-026094 - P/N 1-1659321-1 ADDED	21 DEC 10	WR	-