

Heterojunction Bipolar Transistor (InGaP HBT)

Broadband High Linearity Amplifier


The MMG3007NT1 is a General Purpose Amplifier that is internally input and output matched. It is designed for a broad range of Class A, small-signal, high linearity, general purpose applications. It is suitable for applications with frequencies from 0 to 6000 MHz such as Cellular, PCS, BWA, WLL, PHS, CATV, VHF, UHF, UMTS and general small-signal RF.

Features

- Frequency: 0 to 6000 MHz
- P1dB: 16 dBm @ 900 MHz
- Small-Signal Gain: 19 dB @ 900 MHz
- Third Order Output Intercept Point: 30 dBm @ 900 MHz
- Single 5 Volt Supply
- Internally Matched to 50 Ohms
- Low Cost SOT-89 Surface Mount Package
- Pb-Free and RoHS Compliant
- In Tape and Reel. T1 Suffix = 1000 Units per 12 mm, 7 inch Reel.

MMG3007NT1

**0-6000 MHz, 19 dB
16 dBm
InGaP HBT**



**CASE 1514-01, STYLE 1
SOT-89
PLASTIC**

Table 1. Typical Performance ⁽¹⁾

Characteristic	Symbol	900 MHz	2140 MHz	3500 MHz	Unit
Small-Signal Gain (S21)	G _p	19	16.5	14	dB
Input Return Loss (S11)	IRL	-14	-21	-21	dB
Output Return Loss (S22)	ORL	-20	-17	-25	dB
Power Output @1dB Compression	P1dB	16	15.5	16	dBm
Third Order Output Intercept Point	IP3	30	29	28.5	dBm

1. V_{CC} = 5 Vdc, T_C = 25°C, 50 ohm system

Table 2. Maximum Ratings

Rating	Symbol	Value	Unit
Supply Voltage ⁽²⁾	V _{CC}	7	V
Supply Current ⁽²⁾	I _{CC}	250	mA
RF Input Power	P _{in}	10	dBm
Storage Temperature Range	T _{stg}	-65 to +150	°C
Junction Temperature ⁽³⁾	T _J	150	°C

2. Continuous voltage and current applied to device.

3. For reliable operation, the junction temperature should not exceed 150°C.

Table 3. Thermal Characteristics (V_{CC} = 5 Vdc, I_{CC} = 47 mA, T_C = 25°C)

Characteristic	Symbol	Value ⁽⁴⁾	Unit
Thermal Resistance, Junction to Case	R _{θJC}	77	°C/W

4. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf> Select Documentation/Application Notes - AN1955.


Table 4. Electrical Characteristics ($V_{CC} = 5 \text{ Vdc}$, 900 MHz, $T_C = 25^\circ\text{C}$, 50 ohm system, in Freescale Application Circuit)

Characteristic	Symbol	Min	Typ	Max	Unit
Small-Signal Gain (S21)	G_p	18	19	—	dB
Input Return Loss (S11)	IRL	—	-14	—	dB
Output Return Loss (S22)	ORL	—	-20	—	dB
Power Output @ 1dB Compression	P1dB	—	16	—	dBm
Third Order Output Intercept Point	IP3	—	30	—	dBm
Noise Figure	NF	—	3.8	—	dB
Supply Current ⁽¹⁾	I_{CC}	39	47	55	mA
Supply Voltage ⁽¹⁾	V_{CC}	—	5	—	V

1. For reliable operation, the junction temperature should not exceed 150°C .

Table 5. Functional Pin Description

Pin Number	Pin Function
1	RF _{in}
2	Ground
3	RF _{out} /DC Supply

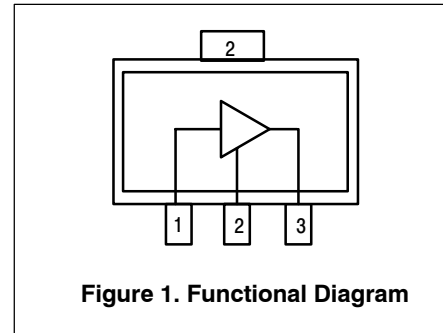**Table 6. ESD Protection Characteristics**

Test Methodology	Class
Human Body Model (per JESD 22-A114)	1A (Minimum)
Machine Model (per EIA/JESD 22-A115)	A (Minimum)
Charge Device Model (per JESD 22-C101)	IV (Minimum)

Table 7. Moisture Sensitivity Level

Test Methodology	Rating	Package Peak Temperature	Unit
Per JESD 22-A113, IPC/JEDEC J-STD-020	1	260	°C

50 OHM TYPICAL CHARACTERISTICS

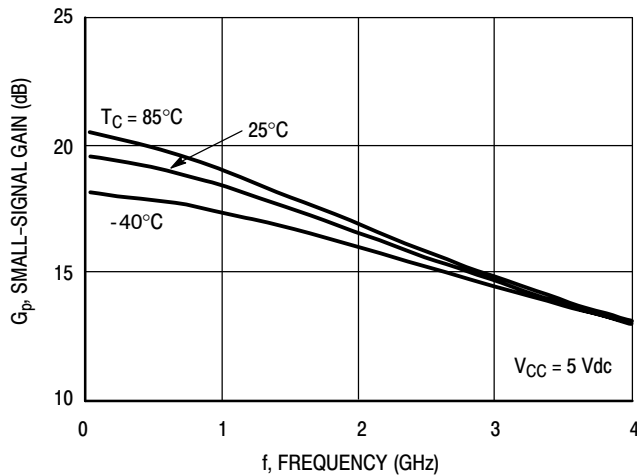


Figure 2. Small-Signal Gain (S21) versus Frequency

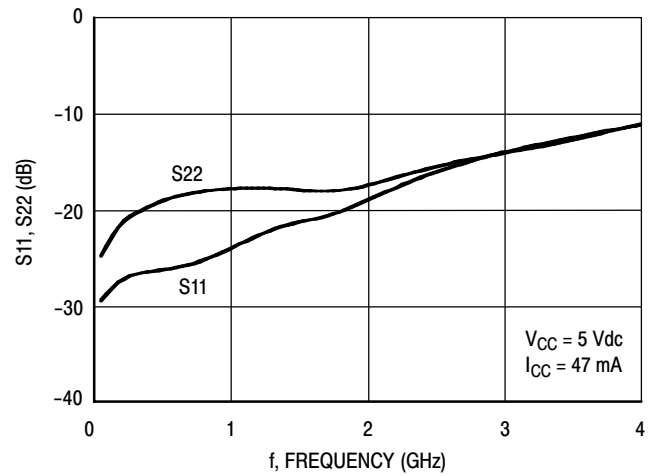


Figure 3. Input/Output Return Loss versus Frequency

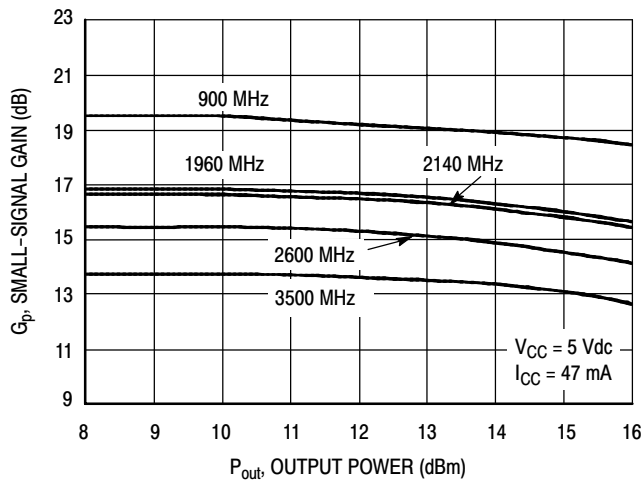


Figure 4. Small-Signal Gain versus Output Power

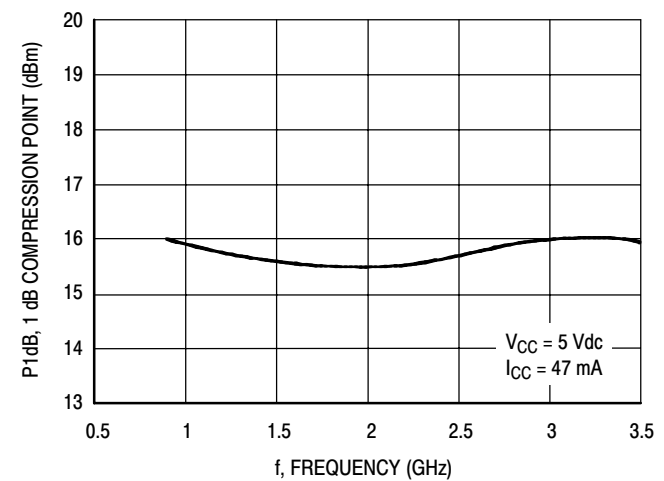


Figure 5. P1dB versus Frequency

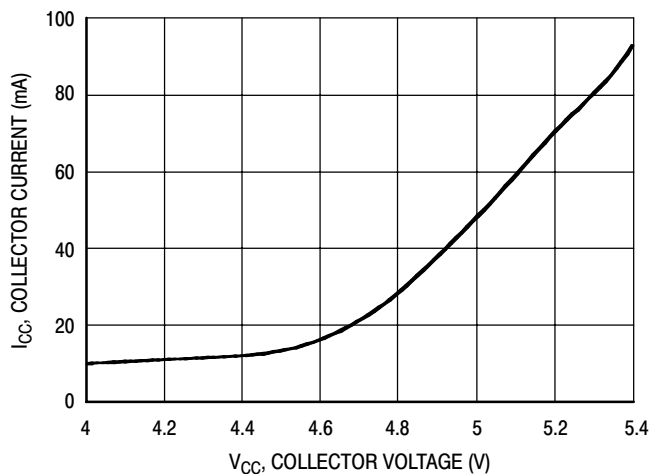


Figure 6. Collector Current versus Collector Voltage

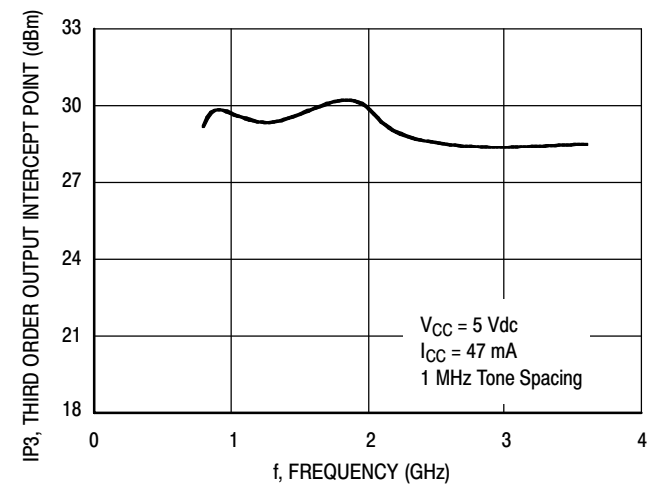


Figure 7. Third Order Output Intercept Point versus Frequency

50 OHM TYPICAL CHARACTERISTICS

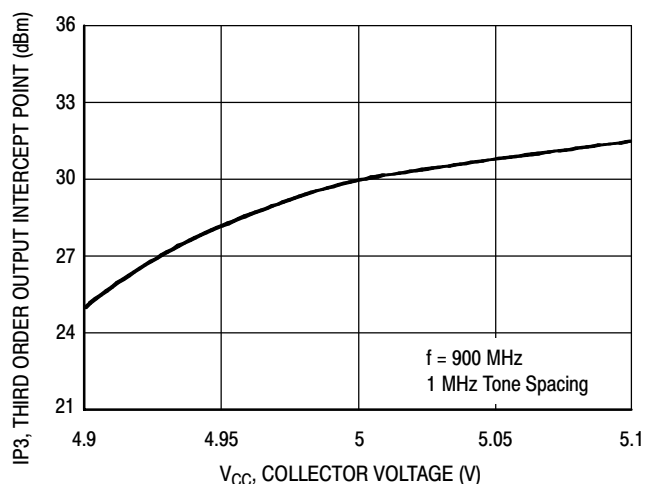


Figure 8. Third Order Output Intercept Point versus Collector Voltage

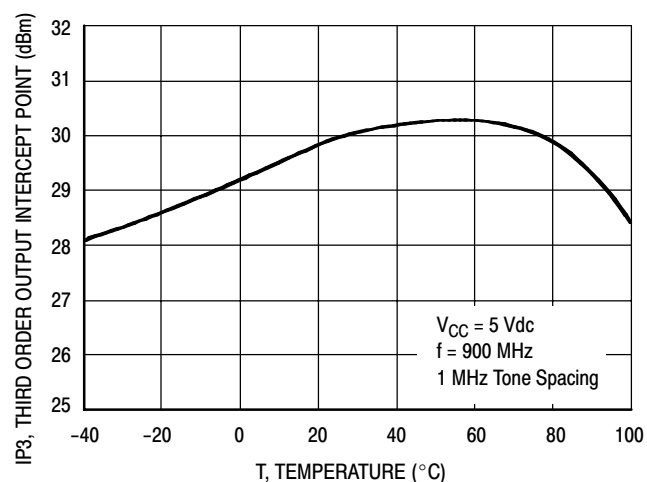


Figure 9. Third Order Output Intercept Point versus Case Temperature


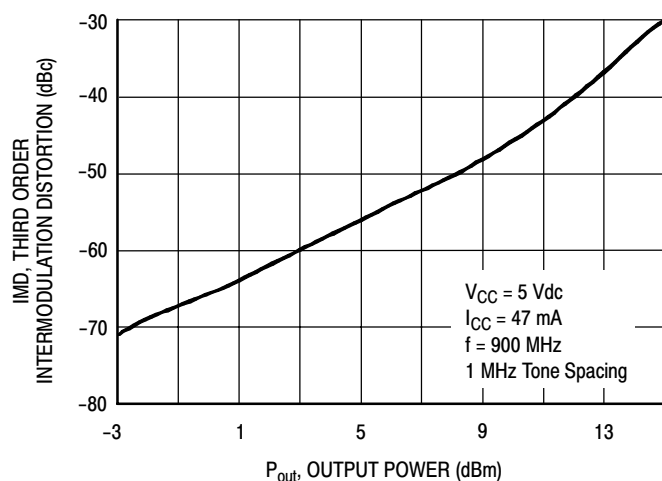


Figure 10. Third Order Intermodulation versus Output Power

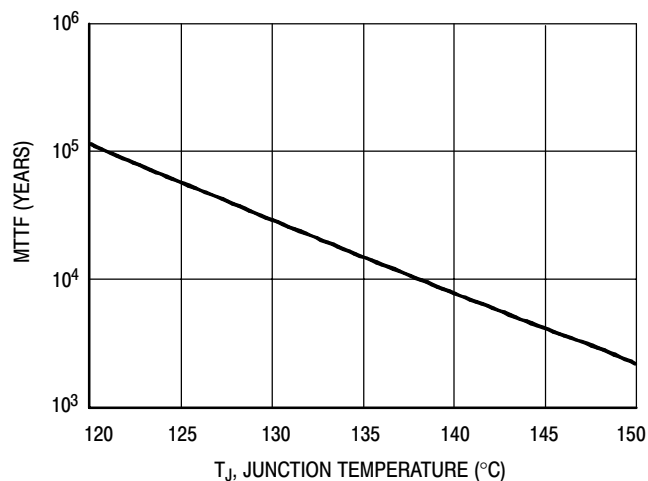

NOTE: The MTTF is calculated with $V_{CC} = 5 \text{ Vdc}$, $I_{CC} = 47 \text{ mA}$

Figure 11. MTTF versus Junction Temperature

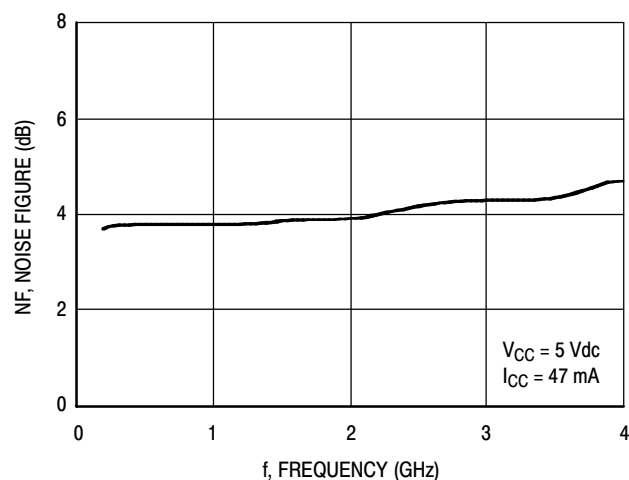


Figure 12. Noise Figure versus Frequency

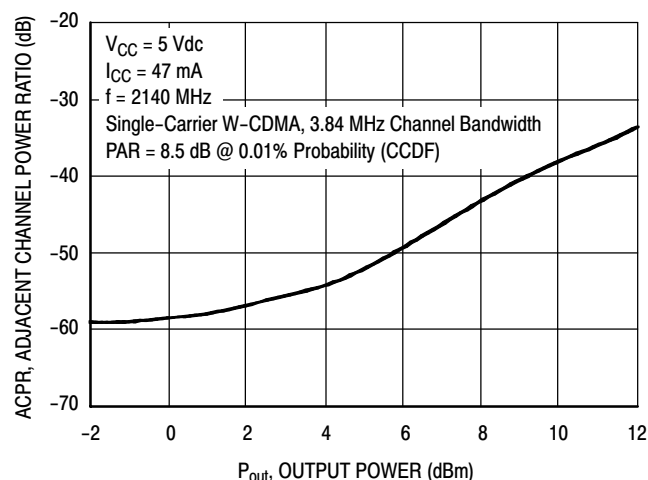


Figure 13. Single-Carrier W-CDMA Adjacent Channel Power Ratio versus Output Power

MMG3007NT1

50 OHM APPLICATION CIRCUIT: 40-300 MHz

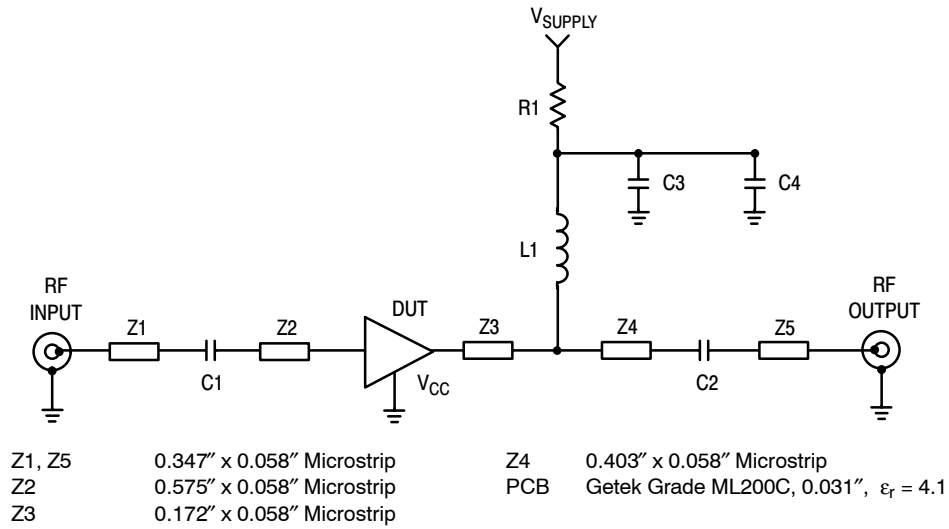


Figure 14. 50 Ohm Test Circuit Schematic

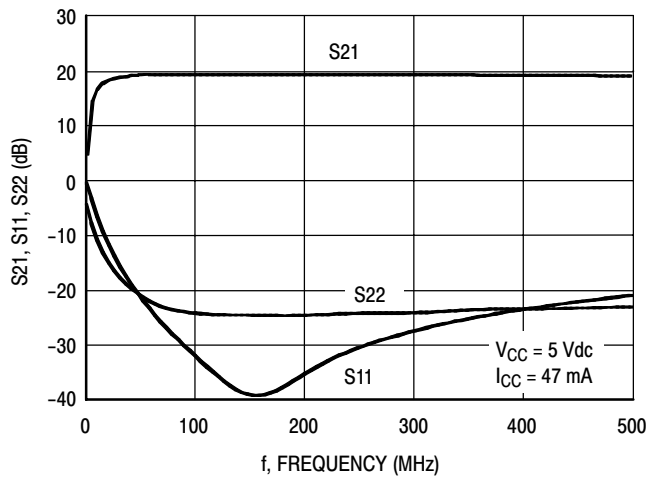


Figure 15. S21, S11 and S22 versus Frequency

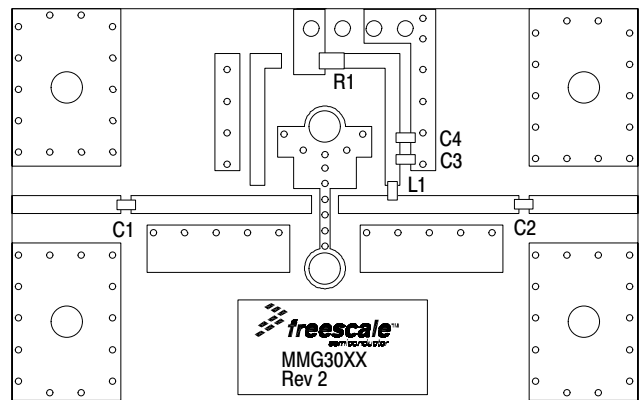


Figure 16. 50 Ohm Test Circuit Component Layout

Table 8. 50 Ohm Test Circuit Component Designations and Values

Part	Description	Part Number	Manufacturer
C1, C2, C3	0.01 μ F Chip Capacitors	0603A103JAT2A	AVX
C4	1000 pF Chip Capacitor	0603A102JAT2A	AVX
L1	470 nH Chip Inductor	BK2125HM471	Taiyo Yuden
R1	0 Ω Chip Resistor	ERJ3GEY0R00V	Panasonic

50 OHM APPLICATION CIRCUIT: 300-3600 MHz

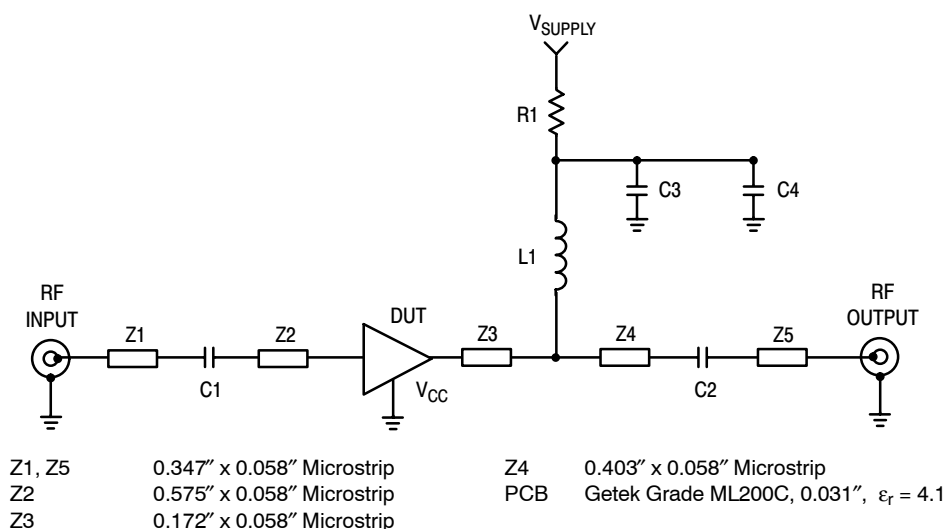


Figure 17. 50 Ohm Test Circuit Schematic

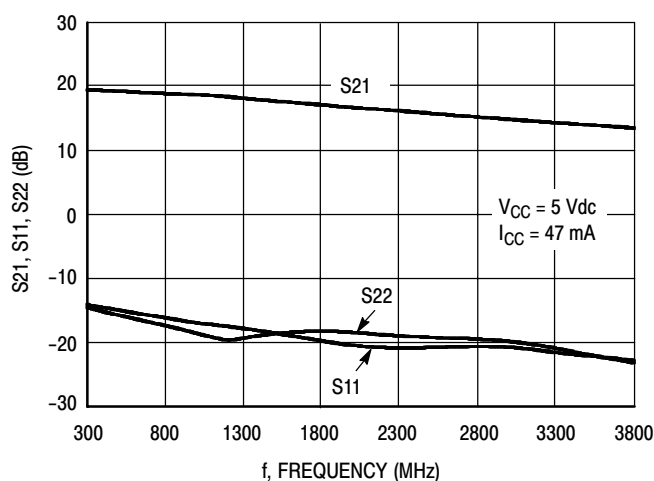


Figure 18. S21, S11 and S22 versus Frequency

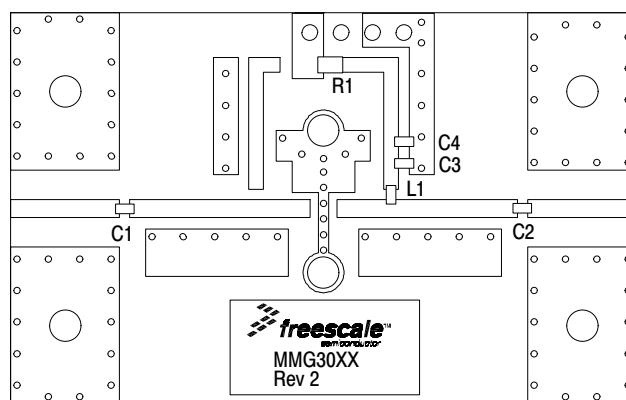


Figure 19. 50 Ohm Test Circuit Component Layout

Table 9. 50 Ohm Test Circuit Component Designations and Values

Part	Description	Part Number	Manufacturer
C1, C2	150 pF Chip Capacitors	06035A151JAT2A	AVX
C3	0.01 μ F Chip Capacitor	0603A103JAT2A	AVX
C4	1000 pF Chip Capacitor	0603A102JAT2A	AVX
L1	56 nH Chip Inductor	HK160856NJ-T	Taiyo Yuden
R1	0 Ω Chip Resistor	ERJ3GEY0R00V	Panasonic


50 OHM TYPICAL CHARACTERISTICS

Table 10. Class A Common Emitter S-Parameters at $V_{CC} = 5 \text{ Vdc}$, $I_{CC} = 47 \text{ mA}$, $T_C = 25^\circ\text{C}$


f GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	S ₁₁	$\angle \phi$	S ₂₁	$\angle \phi$	S ₁₂	$\angle \phi$	S ₂₂	$\angle \phi$
0.1	0.03698	162.744	9.488476	175.169	0.07218	-0.406	0.06601	-6.062
0.15	0.0413	161.759	9.431009	172.714	0.073936	-0.163	0.07813	-11.706
0.2	0.04475	159.333	9.37615	169.547	0.07479	-1.111	0.089562	-18.834
0.25	0.046352	159.222	9.34083	167.191	0.0744	-1.219	0.09748	-25.724
0.3	0.048403	155.469	9.29558	164.704	0.07458	-1.237	0.10124	-32.775
0.35	0.05	151.008	9.26495	162.138	0.07444	-1.639	0.10466	-36.946
0.4	0.0499	147.696	9.21219	159.65	0.07473	-1.957	0.10811	-41.977
0.45	0.04922	144.11	9.16094	157.234	0.07499	-2.087	0.11164	-46.631
0.5	0.04838	141.343	9.10787	154.702	0.07517	-2.464	0.11391	-50.846
0.55	0.04902	137.521	9.04991	152.326	0.07536	-2.681	0.11765	-55.096
0.6	0.04911	134.226	8.98419	149.922	0.07567	-2.89	0.11998	-59.312
0.65	0.0497	130.851	8.91939	147.525	0.07584	-3.227	0.12163	-63.354
0.7	0.05086	127.93	8.85099	145.201	0.07618	-3.577	0.12411	-67.411
0.75	0.05247	124.848	8.78068	142.838	0.07642	-3.81	0.12586	-71.332
0.8	0.05441	122.43	8.70765	140.522	0.07659	-4.138	0.12711	-75.244
0.85	0.05624	120.786	8.63598	138.198	0.07702	-4.463	0.12825	-79.297
0.9	0.05818	118.791	8.5575	135.918	0.0774	-4.812	0.12922	-83.181
0.95	0.06054	117.037	8.47718	133.677	0.07767	-5.244	0.13	-87.373
1.00	0.06284	115.852	8.40286	131.466	0.07806	-5.558	0.13077	-91.474
1.05	0.06676	114.603	8.31905	129.243	0.07848	-5.948	0.13124	-95.143
1.10	0.06962	113.845	8.23305	127.045	0.07874	-6.3	0.13158	-99.674
1.15	0.07142	114.019	8.14799	124.84	0.07912	-6.731	0.13134	-104.011
1.20	0.07473	113.644	8.05859	122.666	0.07962	-7.194	0.13136	-108.404
1.25	0.07822	113.329	7.97269	120.536	0.07992	-7.652	0.13147	-112.847
1.30	0.08137	113.158	7.89042	118.443	0.08035	-8.105	0.1318	-117.291
1.35	0.08501	112.83	7.80455	116.374	0.08077	-8.476	0.13257	-121.809
1.40	0.085621	112.341	7.71693	114.349	0.08135	-8.943	0.13274	-126.4
1.45	0.08691	112.503	7.62844	112.301	0.08168	-9.492	0.130129	-130.945
1.50	0.087447	112.516	7.55444	110.29	0.08226	-9.966	0.127178	-132.429
1.55	0.088958	110.702	7.46781	108.325	0.08275	-10.605	0.125783	-135.873
1.60	0.088598	108.771	7.39276	106.371	0.08326	-11.086	0.12282	-139.82
1.65	0.089575	107.354	7.30109	104.406	0.08366	-11.654	0.1228	-142.9
1.70	0.09071	105.666	7.2314	102.488	0.0841	-12.158	0.12308	-146.866
1.75	0.0938	104.101	7.15066	100.592	0.08459	-12.724	0.12424	-150.805
1.80	0.097	102.621	7.07137	98.688	0.0851	-13.319	0.12564	-154.586
1.85	0.10094	101.285	6.98725	96.791	0.08555	-13.926	0.12718	-158.448
1.90	0.10562	99.475	6.90714	94.976	0.08607	-14.507	0.12895	-162.5
1.95	0.10927	97.823	6.83262	93.117	0.0865	-15.154	0.13127	-166.07
2.00	0.11424	96.4	6.75439	91.288	0.08691	-15.771	0.13415	-169.355
2.05	0.11811	94.531	6.67977	89.43	0.08733	-16.325	0.13706	-172.886
2.10	0.12221	93.106	6.60249	87.648	0.08781	-17.024	0.14095	-175.782
2.15	0.12585	91.879	6.53055	85.88	0.0884	-17.685	0.14488	-179.155
2.20	0.13197	90.391	6.44752	84.16	0.08868	-18.268	0.14844	178.18
2.25	0.13625	88.624	6.37451	82.389	0.08924	-18.993	0.15223	175.153
2.30	0.14158	86.951	6.30389	80.681	0.08971	-19.632	0.15572	172.537
2.35	0.14606	85.398	6.23166	78.989	0.09007	-20.321	0.15962	170.114

Table 10. Class A Common Emitter S-Parameters at $V_{CC} = 5 \text{ Vdc}$, $I_{CC} = 47 \text{ mA}$, $T_C = 25^\circ\text{C}$ (continued)

f GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	S ₁₁	$\angle \phi$	S ₂₁	$\angle \phi$	S ₁₂	$\angle \phi$	S ₂₂	$\angle \phi$
2.40	0.15065	83.971	6.16179	77.288	0.09053	-20.98	0.16279	167.517
2.45	0.15511	82.457	6.09153	75.581	0.09088	-21.711	0.16641	165.072
2.50	0.15948	80.991	6.02115	73.906	0.09142	-22.394	0.16996	162.826
2.55	0.16385	79.722	5.95767	72.273	0.09177	-23.024	0.17342	160.459
2.60	0.16854	78.35	5.89249	70.612	0.09216	-23.702	0.17676	157.989
2.65	0.17283	76.864	5.82721	68.994	0.09255	-24.506	0.17953	155.564
2.70	0.17698	75.562	5.76221	67.358	0.09293	-25.194	0.18268	153.165
2.75	0.18126	74.328	5.70193	65.748	0.09333	-25.926	0.18543	150.629
2.80	0.1858	72.976	5.64062	64.155	0.09391	-26.671	0.18837	148.259
2.85	0.18957	71.773	5.58104	62.533	0.09428	-27.402	0.19087	145.593
2.90	0.19403	70.699	5.52616	60.973	0.09472	-28.203	0.19395	143.044
2.95	0.19798	69.575	5.46422	59.362	0.09518	-28.947	0.19629	140.485
3.00	0.20132	68.53	5.41159	57.778	0.09558	-29.733	0.19941	137.461
3.05	0.20676	67.445	5.36032	56.228	0.09592	-30.462	0.20221	135.101
3.10	0.21059	66.347	5.30349	54.654	0.09653	-31.263	0.20477	132.383
3.15	0.21388	65.517	5.25234	53.104	0.09687	-32.035	0.20796	129.58
3.20	0.21774	64.628	5.20188	51.53	0.09729	-32.944	0.21083	126.913
3.25	0.22229	63.76	5.15023	49.962	0.09771	-33.702	0.21442	124.314
3.30	0.22492	62.653	5.10104	48.396	0.09812	-34.531	0.21656	121.289
3.35	0.2287	61.882	5.05108	46.866	0.09855	-35.414	0.22001	118.535
3.40	0.23228	60.924	5.00022	45.297	0.099	-36.284	0.2241	115.888
3.45	0.2365	60.161	4.95117	43.756	0.09926	-37.17	0.22826	113.148
3.50	0.24039	59.326	4.90461	42.216	0.09948	-38.046	0.23275	110.547
3.55	0.24401	58.457	4.85739	40.692	0.09979	-38.943	0.23669	107.983
3.60	0.24834	57.659	4.80824	39.155	0.10008	-39.768	0.24177	105.495

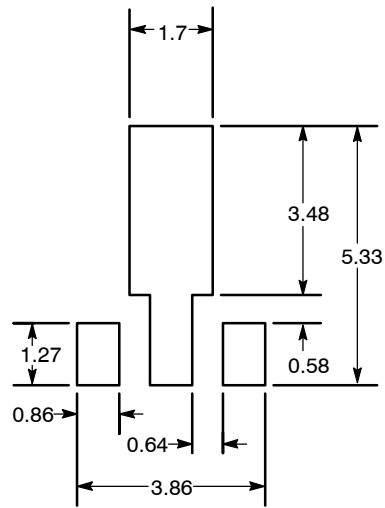

Recommended Solder Stencil

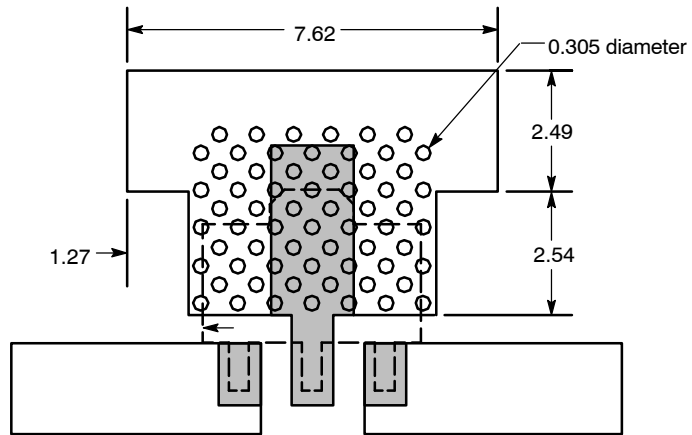


NOTES:

1. THERMAL AND RF GROUNDING CONSIDERATIONS SHOULD BE USED IN PCB LAYOUT DESIGN.
2. DEPENDING ON PCB DESIGN RULES, AS MANY VIAS AS POSSIBLE SHOULD BE PLACED ON THE LANDING PATTERN.
3. IF VIAS CANNOT BE PLACED ON THE LANDING PATTERN, THEN AS MANY VIAS AS POSSIBLE SHOULD BE PLACED AS CLOSE TO THE LANDING PATTERN AS POSSIBLE FOR OPTIMAL THERMAL AND RF PERFORMANCE.
4. RECOMMENDED VIA PATTERN SHOWN HAS 0.381 x 0.762 MM PITCH.


Figure 20. Recommended Mounting Configuration

PACKAGE DIMENSIONS

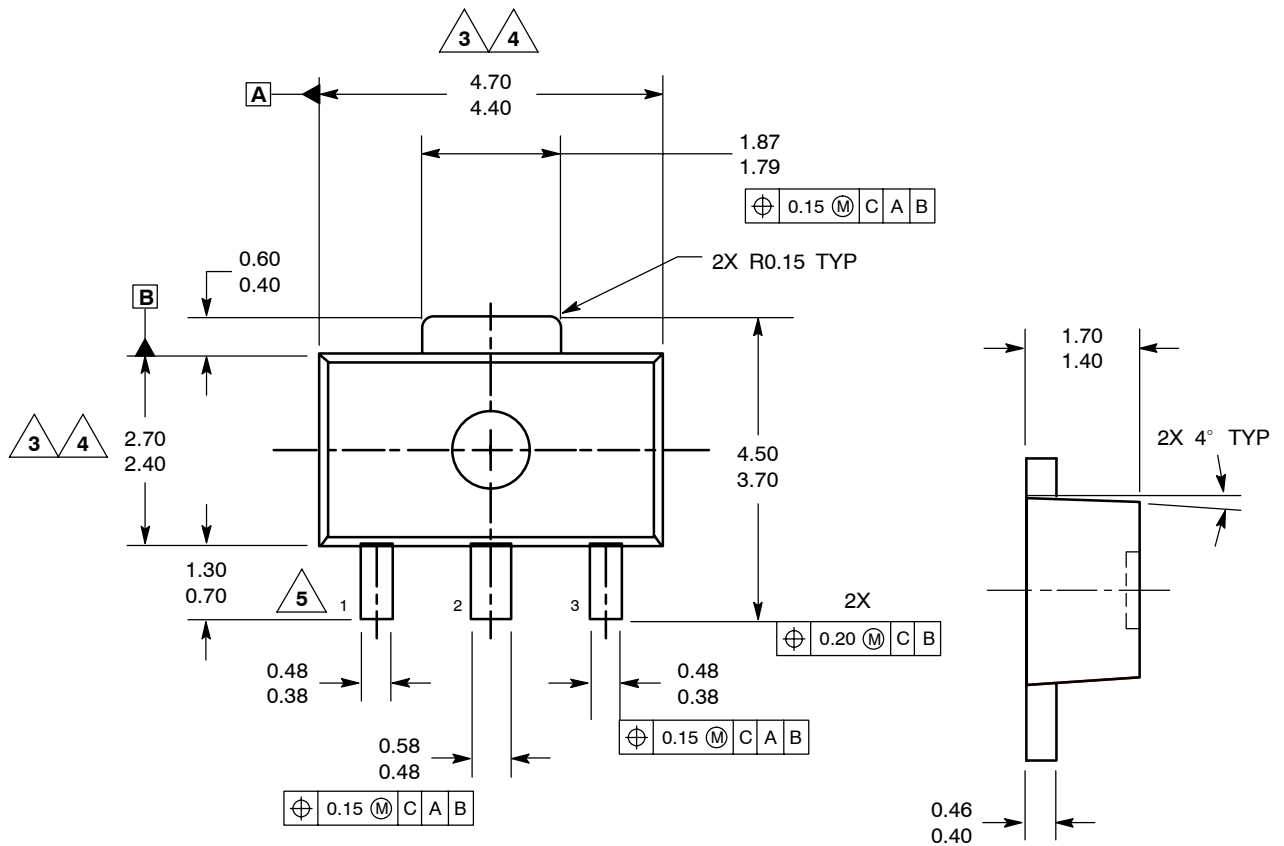


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.5MM PER END. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.5MM PER SIDE.
4. DIMENSIONS ARE DETERMINED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

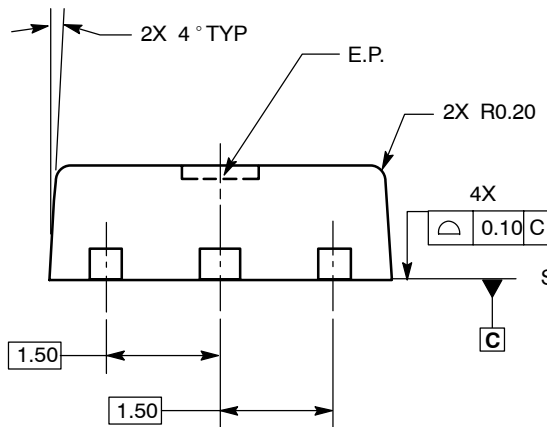

STYLE 1:
PIN 1. RF INPUT
2. GROUND
3. RF OUTPUT

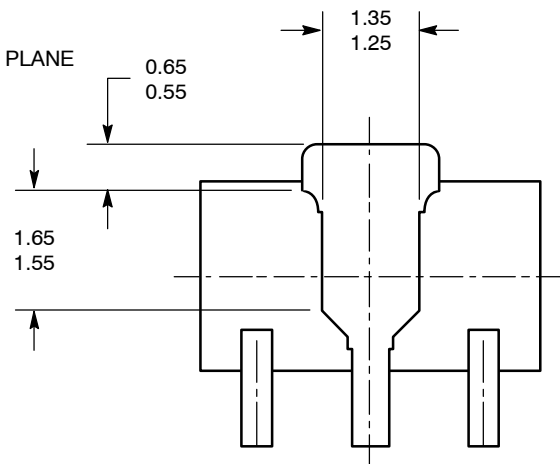

CASE 1514-01
ISSUE C
SOT-89
PLASTIC

BOTTOM VIEW

MMG3007NT1

How to Reach Us:

Home Page:
www.freescale.com

E-mail:
support@freescale.com

USA/Europe or Locations Not Listed:
Freescale Semiconductor
Technical Information Center, CH370
1300 N. Alma School Road
Chandler, Arizona 85224
+1-800-521-6274 or +1-480-768-2130
support@freescale.com

Europe, Middle East, and Africa:
Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
support@freescale.com

Japan:
Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku,
Tokyo 153-0064
Japan
0120 191014 or +81 3 5437 9125
support.japan@freescale.com

Asia/Pacific:
Freescale Semiconductor Hong Kong Ltd.
Technical Information Center
2 Dai King Street
Tai Po Industrial Estate
Tai Po, N.T., Hong Kong
+800 2666 8080
support.asia@freescale.com

For Literature Requests Only:
Freescale Semiconductor Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
1-800-441-2447 or 303-675-2140
Fax: 303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

RoHS-compliant and/or Pb-free versions of Freescale products have the functionality and electrical characteristics of their non-RoHS-compliant and/or non-Pb-free counterparts. For further information, see <http://www.freescale.com> or contact your Freescale sales representative.

For information on Freescale's Environmental Products program, go to <http://www.freescale.com/epp>.

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.
© Freescale Semiconductor, Inc. 2005. All rights reserved.

