


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

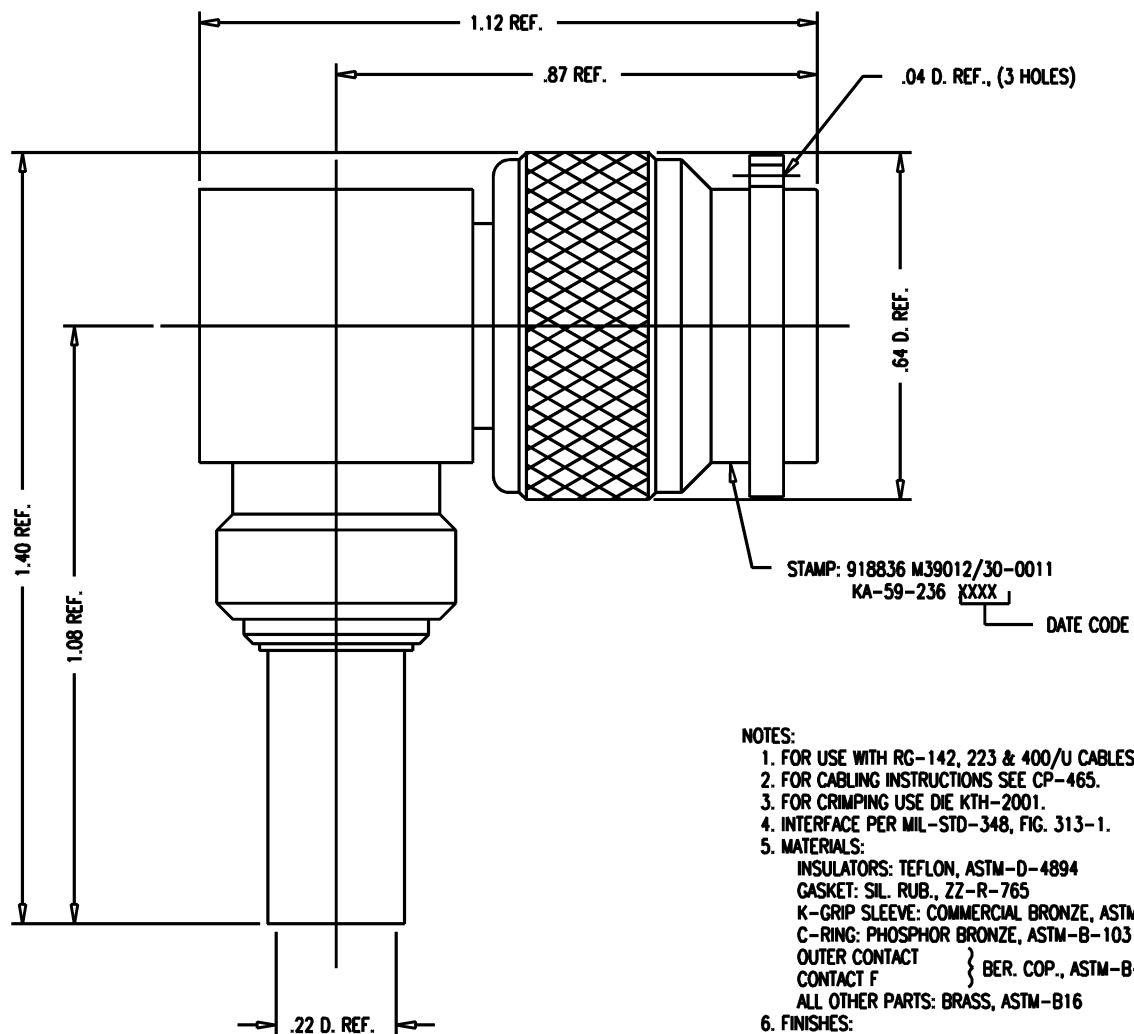

NOTES:

1. FOR USE WITH RG-142, 223 & 400/U CABLES.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CRIMPING USE DIE KTH-2001.
4. INTERFACE PER MIL-STD-348, FIG. 313-1.
5. MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
GASKET: SIL. RUB., ZZ-R-765
K-GRIP SLEEVE: COMMERCIAL BRONZE, ASTM-B-135
C-RING: PHOSPHOR BRONZE, ASTM-B-103
OUTER CONTACT } BER. COP., ASTM-B-196
CONTACT F }
ALL OTHER PARTS: BRASS, ASTM-B16
6. FINISHES:
CENTER CONTACTS: HARD GOLD PLT. PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz

GSD

M39012/30-0011

REVISIONS

ISSUE	CHANGES
6	CN 36790 C REDRAWN KH 02/27/96
7	CN 38244 C BDH 03/12/01

KAM6428

SCALE 4:1

APPROX SURFACE AREA

WAS: KA-59-236

USED ON

REF:

PLUG, ANGLE, TNC

DRAWN KH 02/27/96

DESIGN AR 02/28/96

APPR. DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M39012/30-0011

GSD