

NPN General Purpose Amplifier**MMBT2369A****FEATURES**


- Epitaxial planar die construction.
- Ultra-small surface mount package.



Lead-free

APPLICATIONS

- Use as a medium power amplifier.

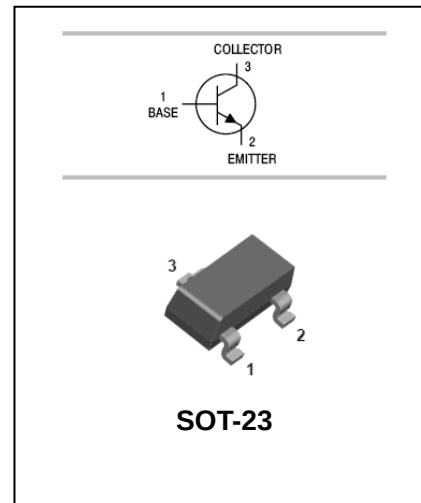**ORDERING INFORMATION**

Type No.	Marking	Package Code
MMBT2369A	1JA	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	15	V
V_{EBO}	Emitter-Base Voltage	4.5	V
I_C	Collector Current -Continuous	200	mA
P_C	Collector Dissipation	300	mW
T_j, T_{stg}	Junction and Storage Temperature	-55to+150	°C

NPN General Purpose Amplifier**MMBT2369A****ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A$ $I_E=0$	40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10mA$ $I_B=0$	15			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A$ $I_C=0$	4.5			V
Collector cut-off current	I_{CBO}	$V_{CB}=20V$ $I_E=0$			0.4	μA
DC current gain	h_{FE}	$V_{CE}=1.0V$ $I_C=10mA$			120	
		$V_{CE}=0.35V$ $I_C=10mA$	40			
		$V_{CE}=0.4V$ $I_C=30mA$	30			
		$V_{CE}=0.4V$ $I_C=30mA$	20			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=10mA$ $I_B=1.0mA$ $I_C=30mA$ $I_B=3.0mA$ $I_C=100mA$ $I_B=10mA$			0.2 0.25 0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=10mA$ $I_B=1.0mA$ $I_C=30mA$ $I_B=3.0mA$ $I_C=100mA$ $I_B=10mA$	0.7		0.85 1.15 1.6	V
Output capacitance	C_{obo}	$V_{CB}=5V$, $I_E=0$, $f=1.0MHz$			4.0	pF
Storage time	t_S	$I_{B1}=I_{B2}=I_C=10mA$		5.0	13	ns
Turn-on time	t_{on}	$V_{CC}=3V$, $I_C=10mA$, $I_{B1}=3mA$		8.0	12	ns
Turn-off time	t_{off}	$V_{CC}=3V$, $I_C=10mA$, $I_{B1}=3mA$, $I_{B2}=1.5mA$		10	18	ns


NPN General Purpose Amplifier

MMBT2369A


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

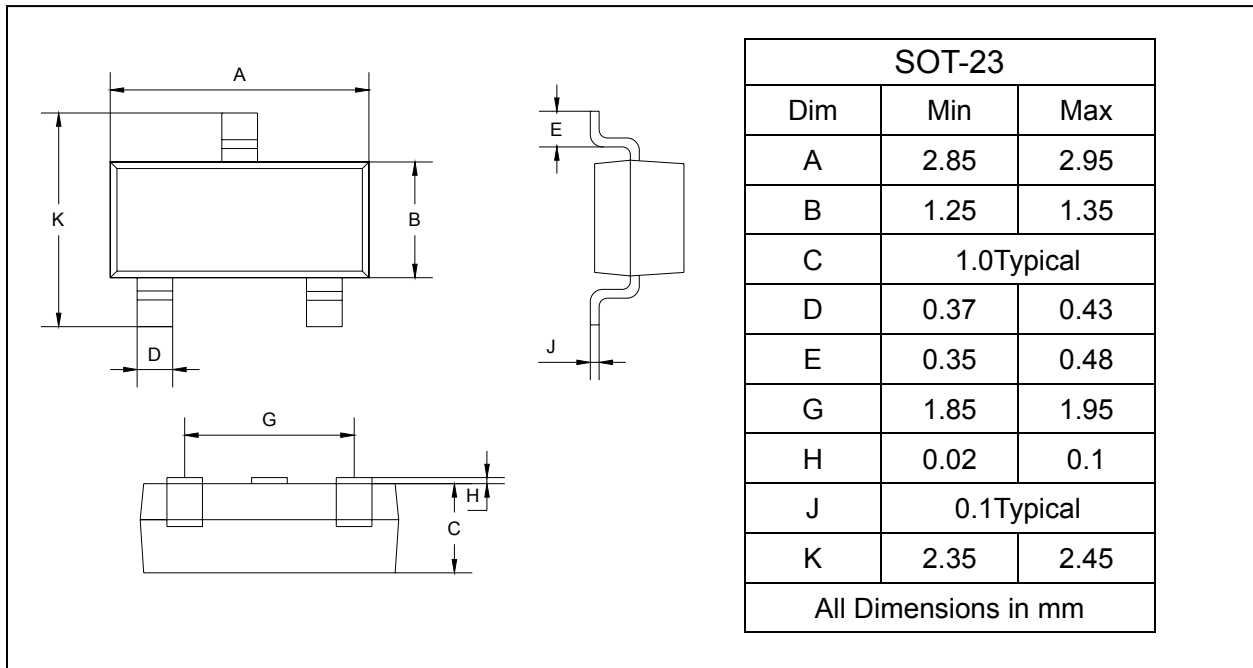

SOLDERING FOOTPRINT

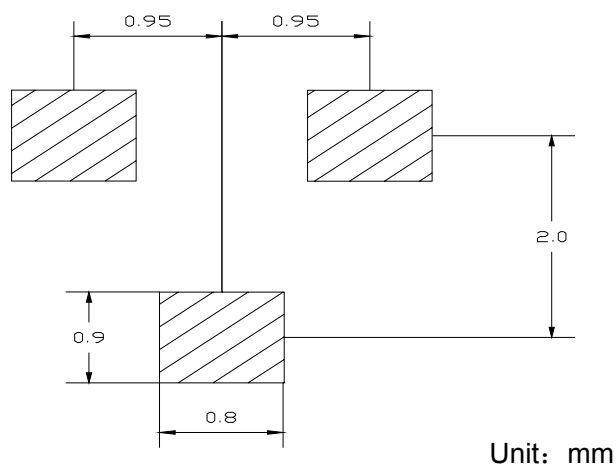

PACKAGE INFORMATION

Device	Package	Shipping
MMBT2369A	SOT-23	3000/Tape&Reel