


A		B		C		D		E		F		G		H	
DVG. NO.		ZONE		REV.		DESCRIPTION		DATE		APPROVED		E.V.		E.V.	
XX6-50X-D				X1		CUSTOMER APPROVAL		03/26/99				ADD RETRACTED LENGTH		03/29/99	
				X2											

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.



P2

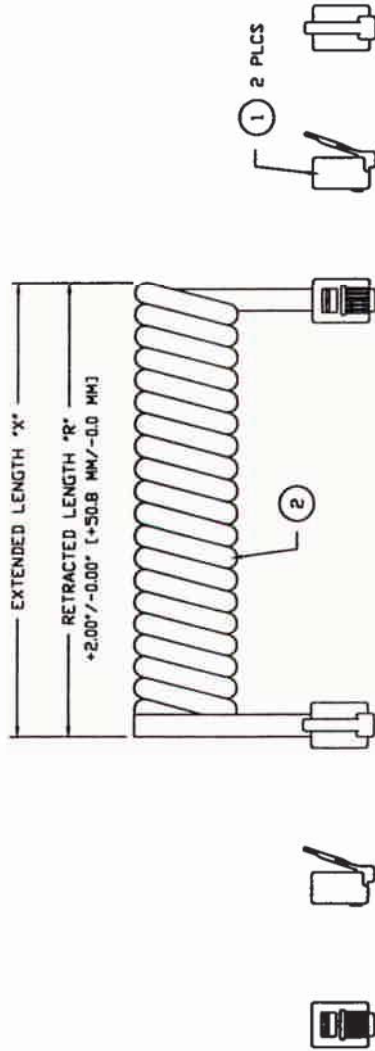

CUSTOMER APPROVAL
ENGR. SIGN Matt Lerner
DATE: 4-13-99

NOTES: UNLESS OTHERWISE SPECIFIED.

1. TEST CABLE FOR ALL OPENS & SHORTS.

2. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG.
PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

THIRD ANGLE PROJECTION				TABULATION BLOCK			
				I/O INTERCONNECT SANTA ANA, CALIFORNIA			
UNLESS OTHERWISE NOTED 1) DIMENSIONS ARE IN INCHES (MILLIMETER) 2) TOLERANCES: XXX ± 0.25 (6.35)				TITLE: 6P6C/6P6C COIL CABLE, REVERSE STYLE, CABLE ASSEMBLY PART NO. 466-XX6-50X-D REV. 1 CUSTOMER: 466-XX6-50X-D SCALE: NONE SHEET 1 OF 1			
ITEM	QTY	MOFG.	IOI PART NO.	DESCRIPTION	CABLE ASSEMBLY PARTS LIST		
2	2 PCS	IOI	SEE "TABULATION BLOCK"	MODULAR COIL CABLE, 26 AVG (7/34) BARE COPPER, 6CONDUCTOR, UNSHIELDED, PVC JACKET, (SEE TABULATION BLOCK FOR COLOR).			
1	2 PCS	IOI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U" AU, FLAT TYPE EXIT.			


IOI PART NUMBER	IOI CABLE PART NUMBER	EXTENDED LENGTH "X"	RETRACTED LENGTH "R"	COLOR
466-146-503-D	121-610-022	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	WHITE
466-146-504-D	121-610-012	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	BLACK
466-146-503-D	121-610-002	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	SILVER SATIN
466-106-502-D	121-610-021	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	WHITE
466-106-501-D	121-610-011	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	BLACK
466-106-500-D	121-610-001	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	SILVER SATIN
466-076-503-D	121-610-020	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	WHITE
466-076-504-D	121-610-010	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	BLACK
466-076-503-D	121-610-000	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	SILVER SATIN
466-056-502-D	121-610-023	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	WHITE
466-056-501-D	121-610-013	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	BLACK
466-056-500-D	121-610-003	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	SILVER SATIN

WIRE DIAGRAM


P1	P2
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

A		B	C	D	E	F	G	H
THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC., U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.								
DVG. NO.		ZONE		REV.		DESCRIPTION		DATE
XX6-SIX-D				X1		CUSTOMER APPROVAL		03/26/99
				X2		ADD RETRACTED LENGTH		03/29/99
								E.V.

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PART SHALL BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

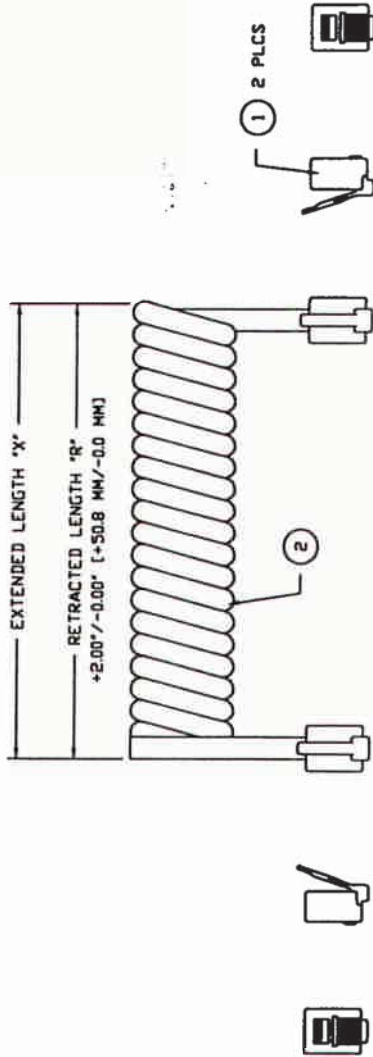

P2



CUSTOMER APPROVAL
ENGR. SIGN *Math Yarnes*
DATE: 4-13-99

NOTES: UNLESS OTHERWISE SPECIFIED.

1. TEST CABLE FOR ALL OPENS & SHORTS.
2. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

466-146-S15-D	121-610-022	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	WHITE
466-146-S14-D	121-610-012	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	BLACK
466-146-S13-D	121-610-002	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	SILVER SATIN
466-106-S12-D	121-610-021	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	WHITE
466-106-S11-D	121-610-011	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	BLACK
466-106-S10-D	121-610-001	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	SILVER SATIN
466-076-S15-D	121-610-020	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	WHITE
466-076-S14-D	121-610-010	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	BLACK
466-076-S13-D	121-610-000	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	SILVER SATIN
466-056-S12-D	121-610-023	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	WHITE
466-056-S11-D	121-610-013	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	BLACK
466-056-S10-D	121-610-003	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	SILVER SATIN
IOI PART NUMBER	IOI CABLE PART NUMBER	EXTENDED LENGTH "X"	RETRACTED LENGTH "R"	

TABULATION BLOCK

				I/O INTERCONNECT SANTA ANA, CALIFORNIA	
THIRD ANGLE PROJECTION		TITLE: 6P6C/6P6C COIL CABLE.		STANDARD STYLE, CABLE ASSEMBLY	
UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES (MILLIMETER)		PART NO. 466-XX6-SIX-D		REV. X2	
2) TOLERANCES: XXX ± 0.25 (6.35)		CUSTOMER:		DIGI KEY	
SCALE: NONE		SHEET: 1 OF 1		REV. X2	

CABLE ASSEMBLY PARTS LIST


ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION
2	2 PCS	SEE	466-146-S15-D	MODULAR COIL CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, PVC JACKET, (SEE TABULATION BLOCK FOR COLOR).
1	2 PCS	IOI	325-661-SOX	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U" AU, FLAT TYPE EXIT.

A	B	C	D	E	F	G	H
DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED		
XX6-512-D	X1		CUSTOMER APPROVAL	03/24/99	E.V.		

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

WIRE DIAGRAM

P1	P2
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

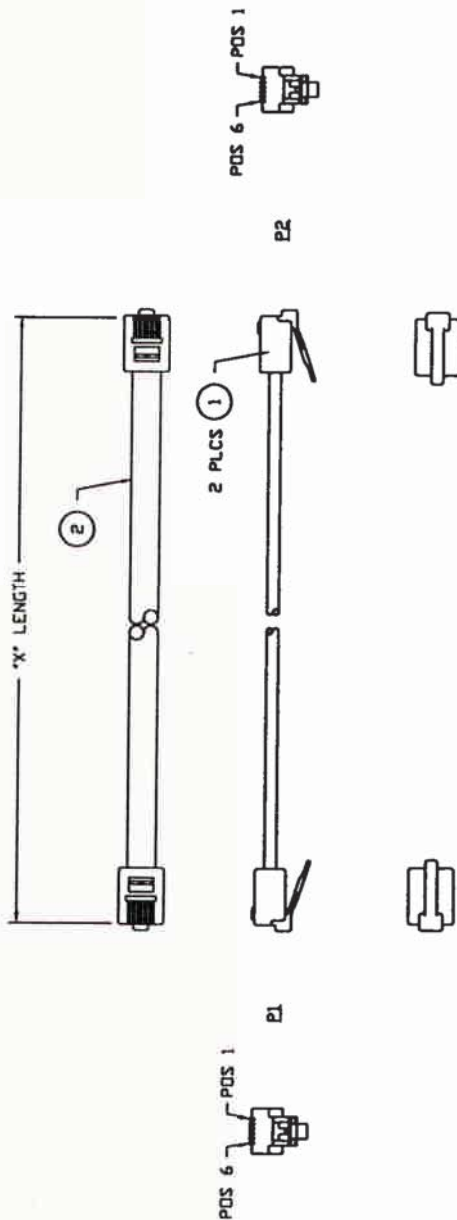

CUSTOMER APPROVAL

ENGR. SIGN Matt Aemmer
DATE: 4-12-99

- NOTES: UNLESS OTHERWISE SPECIFIED.
1. CABLE TO BE BUNDLED AND TWIST TIED.
 2. TEST CABLE FOR ALL OPENS & SHORTS.
 3. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

H1661-25-ND
H1661-14-ND
H1661-07-ND

466-256-512-D	25.0 FT ± 4.0 IN 762 M ± 101.6 MM
466-146-512-D	14.0 FT ± 3.0 IN 427 M ± 76.2 MM
466-076-512-D	7.0 FT ± 2.0 IN 213 M ± 50.8 MM

PART NUMBER
I/O INTERCONNECT

LENGTH 'X'

THIRD ANGLE PROJECTION



UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
XXX ± 0.25 (6.35)

TITLE
I/O INTERCONNECT
SANTA ANA, CALIFORNIA

REV.	REV.	REV.	REV.
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5	5	5	5
6	6	6	6
7	7	7	7
8	8	8	8
9	9	9	9
10	10	10	10
11	11	11	11
12	12	12	12
13	13	13	13
14	14	14	14
15	15	15	15
16	16	16	16
17	17	17	17
18	18	18	18
19	19	19	19
20	20	20	20
21	21	21	21
22	22	22	22
23	23	23	23
24	24	24	24
25	25	25	25
26	26	26	26
27	27	27	27
28	28	28	28
29	29	29	29
30	30	30	30
31	31	31	31
32	32	32	32
33	33	33	33
34	34	34	34
35	35	35	35
36	36	36	36
37	37	37	37
38	38	38	38
39	39	39	39
40	40	40	40
41	41	41	41
42	42	42	42
43	43	43	43
44	44	44	44
45	45	45	45
46	46	46	46
47	47	47	47
48	48	48	48
49	49	49	49
50	50	50	50
51	51	51	51
52	52	52	52
53	53	53	53
54	54	54	54
55	55	55	55
56	56	56	56
57	57	57	57
58	58	58	58
59	59	59	59
60	60	60	60
61	61	61	61
62	62	62	62
63	63	63	63
64	64	64	64
65	65	65	65
66	66	66	66
67	67	67	67
68	68	68	68
69	69	69	69
70	70	70	70
71	71	71	71
72	72	72	72
73	73	73	73
74	74	74	74
75	75	75	75
76	76	76	76
77	77	77	77
78	78	78	78
79	79	79	79
80	80	80	80
81	81	81	81
82	82	82	82
83	83	83	83
84	84	84	84
85	85	85	85
86	86	86	86
87	87	87	87
88	88	88	88
89	89	89	89
90	90	90	90
91	91	91	91
92	92	92	92
93	93	93	93
94	94	94	94
95	95	95	95
96	96	96	96
97	97	97	97
98	98	98	98
99	99	99	99
100	100	100	100

MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, WHITE PVC.

CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50u" Au, FLAT TYPE EXIT.

DESCRIPTION

CABLE ASSEMBLY PARTS LIST


ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION
2	*X*	IOI	120-610-020	MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, WHITE PVC.
1	2 PCS	IOI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50u" Au, FLAT TYPE EXIT.

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
XX6-511-D		X1	CUSTOMER APPROVAL	03/24/99	E.V.

WIRE DIAGRAM

P1	P2
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

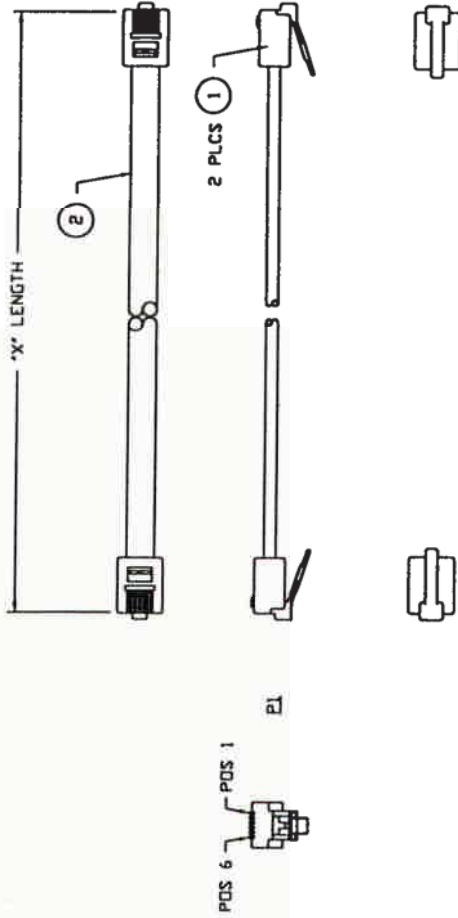

CUSTOMER APPROVAL

ENGR. SIGN *Math Sumic*

DATE: 4-12-99


NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE TO BE BUNDLED AND TWIST TIED.

2. TEST CABLE FOR ALL OPENS & SHORTS.

3. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG.
PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

H1662-25-ND
H1662-14-ND
H1662-07-ND



UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
XXX ± 0.25 (6.35)

MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, BLACK PVC.

CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 500' AU, FLAT TYPE EXIT.


DESCRIPTION

CABLE ASSEMBLY PARTS LIST

ITEM	QTY	MFG.	ID1	DESCRIPTION
2	120-610-010	ID1		
1	325-661-50X	ID1		

466-256-511-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-511-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-511-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM
PART NUMBER	LENGTH "X"
I/O INTERCONNECT	

I/O INTERCONNECT	
SANTA ANA, CALIFORNIA	
DATE	REV.
03/24/99	X1
6P6C MODULAR, STANDARD STYLE, BLACK, CABLE ASSEMBLY	
PART NO.	466-XX6-511-D
DWG. NO.	466-XX6-511-D
CUSTOMER	DIGI KEY
SCALE	NONE
SHEET	1 OF 1

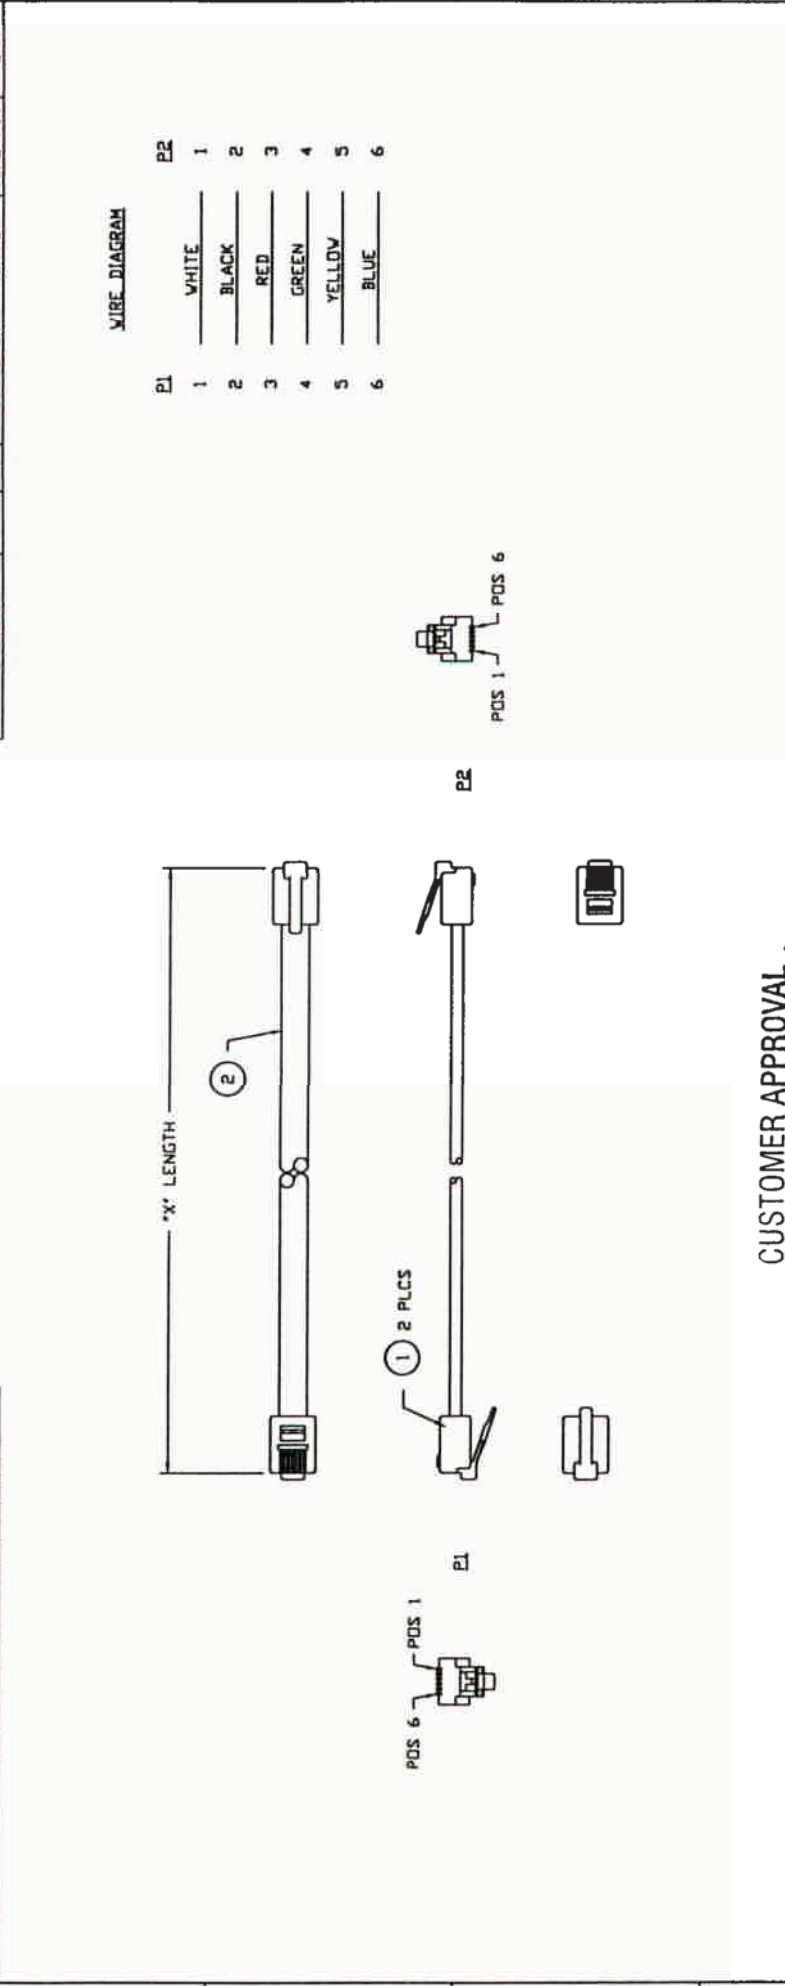

466-256-502-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-502-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-502-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM
PART NUMBER	LENGTH "X"
I/O INTERCONNECT	

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES
XXX ± 0.25 (6.35)

ENGR. SIGN Math Lerner

DATE: 4-12-99

CUSTOMER APPROVAL

DATE: 4-12-99

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE TO BE BUNDLED AND TWIST TIED.

2. TEST CABLE FOR ALL OPENS & SHORTS.

3. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG.

PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

2	"X"	IOI	120-610-020	MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, WHITE PVC.
1	2 PCS	IOI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50u" AV, FLAT TYPE EXIT.
ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION

CABLE ASSEMBLY PARTS LIST

I/O INTERCONNECT
SANTA ANA, CALIFORNIA


REV. XI

SCALE: NONE

SHEET 1 OF 1

A		B	C	D	E	F	G	H
DWG. NO.		ZONE	REV.	DESCRIPTION	DATE	APPROVED		
XX6-500-D		X1		CUSTOMER APPROVAL	03/24/99	E.V.		

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PARTS OR SUBASSEMBLIES ARE TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

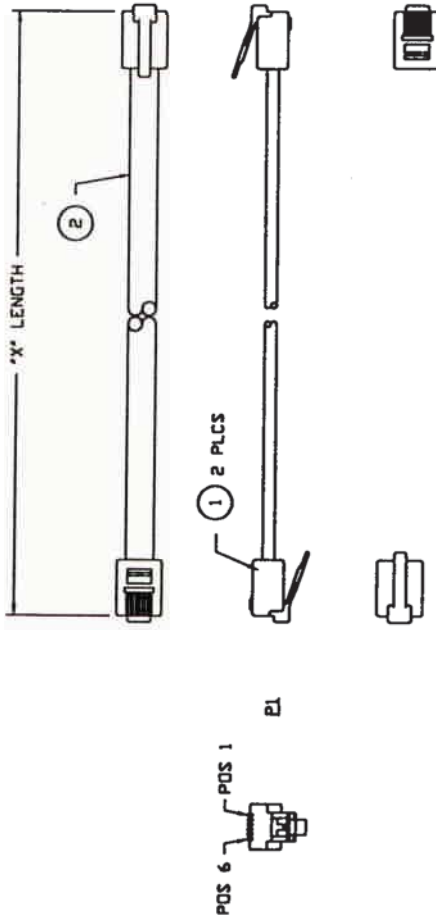

WIRE DIAGRAM

P1	P2
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE


CUSTOMER APPROVAL

ENGR. SIGN Math J. Jemur
DATE: 4-12-99

- NOTES: UNLESS OTHERWISE SPECIFIED.
1. CABLE TO BE BUNDLED AND TWIST TIED.
 2. TEST CABLE FOR ALL OPENS & SHORTS.
 3. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

H2663-25-ND
H2663-14-ND
H2663-07-ND

466-256-500-D	25.0 FT ± 4.0 IN 762 M ± 101.6 MM
466-146-500-D	14.0 FT ± 3.0 IN 427 M ± 76.2 MM
466-076-500-D	7.0 FT ± 2.0 IN 213 M ± 50.8 MM
PART NUMBER	LENGTH "X"
I/O INTERCONNECT	



I/O INTERCONNECT	
DATE	REV.
03/24/99	X1
TITLE	
6P6C MODULAR, REVERT STYLE, SILVER SATIN, CABLE ASSEMBLY	
PART NO.	466-XX6-500-D
REV. NO.	466-XX6-500-D
CUSTOMER	DIGI KEY
SCALE	NONE
SHEET	1 OF 1

MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, SILVER SATIN PVC.

CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50u" AU, FLAT TYPE EXIT.

CABLE ASSEMBLY PARTS LIST

DESCRIPTION

ITEM	QTY	MFG.	IOI PART NO.
------	-----	------	--------------

2	101	120-610-000	
---	-----	-------------	--



1	2 PCS	IOI	325-661-50X
---	-------	-----	-------------

A	B	C	D	E	F	G	H
DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED		
XX6-522-D	X1		CUSTOMER APPROVAL	03/24/99	E.V.		

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

WIRE DIAGRAM

PI	OPEN END
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

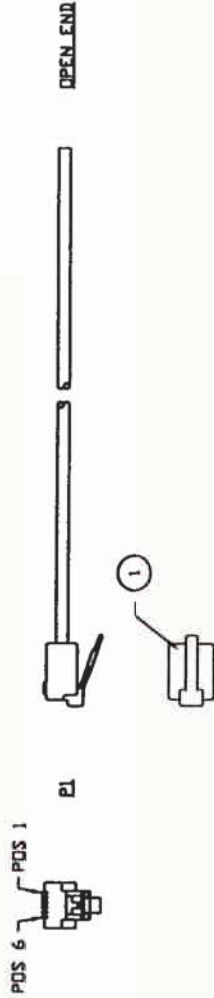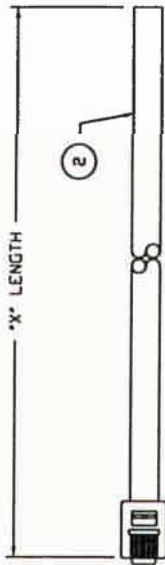

CUSTOMER APPROVAL
ENGR. SIGN Math Thomas
DATE: 4-12-99


- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

H3661-25-ND
H3661-14-ND
H3661-07-ND

466-256-522-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-522-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-522-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM

PART NUMBER
I/O INTERCONNECT

LENGTH "X"



THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
XXX ± 0.25 (6.35)

TITLE	SANTA ANA, CALIFORNIA
DATE	GP6C MODULAR, TO OPEN END, WHITE, CABLE ASSEMBLY
PART NO.	466-XX6-522-D
PWG NO.	466-XX6-522-D
CUSTOMER	DIGI KEY
REV.	X1
SCALE	NONE
SHEET	1 OF 1

MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, WHITE PVC.

CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U Au, FLAT TYPE EXIT.

DESCRIPTION

CABLE ASSEMBLY PARTS LIST


ITEM	QTY	MFG.	IOI PART NO.
2	1	IOI	120-610-020
1	1	PC	325-661-50X

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC., U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
XX6-521-D		X1	CUSTOMER APPROVAL	03/24/99	E.V.

WIRE DIAGRAM

P1	OPEN END
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

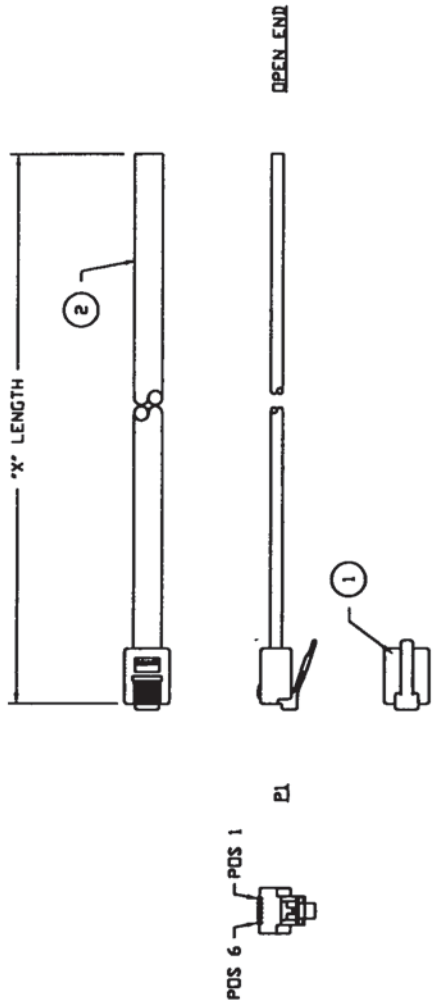

CUSTOMER APPROVAL
ENGR. SIGN Mark Thomas
DATE: 4-12-99

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

H3662-25-ND
H3662-14-ND
H3662-07-ND

466-256-521-D	25.0 FT ± 4.0 IN 762 M ± 101.6 MM
466-146-521-D	14.0 FT ± 3.0 IN 427 M ± 76.2 MM
466-076-521-D	7.0 FT ± 2.0 IN 213 M ± 50.8 MM
PART NUMBER	LENGTH "X"

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
XXX ± 0.25 (6.35)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

6P6C MODULAR, TO OPEN END,
BLACK, CABLE ASSEMBLY

PART NO: 466-XX6-521-D
REV NO: 466-XX6-521-D
CUSTOMER: 0101 KEY
REV: X1

ITEM	QTY	MFG.	DESCRIPTION
2	"X"	101	MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, BLACK PVC.
1	1 PC	101	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U" AU, FLAT TYPE EXIT.
CABLE ASSEMBLY PARTS LIST			

