



CONAN®

High Density, Low Profile 1.00mm Connector System
Enhances Reliability for Portable Electronics

DESCRIPTION

The Conan 1.0mm mezzanine connector system provides a mechanically secure, high density electrical interface between parallel printed circuit boards.

Conan's mechanical features and palladium/nickel/gold plated electrical contacts qualify it for high reliability use in portable and mobile electronic equipment.

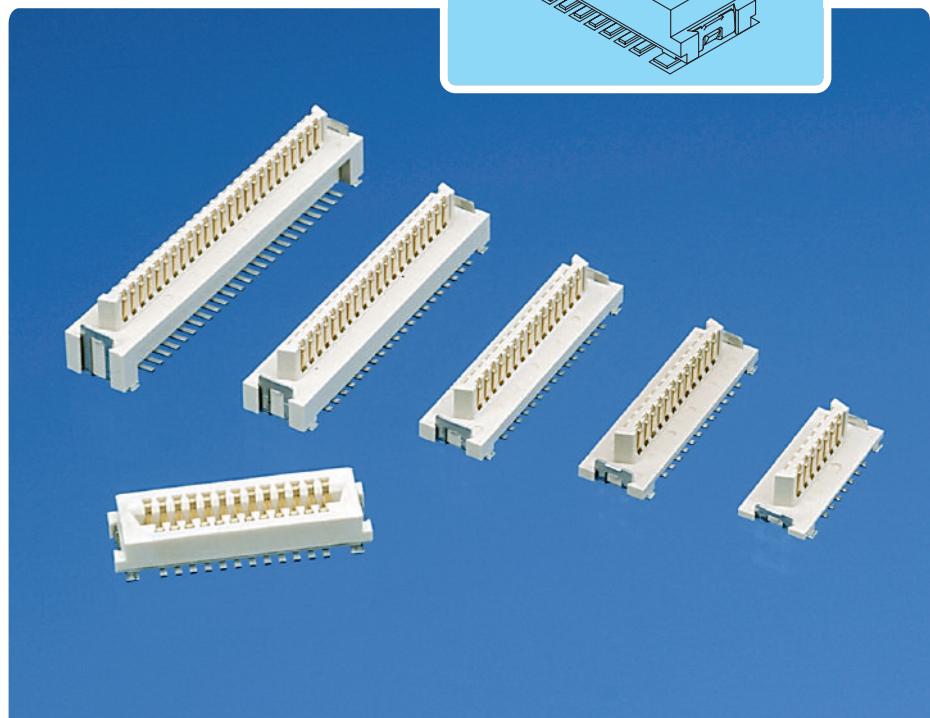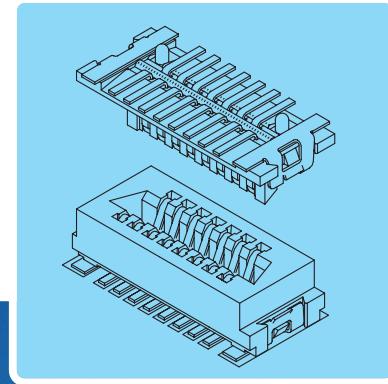

FEATURES & BENEFITS

- "Snap" engagement contacts assure secure mating with an audible "click"
- Blade-on-beam contact design allows "peeling" disengagement and prevents contact stubbing
- Connector housings feature "lead-in" angles to assist in mating
- Surface mounted metal hold-downs reinforce connector retention to the printed circuit board
- Mating polarization prevents backward connections
- PCB polarization prevents errors during printed circuit board assembly
- Pick and place caps with tape and reel packaging support automated assembly processes
- Header height options support a range of PCB stack heights: 4.15mm to 7mm
- 9 part sizes: 9 to 69 contacts
- Lead-free RoHS compatible products satisfy environmental regulations

TARGET MARKETS / APPLICATIONS

- Portable and mobile electronic equipment
- Medical and Instrumentation
- Office equipment
- Communications and networking equipment
- Point-of-sale equipment

MATERIALS

- Contact base metal
 - Header: Phosphor bronze
 - Receptacle: Beryllium copper
- Contact area finish: 0.38um (15um) GXT (Palladium-nickel alloy with gold flash) over 1.27um (50um) nickel
- Solder area finish: Pure tin over 1.27um (50um) nickel
- Housing material: Cream-colored LCP (UL 94V-0)
- Hold-down base metal: Brass
- Hold-down finish: Pure tin over nickel

ELECTRICAL PERFORMANCE

- Insulation resistance: 1000 MΩ min
- Contact resistance: 30 mΩ max
- Withstanding voltage: 500 V ac, rms, 60 Hz
- Current rating: 1.0 amp continuous (per contact, all contacts powered)
- Signal Integrity (differential pairs, connector only)
 - Impedance: 100Ω +/- 10% @ 50 ps edge (10-90%)
 - Insertion Loss: < 1dB to 5GHz
 - NEXT: ≤3.5% for a 50 ps edge (10-90%)
 - FEXT: ≤2.5% for a 50 ps edge (10-90%)

PART NUMBERS

TYPE	T	C	W	X	Y	ZZ	LF	LEAD FREE OPTION
HEADER WITH NO PEGS	0							
HEADER WITH PEGS	1							
RECEPTACLE WITH NO PEGS	2							
RECEPTACLE WITH PEGS	3							
PICK AND PLACE CAP OR TAPE	C							
WITHOUT CAP	0							
WITH CAP	1							
PACKAGING	W							
TUBE	2							
PRESSURE SEALED TAPE & REEL	3							
PLATING	X							
15u"/.38u GXT	1							

Recommended packaging combinations:
For production: Connector with pick and place cap packaged in tape and reel (XXXX1-XXXXX)
For proto-typing: Connector without pick and place cap packaged in tubes (XXXX0-XXXXX)

Additional information can be found at www.fciconnect.com/conan

MECHANICAL PERFORMANCE

- Mating force: 125g per contact max
- Unmating force: 45g per contact min
- Retention force (connector to PCB): 44 N (10lbf) min
- Contact wipe: 0.64mm (0.025 in.)
- Durability: 30 mating cycles

SPECIFICATIONS

- GS-12-006

APPROVALS AND CERTIFICATIONS

- UR file: E66906; CSA file: LR46923

PRIMARY CUSTOMER DRAWING

- 91900

PACKAGING

- Anti-static tubes or tape and reel

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[91900-21211](#) [91900-21531](#) [91900-31111](#) [91900-31151](#) [91900-31211](#) [91900-31309](#) [91900-31315](#) [91900-31321](#)
[91900-31331](#) [91900-31421](#) [91900-31425](#) [91900-31441](#) [91900-31521](#) [91900-31531](#) [91900-31551](#) [91900-21321LF](#)