

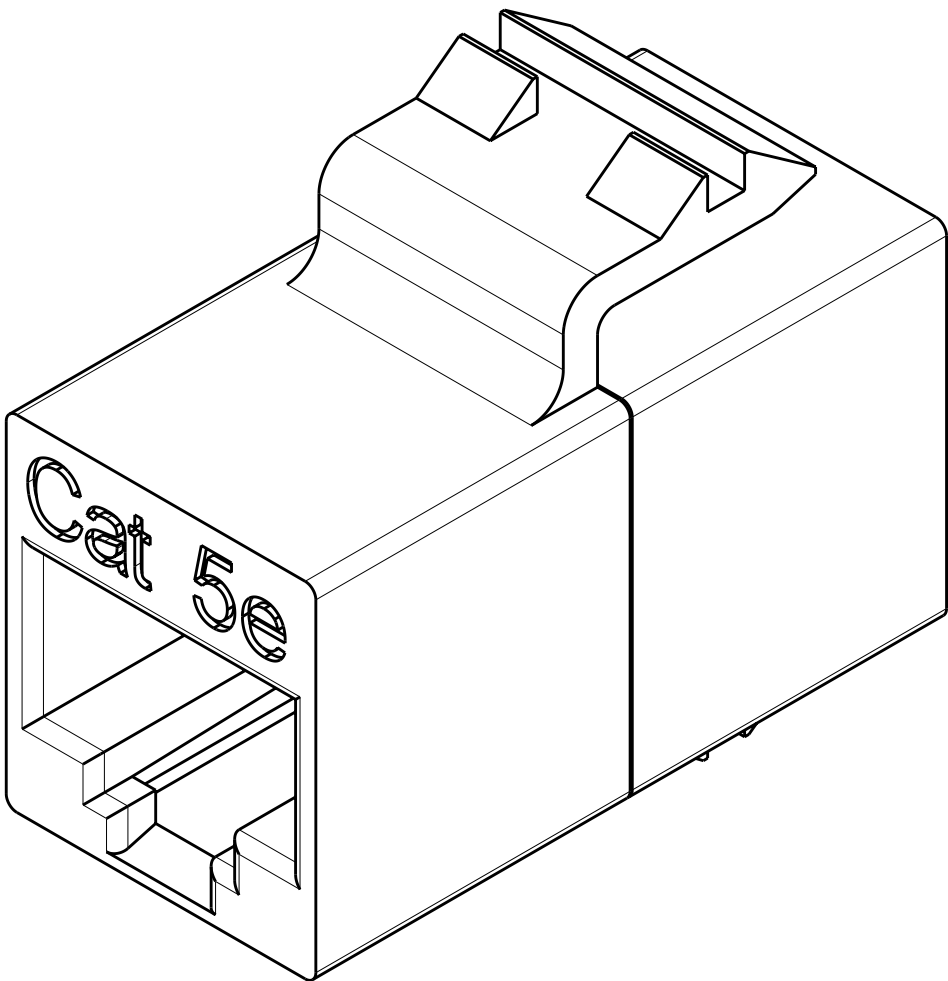
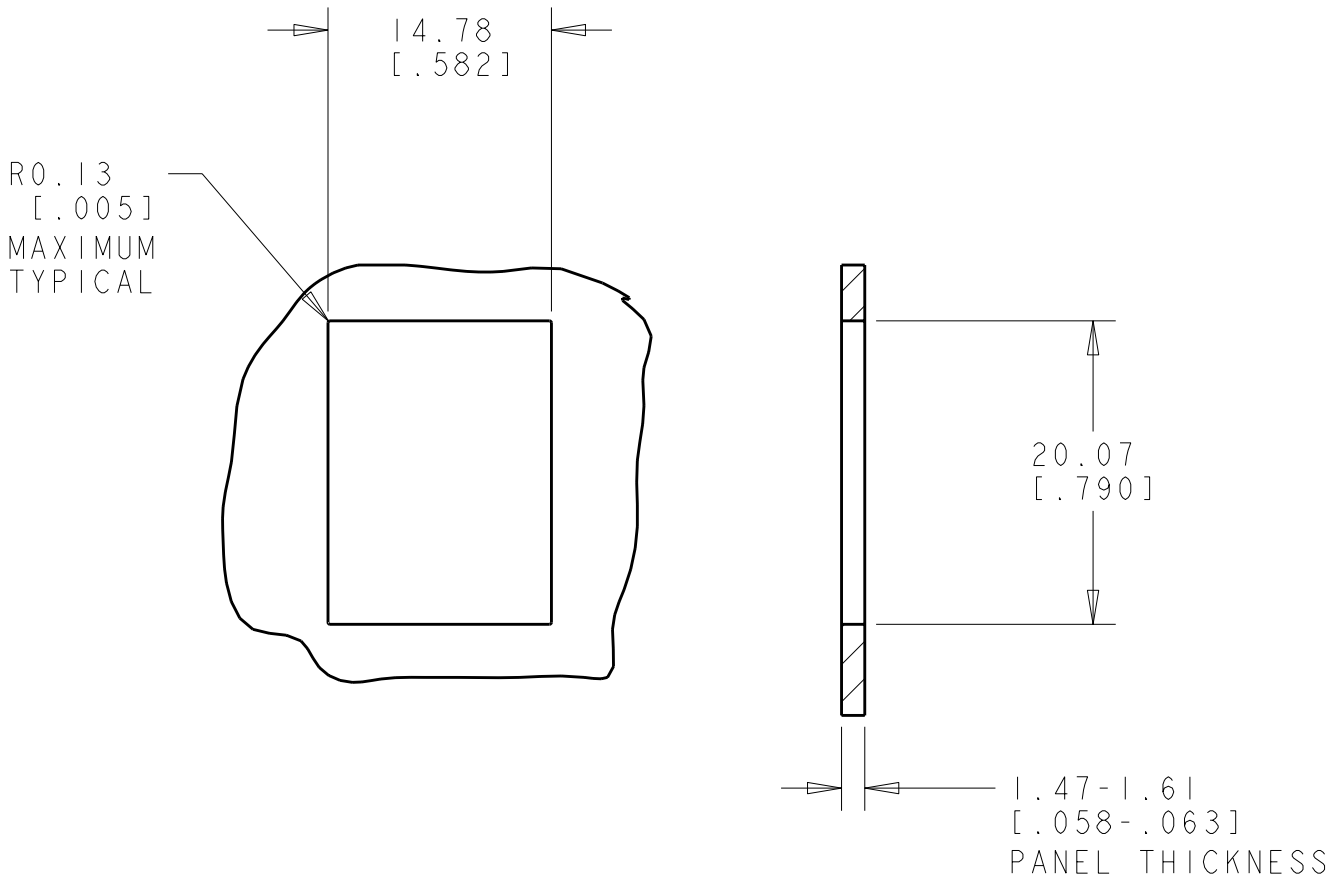
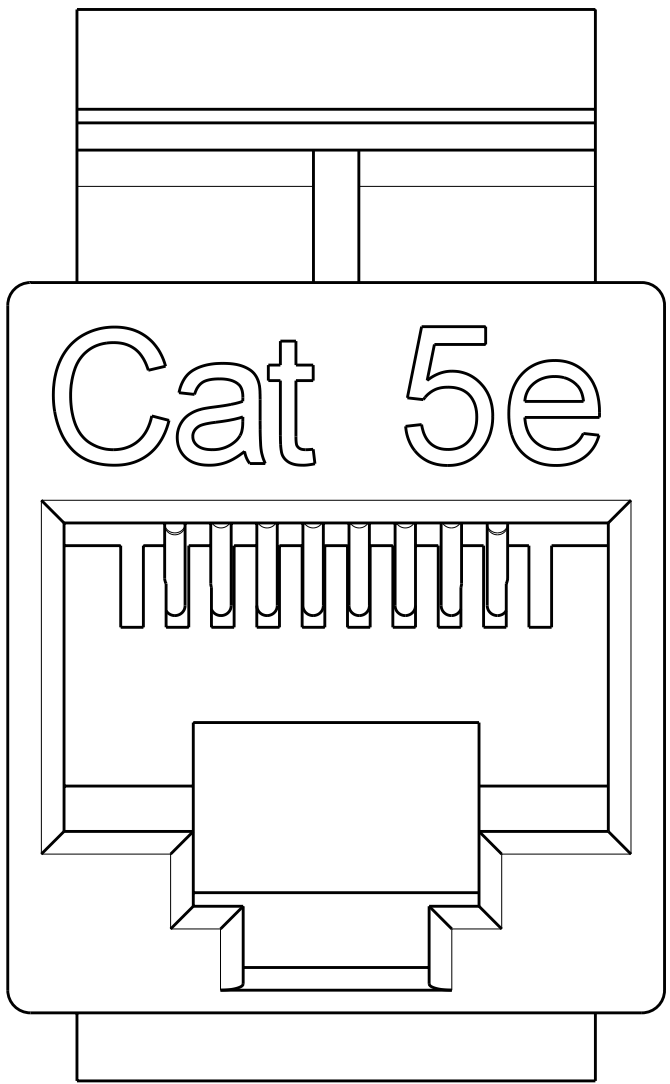


LOC		DIST		REVISIONS				
F	L	T	R	DESCRIPTION	DATE	OWN	APVD	
	A			RLSD; ECO-09-027567	14DEC2009	GG	RA	


- ALL DIMENSIONS SHOWN ARE NOMINAL
UNLESS OTHERWISE SPECIFIED.
- MATERIAL:
COUPLER HOUSING - ABS HIGH-IMPACT UL94V-0 THERMOPLASTIC
SPRING WIRE - PHOSPHOR BRONZE 5100W TEMPER WIRE,
Ø=0.45MM, 50µ" GOLD OVER 100µ" NICKEL UNDERCOAT.
3. MOUNTING PANEL THICKNESS .062 [1.57] NOMINAL.

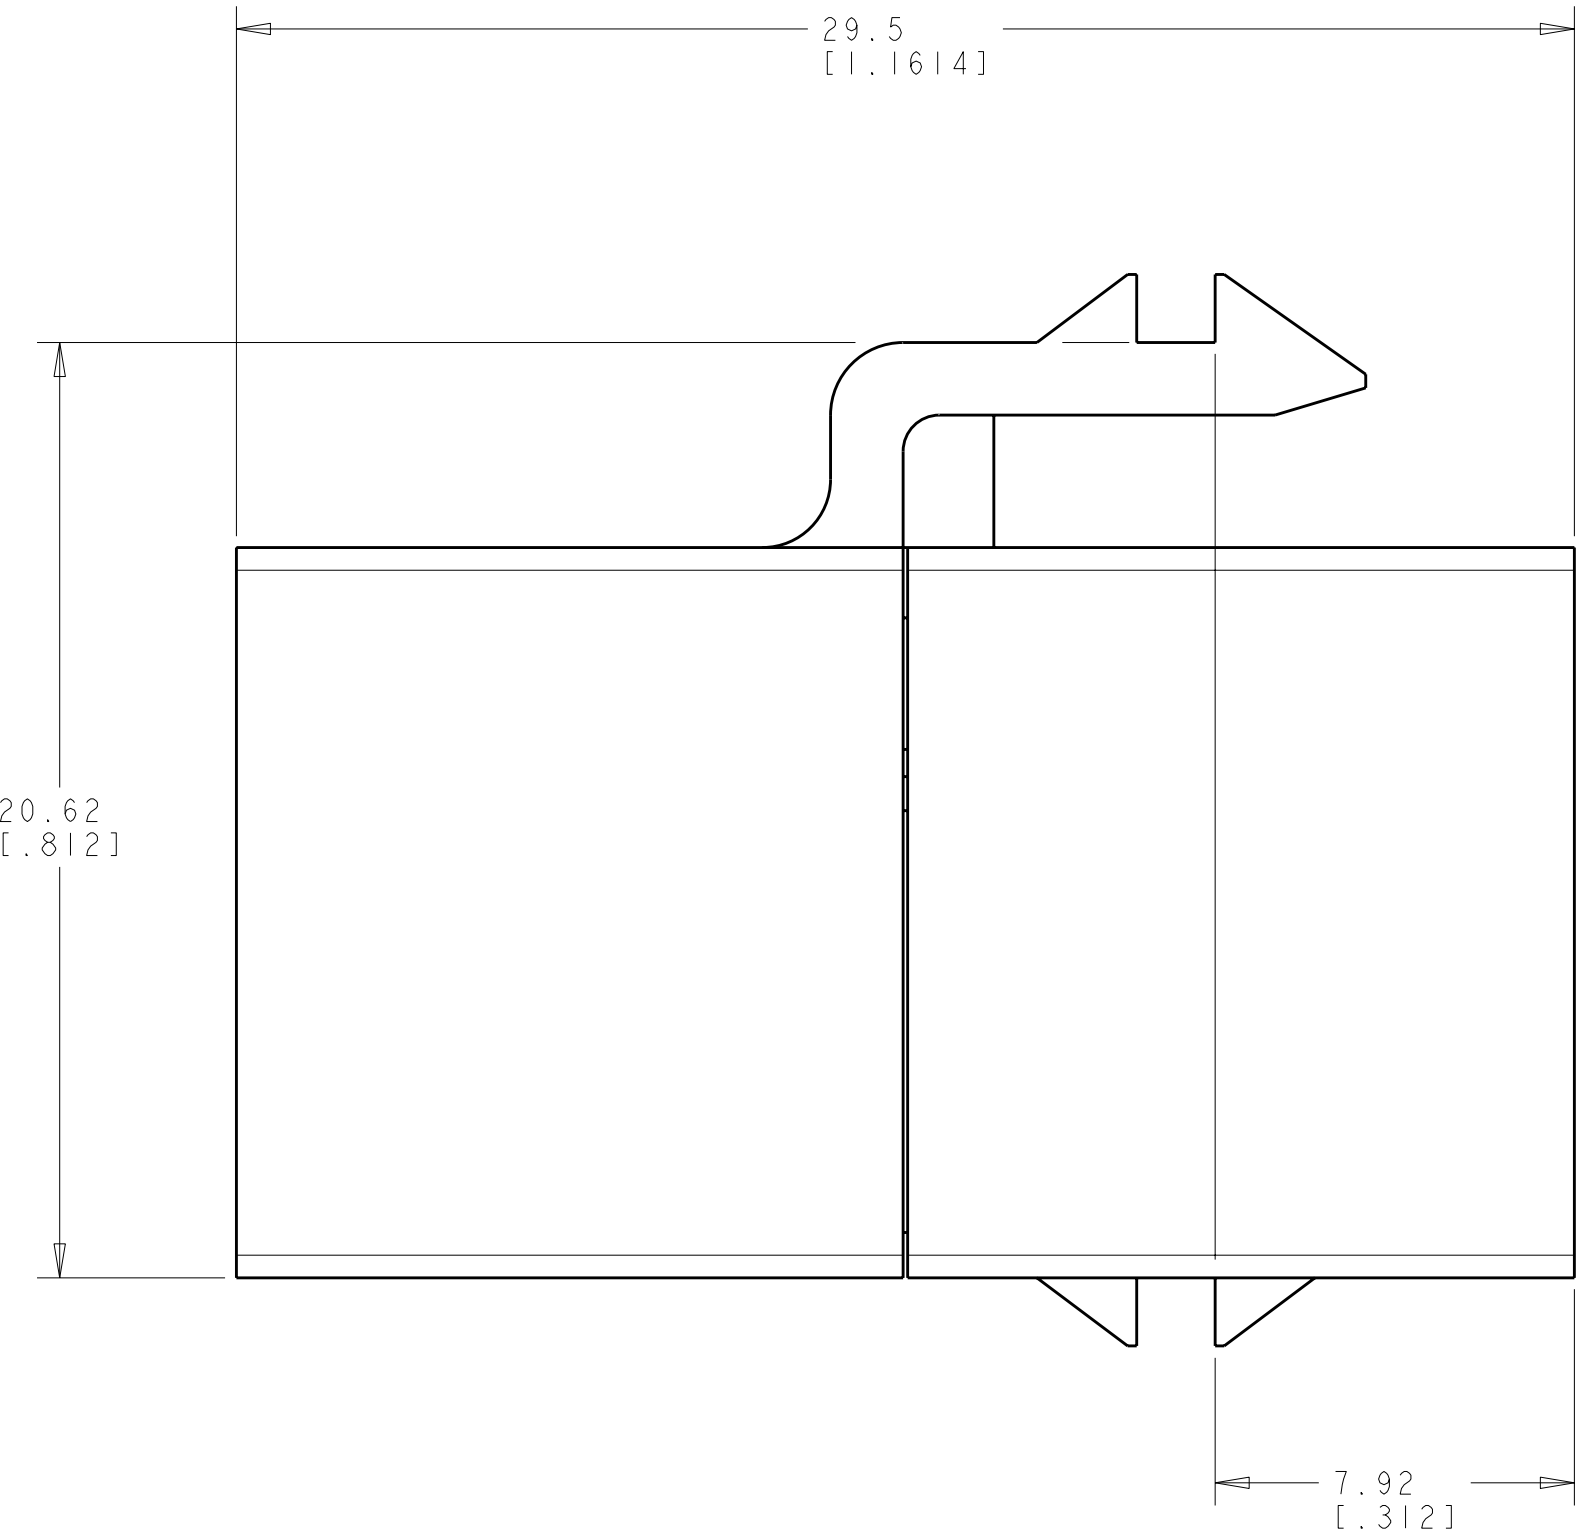

SCALE 4:1

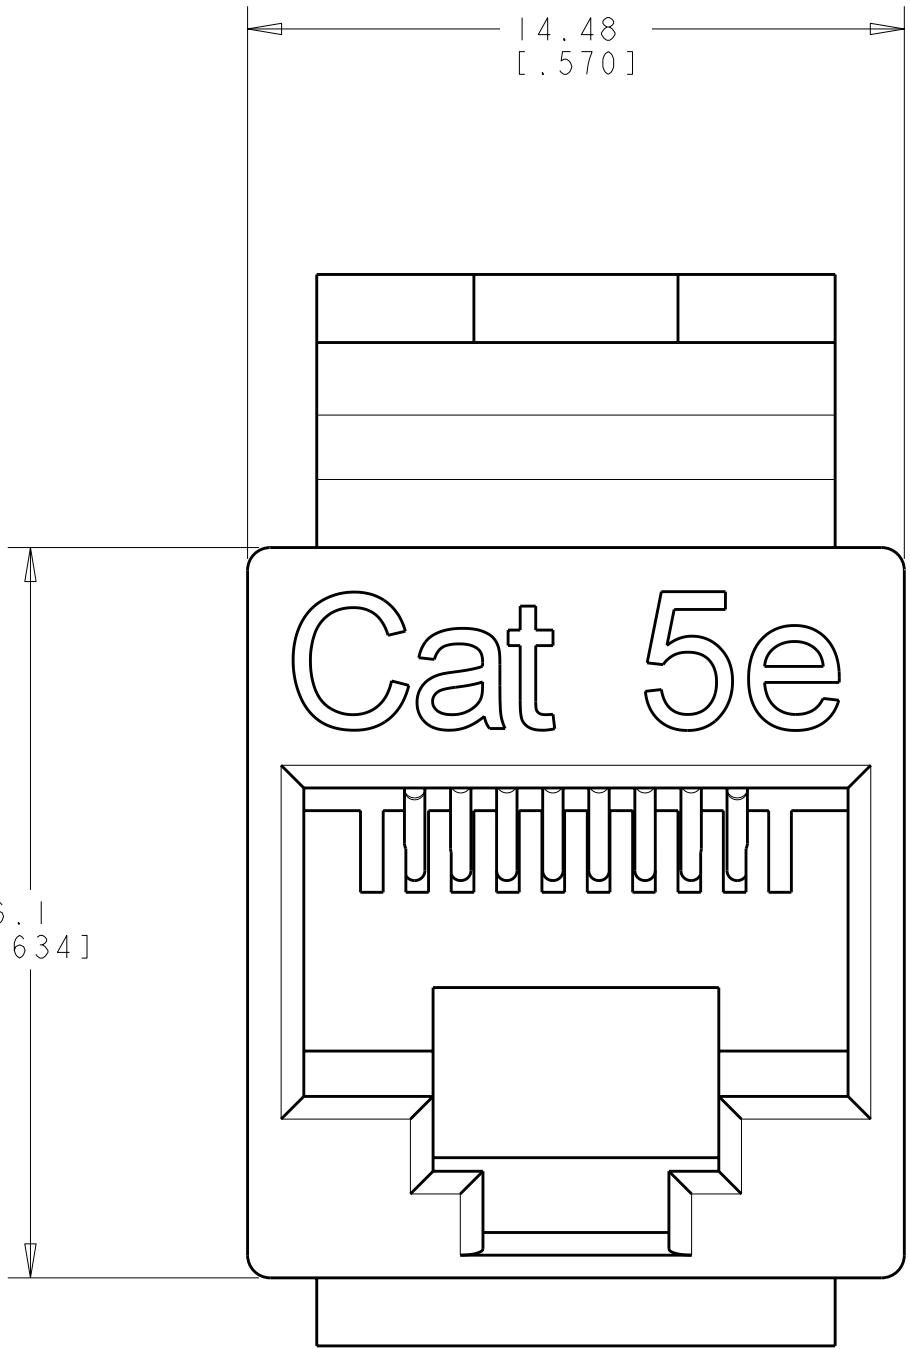

SINGLE PANEL CUTOUT

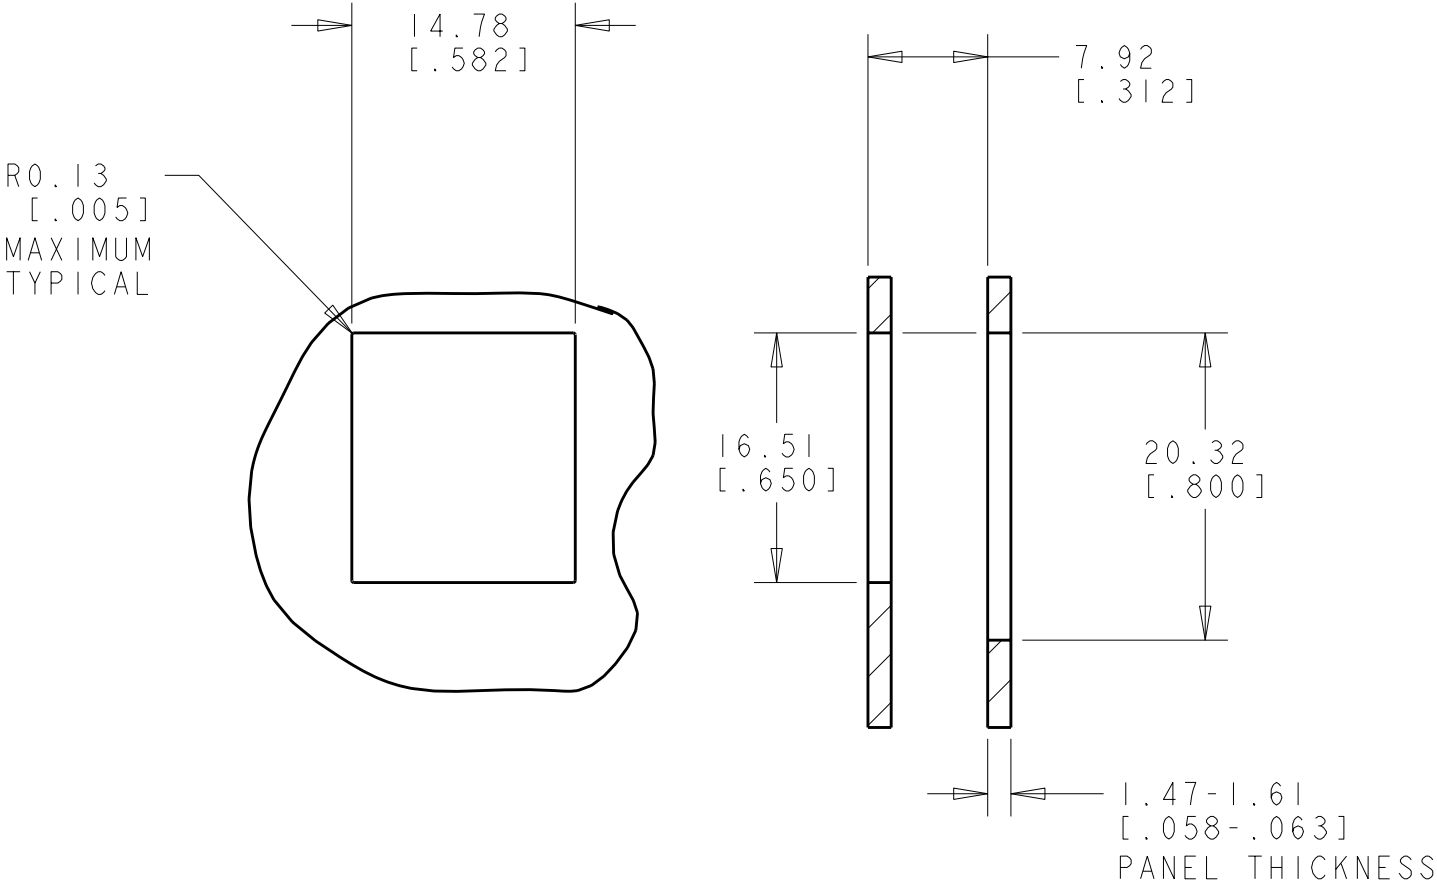

SUGGESTED FLUSH MOUNT
PANEL APPLICATION CUTOUT

2111121-1
PART NUMBER

DWN S. GARRETT 18NOV2009		Tyco Electronics Harrisburg, PA 17105-3608	
CHK R. ASHBY 18NOV2009		NAME COUPLER, SL, INLINE, CAT5E, UNSHIELDED	
APVD R. ASHBY 18NOV2009		PRODUCT SPEC	
APPLICATION SPEC		SIZE A100779	
WEIGHT -		DRAWING NO C=2111121	
CUSTOMER DRAWING		RESTRICTED TO -	
SCALE 6:1		SHEET 1 OF 1	
REV A			