

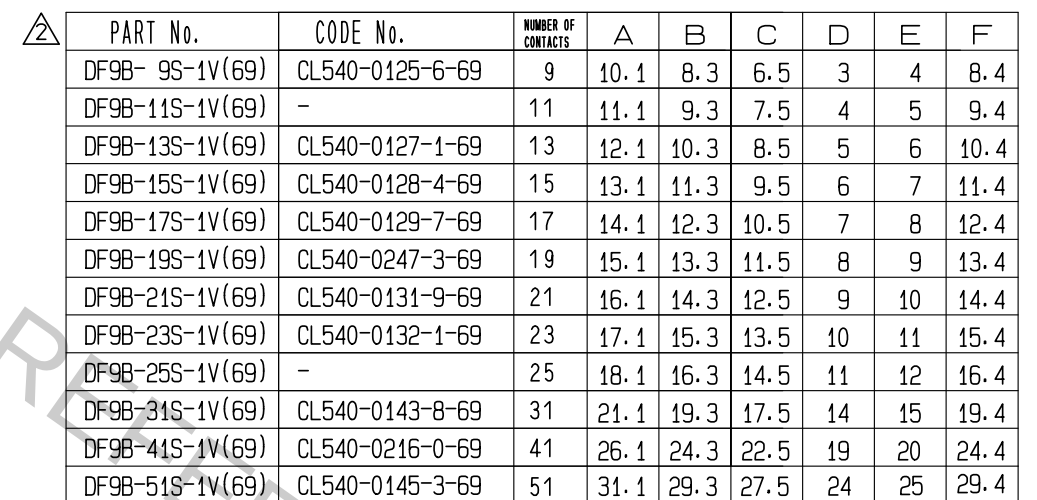


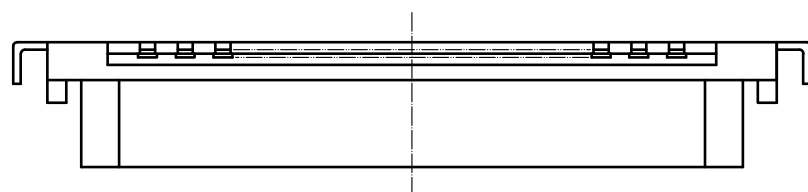

31 TO 51 CONTACT CONNECTORS HAVE TWO LOCKS AS PER DRAWING.

3	BRASS	SURFACE:TIN PLATED<REFLOW FINISH>1μm min UNDER PLATING:COPPER 0.3μm min		8	PS	REINFORCEMENT COLLAR
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.2μm min		7	PS	BLACK<PLASTIC REEL>
		LEAD AREA:TIN PLATED 1μm min		6	POLYIMIDE	BROWN<HEAT-RESISTANCE TAPE>
		UNDER PLATING:NICKEL 0.3μm min		5	POLYESTER	CLEAR<COVER TAPE>
1	POLYAMIDE	BEIGE, UL94V-0		4	PS	CLEAR<EMBOSSED CARRIER TAPE>
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-H-00002725	DESIGNED YT. TAKAGI	CHECKED TS. MIYAZAKI	DATE 17. 09. 28
 HIROSE ELECTRIC CO., LTD.		APPROVED . KH. IKEDA		12. 01. 16	DRAWING NO. EDC3-341297-02			
		CHECKED . AR. TAKAHASHI		12. 01. 16	PART NO. DF9B- * S-1V<69>			
		DESIGNED . SH. HOSODA		12. 01. 16	CODE NO. CL540-			
		DRAWN . KR. AJITO		12. 01. 16	 			

