

Absolute maximum ratings

(Ta=25°C)

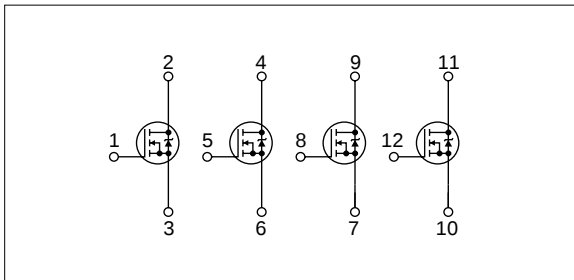
Symbol	Ratings	Unit
V _{DSS}	100	V
V _{GSS}	±20	V
I _D	±4	A
I _D (pulse)	±8 (PW≤1ms)	A
E _{AS} *	16	mJ
P _T	4 (Ta=25°C, with all circuits operating, without heatsink)	W
	28 (Tc=25°C, with all circuits operating, with infinite heatsink)	W
θ _{j-a}	31.2 (Junction-Air, Ta=25°C, with all circuits operating)	°C/W
θ _{j-c}	4.46 (Junction-Case, Tc=25°C, with all circuits operating)	°C/W
T _{ch}	150	°C
T _{stg}	-40 to +150	°C

* : V_{DD}=20V, L=1mH, I_D=5A, unclamped, see Fig. E on page 15.








(Ta=25°C)

Symbol	Specification			Unit	Conditions
	min	typ	max		
V _{(BR)DSS}	100			V	I _D =250μA, V _{GS} =0V
I _{GSS}			±500	nA	V _{GS} =±20V
I _{DSS}			250	μA	V _{DS} =100V, V _{GS} =0V
V _{TH}	2.0		4.0	V	V _{DS} =10V, I _D =250μA
Re(yfs)	1.1	1.7		S	V _{DS} =10V, I _D =4A
R _{DS(ON)}		0.50	0.60	Ω	V _{GS} =10V, I _D =4A
C _{iss}		180		pF	V _{DS} =25V, f=1.0MHz,
C _{oss}		82		pF	V _{GS} =0V
ton		40		ns	I _D =4A, V _{DD} =50V, V _{GS} =10V, see Fig. 3 on page 16.
toff		40		ns	
V _{SD}		1.2	2.0	V	I _{SD} =4A, V _{GS} =0V
trr		250		ns	I _{SD} =±100mA


Equivalent circuit diagram



Characteristic curves

I_D-V_{DS} Characteristics (Typical)I_D-V_{GS} Characteristics (Typical)R_{DS(ON)}-I_D Characteristics (Typical)Re(yfs)-I_D Characteristics (Typical)R_{DS(ON)}-T_C Characteristics (Typical)Capacitance-V_{DS} Characteristics (Typical)I_{DR}-V_{SD} Characteristics (Typical)

Safe Operating Area (SOA)

P_T-T_a Characteristics