


NAIS

SMALL POLARIZED RELAY WITH HIGH SENSITIVITY 50mW

TX-S RELAYS

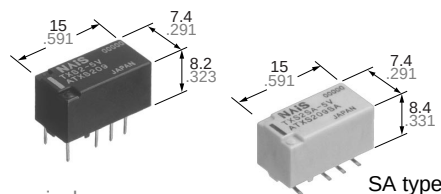

mm inch

SA type

FEATURES

High sensitivity

- 50mW nominal operating power (single side stable 1.5-12V)
- Useful for electric-power-saving

Approx. 0.3 μ V low thermal electromotive force

Outstanding surge resistance

- Surge withstand between open contacts: 1,500V 10 $\times$ 160 μ s (FCC part 68)
- Surge withstand between contacts and coil: 2,500V 2 $\times$ 10 μ s (Bellcore)

SPECIFICATIONS

Contact

Arrangement			2 Form C
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)			100 mΩ
Contact material			Gold-clad silver alloy
Rating	Nominal switching capacity (resistive load)		1 A 30 V DC
	Max. switching power (resistive load)		30 W (DC)
	Max. switching voltage		110 V DC
	Max. switching current		1 A
	Min. switching capacity ※1		10 μA 10 mV DC
Nominal operating power	Single side stable		50 mW (1.5 to 12 V DC) 70 mW (24 V DC)
	1 coil latching		35 mW (1.5 to 12 V DC) 50 mW (24 V DC)
	2 coil latching		70 mW (1.5 to 12 V DC) 150 mW (24 V DC)
Expected life (min. operations)	Mechanical (at 180 cpm)		5×10 ⁷
	Electrical (at 20 cpm)	1 A 30 V DC resistive	2×10 ⁵

Note:

※1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

* Specifications will vary with foreign standards certification ratings.

※1 Measurement at same location as "Initial breakdown voltage" section.

※2 Detection current: 10mA

※3 Excluding contact bounce time.

※4 By resistive method; nominal voltage applied to the coil; contact carrying current: 1 A.

※5 Half-wave pulse of sine wave: 6 ms; detection time: 10 μ s

Characteristics

Initial insulation resistance ※1		Min. 1,000 M Ω (at 500 V DC)
Initial breakdown voltage ※2	Between open contacts	750 Vrms for 1min.
	Between contact sets	1,000 Vrms for 1min.
	Between contacts and coil	1,800 Vrms for 1min.
Initial surge voltage	Between open contacts (10 $\times$ 160 μ s)	1,500V (FCC Part 68)
	Between contacts and coil (2 $\times$ 10 μ s)	2,500V (Bellcore)
Operate time [Set time] ※3 (at 20°C)(at nominal voltage)		Max. 5 ms (Approx. 3 ms) [Max. 5 ms (Approx. 3 ms)]
Release time (without diode) [Reset time] ※3 (at 20°C)(at nominal voltage)		Max. 5 ms (Approx. 1.5 ms) [Max. 5 ms (Approx. 3 ms)]
Temperature rise ※4 (at 20°C)		Max. 50°C
Shock resistance	Functional ※5	Min. 750 m/s ² {75 G}
	Destructive ※6	Min. 1,000 m/s ² {100 G}
Vibration resistance	Functional ※7	10 to 55 Hz at double amplitude of 3.3 mm
	Destructive	10 to 55 Hz at double amplitude of 5 mm
Conditions for operation, transport and storage ※8 (Not freezing and condensing at low temperature)	Ambient temperature	-40°C to +70°C -40°F to +158°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 2 g .071 oz

※6 Half-wave pulse of sine wave: 6 ms

※7 Detection time: 10 μ s

※8 Refer to 4. Conditions for operation, transport and storage mentioned in Cautions for use (Page 178).

TYPICAL APPLICATIONS

- Telephone equipment
- Measuring equipment

- Communications equipment
- Office Automation equipment

ORDERING INFORMATION

Ex. TXS 2 SA - L - H - 3V - Z

Contact arrangement	Surface-mount availability	Operating function	Terminal shape	Coil voltage (DC)	Packing style
2: 2 Form C	Nil: Standard PC board terminal type or self-clinching terminal type SA: Standard surface-mount terminal type SL: High connection reliability surface-mount terminal type SS: Space saving surface-mount terminal type	Nil: Single side stable L: 1 coil latching L2: 2 coil latching	Nil: Standard PC board terminal or surface-mount terminal H: Self-clinching terminal	1.5, 3, 4.5, 6, 9, 12, 24 V	Nil: Tube packing Z: Tape and reel packing(picked from the 8/9/10/12 -pin side)

Notes: 1. Tape and reel (picked from 1/3/4/5-pin side) is also available by request. Part number suffix "-X" is needed when ordering. (ex.) TXS2SA-3 V-X

2. Tape and reel packing symbol "-Z" or "-X" are not marked on the relay.

TYPES AND COIL DATA (at 20°C 68°F)

1) Standard PC board terminal type and self-clinching terminal type

Single side stable

Part No.		Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Max. Allowable voltage, V DC
Standard PC board terminal	Self-clinching terminal							
TXS2-1.5V	TXS2-H-1.5V	1.5	1.2	0.15	33.3	45	50	2.2
TXS2-3V	TXS2-H-3V	3	2.4	0.3	16.7	180	50	4.5
TXS2-4.5V	TXS2-H-4.5V	4.5	3.6	0.45	11.1	405	50	6.7
TXS2-6V	TXS2-H-6V	6	4.8	0.6	8.3	720	50	9
TXS2-9V	TXS2-H-9V	9	7.2	0.9	5.6	1,620	50	13.5
TXS2-12V	TXS2-H-12V	12	9.6	1.2	4.2	2,880	50	18
TXS2-24V	TXS2-H-24V	24	19.2	2.4	2.9	8,229	70	36

1 coil latching

Part No.		Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (Max.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Max. Allowable voltage, V DC
Standard PC board terminal	Self-clinching terminal							
TXS2-L-1.5V	TXS2-L-H-1.5V	1.5	1.2	1.2	23.3	64.3	35	2.2
TXS2-L-3V	TXS2-L-H-3V	3	2.4	2.4	11.7	257	35	4.5
TXS2-L-4.5V	TXS2-L-H-4.5V	4.5	3.6	3.6	7.8	579	35	6.7
TXS2-L-6V	TXS2-L-H-6V	6	4.8	4.8	5.8	1,029	35	9
TXS2-L-9V	TXS2-L-H-9V	9	7.2	7.2	3.9	2,314	35	13.5
TXS2-L-12V	TXS2-L-H-12V	12	9.6	9.6	2.9	4,114	35	18
TXS2-L-24V	TXS2-L-H-24V	24	19.2	19.2	2.1	11,520	50	36

2 coil latching

Part No.		Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (Max.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Max. Allowable voltage, V DC
Standard PC board terminal	Self-clinching terminal							
TXS2-L2-1.5V	TXS2-L2-H-1.5V	1.5	1.2	1.2	46.7	32.1	70	2.2
TXS2-L2-3V	TXS2-L2-H-3V	3	2.4	2.4	23.3	129	70	4.5
TXS2-L2-4.5V	TXS2-L2-H-4.5V	4.5	3.6	3.6	15.6	289	70	6.7
TXS2-L2-6V	TXS2-L2-H-6V	6	4.8	4.8	11.7	514	70	9
TXS2-L2-9V	TXS2-L2-H-9V	9	7.2	7.2	7.8	1,157	70	13.5
TXS2-L2-12V	TXS2-L2-H-12V	12	9.6	9.6	5.8	2,057	70	18
TXS2-L2-24V	TXS2-L2-H-24V	24	19.2	19.2	6.3	3,840	150	36

Notes:

1. Specified value of pick-up, drop-out, set and reset voltage is with the condition of square wave coil pulse.
2. Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

2) Surface-mount terminal type

Single side stable

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Max. Allowable voltage, V DC
TXS2S○-1.5 V	1.5	1.2	0.15	33.3	45	50	2.2
TXS2S○-3 V	3	2.4	0.3	16.7	180	50	4.5
TXS2S○-4.5 V	4.5	3.6	0.45	11.1	405	50	6.7
TXS2S○-6 V	6	4.8	0.6	8.3	720	50	9
TXS2S○-9 V	9	7.2	0.9	5.6	1,620	50	13.5
TXS2S○-12 V	12	9.6	1.2	4.2	2,880	50	18
TXS2S○-24 V	24	19.2	2.4	2.9	8,229	70	36

1 coil latching

Part No.	Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (max.)	Nominal operating current, mA ($\pm 10\%$)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating power, mW	Max. Allowable voltage, V DC
TXS2SO-L-1.5 V	1.5	1.2	1.2	23.3	64.3	35	2.2
TXS2SO-L-3 V	3	2.4	2.4	11.7	257	35	4.5
TXS2SO-L-4.5 V	4.5	3.6	3.6	7.8	579	35	6.7
TXS2SO-L-6 V	6	4.8	4.8	5.8	1,029	35	9
TXS2SO-L-9 V	9	7.2	7.2	3.9	2,314	35	13.5
TXS2SO-L-12 V	12	9.6	9.6	2.9	4,114	35	18
TXS2SO-L-24 V	24	19.2	19.2	2.1	11,520	50	36

2 coil latching

Part No.	Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (max.)	Nominal operating current, mA ($\pm 10\%$)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating power, mW	Max. Allowable voltage, V DC
TXS2SO-L2-1.5 V	1.5	1.2	1.2	46.7	32.1	70	2.2
TXS2SO-L2-3 V	3	2.4	2.4	23.3	129	70	4.5
TXS2SO-L2-4.5 V	4.5	3.6	3.6	15.6	289	70	6.7
TXS2SO-L2-6 V	6	4.8	4.8	11.7	514	70	9
TXS2SO-L2-9 V	9	7.2	7.2	7.8	1,157	70	13.5
TXS2SO-L2-12 V	12	9.6	9.6	5.8	2,057	70	18
TXS2SO-L2-24 V	24	19.2	19.2	6.3	3,840	150	36

○: For each surface-mounted terminal variation, input the following letter.

SA type: A, SL type: L, SS type: S

Notes:

- Specified value of pick-up, drop-out, set and reset voltage is with the condition of square wave coil pulse.
- Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.
- Tape and reel packing is also available for surface-mount type by request. Part number suffix "-X" or "-Z" is needed when ordering.
In this case, "X" or "Z" are not marked on the relay.

Quantity in tape and reel: 500 pcs.

(ex.) • TXS2SA-3V-X

• TXS2SA-L-3V-Z

Picked from the 1/3/4/5-pin side



Picked from the 8/9/10/12-pin side

DIMENSIONS


mm inch

1. Single side stable and 1 coil latching type

Standard PC board terminal

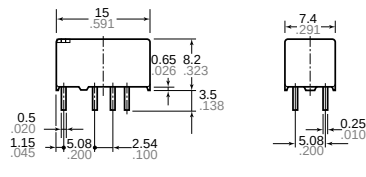


PC board pattern
(Copper-side view)




Tolerance: $\pm 0.1 \pm 0.004$

Schematic (Bottom view)
Single side stable (Deenergized condition) 1 coil latching (Reset condition)

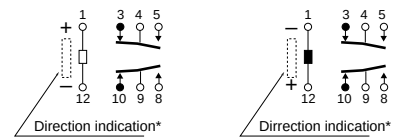


*Orientation stripe located on top of relay.

Self clinching terminal

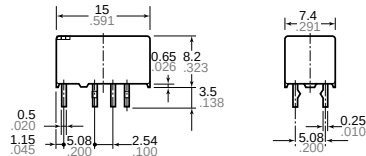


General tolerance: $\pm 0.3 \pm 0.012$

mm inch

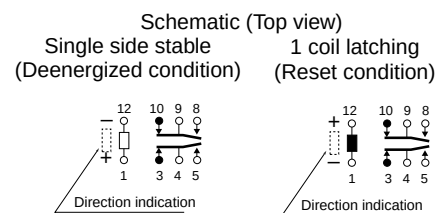


Tolerance: $\pm 0.1 \pm .004$

PC board pattern
(Copper side view)




Tolerance: $\pm 0.1 \pm .004$

Schematic (Bottom view)
2 coil latching
(Reset condition)




General tolerance: $\pm 0.3 \pm .012$

Suggested mounting pad
(Top view)




Schematic (Top view)
1 coil latching
(Reset condition)




Tolerance: $\pm 0.1 \pm .004$

REFERENCE DATA

1. Maximum switching capacity

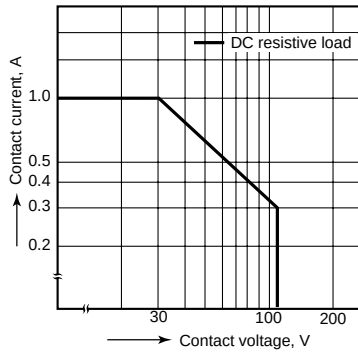


2. Life curve

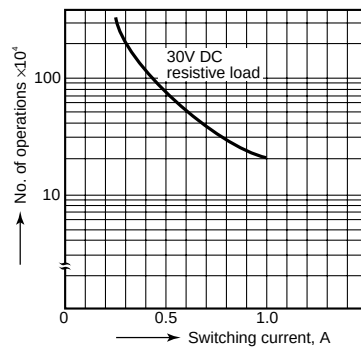

3. Mechanical life

Tested sample: TXS2-4.5V, 10 pcs.
Operating frequency: 180 cpm

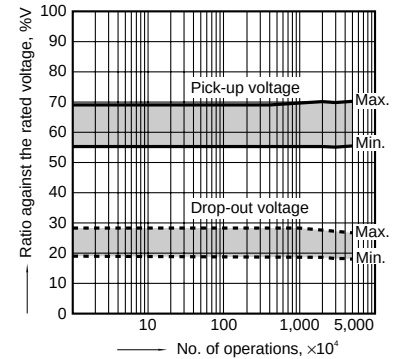


4. Electrical life (1 A 30 V DC resistive load)


Tested sample: TXS2-4.5V, 6 pcs.

Operating frequency: 20 cpm

Change of pick-up and drop-out voltage

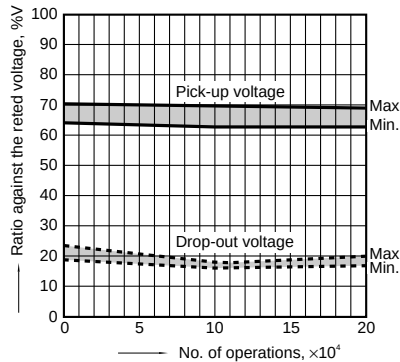

Change of contact resistance

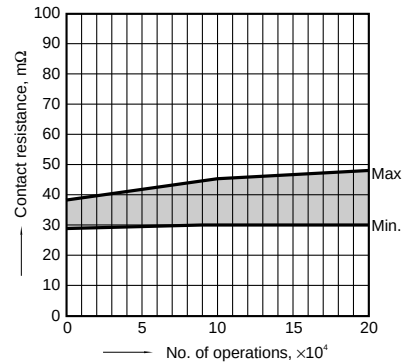


5-(1). Coil temperature rise

Tested sample: TXS2-4.5V, 6 pcs.

Point measured: Inside the coil

Ambient temperature: 25°C 77°F, 70°C 158°F

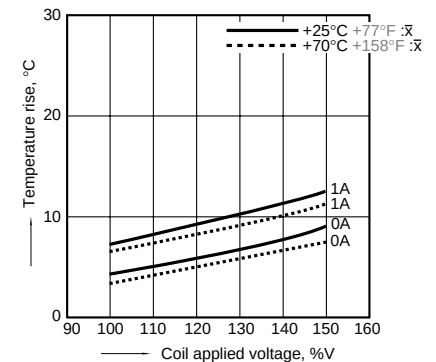


5-(2). Coil temperature rise

Tested sample: TXS2-24V, 6 pcs.


Point measured: Inside the coil

Ambient temperature: 25°C 77°F, 70°C 158°F

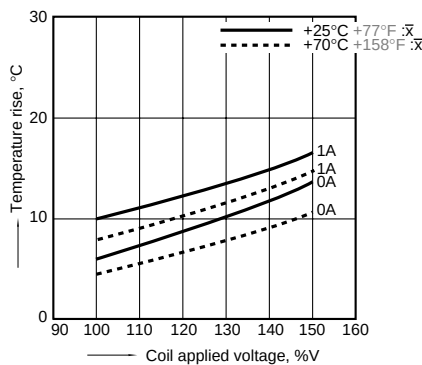


6-(1). Operate and release time (with diode)

Tested sample: TXS2-4.5V, 10 pcs.

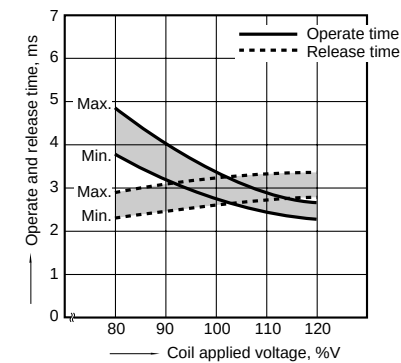


6-(2). Operate and release time (without diode)

Tested sample: TXS2-4.5V, 10 pcs.

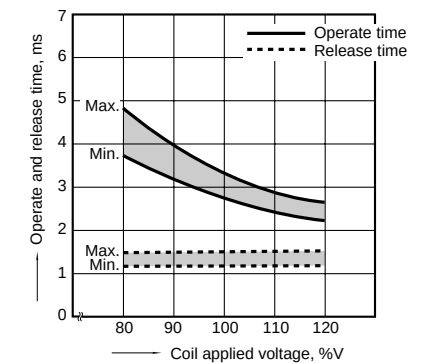


7. Distribution of pick-up and drop-out voltage

Tested sample: TXS2-4.5V, 50 pcs.

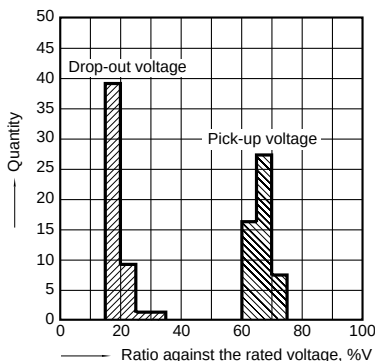


8. Distribution of set and reset voltage

Tested sample: TXS2-4.5V 30 pcs.

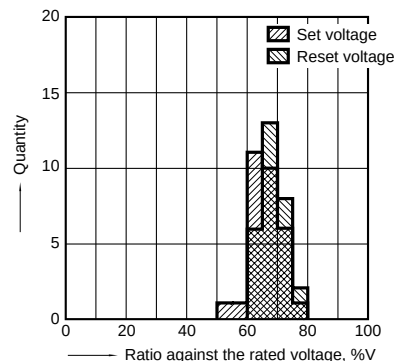


9. Ambient temperature characteristics

Tested sample: TXS2-4.5V 5 pcs.

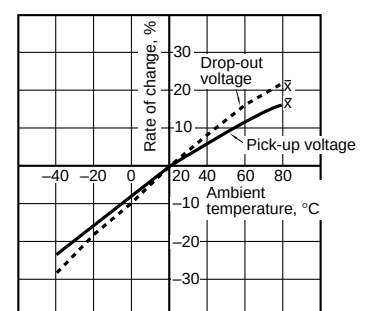


TX-S


10. Distribution of contact resistance
Tested sample: TXS2-4.5V, 50 pcs. (50x4 contacts)

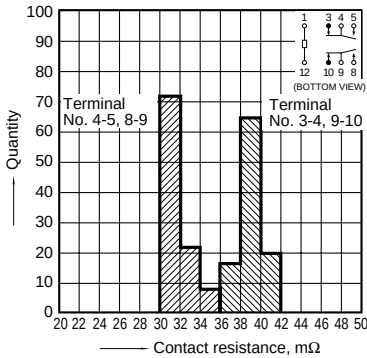


11-(1). High frequency characteristics
Tested sample: TXS2-4.5V, 2 pcs.
Isolation characteristics

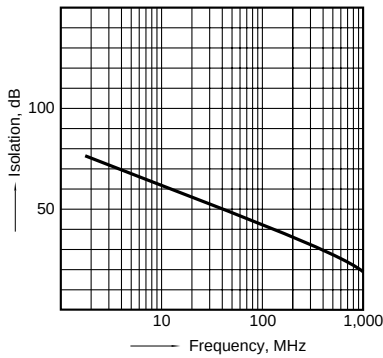


11-(2). High frequency characteristics
Tested sample: TXS2-4.5V, 2 pcs.
Insertion loss characteristics

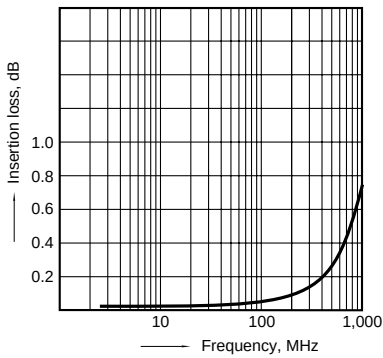


12-(1). Malfunctional shock (single side stable)
Tested sample: TXS2-4.5V, 6 pcs.

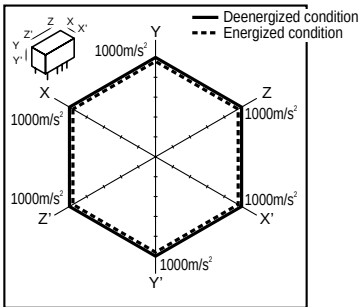


12-(2). Malfunctional shock (latching)
Tested sample: TXS2-L2-4.5V, 6 pcs.




13. Thermal electromotive force
Tested sample: TXS2-4.5V, 10 pcs.

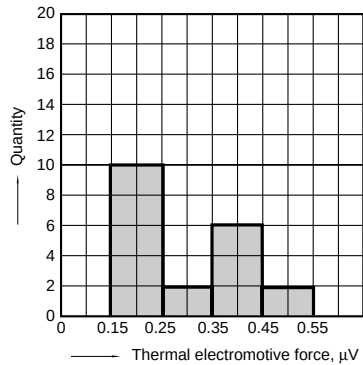


14-(1). Influence of adjacent mounting
Tested sample: TXS2-4.5V, 6 pcs.

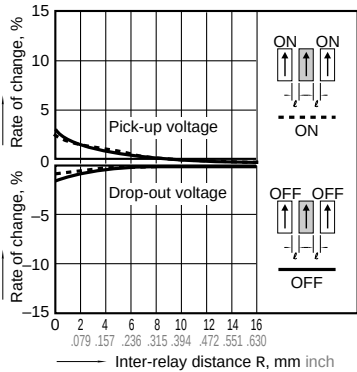


14-(2). Influence of adjacent mounting
Tested sample: TXS2-4.5V, 6 pcs.

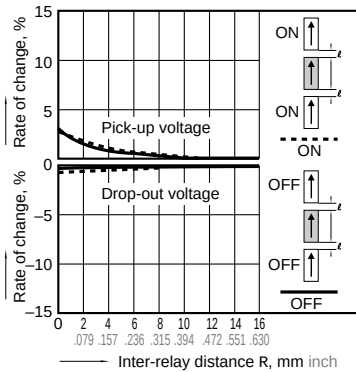


14-(3). Influence of adjacent mounting
Tested sample: TXS2-4.5V, 6 pcs.

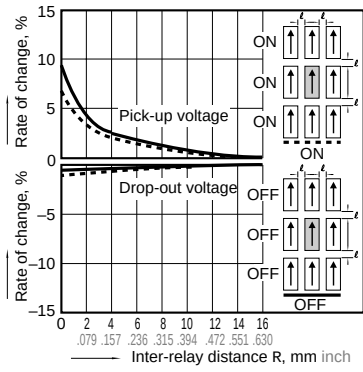


15. Pulse dialing test
Tested sample: TXS2-4.5V, 6 pcs.
(35 mA 48V DC wire spring relay)



Change of pick-up and drop-out voltage

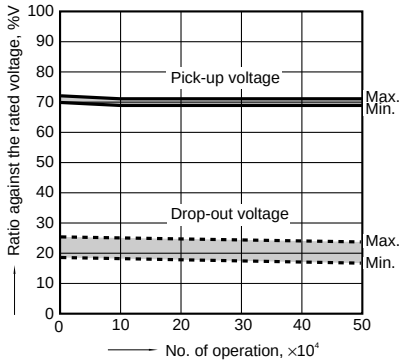

Change of contact resistance

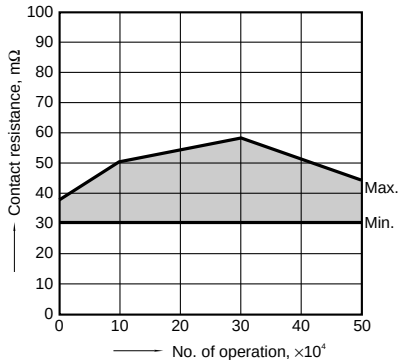

Note: Data of surface-mount type are the same as those of PC board terminal type.

For Cautions for Use, see Page 178 and 179.