

HCM1307

High current power inductors



Applications

- Multi-phase regulators
- Voltage Regulator Modules (VRMs)
- Distributed power systems DC-DC converters
- Desktop and server VRMs and EVRDs
- Point-of-Load (POL) modules
- Field Programmable Gate Array (FPGA) DC-DC converters
- Battery power systems
- High current power supplies
- Data networking and storage systems

Environmental Data

- Storage temperature range (Component): -55°C to +125°C
- Operating temperature range: -55°C to +125°C (ambient + self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant



Product Specifications

Part Number ⁶	OCL ¹ (μ H) $\pm 20\%$	FLL ² (μ H) minimum	I _{rms} ³ (amps)	I _{sat} ⁴ (amps)	DCR (m Ω) typical @ +20°C	DCR (m Ω) maximum @ +20°C	K-factor ⁵
HCM1307-R47-R	0.47	0.26	38	63	1.0	1.2	192
HCM1307-1R0-R	1.0	0.56	29	49	1.7	2.0	111
HCM1307-3R3-R	3.3	1.85	15	40	4.3	4.5	88

1. Open Circuit Inductance (OCL) Test Parameters: 100kHz, 1.0Vrms, 0.0Adc, @ +25°C

2. Full Load Inductance (FLL) Test Parameters: 100kHz, 1.0Vrms, @ I_{sat} @ +25°C

3. I_{rms}: DC current for an approximate temperature rise of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

4. I_{sat}: Peak current for approximately 30% rolloff @ +25°C

5. K-factor: Used to determine B_{p-p} for core loss (see graph). B_{p-p} = K * L * A₁. B_{p-p}: (Gauss), K: (K-factor from table), L: (Inductance in μ H), A₁ (Peak to peak ripple current in Amps).

6. Part Number Definition: HCM1307-xxx-R


HCM1307 = Product code and size

xxx= inductance value in μ H, R= decimal point ,

If no R is present then last character equals number of zeros

-R suffix = RoHS compliant

Dimensions (mm)

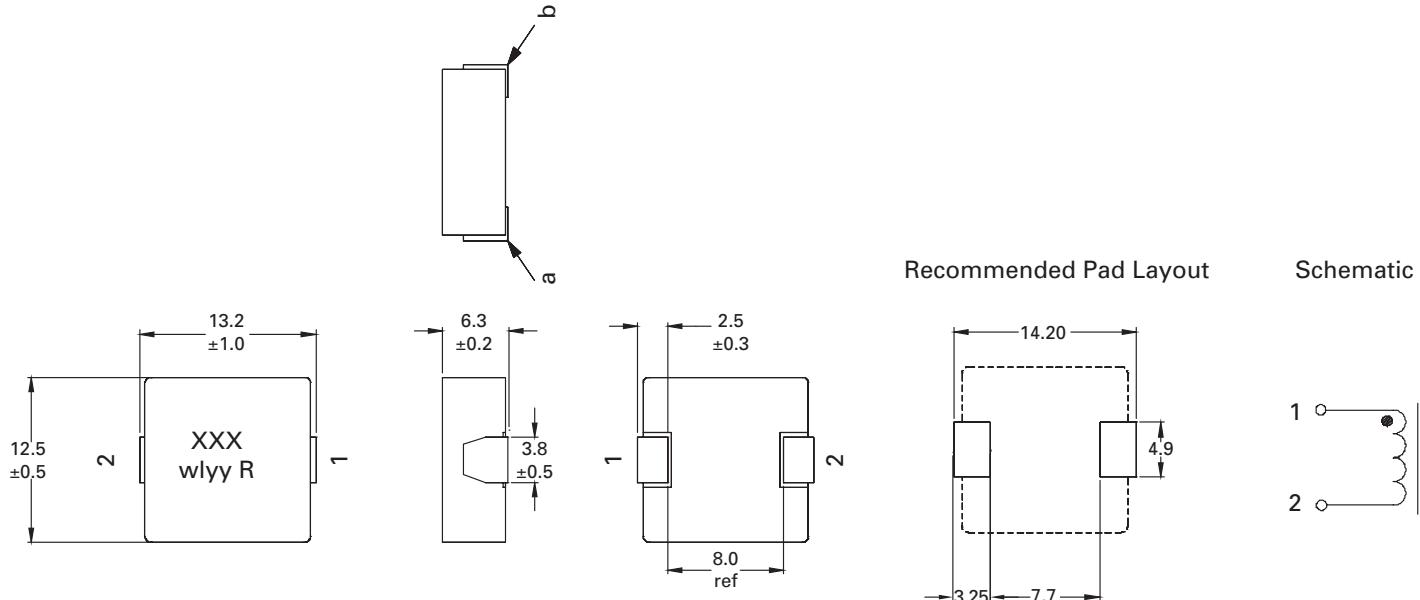

Part marking: XXX=Inductance value in μ H, R= decimal point. If no R is present then last character equals number of zeros.
wlyy=date code, R=revision level

All soldering surfaces to be coplanar within 0.10 millimeters


Tolerances are ± 0.3 millimeters unless stated otherwise

Color: Grey


Do not route traces or vias underneath the inductor

Packaging information (mm)


Supplied in tape and reel packaging, 400 parts per 13" diameter reel

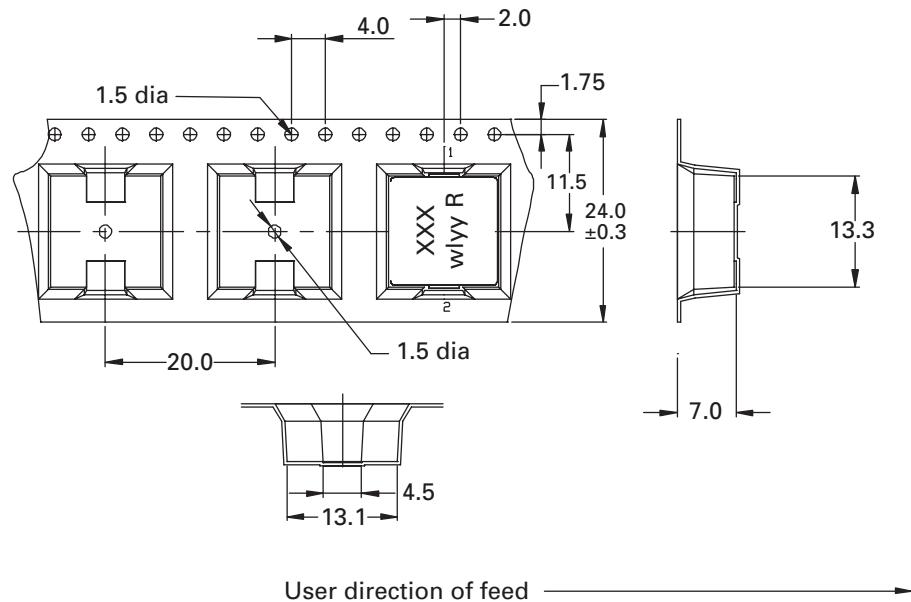

Temperature rise vs. total loss

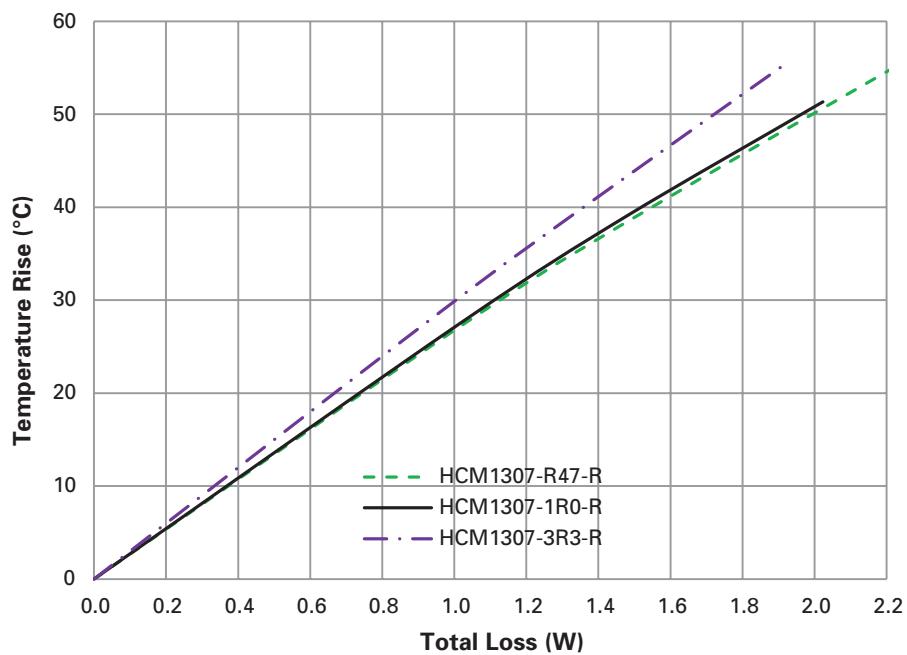


Core loss vs. B_{p-p}

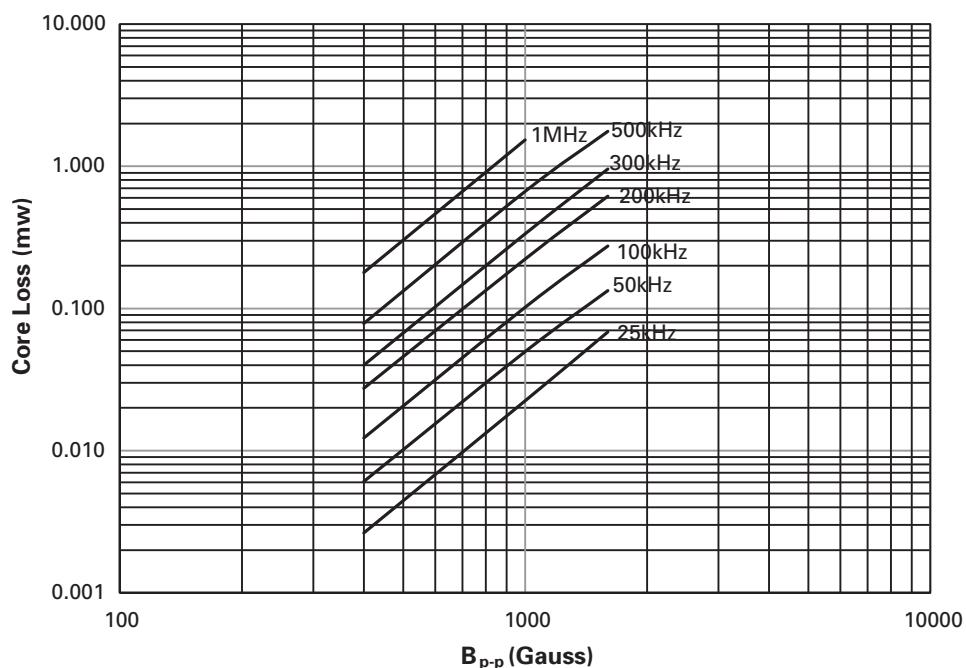


Inductance characteristics


HCM1307-R47-R

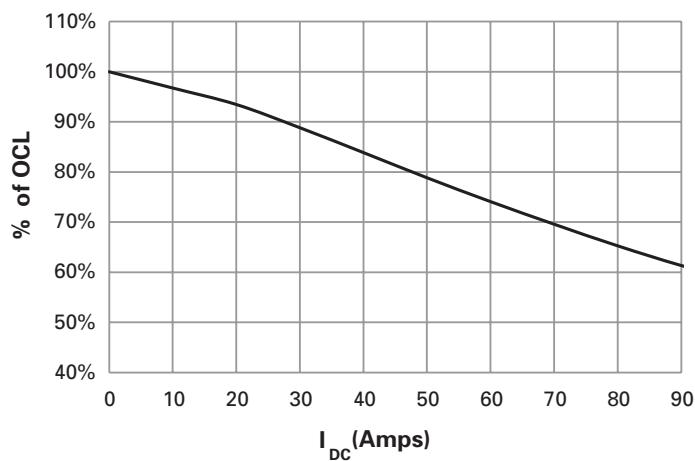

HCM1307-1R0-R

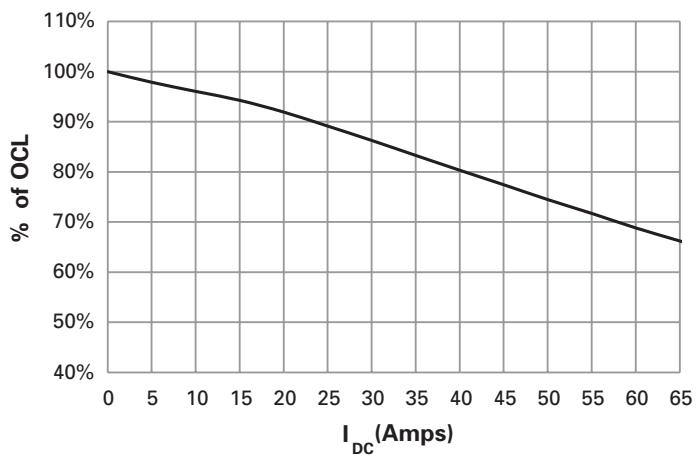

HCM1307-3R3-R

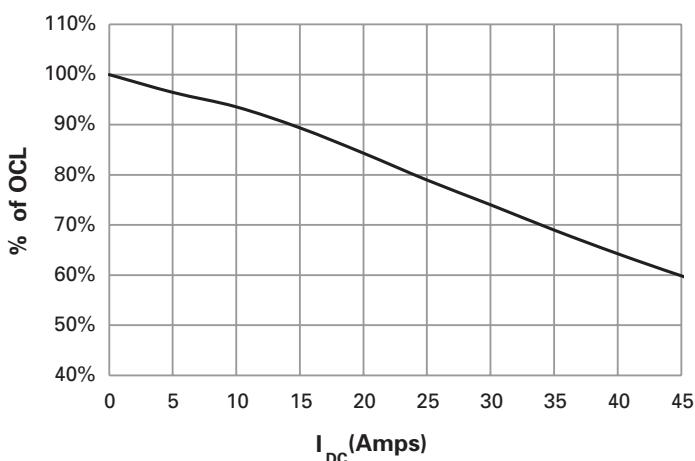

Solder reflow profile

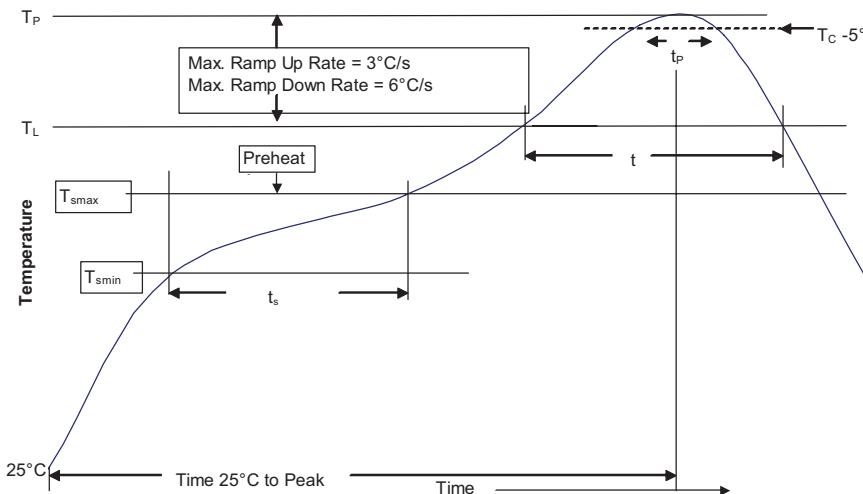


Table 1 - Standard SnPb Solder (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm)	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak	<ul style="list-style-type: none"> Temperature min. (T_{smin}) Temperature max. (T_{smax}) Time (T_{smin} to T_{smax}) (t_s) 	100°C 150°C 60-120 Seconds 60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_c)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/elx

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 10433 BU-MC15009
September 2015

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.