
TABLE OF CONTENTS

Description of Terminology.....	2
Structural Drawing	2
Reliability Test and Measuring Method	2
Handling Precautions	3
Super Bright LED Light Bar Module	
Description of Part Number	4
Characteristics by Color	4
LED Light Bar Module Product Line	4-7
Super Bright LED Numeric Display (Seven Segment Display)	
Description of Part Number	8
Characteristics by Color	8
7.5mm Type	9
10.0mm Type	10-12
15.0mm Type	13
25.0mm Type	14
Bi-Color LED Numeric Display.....	15
Alpha Numeric LED Display	16
Index by Part Number	17-19

DESCRIPTION OF TERMINOLOGY

	ITEMS	SYMBOLS	DEFINITION	UNIT
Absolute Max. Ratings	Power dissipation	(Pd)	Power dissipated by forward current and forward voltage	(mW)
	Forward current	(If)	Current from anode to cathode	(mA)
	Peak forward current	(IfM)	Forward peak current driven during pulse lighting	(mA)
	Current derating	(Δ If)	Derating over 25°C ambient temperature	(mA/°C)
	Forward voltage	(Vf)	Voltage drop when forward current goes from anode to cathode	(V)
Electro-optical characteristics	Reverse current	(Ir)	Leakage current when bias voltage is applied from cathode to anode	(μ A)
	Luminous intensity	(Iv)	Flux in lumens per unit of solid angle on optical axis	(mcd)
	Peak wavelength	(λ_p)	Wavelength at which radiant intensity becomes greatest	(nm)
	Spectral line half width	($\Delta\lambda$)	Wavelength range in which radiant intensity becomes more than 50% of its peak value	(nm)


RELIABILITY TEST AND MEASURING METHOD

■ Items to be Guaranteed for LEDs


TEST ITEM	STANDARDS	TEST CONDITION	SAMPLE SIZE
Operating Endurance Test	JIS C 7035 Added documents	Ta=25°C, If=Maximum Rated Current, t=1000 Hrs.	25
Resistance to Soldering Heat	JIS C 7021 A-1	260±5°C, 10±1 sec., 3mm from package base	25
Temperature Cycling	JIS C 7021 A-4	-30°C (30 min) to normal temperature (15 min) to +100°C (30 min) To normal temperature (15 min) 5 cycles	25
Humidity (Steady State)	JIS C 7021 B-11	Ta=60±2°C, RH=90±5%, t=1000Hr	25
High Temperature (Storage)	JIS C 7021 B-10	Ta=100±2°C, t=1000Hr	25
Low Temperature (Storage)	JIS C 7021 A-12	Ta=30±2°C, t=1000Hr	25
Lead Tension	JIS C 7021 A-11	*1kg/10 sec. one time (thin lead: 0.5kg)	10
Vibration Fatigue	JIS C 7021 A-10	10G, 100 to 2000Hz sweep for 20 min., 2 hours for directions X, Y and Z	10

■ Measuring Method

Luminous Intensity (Iv)

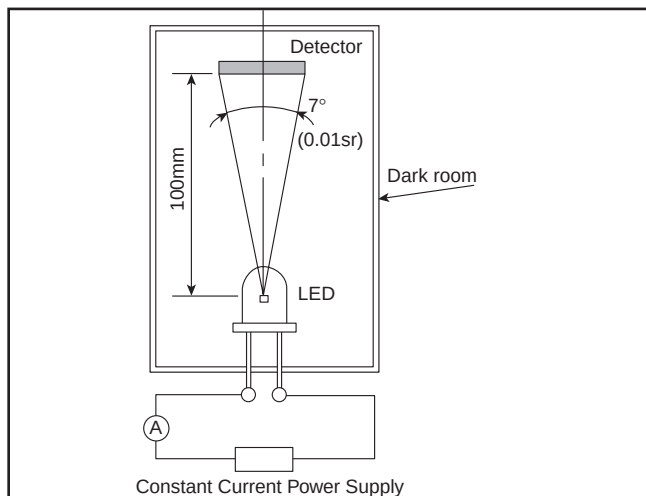

■ Structural Drawing for Numeric Display

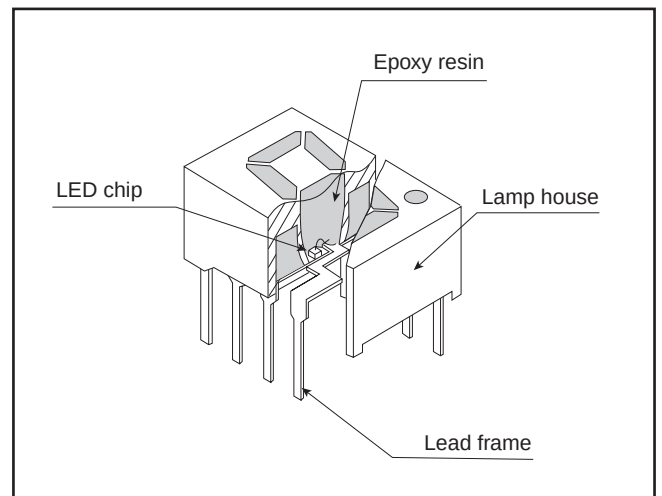

HANDLING PRECAUTIONS

■ Soldering Conditions

Please refer to each product to see if it's compatible with lead-free soldering.

Conventional Soldering Conditions

SOLDERING IRON	DIP SOLDERING	REFLOW SOLDERING
Iron Tip Temperature: 300°C Max. (30W Max.) Soldering Time: 3 Seconds Max. Location: At least 3.0mm away from resin	Pre-heat: 80°C Max. / 60 sec. Max. (Resin surface temperature) Bath Temperature: 260°C Max. Dipping Time: 5 sec. Max. Position: At least 3.0mm away from resin body	Not recommended

Lead-Free Soldering Conditions

SOLDERING IRON	DIP SOLDERING	REFLOW SOLDERING
Iron Tip Temperature: 400°C Max. Soldering Iron: 30W Max. Soldering Time: 3 Seconds Max. Position: At least 2.0mm away from resin	Pre-heat: 100°C Max. / 60 seconds Max. (Resin surface temperature) Bath Temperature: 265°C Max. Dipping time: 5 sec. Max. Position: At least 2.0mm away from resin body	Not recommended

■ Cleaning

Residual solder or flux left on the LED housing could reduce intensity and could affect the optical characteristics. Excess flux can be removed by the following chemical method:

- Cleaning solvents (dipping time: 3 minutes maximum at normal temperature)
 - Ethyl alcohol
 - Isopropyl alcohol
 - Pure water (after cleaning, the water must be removed by drying)
 - Drying condition: 90°C max., 30 sec. max. and 4 times max.
- The effect of ultrasonic cleaning on the LED resin body depends on such factors as the oscillator output, size of PCB and LED mounting method. Ultrasonic cleaning is strongly recommended after confirming that there are no problems.
 - Ultrasonic wave frequency: 28 kHz or 40 kHz
 - Output: 20 W/l
- The solvent for freon equivalent (recommended after confirming that there are no problems).
 - AK-225AES
 - Clean through
 - Pine alpha ST-100S

Chemicals	Freon substitute detergent
Ethyl alcohol	AK225AES
Isopropyl alcohol	Clean through 705H
Pure water	Pine alpha ST-100S

* DIP Soldering and cleaning is not recommended for Alpha-Numeric (AAR121 and AAA121) LED displays.

SUPER BRIGHT LED LIGHT BAR MODULE

Stanley's MU series of super-bright LED light bar modules can be selected from a wide variety of configurations and colors to suit a broad range of requirements. By using front mask patterns, including letters, numbers and even graphics, this series is usable for a myriad of display applications.

Description of Part Number

MU 02 - 2201

Shape Code Emitted color Suffix
2.Red 3.Orange 4.Yellow 5.Green / Pure Green

Characteristics by Color


Ta=25°C

Part No.	Material Emitted Color	Absolute Maximum Ratings						Electro-Optical Characteristics							
		Forward Current	Peak Forward Current	Reverse Voltage	Operating Temperature	Storage Temperature	Derating	Forward Voltage			Reverse Current		Peak λp TYP.	Spectral Line Half Width Δλ TYP.	IF
		IF ÷ 1	IFM ÷ 2	VR	Topr ÷ 3	Tstg ÷ 4	ΔIF	TYP.	MAX.	IF	MAX.	VR			
2□□□	GaAlAs (Red)	30	60	4	-40~+85	-40~+85	0.40	1.7	2.0	20	100	4	660	30	20
3□□□	GaAsP (Orange)	25	60	4	-40~+85	-40~+85	0.33	2.2	2.5	20	100	4	605	30	20
4□□□	GaP (Yellow)	30	60	4	-40~+85	-40~+85	0.40	2.1	2.5	20	100	4	570	30	20
5□□1	GaP (Pure Green)	25	60	4	-40~+85	-40~+85	0.33	2.2	2.5	20	100	4	555	30	20
5□□2	GaP (Green)	30	60	4	-40~+85	-40~+85	0.40	2.1	2.5	20	100	4	560	30	20
5□□5	GaP (Pure Green)	25	60	4	-40~+85	-40~+85	0.33	2.2	2.5	20	100	4	555	30	20
9□□1	GaAlAs (Red)	30	60	4	-40~+85	-40~+85	0.40	1.7	2.0	20	100	4	660	30	20
	GaP (Pure Green)	25	60	4	-40~+85	-40~+85	0.33	2.2	2.5	20	100	4	555	30	20
9□□2	GaAlAs (Red)	30	60	4	-40~+85	-40~+85	0.40	1.7	2.0	20	100	4	660	30	20
	GaP (Yellow)	30	60	4	-40~+85	-40~+85	0.40	2.1	2.5	20	100	4	570	30	20
9□□3	GaAlAs (Red)	30	60	4	-40~+85	-40~+85	0.40	1.7	2.0	20	100	4	660	30	20
	GaAsP (Orange)	25	60	4	-40~+85	-40~+85	0.33	2.2	2.5	20	100	4	605	30	20
Units		mA	mA	V	°C		mA/°C	V		mA	μA	V	nm		mA

- ❖ 1 : MU91, MU92 and MU93 series are all 30 mA.
- ❖ 2 : tw≤2 msec, duty ≤1/5 However, for the MU91, MU92 and MU93 series, 300 mA for red and 100 mA for yellow, orange and pure green (tw ≤1 msec, duty ≤1/20)
- ❖ 3 ❖ 4 : For MU91, MU92 and MU93 series, the temperature range is -30°C to +85°C.

Characteristics by Shape

Ta=25°C



Shape	Part No.	Emitted Color	Resin Color	Light Emitting Surface (Outer Size)	No. of Chips	Absolute Max. Rating	Electro-Optical Characteristics			fig.			
						Power Dissipation Pd	Luminous Intensity		Iv				
							MIN.	TYP.	If				
	MU02-2201	Red	Red	14 x 14 (15 x 15)	4	240	20	42	20	1			
	MU02-2205		Milky White		4	240	20	42	20				
	MU02-3201	Orange	Orange		4	250	10	20	20				
	MU02-3205		Milky White		4	250	10	20	20				
	MU02-4201	Yellow	Yellow		4	300	20	42	20				
	MU02-4205		Milky White		4	300	20	42	20				
	MU02-5201	Pure Green	Green		4	250	10	20	20				
	MU02-5202	Green	Green		4	300	15	32	20				
	MU02-5205	Pure Green	Milky White		4	250	10	20	20				
	MU02-9301	Red	Green		4	240	8	12	20	2			
		Pure Green			4	250	8	12	20				
	MU03-2201	Red	Red	6 x 9 (7 x 10)	2	120	10	20	20	3			
	MU03-2205		Milky White		2	120	10	20	20				
	MU03-3201	Orange	Orange		2	125	5	10	20				
	MU03-3205		Milky White		2	125	5	10	20				
	MU03-4201	Yellow	Yellow		2	150	10	20	20				
	MU03-4205		Milky White		2	150	10	20	20				
	MU03-5201	Pure Green	Green		2	125	3	7	20				
	MU03-5202	Green	Green		2	150	8	16	20				
	MU03-5205	Pure Green	Milky White		2	125	5	10	20				
	MU03-9201	Red	Milky White		1	60	5	7	20				
		Pure Green			1	62.5	3	4	20				
	Units				mm	pcs	mW	mcd			mA		

* Lead-free soldering compatible product

Package Dimensions

unit : mm

Tolerance : ±0.25mm

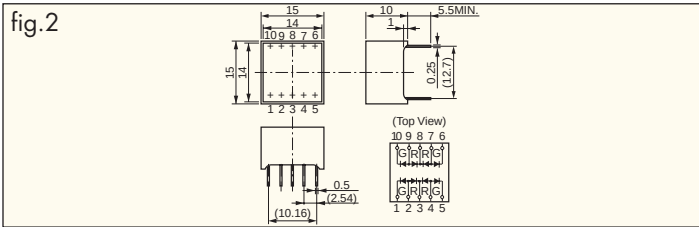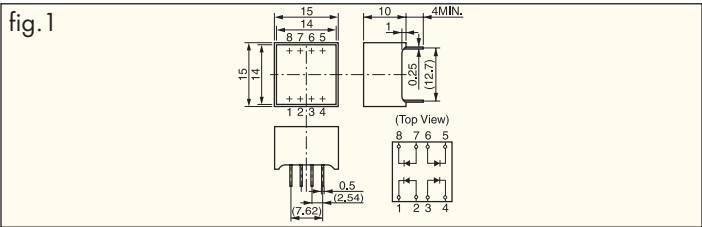

$T_a = 25^\circ\text{C}$

* Lead-free soldering compatible product

Tolerance : $\pm 0.25\text{mm}$

fig.3

Technical drawing of a 3-pin connector (fig.3) showing dimensions and pin configurations.

Dimensions:

- Overall width: 10
- Pin spacing: 9
- Pin height: 6
- Pin width: 7
- Pin pitch: 6.5
- Pin length: 4MIN.
- Pin thickness: 0.5
- Pin diameter: 0.25
- Pin diameter: 2

Pin Configurations:

- Top View: Pins 1, 2, 3. Pin 1 is labeled R, Pin 2 is labeled G. Note: 9201Type only.
- Bottom View: Pins 1, 2, 3. Note: 2250Type only.

fig.4

Technical drawing of a mechanical part (fig.4) showing dimensions and a top view. The main view shows a rectangular part with a total width of 20 and a total height of 7. The width is divided into six segments, numbered 1 to 6, with a total width of 19. The height is divided into two segments, with a total height of 6. The top view shows a rectangular part with a total width of 20 and a total height of 7. The width is divided into six segments, numbered 1 to 6, with a total width of 19. The height is divided into two segments, with a total height of 6. The top view also shows a detail of the top surface with dimensions 6.5, 4MIN., 0.5, and 0.25. The top view is labeled (Top View) and shows a rectangular part with a total width of 20 and a total height of 7. The width is divided into six segments, numbered 1 to 6, with a total width of 19. The height is divided into two segments, with a total height of 6. The top view also shows a detail of the top surface with dimensions 6.5, 4MIN., 0.5, and 0.25.

fig.5

Technical drawing of a 10-pin D-sub connector. The drawing includes three views: a side view, a front view, and a top view.

Side View: Shows the profile of the connector. The overall width is 30mm. The width of the main body is 29mm. The height of the main body is 6mm. The height of the pin area is 1mm. The pin pitch is 2.54mm. The overall height of the connector is 7mm.

Front View: Shows the connector from the front. The overall width is 27mm. The width of the main body is 22.86mm. The height of the main body is 1.5mm. The height of the pin area is 0.5mm. The pin pitch is 2.54mm. The overall height of the connector is 2mm.

Top View: Shows the connector from the top. The overall width is 27mm. The width of the main body is 22.86mm. The height of the main body is 1.5mm. The height of the pin area is 0.5mm. The pin pitch is 2.54mm. The overall height of the connector is 2mm.

fig.6

Technical drawing of a mechanical part showing front, top, and side views with dimensions. The front view shows a rectangular part with a width of 17 and a height of 15. The top view shows a rectangular part with a width of 17 and a height of 15. The side view shows a rectangular part with a width of 7 and a height of 12.7. Dimensions are given in millimeters (mm) and inches (in). The drawing includes a section line and a note '7 4MIN.'.

fig.7

Technical drawing of a 16-pin connector. The drawing includes a front view, a side view, a detail view of a pin, and a top view.

Front View: Shows a rectangular housing with a width of 17mm and a height of 15mm. The pin positions are numbered 1 through 16. The top row of pins is numbered 1 to 8, and the bottom row is numbered 9 to 16.

Side View: Shows the profile of the connector with a total width of 7mm and a pin length of 5.5mm. The housing thickness is 3.5mm, and the pin diameter is 0.25mm. The distance from the housing edge to the pin center is 12.7mm.

Detail View: Shows a single pin with a diameter of 0.5mm and a pitch of 10.16mm (2.54mm).

Top View: Shows the arrangement of the 16 pins in a 2x8 grid. The pins are labeled G, R, R, R, G, G, R, R, G, R, R, R, G, G, R, R. The top row is numbered 1 to 8, and the bottom row is numbered 9 to 16.

SUPER BRIGHT LED LIGHT BAR MODULE

Characteristics by Shape





Ta=25°C

Shape	Part No.	Emitted Color	Resin Color	Light Emitting Surface (Outer Size)	No. of Chips	Absolute Max. Rating	Electro-Optical Characteristics			fig.
						Power Dissipation Pd	Luminous Intensity Iv			
							MIN.	TYP.	If	
	MU09-9101	Red	Milky White	φ 6.4 (φ7)	1	60	4	8	20	8
		Pure Green			2	125	4	6	20	
	MU09-9102	Red	Milky White		1	60	4	8	20	
		Yellow			2	150	6	12	20	
	MU09-9103	Red	Milky White		1	60	4	8	20	
		Orange			2	125	4	8	20	
	MU11-2201	Red	Red	4.6X9.5 (5.6X10.5)	2	120	10	20	20	9
	MU11-3201	Orange	Orange		2	125	5	10	20	
	MU11-4201	Yellow	Yellow		2	150	10	20	20	
	MU11-5201	Pure Green	Green		2	125	5	10	20	
	MU13-9101	Red	Milky White	9X9 (10.1X10.1)	1	60	6	12	20	10
		Pure Green			5	310	7	14	20	
	MU13-9102	Red	Milky White		1	60	6	12	20	
		Yellow			5	375	20	40	20	
	MU16-2101	Red	Red	4X12 (5X13)	2	120	8	16	20	11
	MU16-2105		Milky White		2	120	8	16	20	
	MU16-3101	Orange	Orange		2	125	6	12	20	
	MU16-3105		Milky White		2	125	6	12	20	
	MU16-4101	Yellow	Yellow		2	150	8	16	20	
	MU16-4105		Milky White		2	150	8	16	20	
	MU16-5101	Pure Green	Green		2	125	4	8	20	
	MU16-5105		Milky White		2	125	4	8	20	
		MU17-2101	Red		Red	4X19 (5X20)	3	180	12	
MU17-2105		Milky White		3	180		12	24	20	
MU17-3101		Orange	Orange	3	190		9	18	20	
MU17-3105			Milky White	3	190		9	18	20	
MU17-4101		Yellow	Yellow	3	225		12	24	20	
MU17-4105			Milky White	3	225		12	24	20	
MU17-5101		Pure Green	Green	3	190		5	10	20	
MU17-5105			Milky White	3	190		5	10	20	
Units				mm	pcs		mW	mcd		mA

* Lead-free soldering compatible product

Package Dimensions unit : mm

Tolerance : ±0.25mm

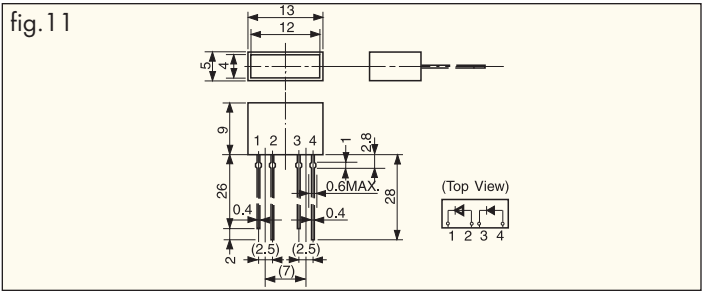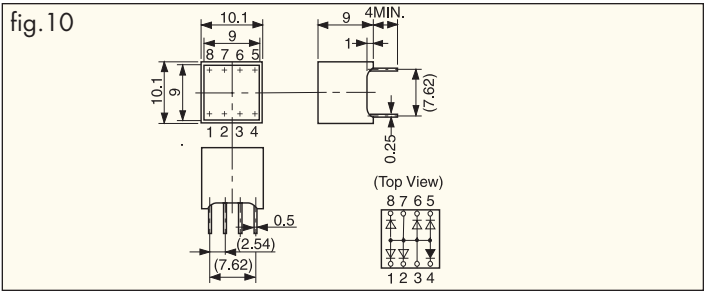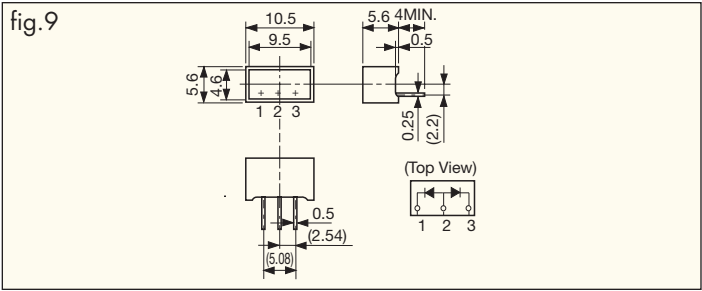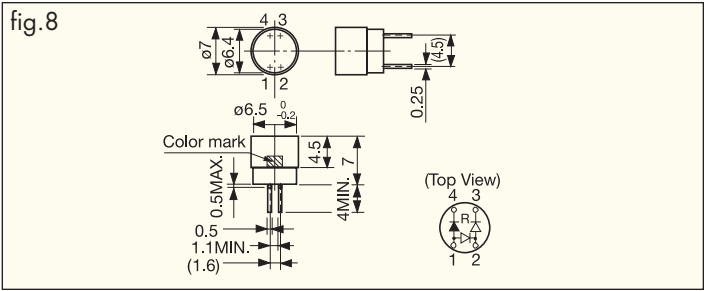

SUPER BRIGHT LED LIGHT BAR MODULE

■ Characteristics by Shape






Ta=25°C

Shape	Part No.	Emitted Color	Resin Color	Light Emitting Surface (Outer Size)	No. of Chips	Absolute Max. Rating Power Dissipation Pd	Electro-Optical Characteristics			fig.
							Luminous Intensity		Iv	
							MIN.	TYP.	If	
	MU20-2101	Red	Red	5X9 (6X10)	1	60	4	8	20	13
	MU20-2105		Milky White		1	60	4	8	20	
	MU20-3101	Orange	Orange		1	62.50	3	6	20	
	MU20-3105		Milky White		1	62.50	3	6	20	
	MU20-4101	Yellow	Yellow		1	75	4	8	20	
	MU20-4105		Milky White		1	75	4	8	20	
	MU20-5101	Pure Green	Green		1	62.50	2	4	20	
	MU20-5105		Milky White		1	62.50	2	4	20	
	MU91-2001	Red	Red	6X6 (6X6)	1	60	3	6	20	14
	MU91-3001	Orange	Orange		1	75	3	6	20	
	MU91-4001	Yellow	Yellow		1	75	3	6	20	
	MU91-5001	Pure Green	Green		1	75	1.2	2.4	20	
	MU92-2001	Red	Red	9X5 (9X5)	1	60	3	6	20	15
	MU92-3001	Orange	Orange		1	75	3	6	20	
	MU92-4001	Yellow	Yellow		1	75	3	6	20	
	MU92-5001	Pure Green	Green		1	75	1.2	2.4	20	
	MU93-2001	Red	Red	10X10 (10X10)	1	60	4	8	20	16
	MU93-3001	Orange	Orange		1	75	4	8	20	
	MU93-4001	Yellow	Yellow		1	75	4	8	20	
	MU93-5001	Pure Green	Green		1	75	1.5	3	20	
Units				mm	pcs	mW	mcd		mA	

* Lead-free soldering compatible product

■ Package Dimensions unit : mm


Tolerance : ±0.25mm

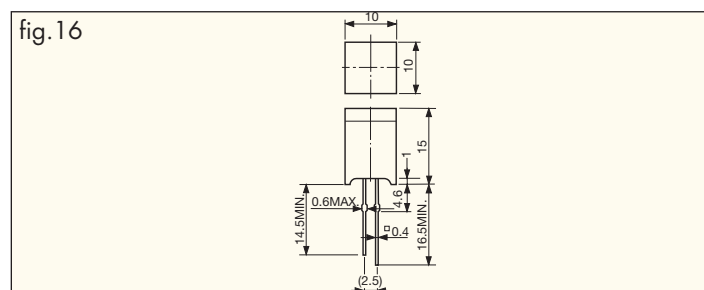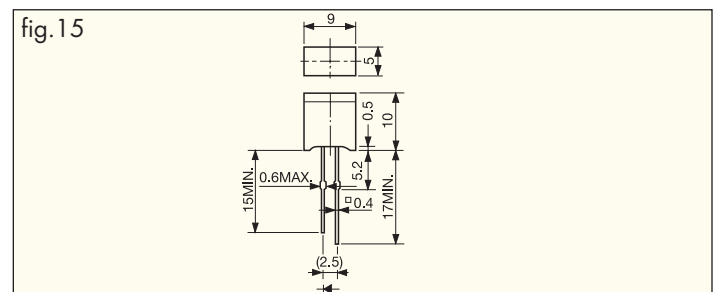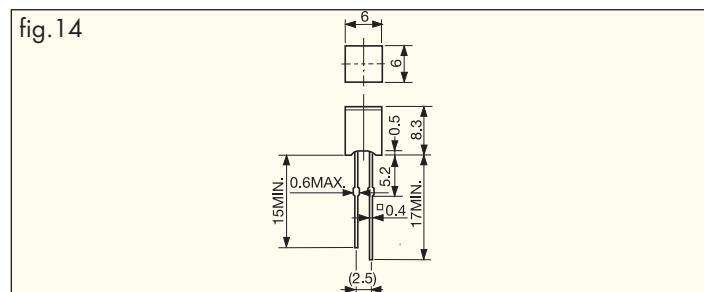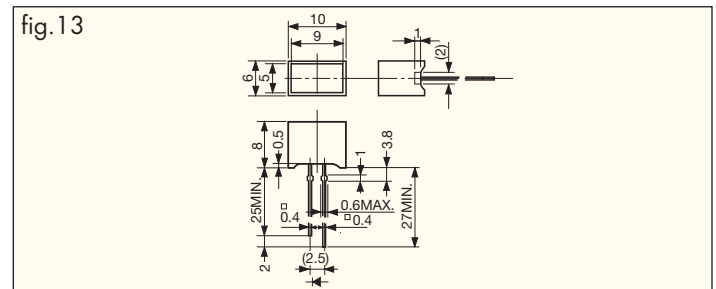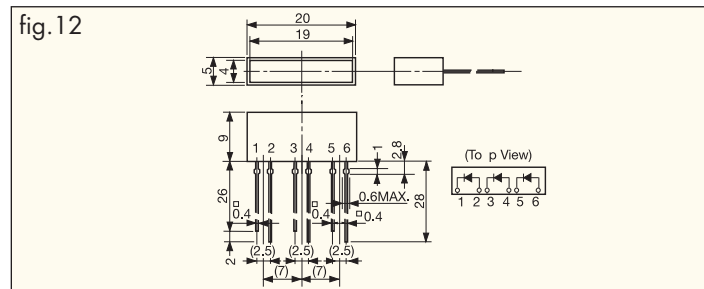

SUPER BRIGHT LED NUMERIC DISPLAY (SEVEN SEGMENT DISPLAY)

Stanley's Numeric Displays which incorporate super-bright LEDs produce vivid, brilliant displays. Available colors are red, pure green, green, yellow and orange. Display types include segment type (character heights 7.5mm to 25mm) and the alpha-numeric type (character heights 25mm and 51mm). These are suitable for dynamic drive due to the low-current drive characteristics.

Description of Part Number

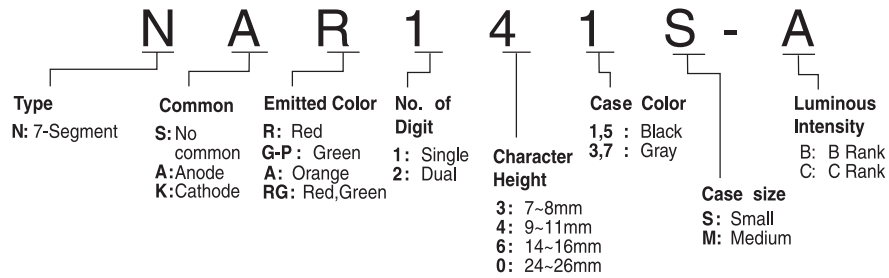

Characteristics by Color

Ta=25°C

Size	Part No.	Material Emitted Color	Chip/ Segment	Absolute Maximum Rating						Electro-Optical Characteristics								Derating
				Power Dissipation Pd	Forward Current If	Peak Forward Current IfM	Reverse Voltage Tr	Operating Temp Topr	Storage Temp Tstg	Forward Voltage VF			Reverse Current IR		Wavelength λp			
										TYP.	MAX.	IF	MAX.	VR	TYP	IF	ΔIF	
7.5	N□R13□	GaP(Red)	1	37.5	15	60	4	-30~+85	-30~+85	2.0	2.5	10	100	4	700	10	0.25	
	N□R13□S,ME	GaAlAs(Red)	1	40	20	80	4	-30~+85	-30~+85	1.7	2.0	10	100	4	660	10	0.33	
	N□G13□P,SP,MP	GaP(Green)	1	48	20	80	4	-30~+85	-30~+85	2.0	2.4	10	100	4	565	10	0.33	
	N□A13□,S,M	GaAsP(Orange)	1	48	20	80	4	-30~+85	-30~+85	2.0	2.4	10	100	4	605	10	0.33	
10	N□R14□,N□R24	GaAlAs(Red)	1	60	30	120	4	-40~+85	-40~+85	1.7	2.0	20	100	4	660	20	0.41	
	N□R14□S	GaAlAs(Red)	1	40	20	80	4	-30~+85	-30~+85	1.7	2.0	10	100	4	660	10	0.33	
	N□G14□P,N□G24P	GaP(Green)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	565	20	0.34	
	N□G14□SP	GaP(Green)	1	48	20	80	4	-40~+85	-30~+85	2.0	2.4	10	100	4	565	10	0.33	
	N□A14□,N□A24□	GaAsP(Orange)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	605	20	0.34	
	N□A14□S	GaAsP(Orange)	1	48	20	80	4	-30~+85	-30~+85	2.0	2.4	10	100	4	605	10	0.33	
	NARG14□	GaAlAs(Red)	1	36	15	70	4	-30~+70	-30~+80	1.7	2.0	10	20	4	660	10	0.22	
		GaP(Green)								2.0	2.4	10			570	10		
15	N□R16□,N□R26□	GaAlAs(Red)	1	60	30	120	4	-40~+85	-40~+85	1.7	2.0	20	100	4	660	20	0.41	
	N□G16□P,N□G26□P	GaP(Green)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	565	20	0.34	
	N□A16□,N□A26□	GaAsP(Orange)	1	63	25	100	4	-40~+85	-40~+85	2.2	2.5	20	100	4	605	20	0.34	
	NARG16□	GaAlAs(Red)	1	36	15	70	4	-30~+70	-30~+80	1.7	2.0	10	20	4	660	10	0.22	
		GaP(Green)								2.0	2.4	10			570	10		
25	N□R10□	GaAlAs(Red)	2	120	30	120	4	-20~+85	-20~+85	3.4	4.0	20	100	8	660	20	0.41	
	N□G10□P	GaP(Green)	2	126	25	100	4	-20~+85	-20~+85	4.4	5.0	20	100	8	565	20	0.34	
	N□A10□	GaAsP(Orange)	2	126	25	100	4	-20~+85	-20~+85	4.4	5.0	20	100	8	605	20	0.34	
	NARG10□	GaAlAs(Red)	2	80	20	❖ 40	4	-30~+70	-30~+80	3.4	4.0	10	100	4	660	10	0.33	
		GaP(Green)	2	96						4.0	4.8	10			570	10		
mm	Units			mW	mA	mA	V	°C		V		mA	μA	V	nm	mA	mA/°C	

- Number of chips per segment
- Ratings and specifications are for one segment
- When both colors of a bi-color LED are driven simultaneously, the rating of NARG types are the total of the Pd, 1F and 1FM values.
- ❖1 : NARG 10□ type in dynamic drive has a duty cycle of 1/2 and f=500Hz and the others have a duty cycle of 1/5 and f=1 kHz.

SUPER BRIGHT LED NUMERIC DISPLAY




7.5mm Type

Ta=25°C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity Iv						fig.
		Anode Common	Cathode Common		Rank B		Rank C		I _F		
		MIN.	TYP.		MIN.	TYP.		MIN.	TYP.		
7.0 X 11.0	Arrow feather type 	NAR131S/133S	NKR131S/133S	Red	1.4	2.8	2.8	5.6	10	1	
		NAG131SP/133SP	NKG131SP/133SP	Green	1	2	—	—	10		
		NAA131S/133S	NKA131S/133S	Orange	0.6	1.2	—	—	10		
10.0 X 15.0	Arrow feather type 	NAG131ME/133ME	NKR131ME/133ME	Red	1.2	2.4	—	—	10	2	
		NAG131MP/133MP	NKG131MP/133MP	Green	0.6	1.2	—	—	10		
		NAA131M/133M	NKA131M/133M	Orange	0.8	1.6	—	—	10		
10.0 X 19.0	Arrow feather type 	NAR131/133	NKR131/133	Red	0.3	0.6	—	—	10	3	
		NAG131P/133P	NKG131P/133P	Green	0.6	1.2	—	—	10		
		NAA131/133	NKA131/133	Orange	0.8	1.6	—	—	10		
mm	Units				mcd						mA

Package Dimensions unit : mm



Tolerance : ±0.25mm

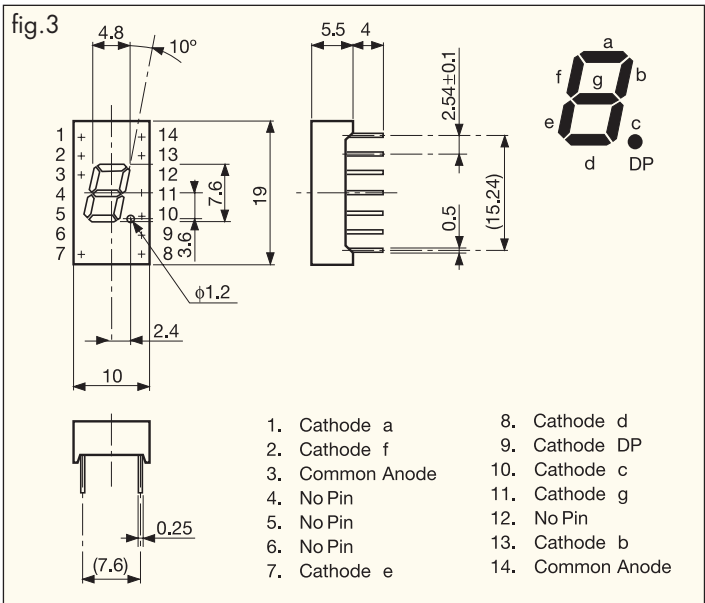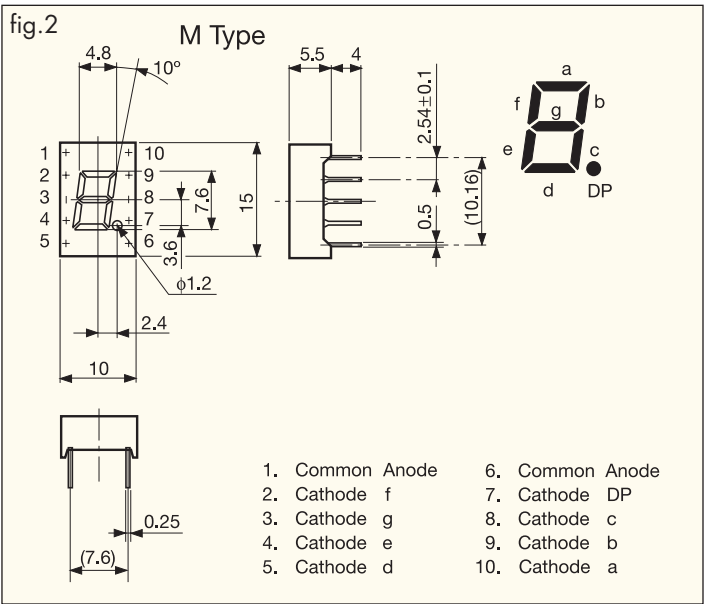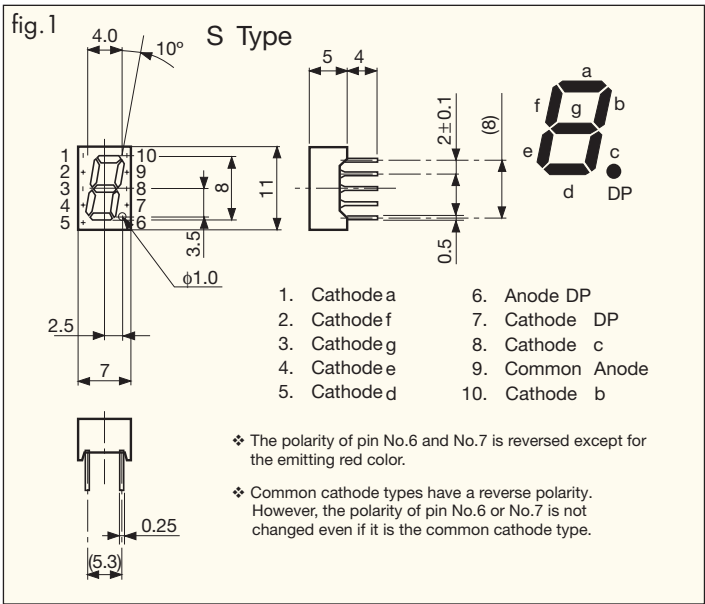

■ 10mm Type

Case Size (WXH)	Shape	Part No.	Emitted Color	Luminous Intensity Iv					fig
				MIN.	Rank B	TYP.	MIN.	Rank C	
12.5 X 19.0	Square shape type 	NSR141/143	Red	4	8	8	11	20	4
		NSG141P/143P	Green	1	2	—	—	20	
		NSA141/143	Orange	3	6	—	—	20	
12.5 X 19.0	Arrow feather type 	NSR145/147	Red	3.2	6.4	6.4	8.8	20	5
		NSG145P/147P	Green	0.8	1.6	—	—	20	
		NSA145/147	Orange	2.4	4.8	—	—	20	
mm	Units			mcd					mA

Tolerance : $\pm 0.25\text{mm}$

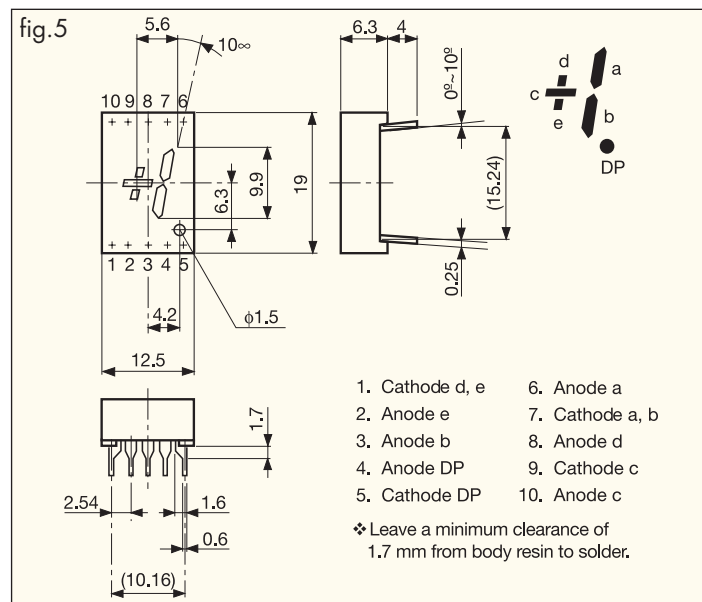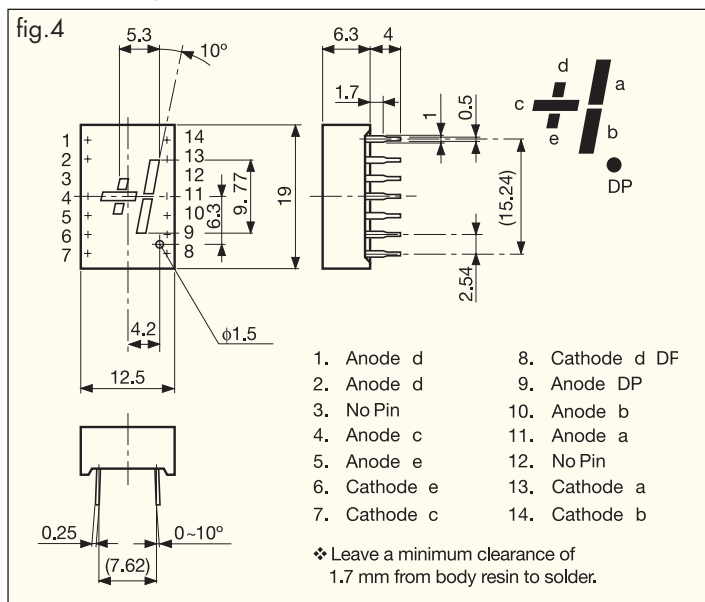

SUPER BRIGHT LED NUMERIC DISPLAY




10mm Type

Ta=25°C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity Iv						fig	
		Anode Common	Cathode Common		Rank B		Rank C		I _F			
9.6 X 13.0	Arrow feather type 	NAR141S/143S	NKR141S/143S	Red	1.6	3.2	3.2	6.4	10	6		
		NAG141SP/143SP	NKG141SP/143SP	Green	0.6	1.2	—	—	10			
		NAA141S/143S	NKA141S/143S	Orange	0.8	1.6	—	—	10			
12.5 X 19.0	Square shape type 	NAR141/143	NKR141/143	Red	4	8	8	11	20	7		
		NAG141P/143P	NKG141P/143P	Green	1	2	—	—	20			
		NAA141/143	NKA141/143	Orange	3	6	—	—	20			
12.5 X 19.0	Arrow feather type 	NAR145/147	NKR145/147	Red	3.2	6.4	6.4	8.8	20	8		
		NAG145P/147P	NKG145P/147P	Green	0.8	1.6	—	—	20			
		NAA145/147	NKA145/147	Orange	2.4	4.8	—	—	20			
mm	Units				mcd						mA	

Package Dimensions unit : mm

Tolerance : ±0.25mm

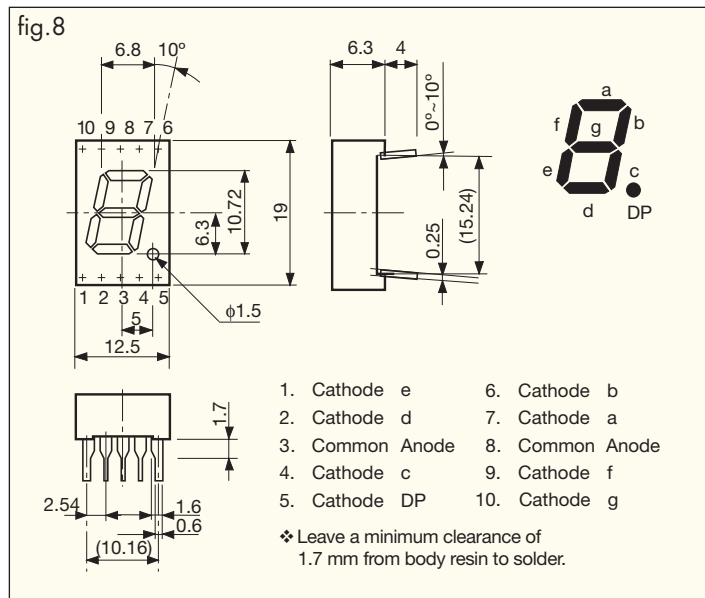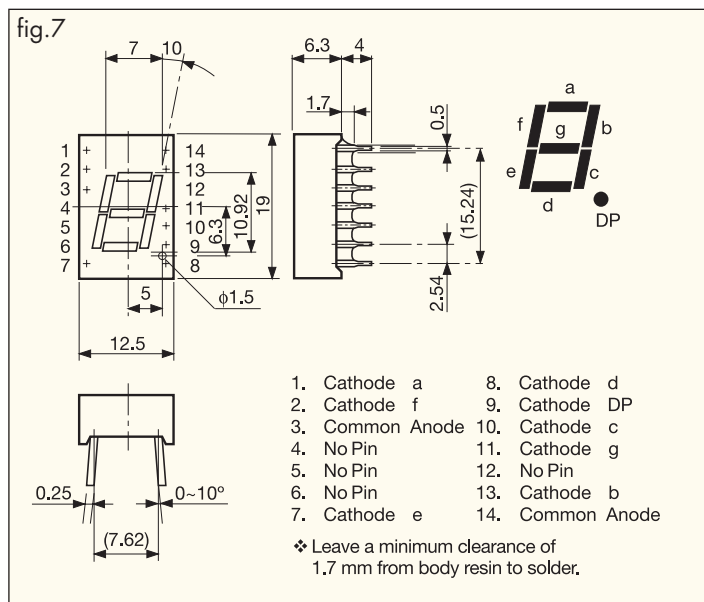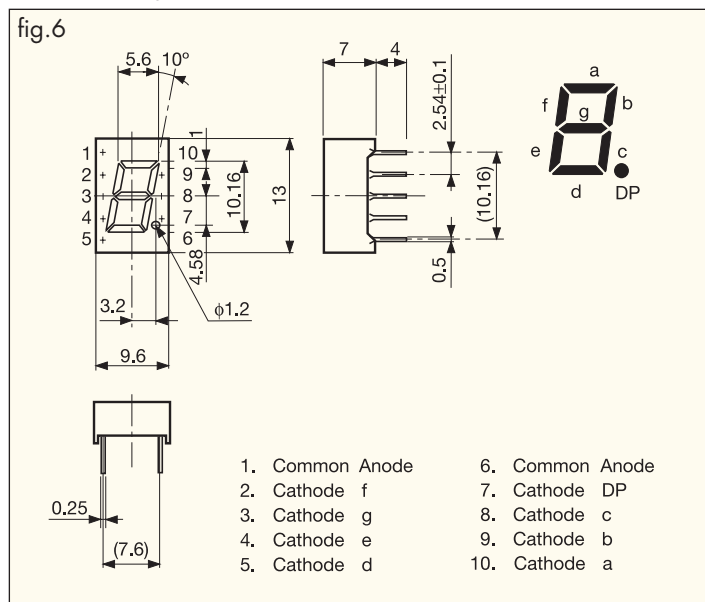

● Common cathode types shown in fig. 6, 7, and 8 have a reverse polarity.

SUPER BRIGHT LED NUMERIC DISPLAY

10mm Type



Ta=25°C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v						fig.
		Anode Common	Cathode Common		Rank B		Rank C		I _F		
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	I _F			
25.2 X 19.0	Square shape type 	NAR241/243	NKR241/243	Red	4	8	8	11	20	9	
		NAG241P/243P	NKG241P/243P	Green	1	2	—	—	20		
		NAA241/243	NKA241/243	Orange	3	6	—	—	20		
25.2 X 19.0	Arrow feather type 	NAR245/247	NKR245/247	Red	3.2	6.4	6.4	8.8	20	10	
		NAG245P/247P	NKG245P/247P	Green	0.8	1.6	—	—	20		
		NAA245/247	NKA245/247	Orange	2.4	4.8	—	—	20		
mm	Units				mcd					mA	

Package Dimensions

unit : mm

Tolerance : ±0.25mm

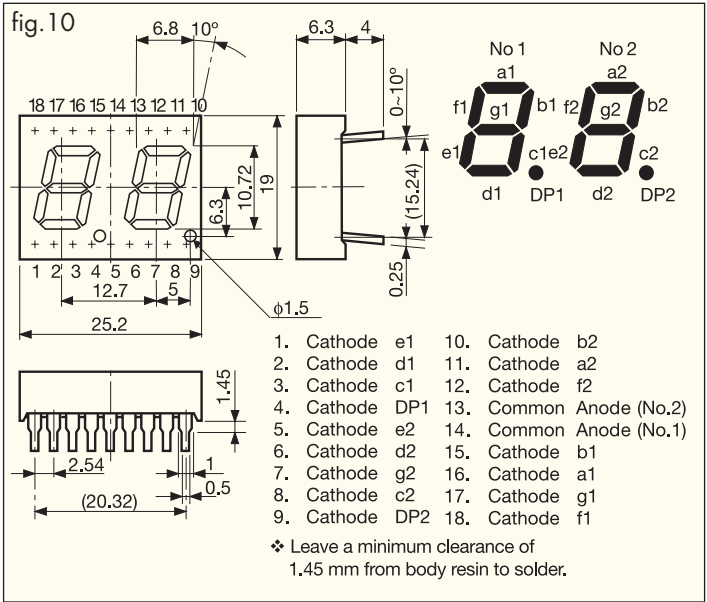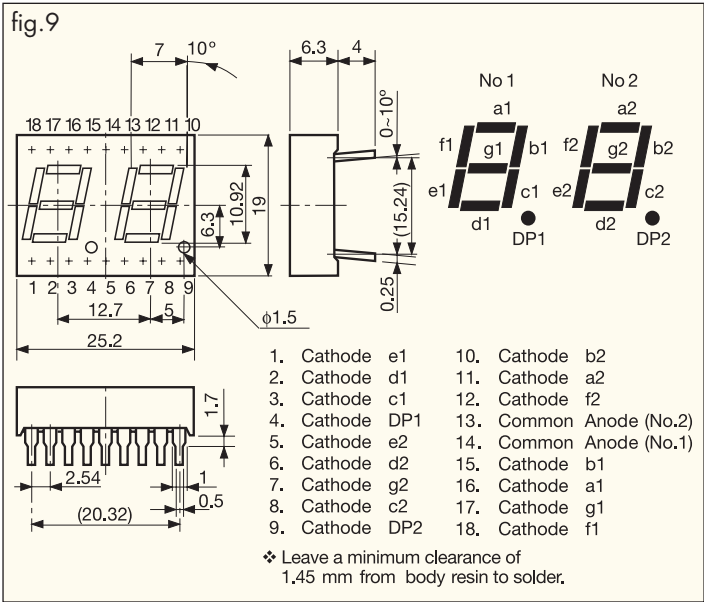

● Common cathode types shown in fig. 9 and 10 have a reverse polarity.

SUPER BRIGHT LED NUMERIC DISPLAY



15mm Type

Ta=25°C


Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v						fig.
		Anode Common	Cathode Common		MIN.	Rank B TYP.	MIN.	Rank C TYP.	I _F		
12.5 X 19.0	Arrow feather type 	NSR161/163		Red	6	12	12	15	20	11	
		NSG161P/163P		Green	2	4	—	—	20		
		NSA161/163		Orange	4	8	—	—	20		
12.5 X 19.0	Arrow feather type 	NAR161/163	NKR161/163	Red	6	12	12	15	20	12	
		NAG161P/163P	NKG161P/163P	Green	2	4	—	—	20		
		NAA161/163	NKA161/163	Orange	4	8	—	—	20		
25.2 X 19.0	Arrow feather type 	NAR261/263	NKR261/263	Red	6	12	12	15	20	13	
		NAG261P/263P	NKG261P/263P	Green	2	4	—	—	20		
		NAA261/263	NKA261/263	Orange	4	8	—	—	20		
mm	Units				mcd					mA	

Package Dimensions unit : mm

Tolerance : ±0.25mm

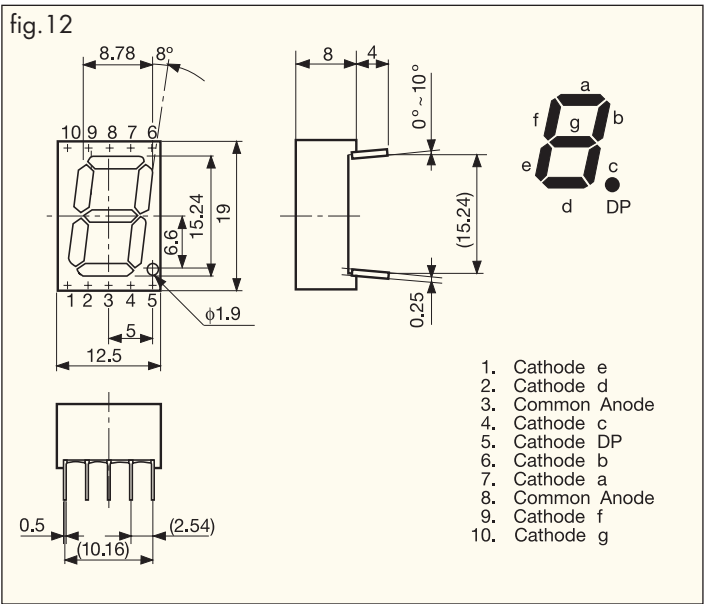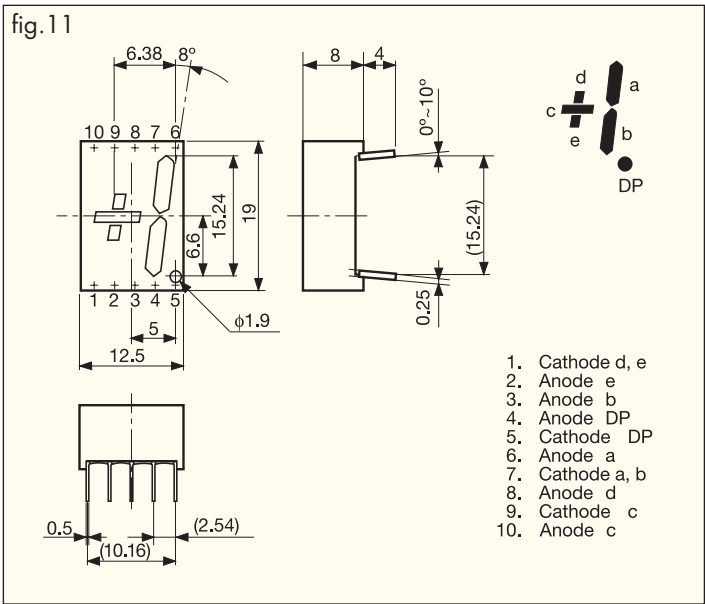

● Common cathode types shown in fig. 12 and 13 have a reverse polarity.

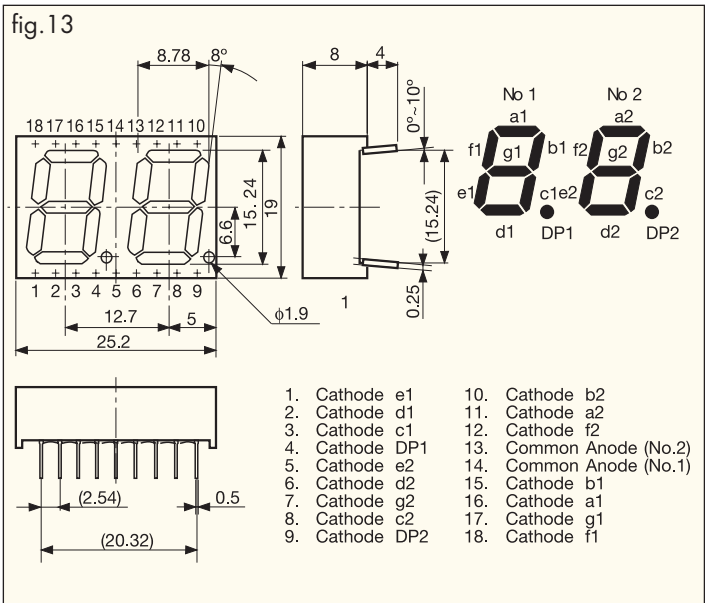

SUPER BRIGHT LED NUMERIC DISPLAY

25mm Type

Ta=25°C



Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity I _v					fig.
		Anode Common	Cathode Common		Rank B		Rank C		I _F	
22.8 X 33.0		NSR101/103		Red	10	20	20	25	20	14
		NSG101P/103P		Green	4	8	—	—	20	
		NSA101/103		Orange	8	16	—	—	20	
22.8 X 33.0		NAR101/103	NKR101/103	Red	10	20	20	25	20	15
		NAG101P/103P	NKG101P/103P	Green	4	8	—	—	20	
		NAA101/103	NKA101/103	Orange	8	16	—	—	20	
22.8 X 33.0		NAR105/107	NKR105/107	Red	10	20	20	25	20	16
		NAG105P/107P	NKG105P/107P	Green	4	8	—	—	20	
		NAA105/107	NKA105/107	Orange	8	16	—	—	20	
mm		Units			mcd				mA	

* Lead-free soldering compatible product


Package Dimensions

unit : mm

Tolerance : ±0.25mm

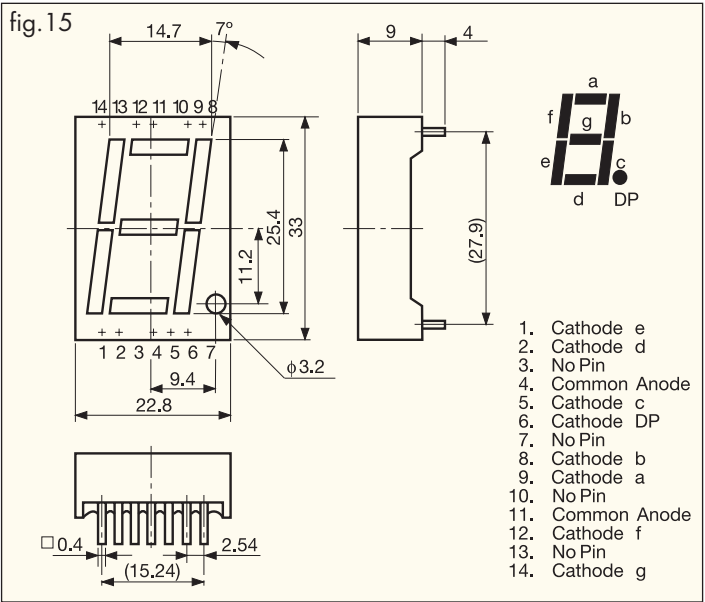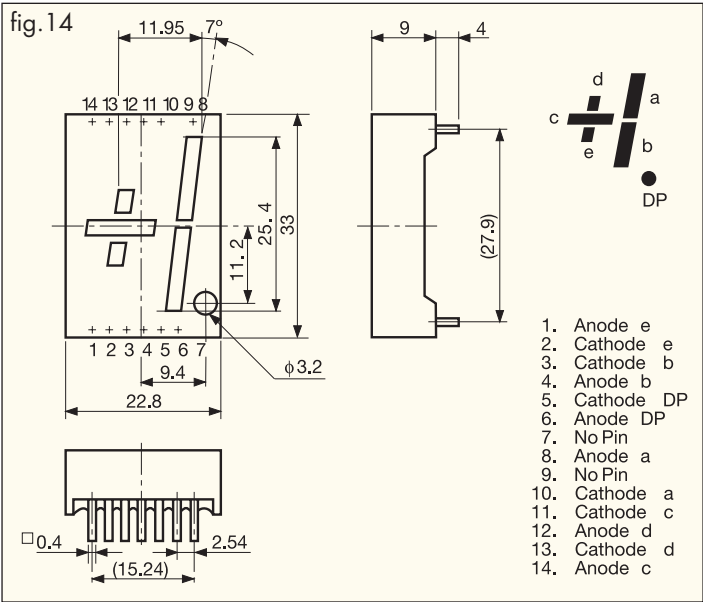

● Common cathode types shown in fig. 15 and 16 have a reverse polarity.

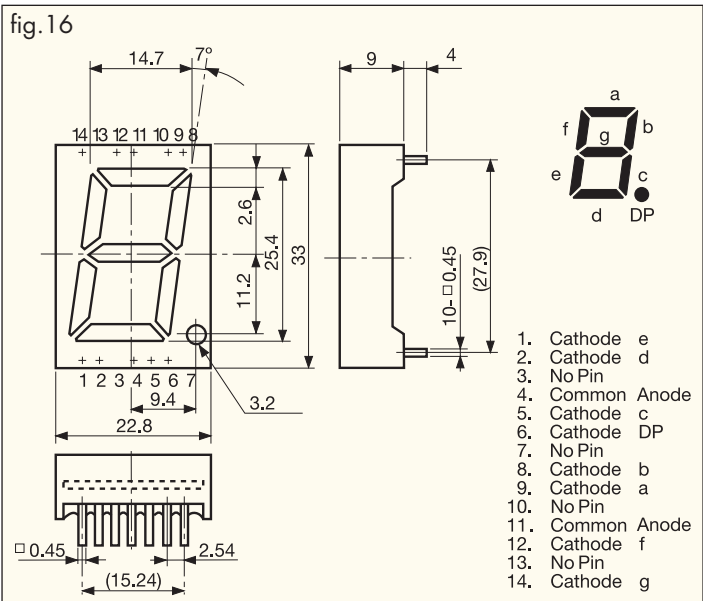

SUPER BRIGHT LED NUMERIC DISPLAY

■ Bi-color LED Numeric Displays 10/15/25mm TYPE




Ta=25°C

Case Size (WXH)	Shape	Part No.		Emitted Color	Luminous Intensity Iv			fig.	
		Anode Common	Cathode Common		MIN.	TYP.	I _F		
10.0 X 19.0	*Arrow feather type 	NARG141/143	NKRG141/143	Red	1.2	2.4	10	17	
				Green	1.2	2.4	10		
12.5 X 19.0	*Arrow feather type 	NARG161/163	NKRG161/163	Red	1.2	2.4	10	18	
				Green	1.2	2.4	10		
22.8 X 33.0	*Arrow feather type 	NARG105/107		Red	2	4	10	19	
				Green	2	4	10		
mm	Units				mcd			mA	

* Lead-free soldering compatible product

■ Package Dimensions unit : mm

Tolerance : ±0.25mm

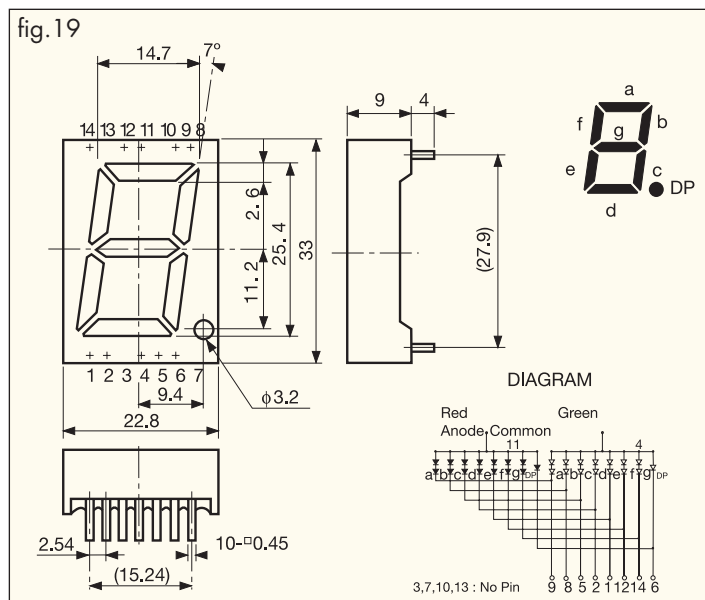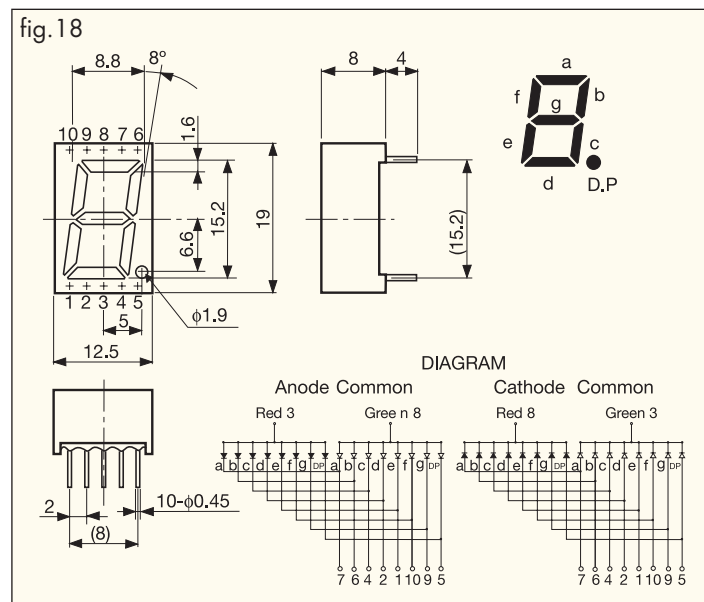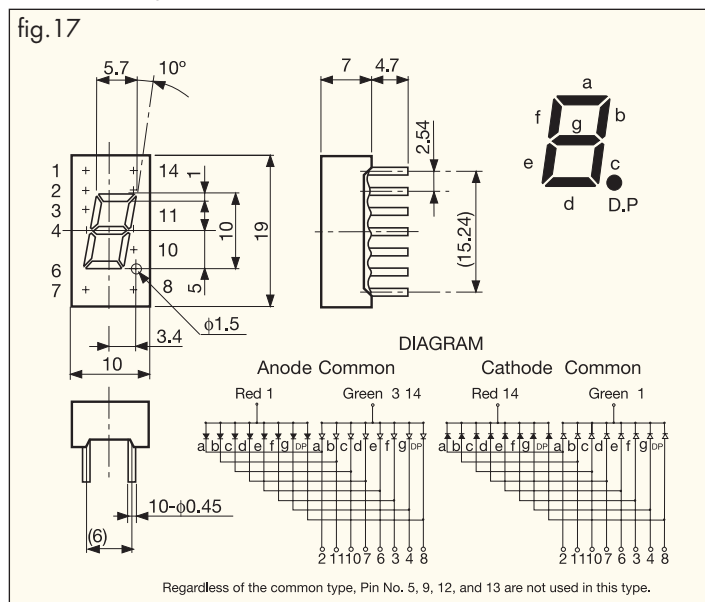

■ Description of Part Number

■ Characteristics by Color

 $T_g = 25^\circ\text{C}$

■ Characteristics by Shape (25/50 mm TYPE)

 $T_g = 25^\circ\text{C}$


* Lead-free soldering compatible product

❖ 20 mA/segment is for segments A,B,E,F,U and P.

■ Package Dimensions

unit : mm

Tolerance : $\pm 0.25\text{mm}$

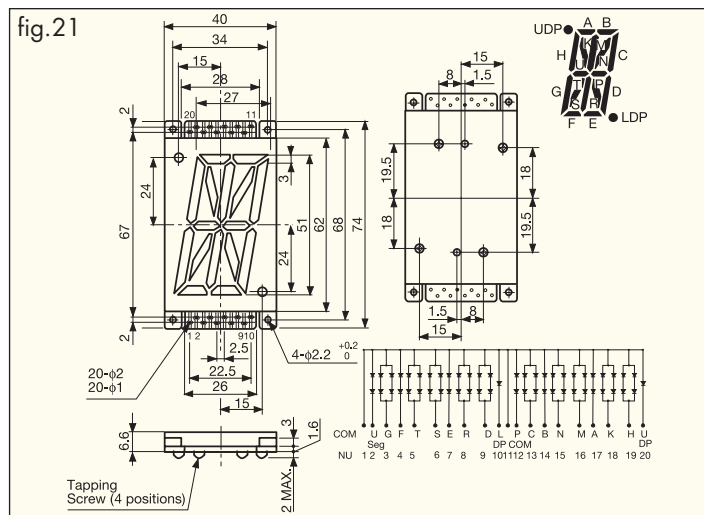

INDEX

PART NUMBER	PAGE
AAA101	16
AAA121	16
AAR101	16
AAR121	16
MU02-2201	4
MU02-2205	4
MU02-3201	4
MU02-3205	4
MU02-4201	4
MU02-4205	4
MU02-5201	4
MU02-5202	4
MU02-5205	4
MU02-9301	4
MU03-2201	4
MU03-2205	4
MU03-3201	4
MU03-3205	4
MU03-4201	4
MU03-4205	4
MU03-5201	4
MU03-5202	4
MU03-5205	4
MU03-9201	4
MU04-2101	5
MU04-2105	5
MU04-3101	5
MU04-3105	5
MU04-4101	5
MU04-4105	5
MU04-5101	5
MU04-5102	5
MU04-5105	5
MU07-2101	5
MU07-3101	5
MU07-4101	5
MU07-5101	5

PART NUMBER	PAGE
MU08-2201	5
MU08-3201	5
MU08-4201	5
MU08-5201	5
MU08-9301	5
MU09-9101	6
MU09-9102	6
MU09-9103	6
MU11-2201	6
MU11-3201	6
MU11-4201	6
MU11-5201	6
MU13-9101	6
MU13-9102	6
MU16-2101	6
MU16-2105	6
MU16-3101	6
MU16-3105	6
MU16-4101	6
MU16-4105	6
MU16-5101	6
MU16-5105	6
MU17-2101	6
MU17-2105	6
MU17-3101	6
MU17-3105	6
MU17-4101	6
MU17-4105	6
MU17-5101	6
MU17-5105	6
MU20-2101	7
MU20-2105	7
MU20-3101	7
MU20-3105	7
MU20-4101	7
MU20-4105	7
MU20-5101	7

PART NUMBER	PAGE
MU20-5105	7
MU91-2001	7
MU91-3001	7
MU91-4001	7
MU91-5001	7
MU92-2001	7
MU92-3001	7
MU92-4001	7
MU92-5001	7
MU93-2001	7
MU93-3001	7
MU93-4001	7
MU93-5001	7
NAA101	14
NAA103	14
NAA105	14
NAA107	14
NAA131	9
NAA131M	9
NAA131S	9
NAA133	9
NAA133M	9
NAA133S	9
NAA141	11
NAA141S	11
NAA143	11
NAA143S	11
NAA145	11
NAA147	11
NAA161	13
NAA163	13
NAA241	12
NAA243	12
NAA245	12
NAA247	12
NAA261	13
NAA263	13

INDEX

PART NUMBER	PAGE
NAG101P	14
NAG103P	14
NAG105P	14
NAG107P	14
NAG131MP	9
NAG131P	9
NAG133MP	9
NAG133P	9
NAG141P	11
NAG141SP	11
NAG143P	11
NAG143SP	11
NAG145P	11
NAG147P	11
NAG161P	13
NAG163P	13
NAG241P	12
NAG243P	12
NAG245P	12
NAG247P	12
NAG261P	13
NAG263P	13
NAR101	14
NAR103	14
NAR105	14
NAR107	14
NAR131	9
NAR131ME	9
NAR131S	9
NAR131SP	9
NAR133	9
NAR133ME	9
NAR133S	9
NAR133SP	9
NAR141	11
NAR141S	11
NAR143	11

PART NUMBER	PAGE
NAR143S	11
NAR145	11
NAR147	11
NAR161	13
NAR163	13
NAR241	12
NAR243	12
NAR245	12
NAR247	12
NAR261	13
NAR263	13
NARG105	15
NARG107	15
NARG141	15
NARG143	15
NARG161	15
NARG163	15
NKA101	14
NKA103	14
NKA105	14
NKA107	14
NKA131	9
NKA131M	9
NKA131S	9
NKA133	9
NKA133M	9
NKA133S	9
NKA141	11
NKA141S	11
NKA143	11
NKA143S	11
NKA145	11
NKA147	11
NKA161	13
NKA163	13
NKA241	12
NKA243	12

PART NUMBER	PAGE
NKA245	12
NKA247	12
NKA261	13
NKA263	13
NKG101P	14
NKG103P	14
NKG105P	14
NKG107P	14
NKG131MP	9
NKG131P	9
NKG131SP	9
NKG133MP	9
NKG133P	9
NKG133SP	9
NKG141P	11
NKG141SP	11
NKG143P	11
NKG143SP	11
NKG145P	11
NKG147P	11
NKG161P	13
NKG163P	13
NKG241P	12
NKG243P	12
NKG245P	12
NKG247P	12
NKG261P	13
NKG263P	13
NKR101	14
NKR103	14
NKR105	14
NKR107	14
NKR131	9
NKR131ME	9
NKR131S	9
NKR133	9
NKR133ME	9

INDEX

PART NUMBER	PAGE
NKR133S	9
NKR141	11
NKR141S	11
NKR143	11
NKR143S	11
NKR145	11
NKR147	11
NKR161	13
NKR163	13
NKR241	12
NKR243	12
NKR245	12
NKR247	12
NKR261	13
NKR263	13
NKRG141	15
NKRG143	15
NKRG161	15
NKRG163	15
NSA101	14
NSA103	14
NSA141	10
NSA143	10
NSA145	10
NSA147	10
NSA161	13
NSA163	13
NSG101P	14
NSG103P	14
NSG141P	10
NSG143P	10
NSG145P	10
NSG147P	10
NSG161P	13
NSG163P	13
NSR101	14
NSR103	14

PART NUMBER	PAGE
NSR141	10
NSR143	10
NSR145	10
NSR147	10
NSR161	13
NSR163	13