

LOC	DIST	REVISIONS							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
AJ	16		A	REVISED PER EC OS14-0150-05			30AUG05	BM	JL

- 1

ZINC PER QQ-Z-363.
- 2

POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3

BERYLLIUM COPPER PER QQ-C-530.
- 4


BRASS PER ASTM-B-453.
- 5

NICKEL PLATE PER QQ-N-290,
3.81 μm [.000150] MINIMUM THICK.
- 6

TIN PLATE PER ASTM B 545,
3.81 μm [.000150] MINIMUM THICK.
- 7

GOLD PLATE PER MIL-G-45204,
0.76 μm [.000030] MINIMUM THICK.
- 9

SEE INSTRUCTION SHEET 408-2769.

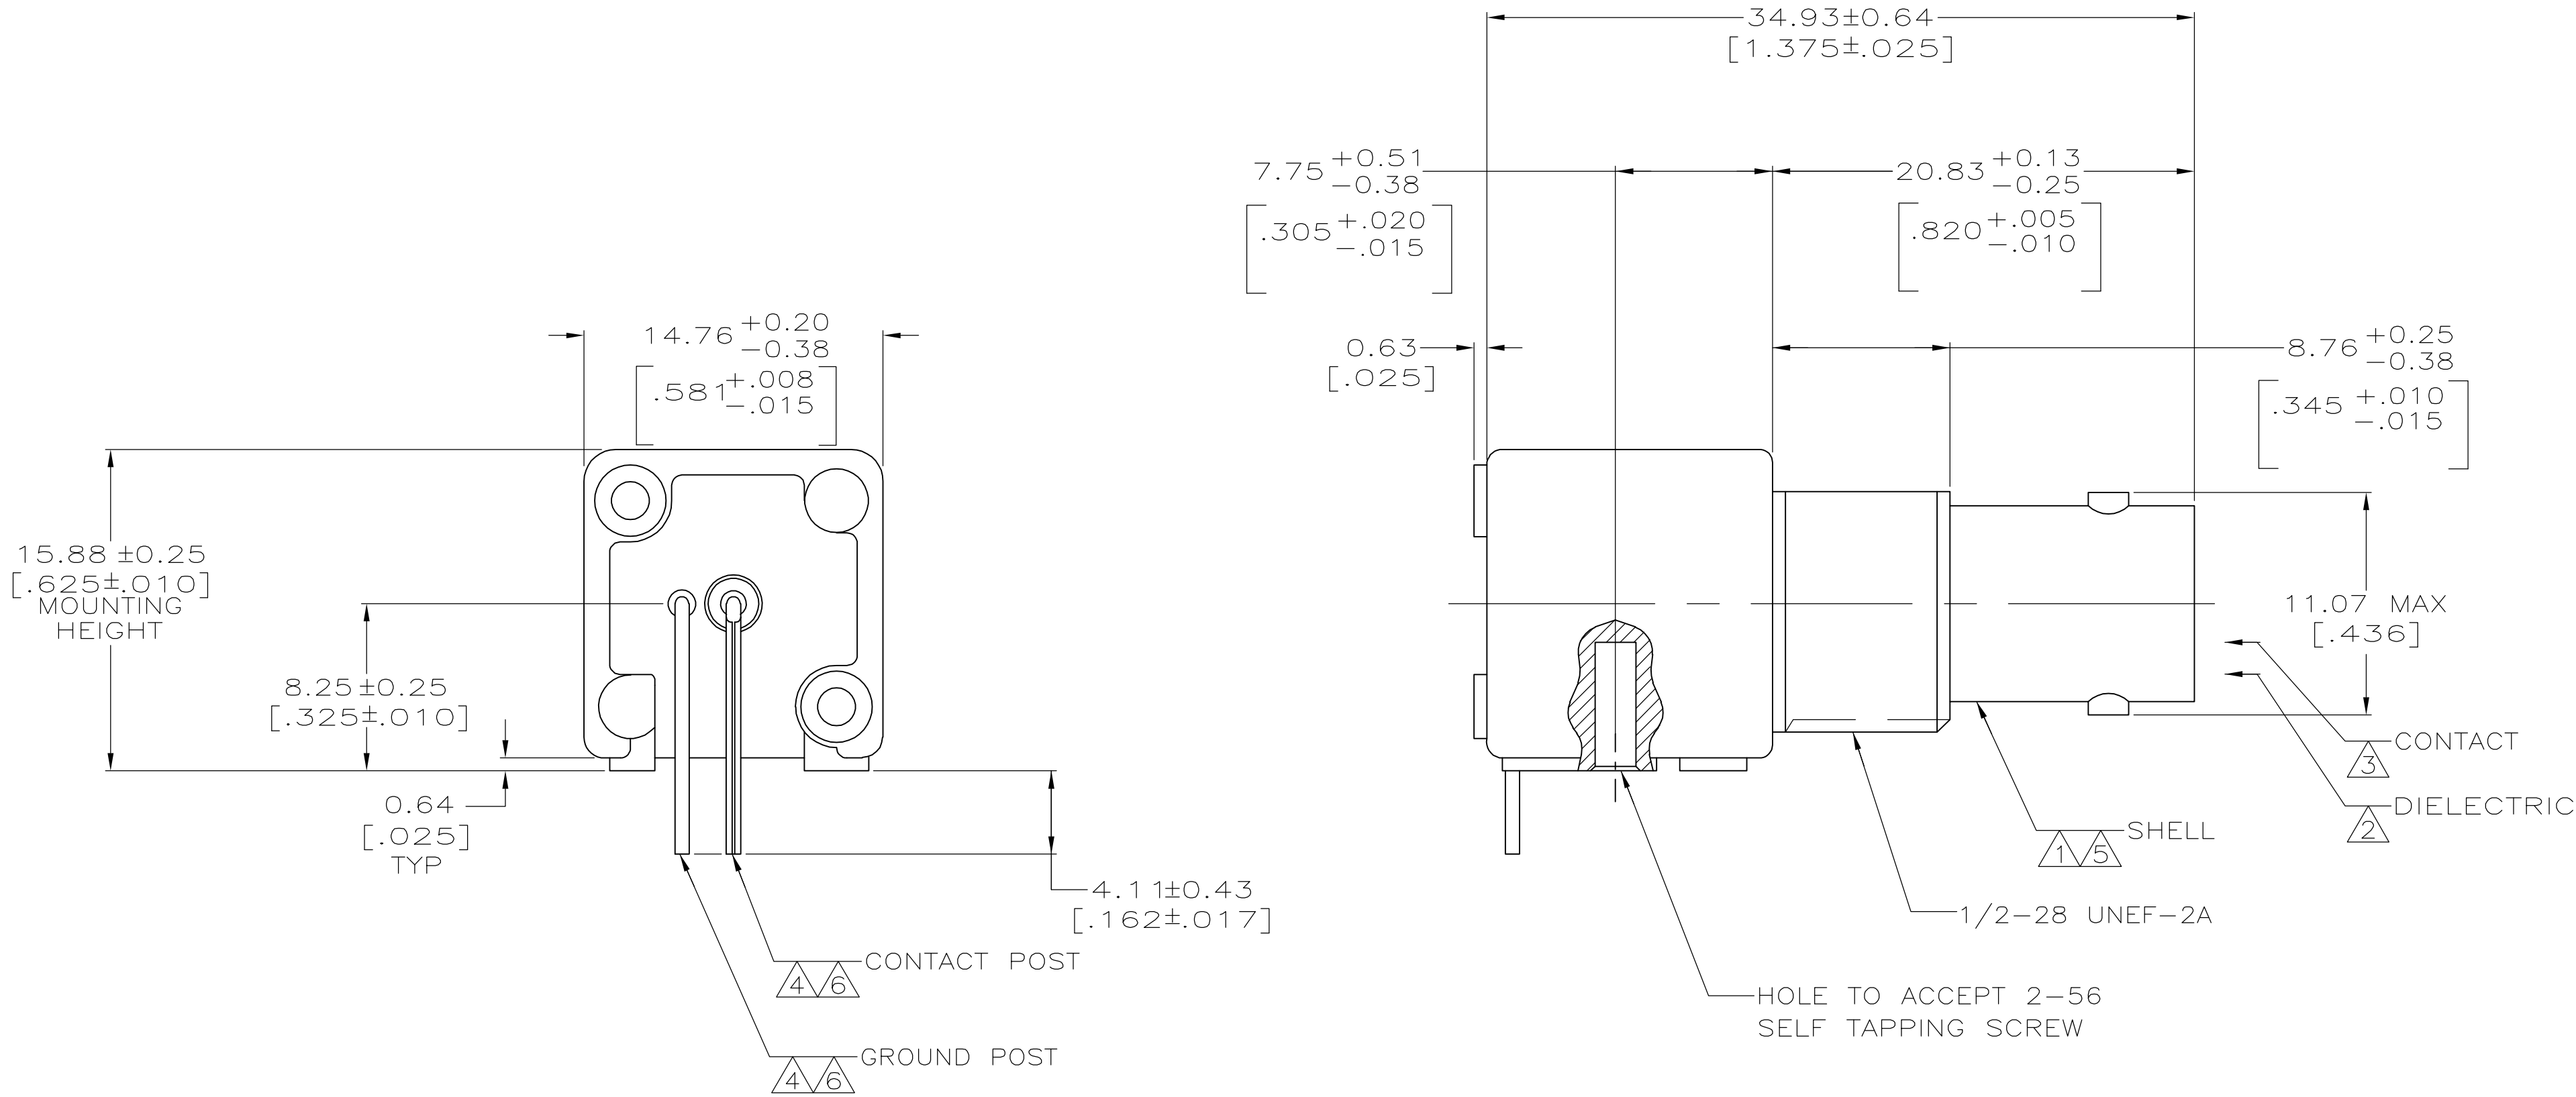

RECOMMENDED PANEL CUTOUT

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 21APR2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm (INCHES)		CHK J. HAVENER - 21APR2005	NAME J. LIPPERT - 21APR2005	
		APVD J. LIPPERT	PRODUCT SPEC	
			APPLICATION SPEC	
			WEIGHT	
			CUSTOMER DRAWING	
TOLERANCES UNLESS OTHERWISE SPECIFIED:			SIZE A1	
0 PLC ± -			CAGE CODE 00779	
1 PLC ± -			DRAWING NO 5222093	
2 PLC ± 0.20 [.008]			RESTRICTED TO	
3 PLC ± -			SCALE 4:1	
4 PLC ± -			SHEET 1 OF 1	
ANGLES ± -			REV A	
FINISH				
SEE NOTES 1 - 4				
SEE NOTES 5 - 7				