

Coaxial

Low Pass Filters

DC to 6700 MHz

NEW!
VLF-SERIES


CASE STYLE: FF704

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current Input to Output	0.5A max. at 25°C


Features

- low cost
- small size
- 7 sections
- temperature stable

Applications

- harmonic rejection
- transmitters/receivers
- lab use

Outline Drawing

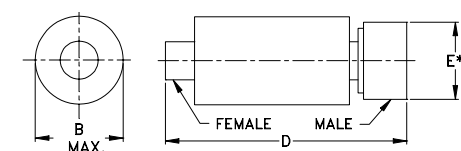

B—OVERALL BODY DIMENSION
 * ACROSS FLATS

Outline Dimensions (inch mm)

B	D	E	wt.
.461	1.42	.312	grams
11.71	36.07	7.92	10


Low Pass Filter Electrical Specifications (T_{AMB}=25°C)

MODEL NO.	PASSBAND (MHz) (loss < 1 dB) Max.	fco, MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		POWER INPUT (W) Max. at 25°C	NO. OF SECTIONS	PRICE \$ Qty. (1-9)
			f 20 Min.	40 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.			
NEW! VLF-225	DC-225	350	440	510-2500	5500	20	1.2	8.5*	7	20.95
NEW! VLF-320	DC-320	460	550	640-2500	5300	20	1.2	8.5*	7	20.95
NEW! VLF-400	DC-400	560	650	680-3000	5500	20	1.2	8.5*	7	20.95
NEW! VLF-490	DC-490	650	780	880-2500	6000	20	1.2	8.5*	7	20.95
NEW! VLF-530	DC-530	700	820	945-3000	6000	20	1.2	8.5*	7	20.95
NEW! VLF-575	DC-575	770	900	1050-3200	5500	20	1.2	8.5*	7	20.95
NEW! VLF-630	DC-630	830	970	1020-3500	6000	20	1.2	8.5*	7	20.95
STOP BAND (MHz) (loss, dB) f 20 30 fr 20 Min. Typ. Typ.										
VLF-800	DC-800	1060	1225	1500-4000	5100	20	1.2	10*	7	19.95
VLF-1000	DC-1000	1300	1550	1900-5000	5500	20	1.3	10*	7	19.95
VLF-1200	DC-1200	1530	1800	2000-5000	6200	20	1.2	10*	7	19.95
VLF-1700	DC-1700	2050	2375	2500-6500	7000	20	1.2	10*	7	19.95
VLF-2250	DC-2250	2575	2850	2950-5000	7200	20	1.2	10*	7	19.95
VLF-5000	DC-5000	5580	6600	6800-11000	18000	20	1.2	9**	7	19.95
VLF-6000	DC-6000	6800	8300	8500-12000	18000	20	1.3	9**	7	19.95
VLF-6700	DC-6700	7600	8900	9500-12000	18000	20	1.3	9**	7	19.95


* Passband rating, derate linearly to 3.5W at 100°C ambient

** Passband rating, derate linearly to 3W at 100°C ambient



typical frequency response



schematic

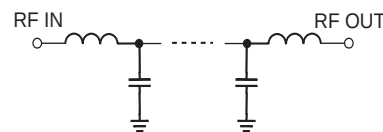

Typical Performance Charts

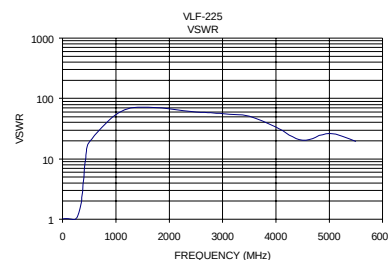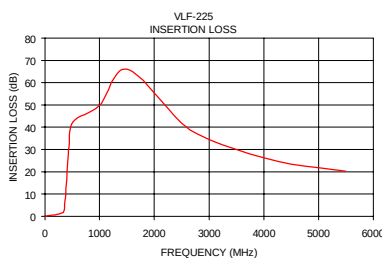

REV. B
 MB9742
 VLF-225 EDR-6588/1 VLF-1000 EDR-6608/1
 VLF-320 EDR-6588/2 VLF-1200 EDR-6608/2
 VLF-400 EDR-6588/3 VLF-1700 EDR-6608/3
 VLF-490 EDR-6588/4 VLF-1700 EDR-6608/3
 VLF-530 EDR-6588/5 VLF-2250 EDR-6608/4
 VLF-575 EDR-6588/6 VLF-5000 EDR-6706/1
 VLF-630 EDR-6588/7 VLF-6000 EDR-6706
 VLF-800 EDR-6608 VLF-6700 EDR-6706/2
 VLF-SERIES
 RV/NAD/CP
 031229
 Page 1 of 4















Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

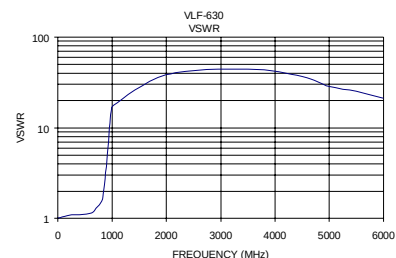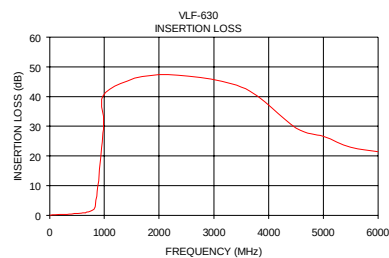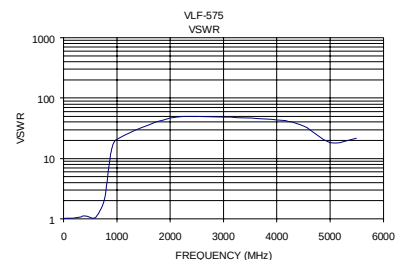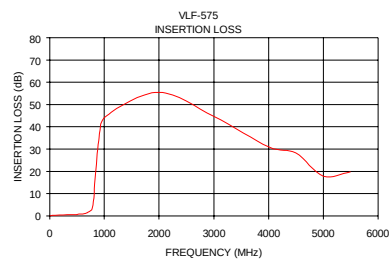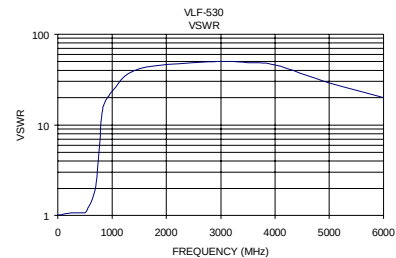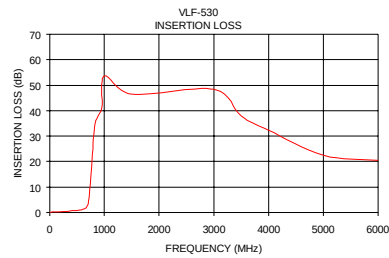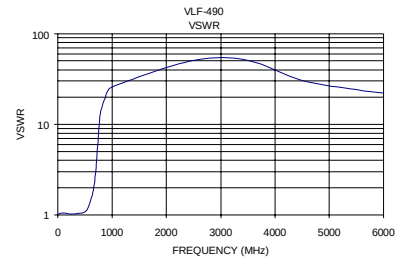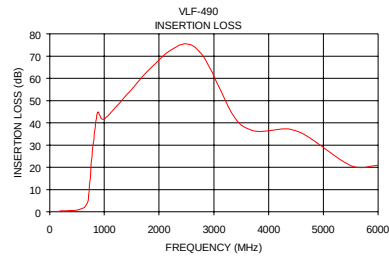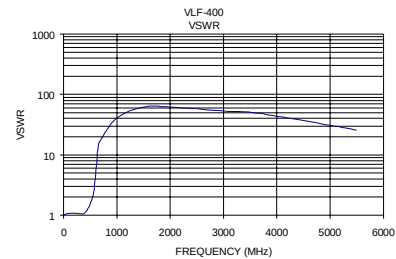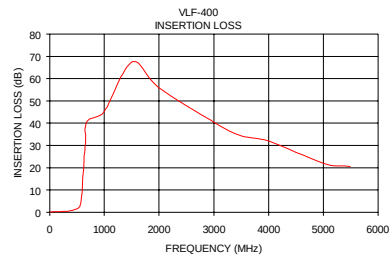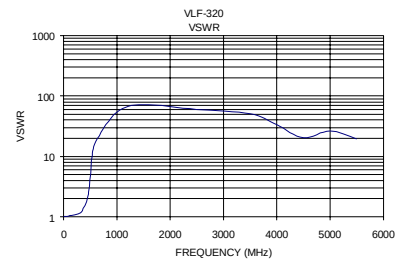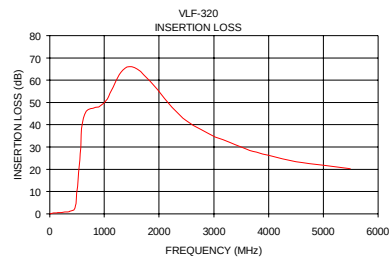

VLF-SERIES

