

Precision Fixed Attenuators, 5W



1 to 40 dB, DC to 18 GHz

BW-SXW5



DC737

Features

- DC to 18 GHz
- precise attenuation
- excellent VSWR, 1.20:1 typ.
- stainless steel SMA male and female connectors

Applications

- matching
- instrumentation
- test set-ups

Electrical Specifications 50Ω

MODEL NO.	FREQUENCY RANGE (GHz) f_L - f_U	ATTENUATION (dB)		VSWR* max.			POWER** (W)	CASE STYLE	PRICE \$ Qty. (1-49)
		Nom.	ACCURACY*	L	M	U			
BW-S1W5	DC-18	1	±0.40	1.20	1.25	1.30	5	DC737	44.95
BW-S2W5	DC-18	2	±0.40	1.20	1.25	1.30	5	DC737	44.95
BW-S3W5	DC-18	3	±0.40	1.20	1.25	1.30	5	DC737	44.95
BW-S4W5	DC-18	4	±0.40	1.20	1.25	1.30	5	DC737	44.95
BW-S5W5	DC-18	5	±0.40	1.20	1.25	1.30	5	DC737	44.95
BW-S6W5	DC-18	6	±0.40	1.20	1.25	1.30	5	DC737	44.95
BW-S7W5	DC-18	7	±0.60	1.20	1.25	1.30	5	DC737	44.95
BW-S8W5	DC-18	8	±0.60	1.20	1.25	1.30	5	DC737	44.95
BW-S9W5	DC-18	9	±0.60	1.20	1.25	1.30	5	DC737	44.95
BW-S10W5	DC-18	10	±0.60	1.20	1.25	1.30	5	DC737	44.95
BW-S12W5	DC-18	12	±0.60	1.20	1.25	1.30	5	DC737	44.95
BW-S15W5	DC-18	15	±0.60	1.20	1.25	1.30	5	DC737	44.95
BW-S20W5	DC-18	20	±0.60	1.20	1.25	1.30	5	DC737	44.95
BW-S30W5	DC-18	30	±0.85	1.20	1.25	1.30	5	DC737	44.95
BW-S40W5	DC-18	40	±0.85	1.20	1.25	1.30	5	DC737	44.95

L = DC - 4 GHz

M = 4-8 GHz


U = 8-12.4 GHz

Notes:

* At 25°C includes power & frequency variations up to 12.4 GHz. Above 12.4 GHz add 0.5 dB typ. to accuracy and 0.3 typ. to VSWR in the U range. Temperature coefficient for attenuation .0004 dB/dB/°C typ.

** Average power at 25°C ambient, derate linearly to 2W at 100°C. Peak Power 125W max., 5μsec pulse width, 100 Hz PRF.

Outline Drawing

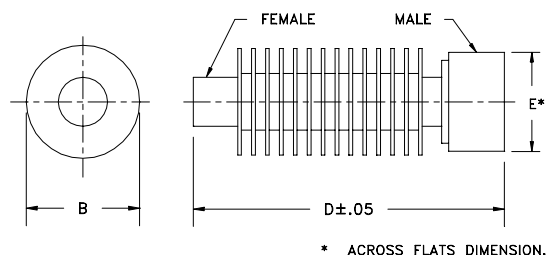

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C***
Connectors:	SMA Female-SMA Male

*** With mated connectors. Unmated, 85°C max.

designers kits available

KIT No.	No. of Units in KIT	Description	Price \$ per KIT
K5-BW1	8	1 of each: 1,2,3,4,5,6,8,10	299.00

Outline Dimensions (inch mm)

A	B	C	D	E	wt.
—	.61	—	1.20	.312	grams
—	15.49	—	30.48	7.94	9.1

Mini-Circuits®
Distribution Centers NORTH AMERICA

INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

REV. A
M74226
EA-8723
BW-SXW5
RS/TD/CP
001101