
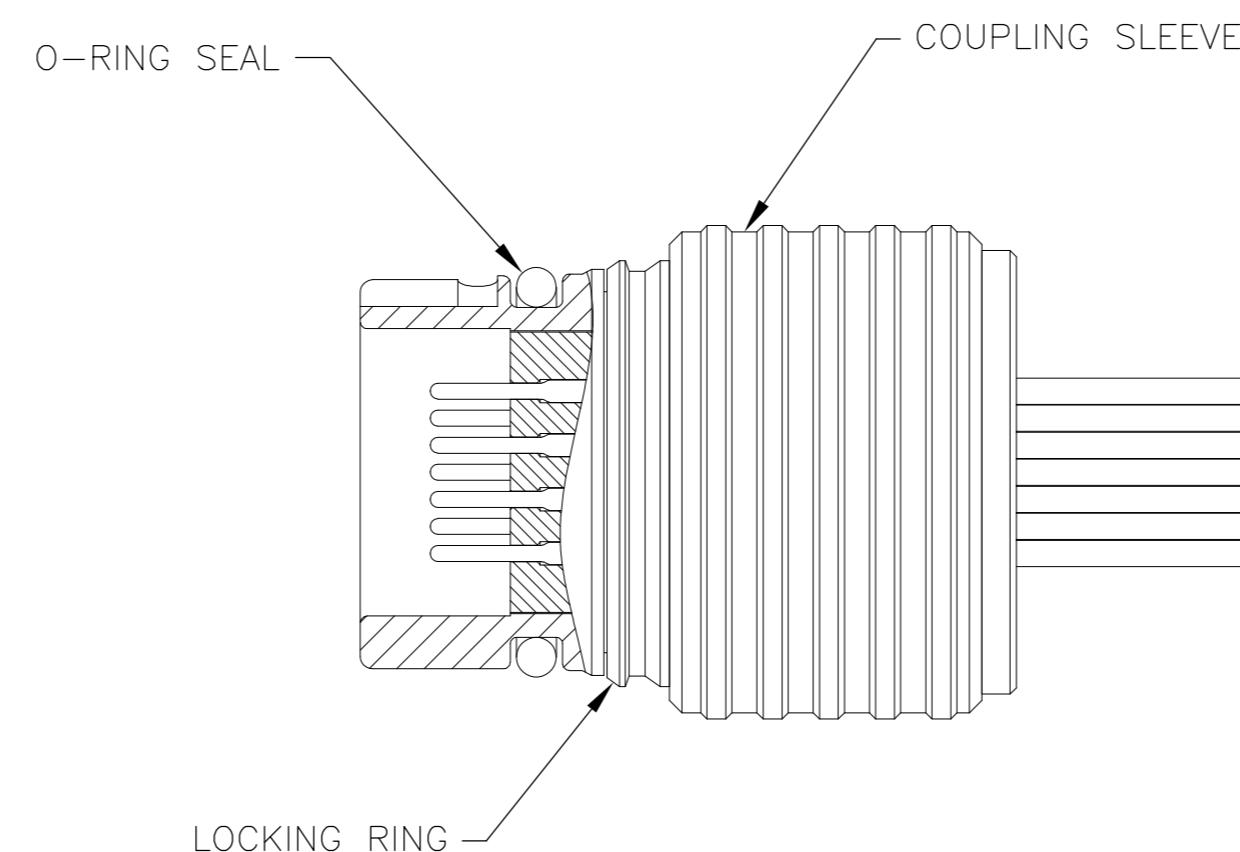
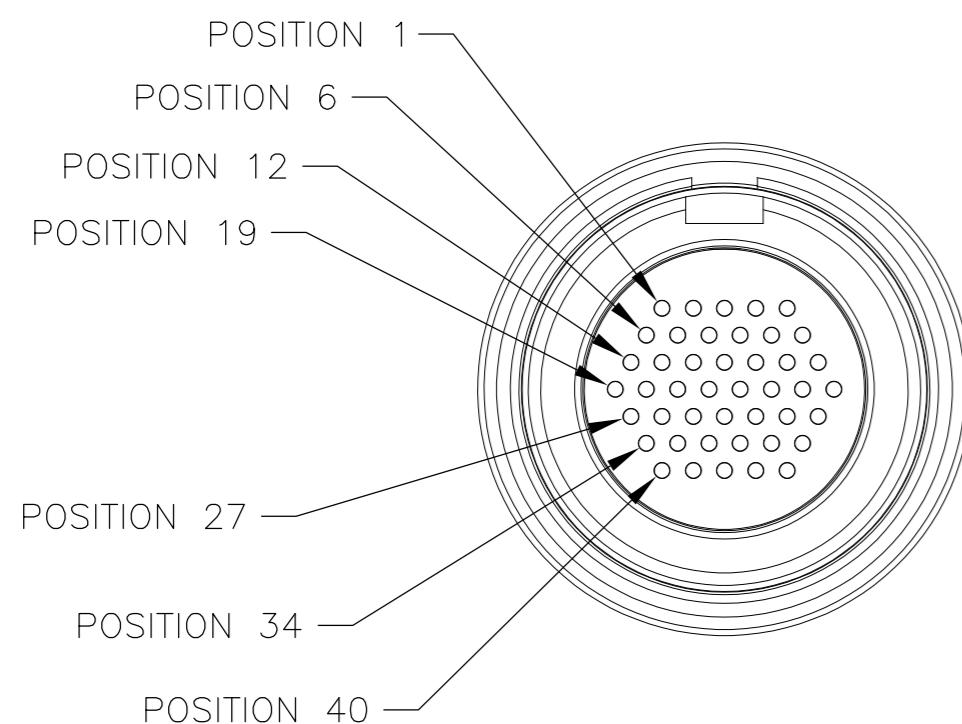
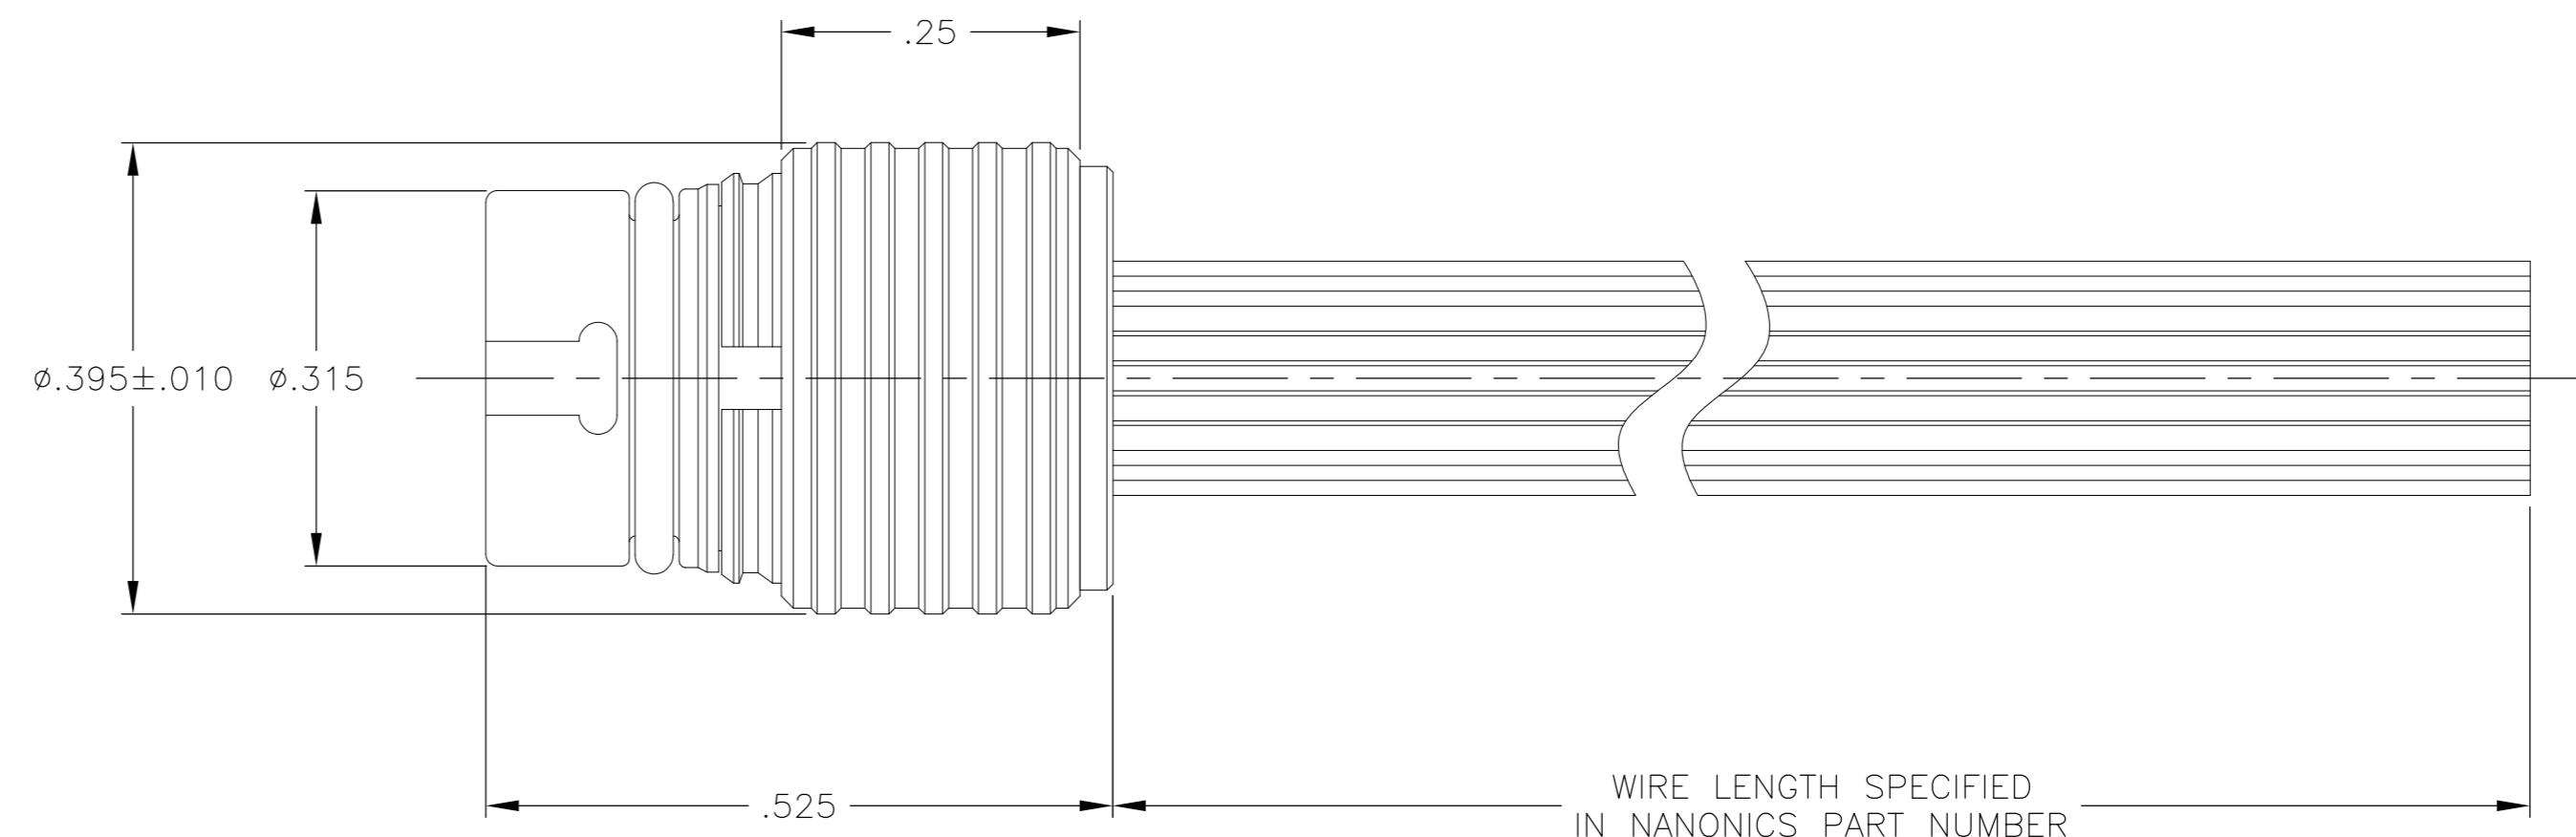


THIS DRAWING IS UNPUBLISHED.  
RELEASED FOR PUBLICATION  
ALL RIGHTS RESERVED.  
© COPYRIGHT - By -

REVISIONS  
LOC — DIST —  
P LTR —  
G UPDATE PER ECO-11-013056  
23 JUN 11 CAS MKS

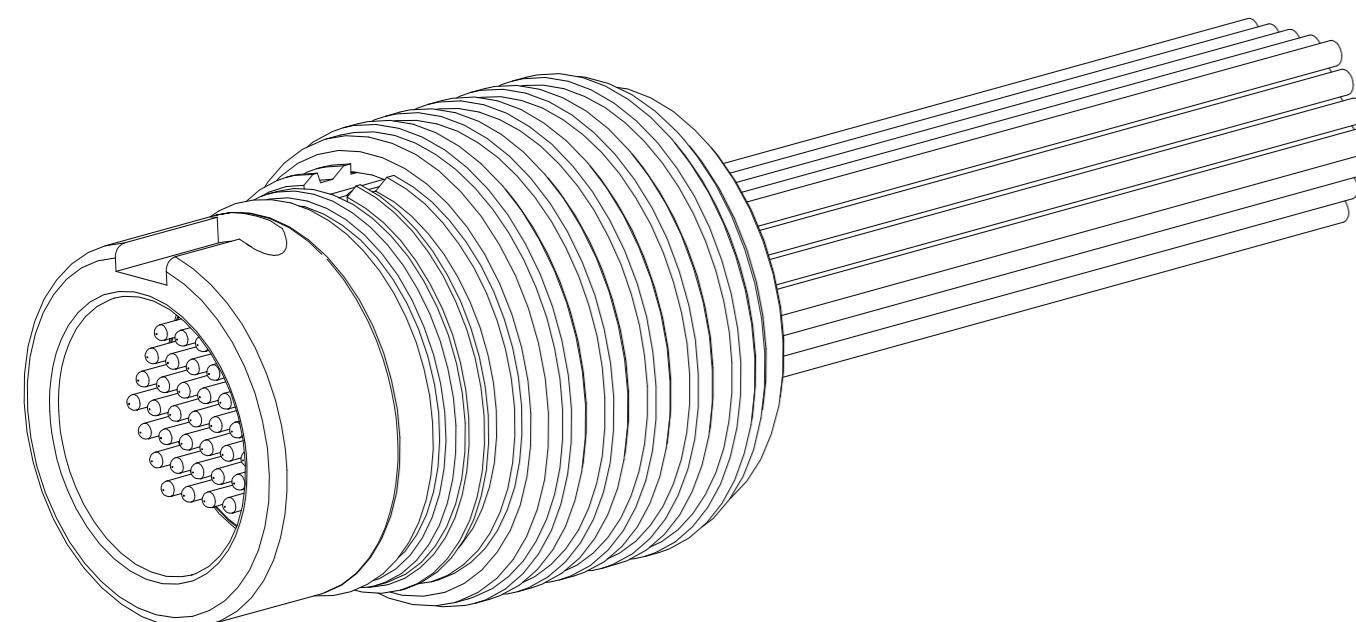

1 CONNECTOR BODY AND COUPLING SLEEVE MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E  
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E  
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067  
O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0027

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC	± —
1 PLC	± —	
2 PLC	± .010	
3 PLC	± .005	
4 PLC	± —	± 1°
ANGLES		
MATERIAL	FINISH	WEIGHT
SEE NOTES	SEE NOTES	—

DRAWN 8 APR 99  
M. STORRY  
CHK 8 APR 99  
E. PAULUS

APVD  
S. KAIN  
PRODUCT SPEC

—

APPLICATION SPEC

—

—

WEIGHT

—

CUSTOMER DRAWING



TE Connectivity

PLUG ASSEMBLY, CIRCULAR,  
QUICK DISCONNECT,  
METAL, 44 POSITION

SIZE CAGE CODE DRAWING NO

A2 OPJN9 C-1589059

RESTRICTED TO

—

SCALE 6:1 SHEET 1 OF 1 REV G

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QCM044PC2DC006](#) [QCM044PC2DC012](#) [QCM044PC2DC020](#)