



# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## General Description

The MAX8640Y/MAX8640Z step-down converters are optimized for applications where small size, high efficiency, and low output ripple are priorities. They utilize a proprietary PWM control scheme that optimizes the switching frequency for high efficiency with small external components and maintains low output ripple voltage at all loads. The MAX8640Z switches at up to 4MHz to allow a tiny 1 $\mu$ H inductor and 2.2 $\mu$ F output capacitor. The MAX8640Y switches at up to 2MHz for higher efficiency while still allowing small 2.2 $\mu$ H and 4.7 $\mu$ F components. Output current is guaranteed up to 500mA, while typical quiescent current is 28 $\mu$ A. Factory-preset output voltages from 0.8V to 2.5V eliminate external feedback components.

Internal synchronous rectification greatly improves efficiency and replaces the external Schottky diode required in conventional step-down converters. Internal fast soft-start eliminates inrush current so as to reduce input capacitor requirements.

The MAX8640Y/MAX8640Z are available in the tiny 6-pin, SC70 (2.0mm x 2.1mm) and  $\mu$ DFN (1.5mm x 1.0mm) packages. Both packages are lead-free.

## Applications

Microprocessor/DSP Core Power  
I/O Power  
Cell Phones, PDAs, DSCs, MP3s  
Other Handhelds Where Space Is Limited

## Features

- ◆ Tiny SC70 and  $\mu$ DFN Packages
- ◆ 500mA Guaranteed Output Current
- ◆ 4MHz or 2MHz PWM Switching Frequency
- ◆ Tiny External Components: 1 $\mu$ H/2.2 $\mu$ F or 2.2 $\mu$ H/4.7 $\mu$ F
- ◆ 28 $\mu$ A Quiescent Current
- ◆ Factory Preset Outputs from 0.8V to 2.5V
- ◆  $\pm 1\%$  Initial Accuracy
- ◆ Low Output Ripple at All Loads
- ◆ Ultrasonic Skip Mode Down to 1mA Loads
- ◆ Ultra-Fast Line- and Load-Transient Response
- ◆ Fast Soft-Start Eliminates Inrush Current

## Ordering Information

| PART*           | PIN-PACKAGE | TOP MARK |
|-----------------|-------------|----------|
| MAX8640YEXT08+T | 6 SC70      | ACQ      |
| MAX8640YEXT10+T | 6 SC70      | ADF      |
| MAX8640YEXT11+T | 6 SC70      | ACR      |
| MAX8640YEXT12+T | 6 SC70      | ACS      |
| MAX8640YEXT13+T | 6 SC70      | ACG      |
| MAX8640YEXT15+T | 6 SC70      | ADD      |
| MAX8640YEXT16+T | 6 SC70      | ADB      |
| MAX8640YEXT18+T | 6 SC70      | ACI      |
| MAX8640YEXT19+T | 6 SC70      | ACH      |
| MAX8640YEXT82+T | 6 SC70      | ADJ      |

\*Contact factory for availability of each version. For 2.85V output (82 version), request application note that includes limitations and typical operating characteristics.


+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.


**Note:** All devices are specified over the -40°C to +85°C operating temperature range.

Ordering Information continued and Selector Guide appears at end of data sheet.

## Typical Operating Circuit

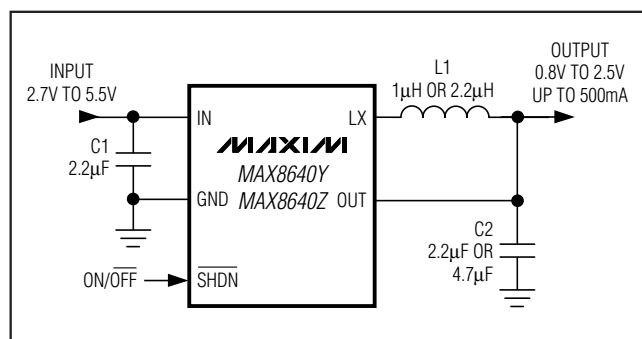

## Pin Configurations

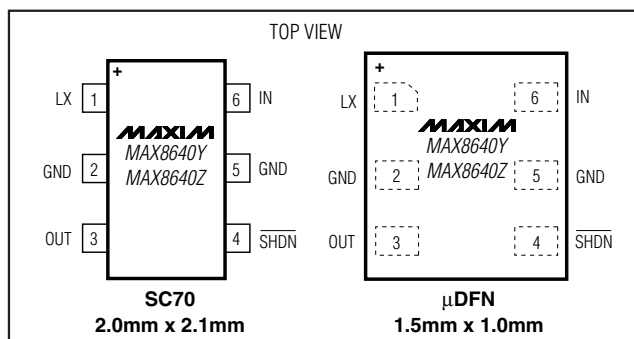

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## ABSOLUTE MAXIMUM RATINGS

IN to GND .....-0.3V to +6V  
 OUT, SHDN to GND .....-0.3V to (VIN + 0.3V)  
 LX Current (Note 1) .....0.8ARMS  
 OUTPUT Short Circuit to GND .....Continuous  
 Continuous Power Dissipation (TA = +70°C)  
   6-Pin SC70 (derate 3.1mW/°C above +70°C).....245mW

6-Pin µDFN (derate 2.1mW/°C above +70°C) .....167.7mW  
 Operating Temperature Range .....-40°C to +85°C  
 Junction Temperature .....+150°C  
 Storage Temperature Range .....-65°C to +150°C  
 Lead Temperature (soldering, 10s) .....+300°C

**Note 1:** LX has internal clamp diodes to IN and GND. Applications that forward bias these diodes should not exceed the IC's package power-dissipation limit.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(VIN = 3.6V, SHDN = IN, TA = -40°C to +85°C, typical values are at TA = +25°C, unless otherwise noted.) (Note 2)








| PARAMETER                                       | SYMBOL    | CONDITIONS                                | MIN  | TYP   | MAX  | UNITS |
|-------------------------------------------------|-----------|-------------------------------------------|------|-------|------|-------|
| Supply Range                                    | VIN       |                                           | 2.7  |       | 5.5  | V     |
| UVLO Threshold                                  | UVLO      | VIN rising, 100mV hysteresis              | 2.44 | 2.6   | 2.70 | V     |
| Supply Current                                  | ICC       | No load, no switching                     |      | 28    | 48   | µA    |
|                                                 |           | SHDN = GND                                |      | 0.01  | 0.1  |       |
|                                                 |           | TA = +25°C                                |      |       |      |       |
|                                                 |           | TA = +85°C                                |      | 0.1   |      |       |
| Output Voltage Range                            | VOU       | Factory preset                            | 0.8  |       | 2.5  | V     |
| Output Voltage Accuracy<br>(Falling Edge)       |           | ILOAD = 0mA, TA = +25°C                   | -1   | 0     | +1   | %     |
|                                                 |           | ILOAD = 0mA, TA = -40°C to +85°C          | -2   |       | +2   |       |
| Output Load Regulation<br>(Voltage Positioning) |           | Equal to inductor DC resistance           |      | RL    |      | V/A   |
| SHDN Logic Input Level                          | VIH       | VIN = 2.7V to 5.5V                        | 1.4  |       |      | V     |
|                                                 | VIL       | VIN = 2.7V to 5.5V                        |      |       | 0.4  |       |
| SHDN Logic Input Bias Current                   | IIH,IL    | VIN = 5.5V,<br>SHDN = GND or IN           |      | 0.001 | 1    | µA    |
|                                                 |           | TA = +25°C                                |      |       |      |       |
|                                                 |           | TA = +85°C                                |      | 0.01  |      |       |
| Peak Current Limit                              | ILIMP     | pFET switch                               | 590  | 770   | 1400 | mA    |
| Valley Current Limit                            | ILIMN     | nFET rectifier                            | 450  | 650   | 1300 | mA    |
| Rectifier Off-Current Threshold                 | ILXOFF    | nFET rectifier                            | 10   | 40    | 70   | mA    |
| On-Resistance                                   | RONP      | pFET switch, ILX = -40mA                  |      | 0.6   | 1.2  | Ω     |
|                                                 | RONN      | nFET rectifier, ILX = 40mA                |      | 0.35  | 0.7  |       |
| LX Leakage Current                              | ILXLKG    | VIN = 5.5V, LX = GND<br>to IN, SHDN = GND |      | 0.1   | 1    | µA    |
|                                                 |           | TA = +25°C                                |      |       |      |       |
|                                                 |           | TA = +85°C                                |      | 1     |      |       |
| Minimum On and Off Times                        | tON(MIN)  |                                           |      | 95    |      | ns    |
|                                                 | tOFF(MIN) |                                           |      | 95    |      |       |
| Thermal Shutdown                                |           |                                           |      | +160  |      | °C    |
| Thermal-Shutdown Hysteresis                     |           |                                           |      | 20    |      | °C    |

**Note 2:** All devices are 100% production tested at TA = +25°C. Limits over the operating temperature range are guaranteed by design.

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Typical Operating Characteristics

( $V_{IN} = 3.6V$ ,  $V_{OUT} = 1.5V$ , MAX8640Z, L = Murata LQH32CN series,  $T_A = +25^\circ C$ , unless otherwise noted.)

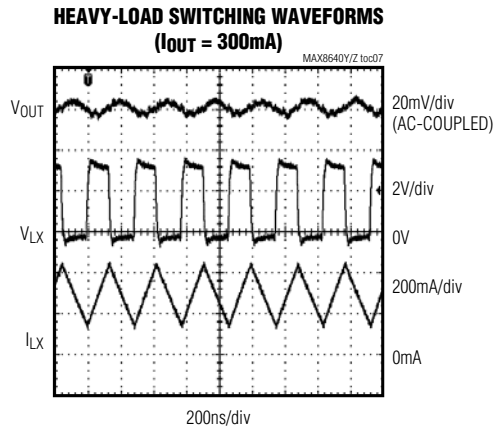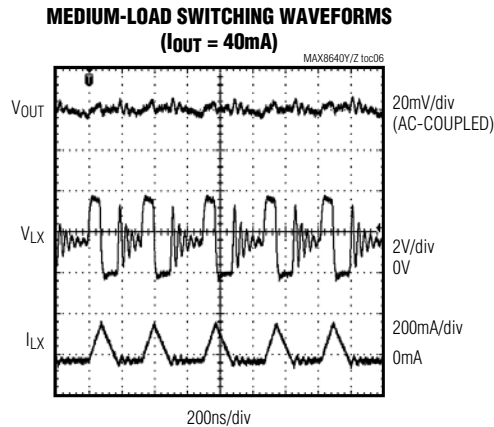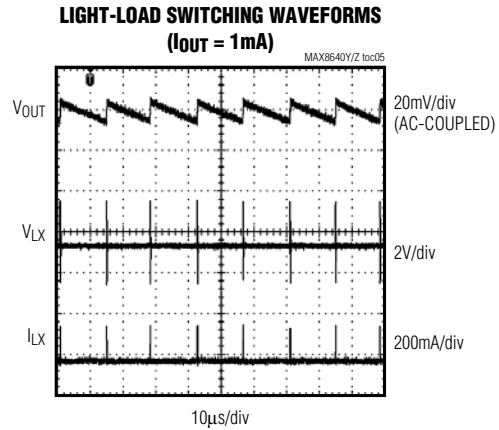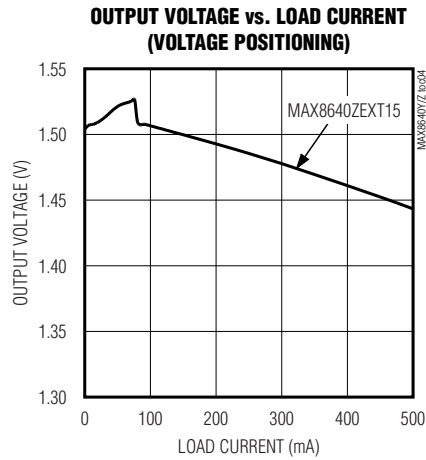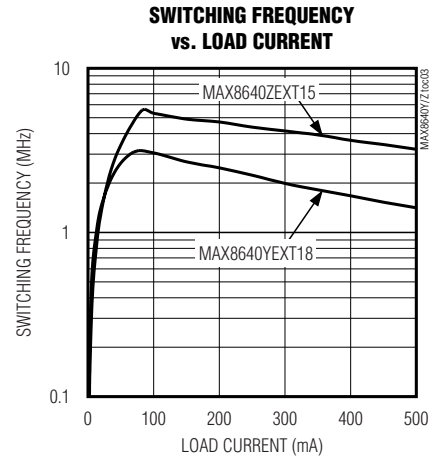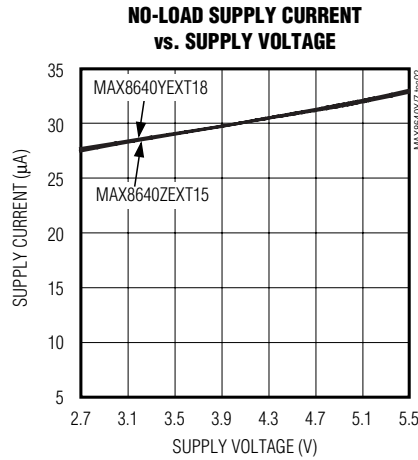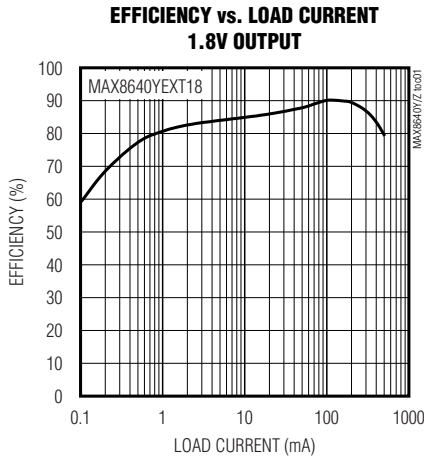


MAX8640Y/MAX8640Z

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters


## Typical Operating Characteristics (continued)

( $V_{IN} = 3.6V$ ,  $V_{OUT} = 1.5V$ , MAX8640Z, L = Murata LQH32CN series,  $T_A = +25^\circ C$ , unless otherwise noted.)


**LIGHT-LOAD STARTUP WAVEFORM  
(100 $\Omega$  LOAD)**

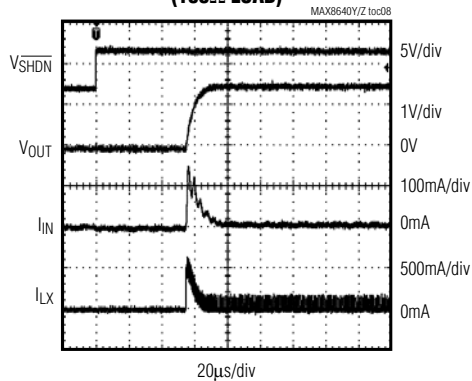


**HEAVY-LOAD STARTUP WAVEFORM  
(5 $\Omega$  LOAD)**

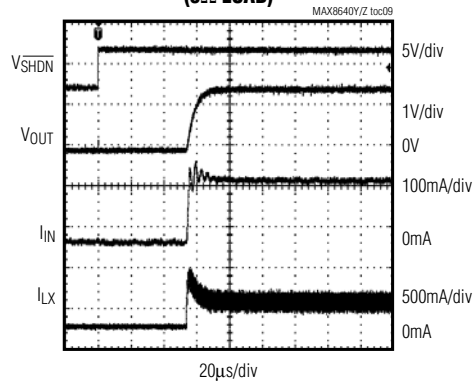


**LINE-TRANSIENT RESPONSE  
(4V TO 3.5V TO 4V)**

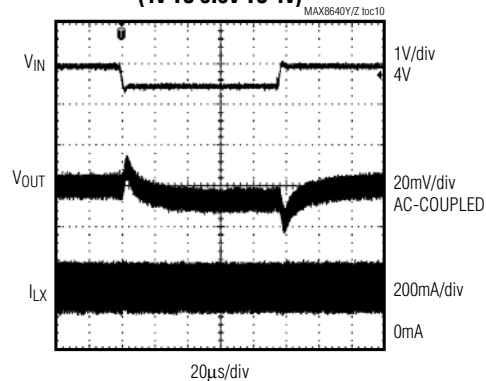

**LOAD-TRANSIENT RESPONSE  
(5mA TO 250mA TO 5mA)**

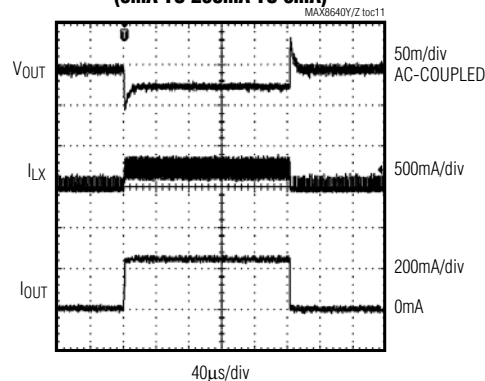

**LOAD-TRANSIENT RESPONSE  
(10mA TO 500mA TO 10mA)**

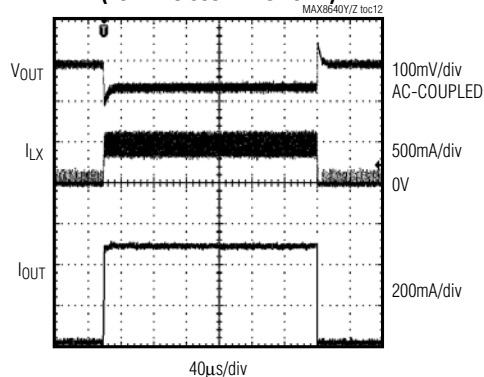

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Pin Description

| PIN  | NAME                     | FUNCTION                                                                                                                                                               |
|------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | LX                       | Inductor Connection to the Internal Drains of the p-channel and n-channel MOSFETs. High impedance during shutdown.                                                     |
| 2, 5 | GND                      | Ground. Connect these pins together directly under the IC.                                                                                                             |
| 3    | OUT                      | Output Sense Input. Bypass with a ceramic capacitor as close as possible to pin 3 (OUT) and pin 2 (GND). OUT is internally connected to the internal feedback network. |
| 4    | $\overline{\text{SHDN}}$ | Active-Low Shutdown Input. Connect to IN or logic-high for normal operation. Connect to GND or logic-low for shutdown mode.                                            |
| 6    | IN                       | Supply Voltage Input. Input voltage range is 2.7V to 5.5V. Bypass with a ceramic capacitor as close as possible to pin 6 (IN) and pin 5 (GND).                         |

## Detailed Description

The MAX8640Y/MAX8640Z step-down converters deliver over 500mA to outputs from 0.8V to 2.5V. They utilize a proprietary hysteretic PWM control scheme that switches at up to 4MHz (MAX8640Z) or 2MHz (MAX8640Y), allowing some trade-off between efficiency and size of external components. At loads below 100mA, the MAX8640Y/MAX8640Z automatically switch to pulse-skipping mode to minimize the typical quiescent current (28 $\mu$ A). Output ripple remains low at all loads, while the skip-mode switching frequency remains ultrasonic down to 1mA (typ) loads. Figure 1 is the simplified functional diagram.

### Control Scheme

A proprietary hysteretic PWM control scheme ensures high efficiency, fast switching, fast transient response, low output ripple, and physically tiny external components. This control scheme is simple: when the output voltage is below the regulation threshold, the error comparator begins a switching cycle by turning on the high-side switch. This switch remains on until the minimum on-time expires and the output voltage is above the regulation threshold or the inductor current is above the current-limit threshold. Once off, the high-side switch remains off until the minimum off-time expires and the output voltage falls again below the regulation threshold. During the off period, the low-side synchronous rectifier turns on and remains on until either the high-side switch turns on again or the inductor current approaches zero. The internal synchronous rectifier eliminates the need for an external Schottky diode.

### Voltage-Positioning Load Regulation

The MAX8640Y/MAX8640Z utilize a unique feedback network. By taking DC feedback from the LX node, the usual phase lag due to the output capacitor is removed, making the loop exceedingly stable and

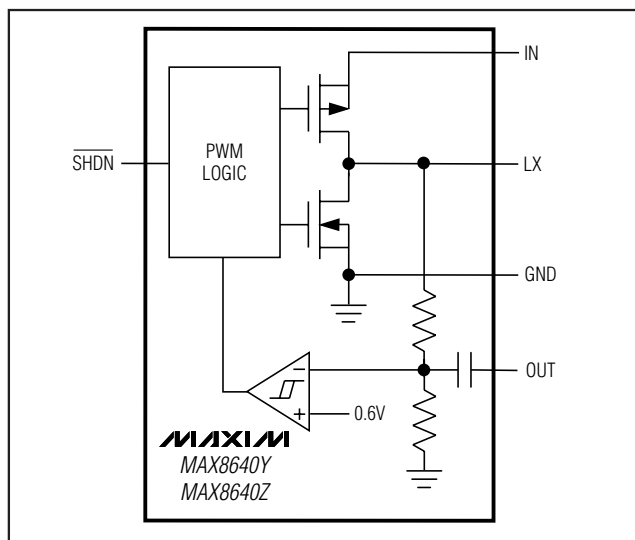


Figure 1. Simplified Functional Diagram

allowing the use of very small ceramic output capacitors. This configuration yields load regulation equal to the inductor's series resistance multiplied by the load current. This voltage-positioning load regulation greatly reduces overshoot during load transients, effectively halving the peak-to-peak output-voltage excursions compared to traditional step-down converters. See the Load-Transient Response in the *Typical Operating Characteristics*.

### Shutdown Mode

Connecting  $\overline{\text{SHDN}}$  to GND or logic low places the MAX8640Y/MAX8640Z in shutdown mode and reduces supply current to 0.1 $\mu$ A (typ). In shutdown, the control circuitry and internal MOSFET switches turn off and LX becomes high impedance. Connect  $\overline{\text{SHDN}}$  to IN or logic high for normal operation.

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Soft-Start

The MAX8640Y/MAX8640Z include internal soft-start circuitry that eliminates inrush current at startup, reducing transients on the input source. Soft-start is particularly useful for higher impedance input sources, such as Li+ and alkaline cells. See the Soft-Start Response in the *Typical Operating Characteristics*.

## Applications Information

The MAX8640Y/MAX8640Z are optimized for use with a tiny inductor and small ceramic capacitors. The correct selection of external components ensures high efficiency, low output ripple, and fast transient response.

### Inductor Selection

A 1 $\mu$ H inductor is recommended for use with the MAX8640Z, and 2.2 $\mu$ H is recommended for the MAX8640Y. A 1 $\mu$ H inductor is physically smaller but requires faster switching, resulting in some efficiency loss. Table 1 lists several recommended inductors.

It is acceptable to use a 1.5 $\mu$ H inductor with either the MAX8640Y or MAX8640Z, but efficiency and ripple should be verified. Similarly, it is acceptable to use a 3.3 $\mu$ H inductor with the MAX8640Y, but performance should be verified.

For optimum voltage positioning of load transients, choose an inductor with DC series resistance in the 75m $\Omega$  to 150m $\Omega$  range. For higher efficiency at heavy loads (above 200mA) or minimal load regulation (but some transient overshoot), the resistance should be kept as low as possible. For light-load applications up to 200mA, higher resistance is acceptable with very little impact on performance.

### Capacitor Selection

#### Output Capacitor

The output capacitor, C2, is required to keep the output voltage ripple small and to ensure regulation loop stability. C2 must have low impedance at the switching frequency. Ceramic capacitors are recommended due to

**Table 1. Suggested Inductors**

| MANUFACTURER | SERIES     | INDUCTANCE<br>( $\mu$ H) | DC RESISTANCE<br>( $\Omega$ typ) | CURRENT RATING<br>(mA) | DIMENSIONS<br>L x W x H (mm) |
|--------------|------------|--------------------------|----------------------------------|------------------------|------------------------------|
| FDK          | MIPFT2520D | 2.0                      | 0.16                             | 900                    | 2.5 x 2.0 x 0.5              |
|              | MIPF2520D  | 1.5                      | 0.07                             | 1500                   | 2.5 x 2.0 x 1.0              |
|              |            | 2.2                      | 0.08                             | 1300                   |                              |
|              |            | 3.3                      | 0.10                             | 1200                   |                              |
| Murata       | LQM31P     | 1.0                      | 0.12                             | 1200                   | 3.2 x 1.6 x 0.95             |
|              |            | 1.5                      | 0.16                             | 1000                   |                              |
|              |            | 2.2                      | 0.22                             | 900                    |                              |
| Sumida       | CDRH2D09   | 1.2                      | 0.08                             | 590                    | 3.0 x 3.0 x 1.0              |
|              |            | 1.5                      | 0.09                             | 520                    |                              |
|              |            | 2.2                      | 0.12                             | 440                    |                              |
| Taiyo Yuden  | CKP3216T   | 1.0                      | 0.11                             | 1100                   | 3.2 x 1.6 x 0.9              |
|              |            | 1.5                      | 0.13                             | 1000                   |                              |
|              |            | 2.2                      | 0.14                             | 900                    |                              |
| TDK          | GLF201208T | 1.0                      | 0.15                             | 460                    | 2.0 x 1.25 x 0.9             |
|              |            | 2.2                      | 0.36                             | 300                    |                              |
|              | GLF2012T   | 1.0                      | 0.07                             | 400                    | 2.0 x 1.25 x 1.35            |
|              |            | 2.2                      | 0.10                             | 300                    |                              |
|              | GLF251812T | 1.0                      | 0.10                             | 800                    | 2.5 x 1.8 x 1.35             |
|              |            | 2.2                      | 0.20                             | 600                    |                              |
| TOKO         | MDT2520-CR | 1.0                      | 0.05                             | 1000                   | 2.5 x 2.0 x 1.0              |
|              |            | 2.2                      | 0.08                             | 700                    |                              |
|              | D2812C     | 1.0                      | 0.07                             | 1100                   | 2.8 x 2.8 x 1.2              |
|              |            | 2.2                      | 0.14                             | 770                    |                              |



# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

their small size and low ESR. Make sure the capacitor maintains its capacitance over temperature and DC bias. Capacitors with X5R or X7R temperature characteristics typically perform well. The output capacitance can be very low; see the *Selector Guide* for recommended capacitance values. For optimum load-transient performance and very low output ripple, the output capacitor value in  $\mu\text{F}$  should be equal to or larger than the inductor value in  $\mu\text{H}$ .

## Input Capacitor

The input capacitor, C1, reduces the current peaks drawn from the battery or input power source and reduces switching noise in the IC. The impedance of C1 at the switching frequency should be kept very low. Ceramic capacitors are recommended due to their small size and low ESR. Make sure the capacitor maintains its capacitance over temperature and DC bias. Capacitors with X5R or X7R temperature characteristics

## Selector Guide

| PART          | OUTPUT VOLTAGE (V) | FREQUENCY (MHz) | RECOMMENDED COMPONENTS |                      | TOP MARK |
|---------------|--------------------|-----------------|------------------------|----------------------|----------|
|               |                    |                 | L1 ( $\mu\text{H}$ )   | C2 ( $\mu\text{F}$ ) |          |
| MAX8640YEXT08 | 0.8                | 1.2             | 2.2                    | 10                   | ACQ      |
| MAX8640YEXT10 | 1.0                | 1.6             | 2.2                    | 4.7                  | ADF      |
| MAX8640YEXT11 | 1.1                | 1.7             | 2.2                    | 4.7                  | ACR      |
| MAX8640YEXT12 | 1.2                | 1.8             | 2.2                    | 4.7                  | ACS      |
| MAX8640YEXT13 | 1.3                | 1.9             | 2.2                    | 4.7                  | ACG      |
| MAX8640YEXT15 | 1.5                | 2.0             | 2.2                    | 4.7                  | ADD      |
| MAX8640YEXT16 | 1.6                | 2.0             | 2.2                    | 4.7                  | ADB      |
| MAX8640YEXT18 | 1.8                | 2.0             | 2.2                    | 4.7                  | ACI      |
| MAX8640YEXT19 | 1.9                | 2.0             | 2.2                    | 4.7                  | ACH      |
| MAX8640YEXT24 | 2.4                | 2.0             | 2.2                    | 4.7                  | ADM      |
| MAX8640YEXT25 | 2.5                | 1.7             | 2.2                    | 4.7                  | ACJ      |
| MAX8640YEXT82 | 2.85               | 1.5             | 2.2                    | 4.7                  | ADJ      |
| MAX8640YELT08 | 0.8                | 1.2             | 2.2                    | 10                   | NB       |
| MAX8640YELT11 | 1.1                | 1.7             | 2.2                    | 4.7                  | NC       |
| MAX8640YELT12 | 1.2                | 1.8             | 2.2                    | 4.7                  | ND       |
| MAX8640YELT13 | 1.3                | 1.9             | 2.2                    | 4.7                  | NE       |
| MAX8640YELT15 | 1.5                | 2.0             | 2.2                    | 4.7                  | NF       |
| MAX8640YELT16 | 1.6                | 2.0             | 2.2                    | 4.7                  | NG       |
| MAX8640YELT18 | 1.8                | 2.0             | 2.2                    | 4.7                  | NH       |
| MAX8640YELT19 | 1.9                | 2.0             | 2.2                    | 4.7                  | NI       |
| MAX8640YELT25 | 2.5                | 1.7             | 2.2                    | 4.7                  | NJ       |
| MAX8640YELT82 | 2.85               | 1.5             | 2.2                    | 4.7                  | OW       |
| MAX8640ZEXT08 | 0.8                | 2.4             | 1                      | 4.7                  | ACL      |
| MAX8640ZEXT11 | 1.1                | 3.4             | 1                      | 2.2                  | ACM      |
| MAX8640ZEXT12 | 1.2                | 3.6             | 1                      | 2.2                  | ACN      |
| MAX8640ZEXT13 | 1.3                | 3.7             | 1                      | 2.2                  | ACO      |
| MAX8640ZEXT15 | 1.5                | 3.9             | 1                      | 2.2                  | ACP      |
| MAX8640ZEXT18 | 1.8                | 4.0             | 1                      | 2.2                  | ACU      |
| MAX8640ZELT08 | 0.8                | 2.4             | 1                      | 4.7                  | NK       |
| MAX8640ZELT11 | 1.1                | 3.4             | 1                      | 2.2                  | NL       |

MAX8640Y/MAX8640Z

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Selector Guide (continued)

| PART          | OUTPUT VOLTAGE (V) | FREQUENCY (MHz) | RECOMMENDED COMPONENTS |         | TOP MARK |
|---------------|--------------------|-----------------|------------------------|---------|----------|
|               |                    |                 | L1 (μH)                | C2 (μF) |          |
| MAX8640ZELT12 | 1.2                | 3.6             | 1                      | 2.2     | NM       |
| MAX8640ZELT13 | 1.3                | 3.7             | 1                      | 2.2     | NN       |
| MAX8640ZELT15 | 1.5                | 3.9             | 1                      | 2.2     | NO       |
| MAX8640ZELT18 | 1.8                | 4.0             | 1                      | 2.2     | NP       |

## Ordering Information (continued)

| PART*                  | PIN-PACKAGE | TOP MARK |
|------------------------|-------------|----------|
| MAX8640YEXT24+T        | 6 SC70      | ADM      |
| MAX8640YEXT25+T        | 6 SC70      | ACJ      |
| MAX8640YELT08+T        | 6 μDFN      | NB       |
| MAX8640YELT11+T        | 6 μDFN      | NC       |
| MAX8640YELT12+T        | 6 μDFN      | ND       |
| MAX8640YELT13+T        | 6 μDFN      | NE       |
| MAX8640YELT15+T        | 6 μDFN      | NF       |
| MAX8640YELT16+T        | 6 μDFN      | NG       |
| MAX8640YELT18+T        | 6 μDFN      | NH       |
| MAX8640YELT19+T        | 6 μDFN      | NI       |
| MAX8640YELT25+T        | 6 μDFN      | NJ       |
| MAX8640YELT82+T        | 6 μDFN      | OW       |
| <b>MAX8640ZEXT08+T</b> | 6 SC70      | ACL      |
| MAX8640ZEXT11+T        | 6 SC70      | ACM      |
| MAX8640ZEXT12+T        | 6 SC70      | ACN      |
| MAX8640ZEXT13+T        | 6 SC70      | ACO      |
| MAX8640ZEXT15+T        | 6 SC70      | ACP      |
| MAX8640ZEXT18+T        | 6 SC70      | ACU      |
| MAX8640ZELT08+T        | 6 μDFN      | NK       |
| MAX8640ZELT11+T        | 6 μDFN      | NL       |
| MAX8640ZELT12+T        | 6 μDFN      | NM       |
| MAX8640ZELT13+T        | 6 μDFN      | NN       |
| MAX8640ZELT15+T        | 6 μDFN      | NO       |
| MAX8640ZELT18+T        | 6 μDFN      | NP       |

\*Contact factory for availability of each version. For 2.85V output (82 version), request application note that includes limitations and typical operating characteristics.

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

**Note:** All devices are specified over the -40°C to +85°C operating temperature range.

typically perform well. Due to the MAX8640Y/MAX8640Z soft-start, the input capacitance can be very low. For optimum noise immunity and low input ripple, choose a capacitor value in μF that is equal to or larger than the inductor's value in μH.

## PCB Layout and Routing

High switching frequencies and large peak currents make PCB layout a very important part of design. Good design minimizes excessive EMI on the feedback paths and voltage gradients in the ground plane, both of which can result in instability or regulation errors. Connect the inductor, input capacitor, and output capacitor as close together as possible, and keep their traces short, direct, and wide. Connect the two GND pins under the IC and directly to the grounds of the input and output capacitors. Keep noisy traces, such as the LX node, as short as possible. Refer to the MAX8640Z evaluation kit for an example PCB layout and routing scheme.

## Chip Information

PROCESS: BiCMOS




# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Package Information

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO.            |
|--------------|--------------|-------------------------|
| 6 $\mu$ DFN  | L611-1       | <a href="#">21-0147</a> |
| 6 SC70       | X6S-1        | <a href="#">21-0077</a> |

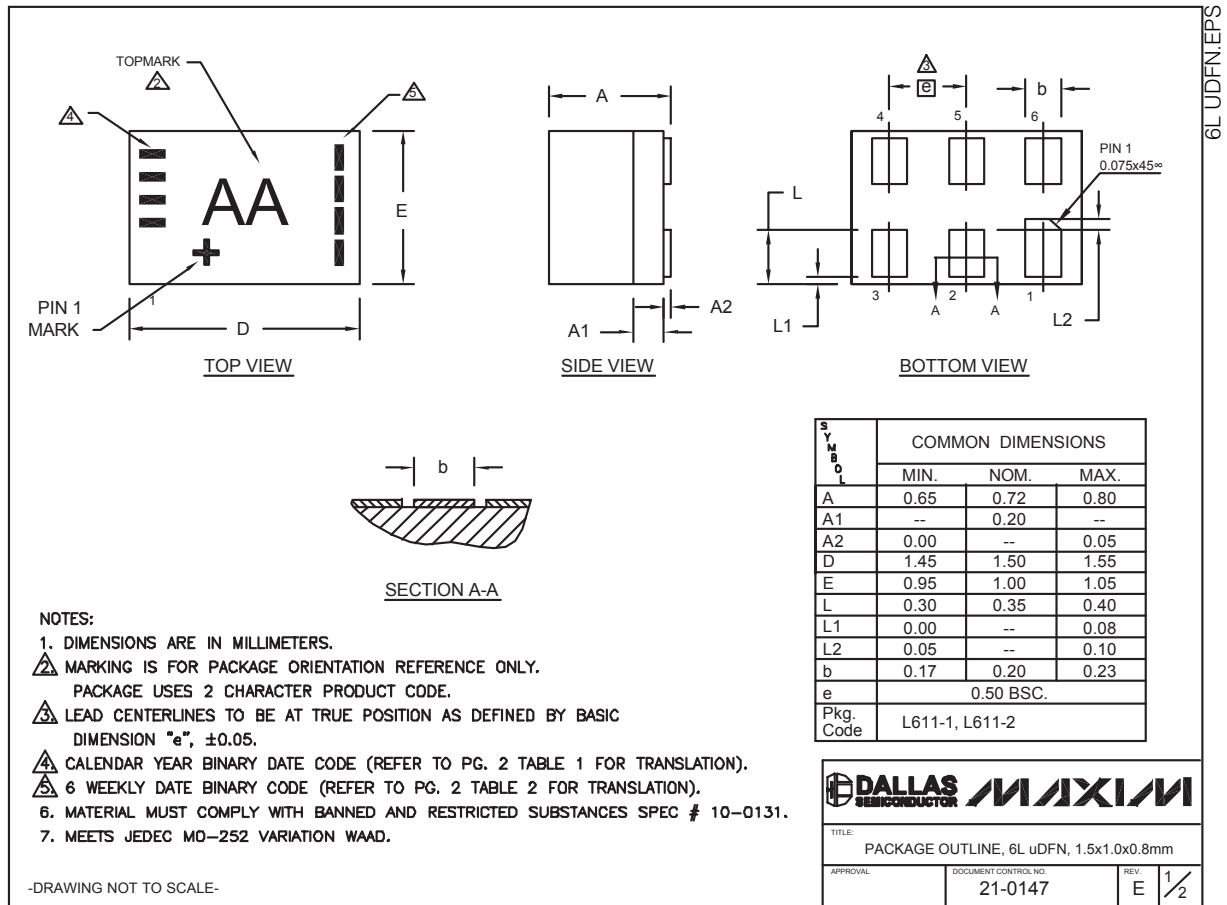


MAX8640Y/MAX8640Z

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Package Information (continued)

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

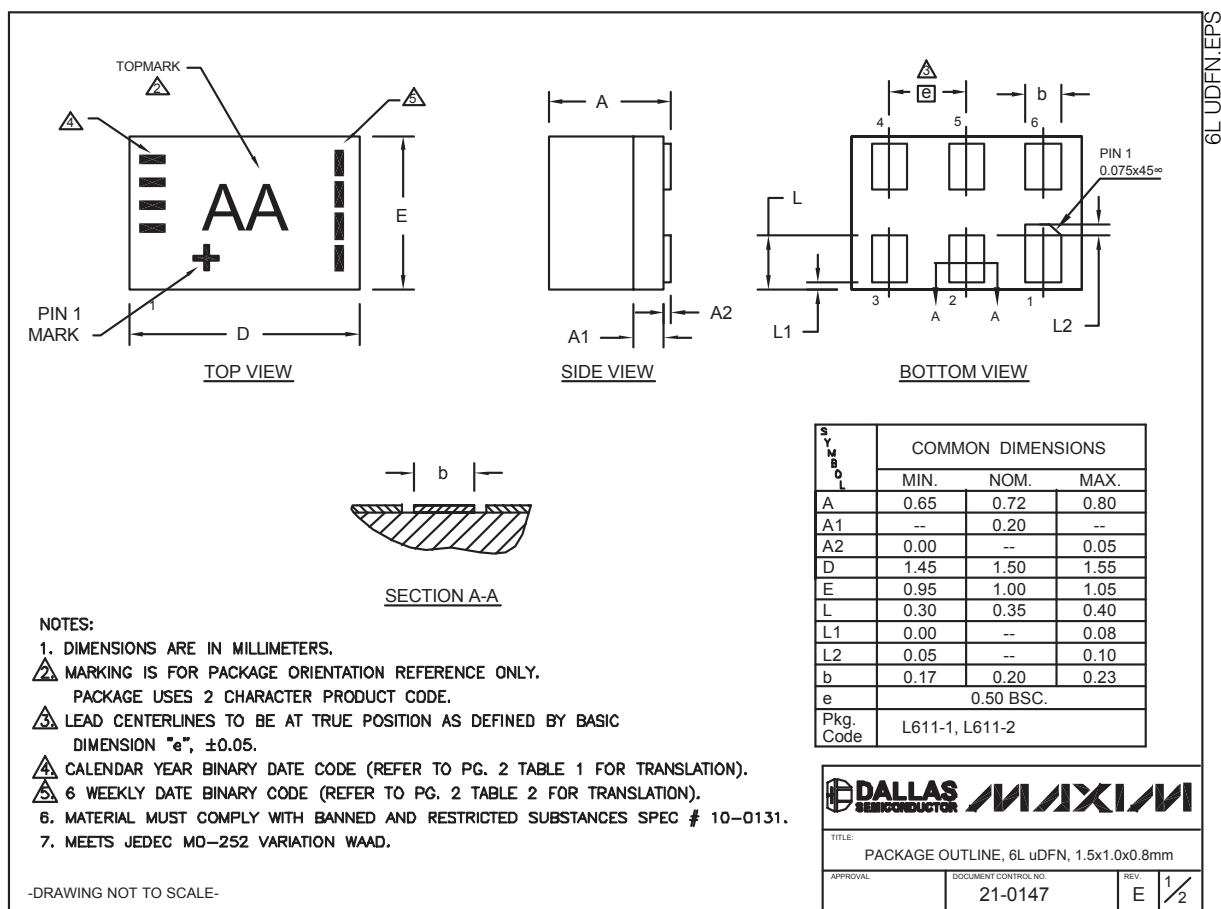


6L uDFN.EPS

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Package Information (continued)

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

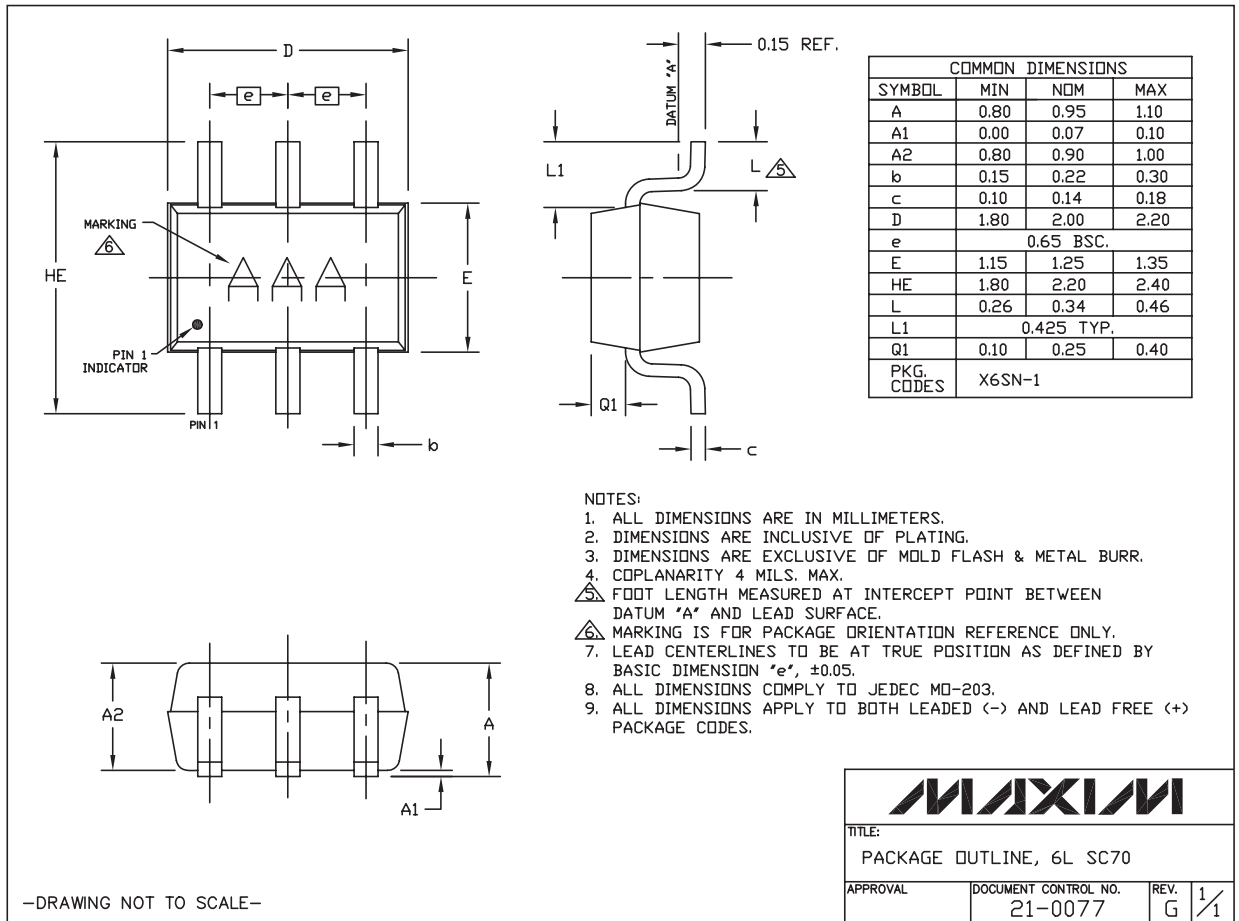

SC70, 6LEPS

MAX8640Y/MAX8640Z

# Tiny 500mA, 4MHz/2MHz Synchronous Step-Down DC-DC Converters

## Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION                                                                                             | PAGES CHANGED |
|-----------------|---------------|---------------------------------------------------------------------------------------------------------|---------------|
| 3               | 6/08          | Added MAX8640YEXT10+T voltage option                                                                    | 7             |
| 4               | 2/09          | Added MAX8640YEXT24+T voltage option and MAX8640YELT82+MAX8640YEXT82+ (82 = 2.85V), and corrected error | 1, 2, 7, 8    |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**