

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

E

ADDED PACKING INFORMATION

27JUN2012

Y.U

T.K

NOTES:



CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1,27 CENTERS .
FOR CABLE REQUIREMENTS SEE AMP APPLICATION SPECIFICATION 114-19022.



THESE RECEPTACLE CONNECTORS MATE WITH 0,64^{±0,05} mm SQUARE OR ROUND POSTS
ON 2,54mm GRID.



MARK INDICATING FIRST CABLE POSITION REFERRING TO CONTACT POSITION.



THERE IS NO POLARIZATION-SLOT AT THIS END IN 6, 10 AND 14 POS CONNECTORS.



THESE CONNECTORS CAN BE USED IN CONJUNCTION WITH STRAIN-RELIEF COVERS
OF PARTNR: 182762.





THERE IS NO POLARIZATION-SLOT AT THIS END IN 6 POS CONNECTORS.




PRODUCT SPECIFICATION 108-19033.




OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

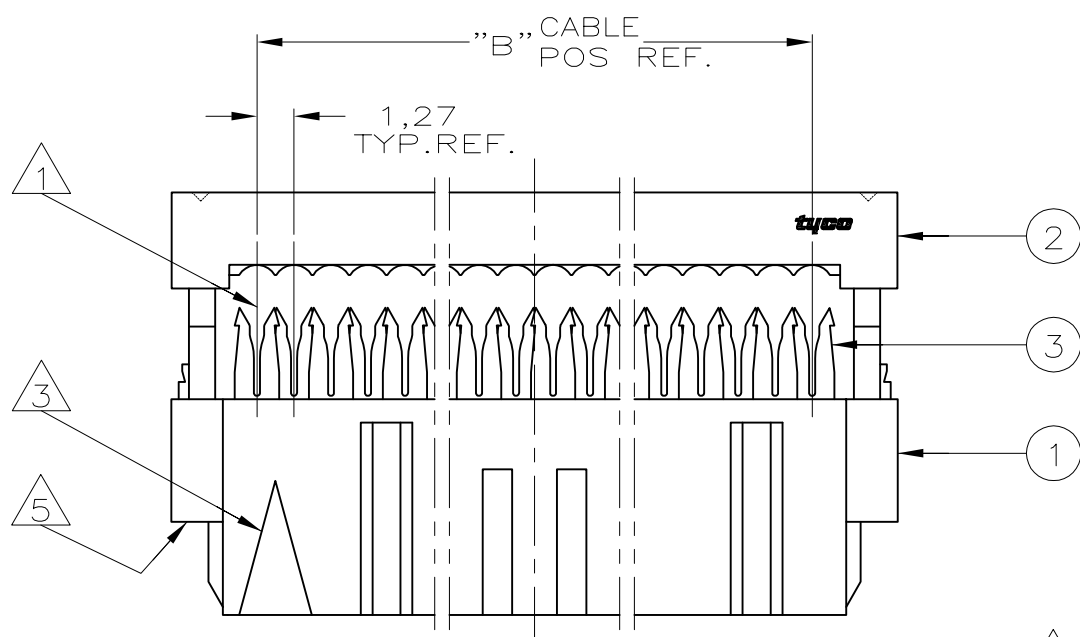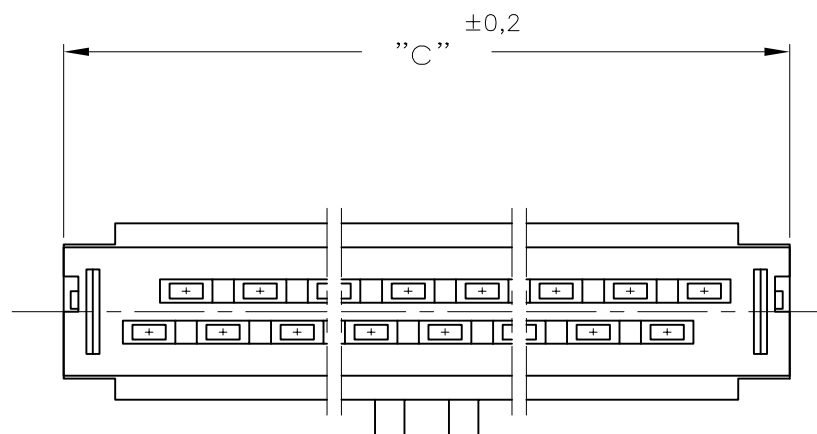

CONNECTOR HEIGHT
AFTER CABLE
TERMINATION.

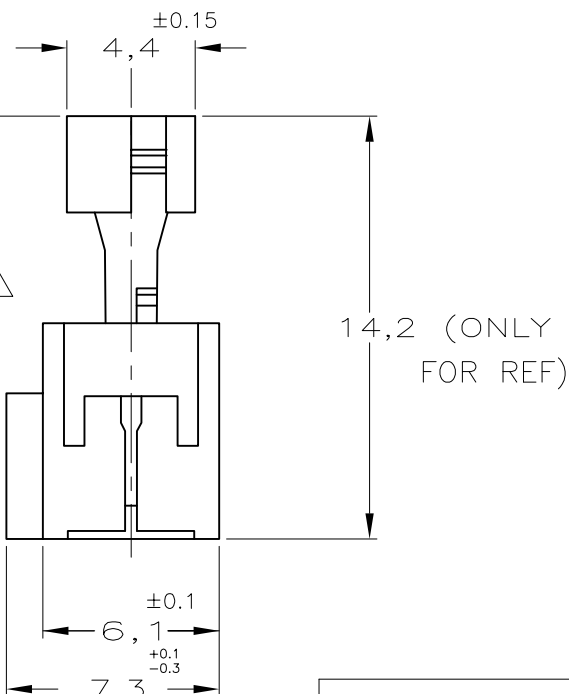

OBSOLETE	85,9	64	32	6-215911-4	D
	80,8	60	30	6-215911-0	D
	68,1	50	25	5-215911-0	D
	60,5	44	22	4-215911-4	D
	55,4	40	20	4-215911-0	D
	47,8	34	17	3-215911-4	D
	42,7	30	15	3-215911-0	D
	37,6	26	13	2-215911-6	D
	30,0	20	10	2-215911-0	D
	24,9	16	8	1-215911-6	D
OBSOLETE	22,4	14	7	1-215911-4	D
	17,3	10	5	1-215911-0	D
	14,8	8	4	0-215911-8	C
OBSOLETE	12,2	6	3	0-215911-6	D
OBSOLETE	9,7	4	2	0-215911-4	C
DIM."C"		"B" CABLE POS.	"A" DUAL POS.	PARTNUMBER	PART REV.

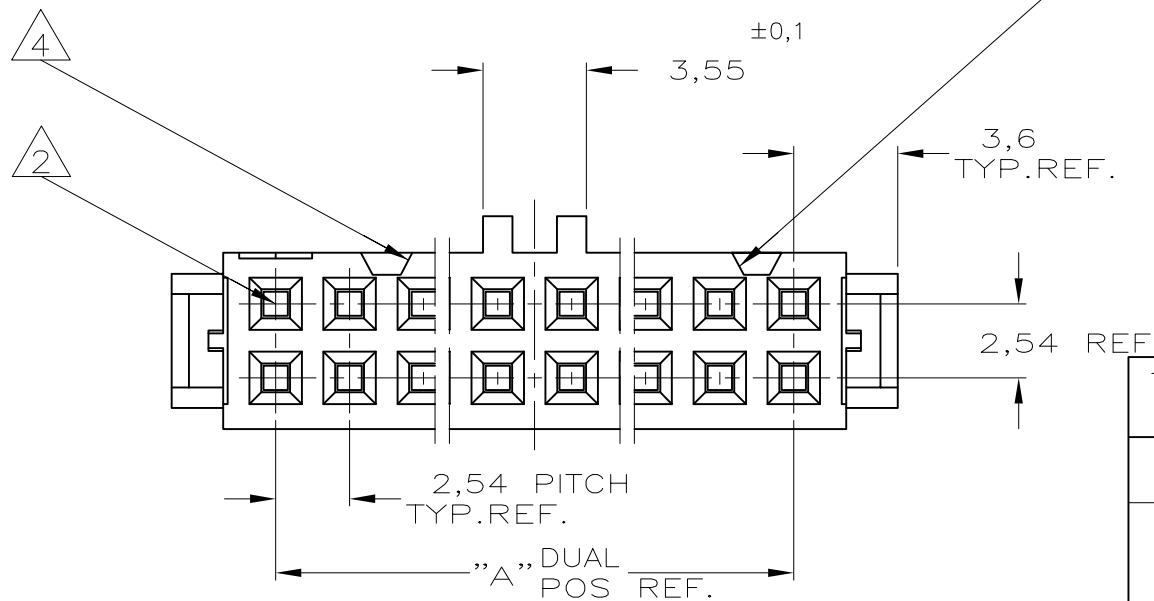

③ RECEPTACLE CONTACT	PHOSPHORBRONZE Cu Sn6	AT CONTACT-PLACE: 0,2µmGOLD AT WIRING END: 2,5µmTIN ENTIRE UNDERCOATING: 1,27µmNICKEL
② COVER	THERMOPLASTIC POLYESTER UL 94 -V0	GREY RAL 7032 (ONLY FOR REF.)
① HOUSING		
COMPONENT NAME	MATERIAL	PLATING / COLOUR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

04FEB1988

W.R.VERBEET

CHK

05FEB1988

R.VERSTIJNEN

APVD

05FEB1988

L.V.SOEST

PRODUCT SPEC


APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL

SEE TABLE

FINISH

SEE TABLE

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SCALE

SHEET

REV

E



TE Connectivity

AMP-LATCH_MIL-TYPE

RECEPTACLE_CONNECTOR

ASSEMBLY_(SYMMETRIC_COVER)

A3

00779

C=215911

4:1

1 OF 2

REV E

4

3

2


1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.


PACKAGING SPECIFICATION

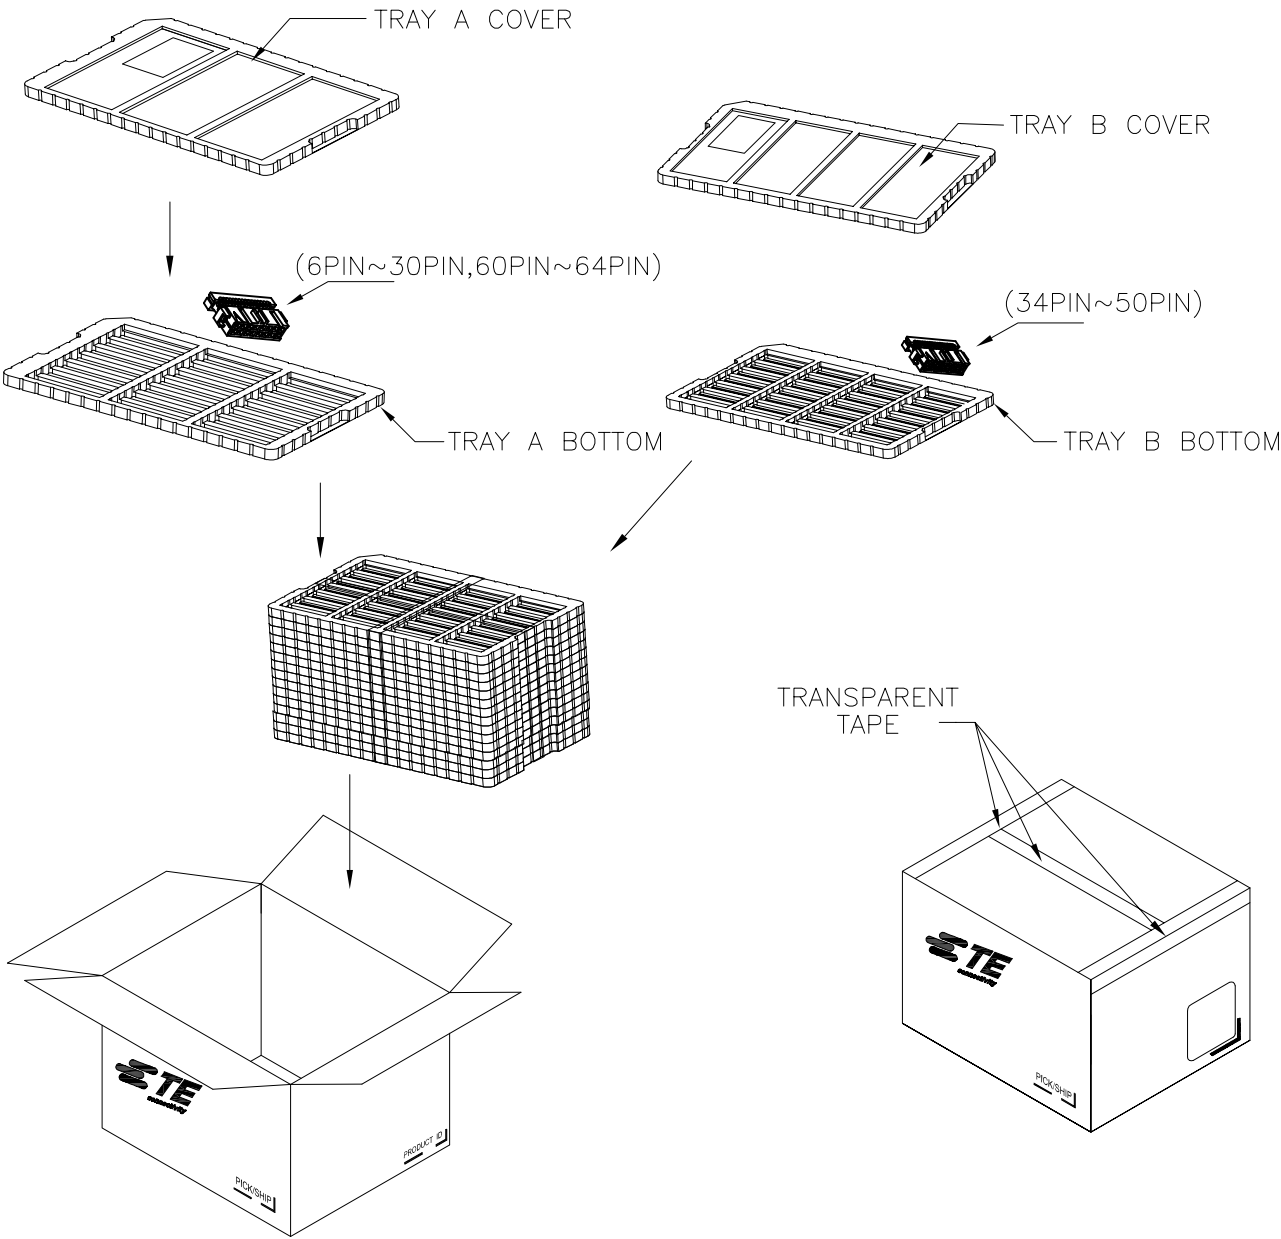

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—	—	—	SEE SHEET 1	—	—	—

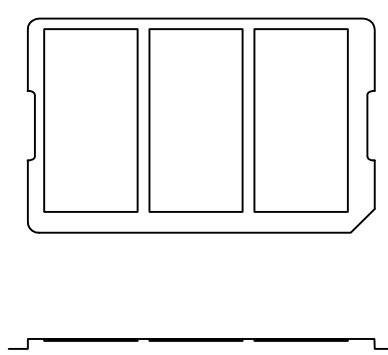


TRAY A COVER

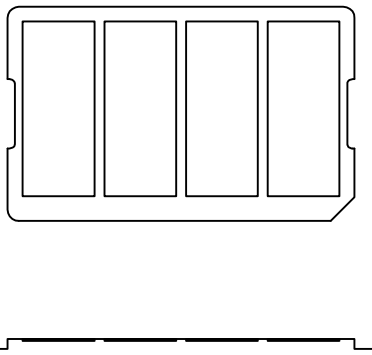


TRAY B COVER

SHOWN AS 1-215911-6

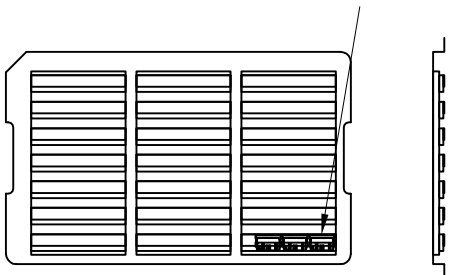


TRAY A BOTTOM

SHOWN AS 4-215911-0

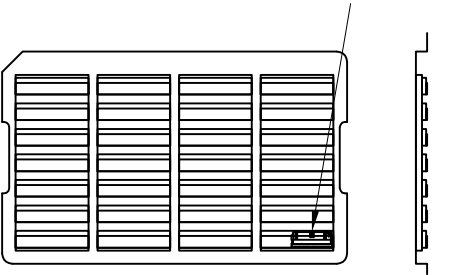

TRAY B BOTTOM

THIS DRAWING IS A CONTROLLED DOCUMENT.



MATERIAL —

DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:		
mm					
0	PLC	± —	1	PLC	± —
2	PLC	± —	3	PLC	± —
4	PLC	± —	4	PLC	± —
ANGLES		± —			

FINISH —

DWN	W.R.VERBEET.	04FEB1988	 TE Connectivity			
CHK	R.VERSTIJNEN	05FEB1988				
APVD	L.V.SOEST	05FEB1988	NAME AMP-LATCH_MIL-TYPE RECEPTACLE_CONNECTOR ASSEMBLY_(SYMMETRIC_COVER)			
PRODUCT SPEC						
APPLICATION SPEC		SIZECAGE CODEDRAWING NORESTRICTED TO				
—						
WEIGHT —		A300779C-215911—				
CUSTOMER DRAWING			SCALE —	SHEET 2 OF 2	REV E	