


NPN SWITCHING TRANSISTOR

2N2369A

- Silicon Planer Epitaxial NPN Transistor
- Hermetic TO18 Metal Package
- Designed For High Speed Switching Applications
- Screening Options Available

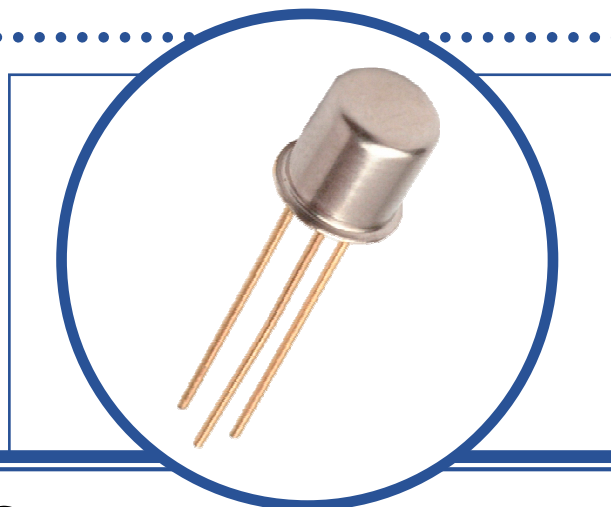

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	40V
V_{CEO}	Collector – Emitter Voltage	15V
V_{CES}	Collector – Emitter Voltage	40V
V_{EBO}	Emitter – Base Voltage	4.5V
I_C	Continuous Collector Current	200mA
P_D	Total Power Dissipation at $T_A = 25^\circ\text{C}$	360mW
	Derate Above 25°C	2.06mW/ $^\circ\text{C}$
P_D	Total Power Dissipation at $T_C = 125^\circ\text{C}$	360mW
	Derate Above 125°C	4.80mW/ $^\circ\text{C}$
T_J	Junction Temperature Range	-65 to $+200^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65 to $+200^\circ\text{C}$

THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
$R_{\theta JA}$	Thermal Resistance, Junction To Ambient			486	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance, Junction To Case			208.3	$^\circ\text{C/W}$

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab Limited

Coventry Road, Lutterworth, Leicestershire, LE17 4JB
Telephone +44 (0) 1455 556565 Fax +44 (0) 1455 552612 Email: sales@semelab-tt.com

Website: <http://www.semelab-tt.com>



A subsidiary of
TT electronics plc.

Document Number 5277

Issue 2

Page 1 of 3

NPN SWITCHING TRANSISTOR 2N2369A

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units
$V_{(BR)CEO}^{(1)}$	Collector-Emitter Breakdown Voltage	$I_C = 10\text{mA}$ $I_B = 0$	15			V
I_{CES}	Collector-Cut-Off Current	$V_{CE} = 20\text{V}$ $I_B = 0$			0.4	μA
I_{CBO}	Collector-Cut-Off Current	$V_{CB} = 40\text{V}$ $I_E = 0$			10	
		$V_{CB} = 32\text{V}$ $I_E = 0$			0.2	
		$V_{CB} = 20\text{V}$ $I_E = 0$ $T_A = 150^\circ\text{C}^{(2)}$			30	
I_{EBO}	Emitter-Cut-Off Current	$V_{EB} = 4.5\text{V}$ $I_C = 0$			10	
		$V_{EB} = 4\text{V}$ $I_C = 0$			0.25	
I_{CEX}	Collector Cut-Off Current	$V_{CE} = 10\text{V}$ $V_{BE} = -0.25\text{V}$ $T_A = 125^\circ\text{C}$			30	
$h_{FE}^{(1)}$	Forward-current transfer ratio	$I_C = 10\text{mA}$ $V_{CE} = 0.35\text{V}$	40		120	
		$I_C = 30\text{mA}$ $V_{CE} = 0.4\text{V}$	30		120	
		$I_C = 10\text{mA}$ $V_{CE} = 1.0\text{V}$	40		120	
		$T_A = -55^\circ\text{C}$	20			
$V_{CE(sat)}^{(1)}$	Collector-Emitter Saturation Voltage	$I_C = 10\text{mA}$ $I_B = 1.0\text{mA}$			0.2	V
		$T_A = 125^\circ\text{C}$			0.3	
		$I_C = 30\text{mA}$ $I_B = 3\text{mA}$			0.25	
		$I_C = 100\text{mA}$ $I_B = 10\text{mA}$			0.45	
$V_{BE(sat)}^{(1)}$	Base-Emitter Saturation Voltage	$I_C = 10\text{mA}$ $I_B = 1.0\text{mA}$	0.7		0.85	
		$T_A = 125^\circ\text{C}$	0.59			
		$T_A = -55^\circ\text{C}$			1.02	
		$I_C = 30\text{mA}$ $I_B = 3\text{mA}$			0.9	
		$I_C = 100\text{mA}$ $I_B = 10\text{mA}$	0.8		1.2	

Notes

(1) Pulse Width $\leq 300\mu\text{s}$, $\delta \leq 2\%$

(2) By design only, not a production test.


NPN SWITCHING TRANSISTOR 2N2369A

DYNAMIC CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units
$ h_{fe} $	Small signal forward-current transfer ratio	$I_C = 10\text{mA}$ $V_{CE} = 10\text{V}$ $f = 100\text{MHz}$	5		10	
C_{obo}	Output Capacitance	$V_{CB} = 5\text{V}$ $I_E = 0$ $f = 1.0\text{MHz}$			4	pF
C_{ibo}	Input Capacitance	$V_{EB} = 0.5\text{V}$ $I_C = 0$ $f = 1.0\text{MHz}$			5	
t_s	Storage Time	$I_C = 10\text{mA}$ $I_{B1} = I_{B2} = 10\text{mA}$			13	ns
t_{on}	Turn-On Time	$I_C = 10\text{mA}$ $V_{CC} = 3\text{V}$ $I_{B1} = 3\text{mA}$			12	
t_{off}	Turn-Off Time	$I_C = 10\text{mA}$ $V_{CC} = 3\text{V}$ $I_{B1} = 3\text{mA}$ $I_{B2} = -1.5\text{mA}$			18	

MECHANICAL DATA

Dimensions in mm (inches)

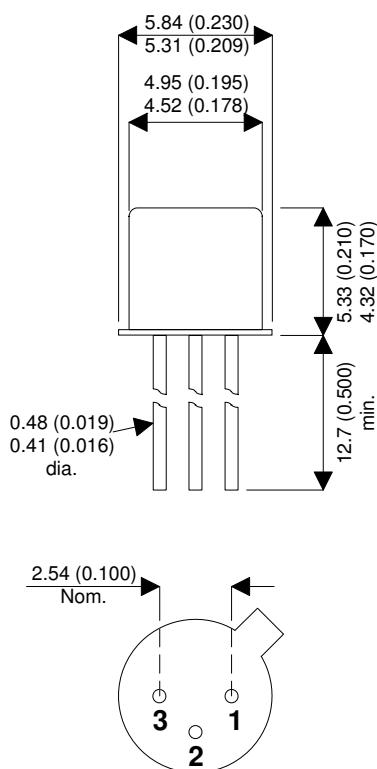

TO-18 (TO-206AA) METAL PACKAGE Underside View

Pin 1 - Emitter

Pin 2 - Base

Pin 3 - Collector