THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
CE	16

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-14-011637	18AUG2014	HZ	RZ

1. MAXIMUM INSERTION LOSS: 0.20dB
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702

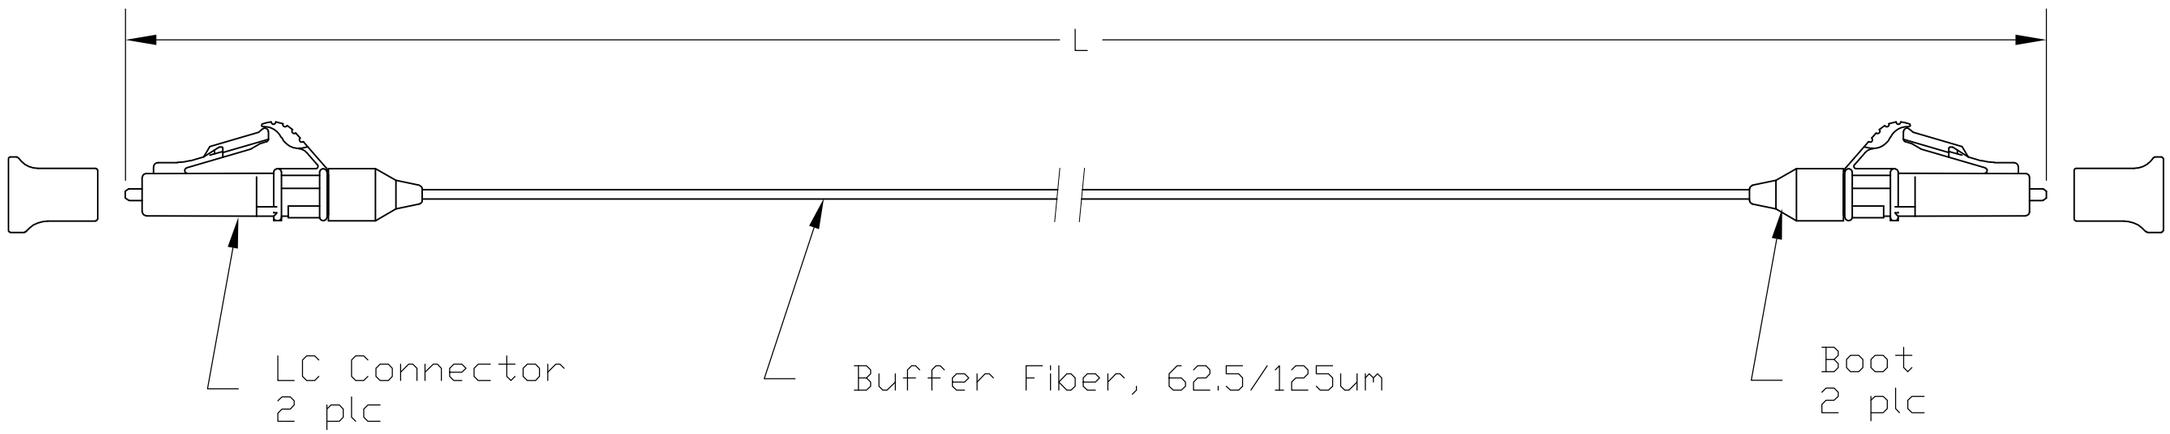

LENGTH (L)	PART NUMBER
10.00±.15 [393.70±6.00]	1-6374108-0
2.15±.05 [84.65±2.00]	6374108-6
5.00±0.08 [196.90±3.00]	6374108-5
4.00±0.08 [157.50±3.00]	6374108-4
3.00±0.05 [118.10±2.00]	6374108-3
2.00±0.05 [78.70±2.00]	6374108-2
1.00±0.05 [39.40±2.00]	6374108-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -

FINISH -

DWN C.S.VASU 31 AUG 05
CHK J.DUNCAN 31 AUG 05
APVD J.DUNCAN 31 AUG 05
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
Cable Assy, Fiber Optic, 900 Buffer 62.5/125um
LC TO LC, Optimate
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-6374108	—

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	C