



# mec Competences

Since its foundation in 1938, mec has been making state-of-the-art electromechanical components.

Today we are focusing on continuous innovation to maintain our position as leader in the segment of high end PCB mount push button switches. By always choosing the best possible solution, whether it is a design principle, a material or a manufacturing process we maintain and improve our sustainable high quality level. With this approach a wealth of know-how has been built up over the years for the benefit of new product development and custom solutions.

Despite the trend of outsourcing it has been the policy of mec to maintain a high degree of vertical integration that enables us to react promptly on specific customer requests. Only processes that are not considered core competences have been outsourced.

## Research and Development

Equipped with the latest CAD solutions with 3D facilities and optical simulation software our experienced R&D engineers are designing, simulating and evaluating new products and machinery continuously. The combination of a strong R&D facility and the vertical integration enables us to provide custom designs from conception to completion.

## Automation - Tooling - Moulding - Stamping - Graphics Marking - Custom Assembly

All switch modules are manufactured on fully automated production lines with complete in-line component tests. All production statistics are analysed and stored in computers. 98% of all parts used in the mec switches are produced in-house.

Ongoing investments ensure that latest technology is available for the tooling department. However, at mec we believe that the most important factors for maintaining a high tool standard are the outstanding skills and experience of our toolmakers.



**Prompt reaction to customer requests has always been important to mec.**

The plastic moulding department consists of numerous moulding machines. Rigorous process control ensures the highest possible precision and reproduceable quality that is essential for making precision components.

All metal parts are manufactured in our metal stamping department. When making contact elements, a computer controlled test station provides a high level of repeatability and secures that any required corrections can be made instantly.

Graphics marking is also made in-house to secure constant quality and durability of both standard and customized graphics for the many keycaps and bezels available. The assembly department offers all kinds of value-added services such as customized final assembly made by experienced and quality conscious personnel.

## Logistics and Production Planning

The production planning software is today fully integrated into the financial and administrative system.

The system provides the backbone that allows us to maintain precise deliveries and to offer excellent customer service.

## Quality – Environment - RoHS

We strive to maintain the highest possible quality standard through our QA system. With 100% in-line inspection, tight tolerance



on all parts and use of only quality material we position ourselves to reach the highest achievable.

To be a part of a sustainable industrialized world environmental consciousness is crucial. At mec we have been substituting materials to more environmental friendly alternatives and are recycling as much as possible. Legal authorities are auditing our environmental management system regularly and confirming that our goal is being reached.

RoHS conversion has been completed for all switches. To manage the inventory in the complete supply chain a separate part number system has been established. All parts manufactured today are RoHS compatible.

## Sales - Customer Service - Distribution

mec have a well established global distribution network that provides a presence in all parts of the world where electronic manufacturing takes place. Through close contact and continuous product training offered to our distributors we maintain a highly qualified and responsive global distribution network

Please contact mec or one of our distributors if you require assistance or samples to complete your new design with mec switches. We welcome inquiries also for custom solutions.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# mec Switches

Colourful and reliable to complete your next design successfully



## Contents

### Selection Guide

|                                             |    |
|---------------------------------------------|----|
| multimec® Pushbutton switches .....         | 04 |
| multimec® Pushbuttons continued .....       | 05 |
| unimec™ Pushbutton switches .....           | 06 |
| multimec® Switches under foil .....         | 07 |
| multimec® Switches - Variable heights ..... | 08 |
| multimec® Solid colour codes .....          | 37 |

### multimec® pushbutton switches

|                                             |    |
|---------------------------------------------|----|
| illumec™ 4A .....                           | 09 |
| 3A + 1B/1C+2A/2B .....                      | 10 |
| 3A + 1A/1H/1M/1ZA .....                     | 11 |
| Navimec™ .....                              | 12 |
| illumec™ 4F .....                           | 13 |
| 3F + 1N .....                               | 14 |
| 3F + 1D/1E/1F .....                         | 15 |
| 3F + 1K/1KB/1KC .....                       | 16 |
| 3F + 1WA/1WD/1WP .....                      | 17 |
| 3F + 1P/1Q/1R .....                         | 18 |
| 3F + 1T/1U/1V .....                         | 19 |
| 3F + 1X .....                               | 20 |
| 3F + 1S+2S .....                            | 21 |
| Aquamec™ .....                              | 22 |
| 3F + 1GA/1GC .....                          | 26 |
| 3C/3E switches .....                        | 27 |
| Varimec™ - Double variability - round ..... | 28 |
| Varimec™ - Double variability- square ..... | 29 |
| Right angle switches 3C/3E/3F .....         | 30 |
| 3F Right angle switches with keycaps .....  | 31 |
| Legends .....                               | 23 |

### Technical information multimec®

|                                                |    |
|------------------------------------------------|----|
| Basic switch modules .....                     | 32 |
| Basic switches continued and tape & reel ..... | 33 |
| Spacing .....                                  | 34 |
| Technical specifications .....                 | 35 |
| LEDs .....                                     | 36 |

### unimec™ pushbutton switches

|                                      |    |
|--------------------------------------|----|
| 16.324-16.326 .....                  | 38 |
| 16.310-16.315 .....                  | 39 |
| 16.300/16.700/16.800 .....           | 40 |
| Vario Support .....                  | 41 |
| Legends .....                        | 42 |
| unimec™ with multimec® keycaps ..... | 43 |

### Technical information unimec™

|                                       |    |
|---------------------------------------|----|
| Basic switch modules .....            | 44 |
| Technical specifications + LEDs ..... | 45 |

### Applications

|                                    |    |
|------------------------------------|----|
| Applications for inspiration ..... | 24 |
| Applications for inspiration ..... | 25 |



### General information

|                        |    |
|------------------------|----|
| Competences .....      | 02 |
| Usage guidelines ..... | 46 |
| Custom products .....  | 47 |

# multimec® PCB Mount Pushbutton Switches

mec specializes in the production of PCB mounted pushbutton switches. Our products are designed to be used in a wide variety of applications. Through the use of a modular approach to switch assembly the user is provided with a unique flexibility in his choice of options. multimec® switches are known for their crisp audible tactile feel although a “quiet” model is available for sensitive applications such as audio and conference equipment.


The multi-coloured keycaps, bezels and LEDs snap together to produce almost unlimited switch configurations. Customized keycaps and bezels can be manufactured for special applications.

|    | 3A/4A Switches                                                                      |                                                                                     |                                                                                     |                                                                                      |                                                                                                                                                                                | Caps and Bezels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       | Page                    |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------------|
|                                                                                     | Pushbutton                                                                          |                                                                                     | Illuminated                                                                         |                                                                                      |                                                                                                                                                                                |  1M  1ZA                                                                                                                                                                                                                                                                                                                                                                                            |       | 11                      |
|                                                                                     | TH                                                                                  | SMD                                                                                 | TH                                                                                  |                                                                                      | SMD                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
|                                                                                     |    |    |    |     |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
|                                                                                     | 3AT                                                                                 | 3AS                                                                                 | 3AT                                                                                 | 4AT                                                                                  | 4AS                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
|                                                                                     | X                                                                                   | X                                                                                   |                                                                                     |                                                                                      |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
|                                                                                     |                                                                                     |                                                                                     | X                                                                                   | X                                                                                    | X                                                                                                                                                                              |  1H<br> 1C +  2A/2C                                                                                                                                                                                                                                                                                             |       | 11/09<br>10/09          |
|                                                                                     | X                                                                                   | X                                                                                   | X                                                                                   | X                                                                                    | X                                                                                                                                                                              |  1A<br> 1B +  2A/2C<br> 1B +  2B/2D +  2B LED |       | 11/09<br>10/09<br>10/09 |
|                                                                                     | 3C/3E Switches                                                                      |                                                                                     |                                                                                     |                                                                                      |                                                                                                                                                                                | Caps and Actuators                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       | Page                    |
|                                                                                     | Pushbutton                                                                          |                                                                                     |                                                                                     |                                                                                      |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
|                                                                                     | TH                                                                                  |                                                                                     | SMD                                                                                 |                                                                                      |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
|  |  |  |  |                                                                                      |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
| 3CT                                                                                 | 3ET                                                                                 | 3CS                                                                                 | 3ES                                                                                 |                                                                                      |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
| X                                                                                   |                                                                                     | X                                                                                   |                                                                                     |                                                                                      |                                                                                                                                                                                | 27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |                         |
|                                                                                     | X                                                                                   |                                                                                     | X                                                                                   |  |                                                                                                                                                                                | 27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |                         |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  |                                                                                                                                                                                | 28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |                         |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  |                                                                                                                                                                                | 29                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |                         |
| Navimec™ Switches                                                                   |                                                                                     |                                                                                     |                                                                                     |                                                                                      | Caps                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Page  |                         |
| Pushbutton                                                                          |                                                                                     |                                                                                     | Illuminated                                                                         |                                                                                      |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
| TH                                                                                  |                                                                                     | SMD                                                                                 | TH                                                                                  | SMD                                                                                  |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
|  |  |  |  |   |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
| 3AT                                                                                 | 3FT                                                                                 | 3AS                                                                                 | 4FT                                                                                 | 4FS                                                                                  |                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |
| X                                                                                   |                                                                                     | X                                                                                   |                                                                                     |                                                                                      |  1ZB  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 12/13 |                         |
|                                                                                     | X                                                                                   |                                                                                     | X                                                                                   | X                                                                                    |  1ZC                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                         |

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® PCB Mount Pushbutton Switches

|    | 3F/4F Switches                                                                      |                                                                                     |                                                                                     |                                                                                                                                                                                     |                                                                                          | Caps and Bezels                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          | Page     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------|
|                                                                                     | Pushbutton                                                                          |                                                                                     | Illuminated                                                                         |                                                                                                                                                                                     |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
|                                                                                     | TH                                                                                  | SMD                                                                                 | TH                                                                                  |                                                                                                                                                                                     | SMD                                                                                      |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
|                                                                                     |    |    |    |                                                                                                    |         |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
|                                                                                     | 3FT                                                                                 | 3FS                                                                                 | 3FT                                                                                 | 4FT                                                                                                                                                                                 | 4FS                                                                                      |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
|                                                                                     | X                                                                                   | X                                                                                   |                                                                                     |                                                                                                                                                                                     |                                                                                          |  1GA                                                                                         |  1GC   |                                                                                                                                                                                  | 26                                                                                       |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |                                                                                          |  1P                                                                                          |                                                                                           |                                                                                                                                                                                  | 18                                                                                       |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |                                                                                          |  1ZC                                                                                         |                                                                                           |                                                                                                                                                                                  | 12                                                                                       |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |                                                                                          |  1K +  2K |                                                                                           |                                                                                                                                                                                  | 16                                                                                       |          |
|                                                                                     |                                                                                     |                                                                                     | X                                                                                   | X                                                                                                                                                                                   | X                                                                                        |  1K                                                                                          |  1KB   |  1KC +  2K | 16/13<br>18/13                                                                           |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |  1Q   |  1R                                                                                          |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
| X                                                                                   | X                                                                                   | X                                                                                   | X                                                                                   | X                                                                                                                                                                                   |  1D   |  1E                                                                                          |  1F    | 15/13                                                                                                                                                                            |                                                                                          |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |  1N   |                                                                                                                                                                                 |                                                                                           | 14/13                                                                                                                                                                            |                                                                                          |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |  1S   |                                                                                                                                                                                 |                                                                                           | 21/13                                                                                                                                                                            |                                                                                          |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |  1T   |  1U                                                                                          |  1V    | 19/13                                                                                                                                                                            |                                                                                          |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |  1X   |                                                                                                                                                                                 |                                                                                           | 20/13                                                                                                                                                                            |                                                                                          |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |  AQN  |  AQC                                                                                         |  AQB01 | 22/13                                                                                                                                                                            |                                                                                          |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |  1WA |  1WD                                                                                        |  1WP  | 17/13                                                                                                                                                                            |                                                                                          |          |
| Right Angle Switches                                                                |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     | Caps and Actuators                                                                       |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  | Page                                                                                     |          |
| Pushbutton                                                                          |                                                                                     | Illuminated                                                                         |                                                                                     |                                                                                                                                                                                     |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
| Through-hole                                                                        |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
|  |  |  |  |                                                                                                                                                                                     |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
| 3CTRAS                                                                              | 3ETRAS                                                                              | 3FRAS                                                                               | 3FRAS w/LED                                                                         |                                                                                                                                                                                     |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          |          |
| X                                                                                   |                                                                                     |                                                                                     |                                                                                     |                                                                                                                                                                                     |                                                                                          |                                                                                                                                                                                 |                                                                                           | 30                                                                                                                                                                               |                                                                                          |          |
|                                                                                     | X                                                                                   |                                                                                     |                                                                                     |                                                                                                |                                                                                          |                                                                                                                                                                                 |                                                                                           | 30/27                                                                                                                                                                            |                                                                                          |          |
|                                                                                     | X                                                                                   |                                                                                     |                                                                                     |                                                                                                |                                                                                          |                                                                                                                                                                                 |                                                                                           | 30/28<br>30/29                                                                                                                                                                   |                                                                                          |          |
|                                                                                     |                                                                                     | X                                                                                   |                                                                                     |  1GA                                                                                           |                                                                                          |                                                                                                                                                                                 |                                                                                           |  1GC                                                                                        | 31/26                                                                                    |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1P                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  | 31/18                                                                                    |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1ZC                                                                                           |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  | 31/12                                                                                    |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1K +  2K |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  | 31/16                                                                                    |          |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1T                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |  1U                                                                                         |  1V | 31/19    |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1S                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  | 31/21                                                                                    |          |
|                                                                                     |                                                                                     |                                                                                     | X                                                                                   |  1D                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |  1E                                                                                         |  1F | 30/31/15 |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1Q                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |  1R                                                                                         |                                                                                          | 30/31/18 |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1S                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          | 30/31/21 |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1N                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          | 30/31/14 |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     |  1X                                                                                            |                                                                                          |                                                                                                                                                                                 |                                                                                           |                                                                                                                                                                                  |                                                                                          | 30/31/20 |

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

This switch range is one of the smallest two pole switches available today. The contacts are capable of producing eight functions depending on the PCB layout. The unimec™ switch is available in momentary and alternate action models with standard silver contacts or optional gold contacts for low level switching. All unimec™ switches are available in low or high temperature models.

|  | Switches<br>Low.<br>Temp.                                                                     | Switches<br>High<br>Temp.                                                                     |                     | Caps and Bezels                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Page |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
|                                                                                   | <br>15.500   |                                                                                               | Silent<br>silver    |  <br>16.300 + 16.310                                                                                                                                                                                                                                                                                                  | 39   |
|                                                                                   |                                                                                               | <br>15.420   | Silent<br>gold      |   <br>16.300 + 16.311 + 16.920                                                                                                                                                                                                     | 39   |
|                                                                                   | <br>15.501   | <br>15.401   | Momentary<br>silver |   <br>16.300 + 16.312 + 16.921                                                                                                                                                                                                     | 39   |
|                                                                                   | <br>15.502  | <br>15.402  | Momentary<br>gold   |    <br>16.300 + 16.314 + 16.920 + 16.921                                                                                                   | 39   |
|                                                                                   | <br>15.551 | <br>15.451 | Alternate<br>silver |    <br>16.300 + 16.315 + 2x16.920/16.921                                                                                                | 39   |
|                                                                                   | <br>15.552 | <br>15.452 | Alternate<br>gold   |   <br>16.270 + 16.300 + 16.324                                                                                                                                                                                               | 38   |
|                                                                                   |                                                                                               |                                                                                               |                     |     <br>16.270 + 16.300 + 16.325 + 16.327 + 16.922 | 38   |
|                                                                                   |                                                                                               |                                                                                               |                     |     <br>16.270 + 16.300 + 16.326 + 2x16.327/16.922 | 38   |
|                                                                                   |                                                                                               |                                                                                               |                     |  16.700                                                                                                                                                                                                                                                                                                                                                                                                | 40   |
|                                                                                   |                                                                                               |                                                                                               |                     |  16.800                                                                                                                                                                                                                                                                                                                                                                                                | 40   |
|                                                                                   |                                                                                               |                                                                                               |                     |  16.300                                                                                                                                                                                                                                                                                                                                                                                                | 40   |
|                                                                                   |                                                                                               |                                                                                               |                     |  Vario Support<br>1x1 to 10x10                                                                                                                                                                                                                                                                                                                                                                         | 41   |
|                                                                                   |                                                                                               |                                                                                               |                     |  <br>Legends for 16.300 + 16.700                                                                                                                                                                                                                                                                                  | 42   |

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec®

## Switches Under Foil

The use of multimec® under a foil overlay offers an attractive alternative to the traditional membrane switch. With a mechanical life of 10 million cycles, multimec® will outperform membrane switches under the most extreme conditions. multimec® switches can be specified with LED illumination to provide back lighting of the overlay for front panel applications. While mec does not manufacture foil overlays, our local distributors can help you locate sources of supply.



|  | Switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Caps and Actuators                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Overall Height (mm)                                     | Diameter (mm)                                                                | Page                                                      |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------|
|                                                                                   |  3CTL6<br>3CTH9<br> 3CSH9                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 6.4                                                     | 6.5                                                                          | 27                                                        |
|                                                                                   |  3ETL9<br>3ETH9<br> 3ESH9                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                               | 08.0-15.0                                               | 6.5                                                                          | 27                                                        |
|                                                                                   |  3FTL6<br>3FTH9<br> 3FSH9                                                                                                                                                                                                                                                                                                            |  1GA<br><br> 1GC<br>+<br> 2S (optional)                                                                                                                                                                               | 12.5<br><br>17.5-22.5                                   | 11.0<br><br>15.0                                                             | 26                                                        |
|                                                                                   |  3ETL<br>3ETH<br> 3ESH                                                                                                                                                                                                                                                                                                               | <br><br>                                                                                                                                                                                                                                                                                                 | 10.4-22.5                                               | 5.2<br>7.8<br>11.6<br><b>Square</b><br>5.2 x 5.2<br>7.8 x 7.8<br>11.6 x 11.6 | 28<br><br>29                                              |
|                                                                                   |  3FTL6<br>3FTH9<br> 3FSH9<br> 3FTL6 w/LED<br> 4FTH9 w/LEDs<br> 4FSH9 w/LEDs |  1D<br><br> 1K<br><br> 1S<br><br> 1T<br><br> 1U | 14.9<br><br>19.1<br><br>16-22.5<br><br>14.9<br><br>14.9 | 9.6<br><br>14.3x14.3<br><br>6.5<br><br>10.6x10.6<br><br>10.6                 | 15/13<br><br>26/13<br><br>21/13<br><br>19/13<br><br>19/13 |

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® Variable height switches

mec is probably the most flexible switch manufacturer worldwide when it comes to fulfilling customers' specific height requirements. This selection guide on variable height switches is giving a simple overview of the many height options the multimec® switch line can offer and how to overcome the problems with adapting building heights.

|  | Switches                                                                                                                                                                                                                                                                                                                 | Caps and Actuators                                                                                                                                                                                                          | Overall Height (mm)                                                                              | Diameter (mm)                                                          | Page         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------|
|                                                                                   |  3CTL6<br>3CTH9<br><br> 3CSH9                                                                                                                          | White – Black                                                                                                                                                                                                               | 6.4                                                                                              | 6.5                                                                    | 27           |
|                                                                                   |  3ETL9<br>3ETH9<br><br> 3FSH9                                                                                                                          | <br>Blue – Grey – Yellow – Red – Black                                                                                                     | 08.0<br>09.5<br>10.4<br>11.0<br>12.0<br>15.0                                                     | 6.5                                                                    | 27           |
|                                                                                   |  3FTL6<br>3FTH9<br><br> 3FSH9                                                                                                                      | <br>1GA09 Black<br>1GC09 Black<br>+<br> 2S (optional) | 12.5<br><br>17.5-22.5<br>in steps of 1 mm                                                        | 11.0<br><br>15.0                                                       | 26           |
|                                                                                   |  3ETL<br>3ETH<br><br> 3ESH                                                                                                                         | <br><br>Blue – Grey – Yellow – Red – Black            | 10.4-22.5<br><u>Double</u><br><u>Variability</u><br>Above recess: 2.4-6.4<br>Below recess: 0-8.1 | 5.2<br>7.8<br>11.6<br><u>Square</u><br>5.2x5.2<br>7.8x7.8<br>11.6x11.6 | 28<br><br>29 |
|                                                                                   |  3FTL6<br>3FTH9<br><br> 3FSH9                                                                                                                      | <br>1S09 Black<br>+<br> 2S (optional)                 | 16.0<br>19.0<br>22.5<br><br>21.0-32.5<br>in steps of 1 mm                                        | 6.5                                                                    | 21           |
|                                                                                   |  3FTL6<br>w/LED<br><br> 4FTH9<br>w/LEDs<br><br> 4FSH9<br>w/LEDs | <br>1S11 Transparent<br>+<br> 2S (optional)           | 16.0<br>19.0<br>22.5<br><br>21.0-32.5<br>in steps of 1 mm                                        | 6.5                                                                    | 21/13        |

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® illumec™ 4A

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
high temp. switch: -40/+160°C  
LED: -30/+85°C



### Dimensions (through-hole)

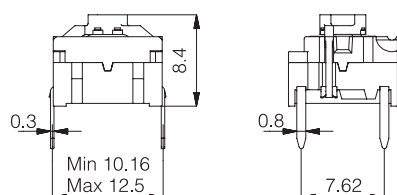


### Top View





### PCB layout and Circuit Diagram


#### 1 LED




#### 2 LEDs



### Dimensions (SMD)

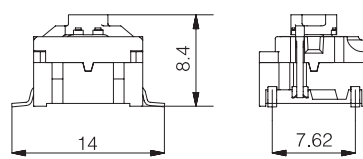


### Top View





### PCB layout and Circuit Diagram

#### 1 LED



#### 2 LEDs



Technical specifications for 4A switch and LEDs see pages 35 and 36

## How to order

**4 A** ☐ ☐ ☐

**Switch** **Mounting**  
**SH9** surface mount  
**TH9** through-hole

☐ ☐ ☐ + ☐ ☐

**LED** **Illuminated Cap**

**01** **1A** 10,12,14,16,18

**22** **1B** 10,12,14,16,18

**42**

**61**

**82**

**2242**

**8222**

**8242**




# multimec®

## 3A + 1B/1C + 2A/2B

### Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C

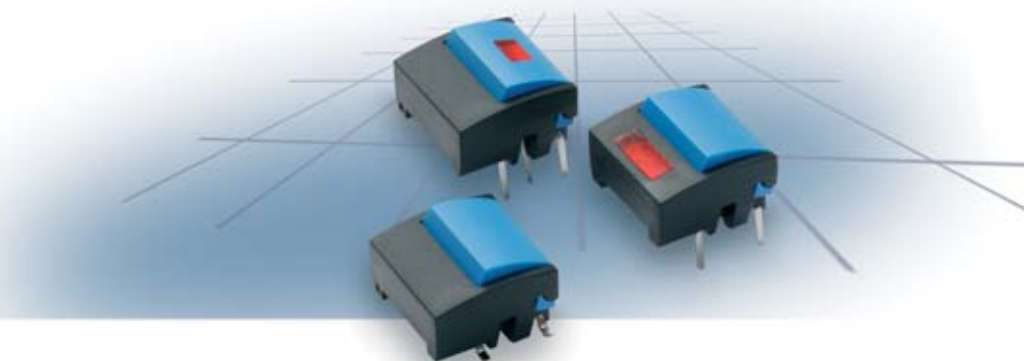

| Dimensions (through-hole) | Dimensions w/LED in switch (1C/1H)   | Dimensions w/LED PCB mounted (2B)    | Dimensions (SMD)          |
|---------------------------|--------------------------------------|--------------------------------------|---------------------------|
| <br><b>PCB layout</b><br> | <br><b>PCB layout (top view)</b><br> | <br><b>PCB layout (top view)</b><br> | <br><b>PCB layout</b><br> |

### How to order

|               |                 |                                               |   |            |                                                                                                                                |   |              |                                                                                                                                |                                                                                                                                                                                                                                                                                                                |
|---------------|-----------------|-----------------------------------------------|---|------------|--------------------------------------------------------------------------------------------------------------------------------|---|--------------|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>3 A</b>    |                 |                                               | + | <b>1 B</b> |                                                                                                                                | + | <b>2 A</b>   |                                                                                                                                |                                                                                                                                                                                                                                                                                                                |
| <b>Switch</b> | <b>Mounting</b> | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>Cap</b> | <b>00</b> blue<br><b>02</b> green<br><b>03</b> grey<br><b>04</b> yellow<br><b>06</b> white<br><b>08</b> red<br><b>09</b> black |   | <b>Bezel</b> | <b>00</b> blue<br><b>02</b> green<br><b>03</b> grey<br><b>04</b> yellow<br><b>06</b> white<br><b>08</b> red<br><b>09</b> black | <b>For 1B and 2A only:</b><br><b>30</b> ultra blue<br><b>40</b> dusty blue<br><b>42</b> aqua blue<br><b>32</b> mint green<br><b>33</b> tele grey<br><b>34</b> melon<br><b>38</b> noble red<br><b>50</b> metal dark blue<br><b>53</b> metal light grey<br><b>57</b> metal dark grey<br><b>58</b> metal bordeaux |

|               |                                                      |                                               |   |                                                                                      |                                                                                                                                |                                                                                                                                |                         |                                                                                                                                |                                                                                                                    |                                                                                                                                |
|---------------|------------------------------------------------------|-----------------------------------------------|---|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>3 A</b>    | <b>T</b>                                             |                                               | + | <b>1 C</b>                                                                           |                                                                                                                                | +                                                                                                                              |                         | +                                                                                                                              | <b>2 A</b>                                                                                                         |                                                                                                                                |
| <b>Switch</b> | <b>Mounting</b><br>T through-hole                    | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>LED</b><br><b>00</b> blue<br><b>20</b> green<br><b>40</b> yellow<br><b>80</b> red | <b>Cap</b>                                                                                                                     | <b>00</b> blue<br><b>02</b> green<br><b>03</b> grey<br><b>04</b> yellow<br><b>06</b> white<br><b>08</b> red<br><b>09</b> black |                         | <b>Lens</b><br><b>1</b> transparent<br><b>2</b> green<br><b>4</b> yellow<br><b>8</b> red                                       | <b>Bezel</b>                                                                                                       | <b>00</b> blue<br><b>02</b> green<br><b>03</b> grey<br><b>04</b> yellow<br><b>06</b> white<br><b>08</b> red<br><b>09</b> black |
| <b>3 A</b>    |                                                      |                                               | + | <b>1 B</b>                                                                           |                                                                                                                                | +                                                                                                                              | <b>2 B</b>              |                                                                                                                                |                                                                                                                    |                                                                                                                                |
| <b>Switch</b> | <b>Mounting</b><br>T through-hole<br>S surface mount | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>Cap</b>                                                                           | <b>00</b> blue<br><b>02</b> green<br><b>03</b> grey<br><b>04</b> yellow<br><b>06</b> white<br><b>08</b> red<br><b>09</b> black |                                                                                                                                | <b>Bezel</b>            | <b>00</b> blue<br><b>02</b> green<br><b>03</b> grey<br><b>04</b> yellow<br><b>06</b> white<br><b>08</b> red<br><b>09</b> black | <b>Lens</b><br><b>1</b> transparent<br><b>2</b> green<br><b>4</b> yellow<br><b>6</b> frosted white<br><b>8</b> red |                                                                                                                                |
|               |                                                      |                                               |   |                                                                                      |                                                                                                                                | +                                                                                                                              | <b>2 B X X X</b>        |                                                                                                                                |                                                                                                                    |                                                                                                                                |
|               |                                                      |                                               |   |                                                                                      |                                                                                                                                |                                                                                                                                | <b>LED for 2B bezel</b> | <b>20</b> green<br><b>40</b> yellow<br><b>80</b> red                                                                           |                                                                                                                    |                                                                                                                                |

Keycaps and bezels shown on this page can also be used on illumeC™ switch 4A - see page 9. Part nos. for bezels for 4A are 2C and 2D.

Ordering example: 3ATL640 + 1C094 + 2A04

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec®

## 3A + 1A/1H/1M/1ZA

### Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C



| Dimensions (through-hole)<br>1A | Dimensions (w/LED)<br>1H | Dimensions (SMD)<br>1ZA | Dimensions (SMD)<br>1M |
|---------------------------------|--------------------------|-------------------------|------------------------|
|                                 |                          |                         |                        |

### How to order

|            |                                   |                                 |   |              |                                                                                  |                                                                                                                |                                                                                          |
|------------|-----------------------------------|---------------------------------|---|--------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| <b>3 A</b> | <input type="checkbox"/>          | <input type="checkbox"/>        | + | <b>1 A</b>   | <input type="checkbox"/>                                                         |                                                                                                                |                                                                                          |
| Switch     | Mounting                          | L 6 low temp.<br>H 9 high temp. |   | Cap          | 00 blue<br>02 green<br>03* grey<br>04 yellow<br>06* white<br>08 red<br>09* black | 30* ultra blue<br>40* dusty blue<br>42* aqua blue<br>32 mint green<br>33 tele grey<br>34 melon<br>38 noble red | 50* metal dark blue<br>53* metal light grey<br>57* metal dark grey<br>58* metal bordeaux |
|            | T through-hole<br>S surface mount |                                 |   | <b>1 Z A</b> |                                                                                  |                                                                                                                |                                                                                          |
|            |                                   |                                 |   | Cap          |                                                                                  |                                                                                                                |                                                                                          |

|            |                                   |                                 |   |            |                                                                               |  |  |
|------------|-----------------------------------|---------------------------------|---|------------|-------------------------------------------------------------------------------|--|--|
| <b>3 A</b> | <input type="checkbox"/>          | <input type="checkbox"/>        | + | <b>1 M</b> | <input type="checkbox"/>                                                      |  |  |
| Switch     | Mounting                          | L 6 low temp.<br>H 9 high temp. |   | Cap        | 00 blue<br>02 green<br>03 grey<br>04 yellow<br>06 white<br>08 red<br>09 black |  |  |
|            | T through-hole<br>S surface mount |                                 |   |            |                                                                               |  |  |

|            |                |                                 |   |                                            |                                                                               |                                                                  |  |
|------------|----------------|---------------------------------|---|--------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------|--|
| <b>3 A</b> | <b>T</b>       | <input type="checkbox"/>        | + | <b>1 H</b>                                 | <input type="checkbox"/>                                                      |                                                                  |  |
| Switch     | Mounting       | L 6 low temp.<br>H 9 high temp. |   | Cap                                        | 00 blue<br>02 green<br>03 grey<br>04 yellow<br>06 white<br>08 red<br>09 black | Lens                                                             |  |
|            | T through-hole |                                 |   |                                            |                                                                               | 1 transparent<br>2 green<br>4 yellow<br>6 frosted white<br>8 red |  |
|            |                |                                 |   | LED                                        |                                                                               |                                                                  |  |
|            |                |                                 |   | 00 blue<br>20 green<br>40 yellow<br>80 red |                                                                               |                                                                  |  |

Keycaps shown on this page can also be used on  
illumecc™ switch 4A - see page 9

Ordering example: 3ATL680 + 1H098


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

## Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




### Dimensions 1ZB (through-hole)

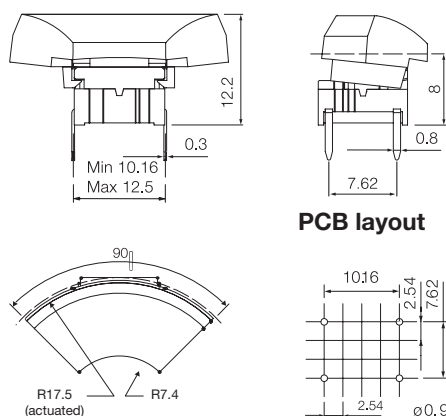

PCB layout


### Dimensions 1ZC (SMD)

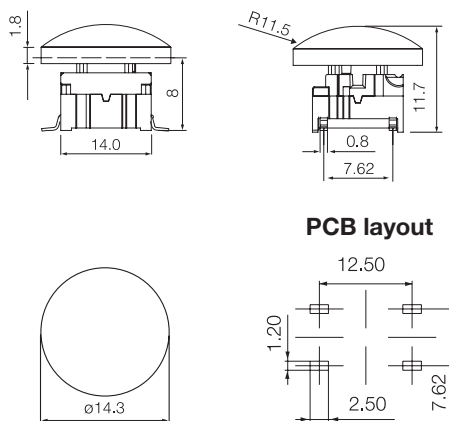


PCB layout

**Recommended panel cut-out:**  
ø35.0-35.5 Depending on application

### PCB layout TH



### PCB layout SMD



## How to order

|               |                        |                       |                |                            |
|---------------|------------------------|-----------------------|----------------|----------------------------|
| <b>3 A</b>    |                        |                       |                |                            |
| <b>Switch</b> | <b>Mounting</b>        | <b>L 6 low temp.</b>  | <b>Cap 1ZB</b> | <b>03 grey</b>             |
|               | <b>T</b> through-hole  | <b>H 9 high temp.</b> |                | <b>06 white</b>            |
|               | <b>S</b> surface mount |                       |                | <b>09 black</b>            |
| <b>3 F</b>    |                        |                       |                | <b>40 dusty blue</b>       |
| <b>Switch</b> | <b>Mounting</b>        | <b>L 6 low temp.</b>  | <b>Cap 1ZC</b> | <b>42 aqua blue</b>        |
|               | <b>T</b> through-hole  | <b>H 9 high temp.</b> |                | <b>50 metal dark blue</b>  |
|               | <b>S</b> surface mount |                       |                | <b>53 metal light grey</b> |
|               |                        |                       |                | <b>57 metal dark grey</b>  |
|               |                        |                       |                | <b>58 metal bordeaux</b>   |

## Navimec<sup>™</sup> Module

|                          |                                                              |
|--------------------------|--------------------------------------------------------------|
| <b>Part No. 9508000</b>  | <b>Navimec<sup>™</sup> Module excl. keycaps</b>              |
| <b>Part No. 950XXYY</b>  | <b>Navimec<sup>™</sup> Module incl. keycaps</b>              |
| <b>Part No. 9509XXYY</b> | <b>Navimec<sup>™</sup> Module incl. keycaps with legends</b> |

The module can be delivered with keycaps (4 x 1ZB and 1 x 1ZC) in solid colours or black keycaps with white legends.


For module incl. keycaps in solid colours (950XXYY) please indicate colour code for 1ZBXX and colour code for 1ZCYY.

For module incl. keycaps with legends (9509XXYY) please indicate legends for 1ZBXX and legends for 1ZCYY. All Caps are black with white legends. Please see legends available on page 23.

**Examples:** Module with 5 switches (4x3ATL6+1x3FTL6) mounted with 4x1ZB30 ultra blue and 1x1ZC42 aqua blue = 9503042.


Module with 5 switches (4x3ATL6+1x3FTL6) mounted with 4x1ZB09XD136 (legend arrow) and 1x1ZC09118 (legend OK) = 9509136118.

## Dimensions Navimec<sup>™</sup> Module

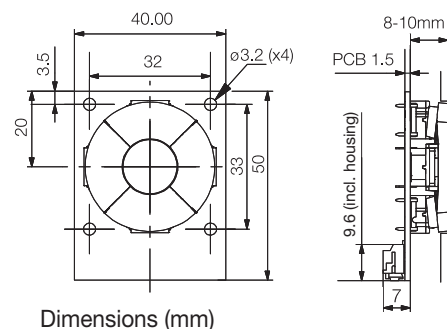

Dimensions (mm)

## Circuit Diagram Navimec<sup>™</sup> Module (Front side View)

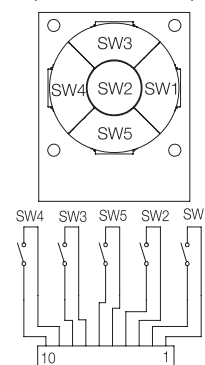

The plug on the Navimec<sup>™</sup> module is JST SMT S10B-PH-SM3-TB or similar.  
We recommend using  
Cable socket: JST PHR-10 or similar  
Contact: JST SPH-002T-PO.5S or similar.

**Ordering example:** 4x3ATL6+1ZB53 and 1x3FTL6+1ZC58 or Navimec<sup>™</sup> Module 9505358

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)





# multimec®


## 3F + 1D/1E/1F

### Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




### Dimensions (through-hole)

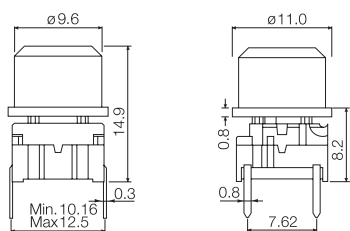


### PCB layout

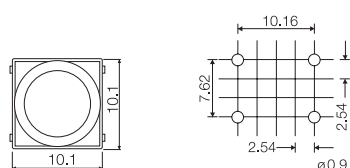


### Dimensions (w/LED)

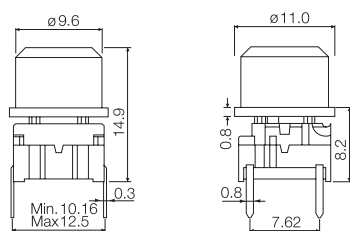


### PCB layout (top view)

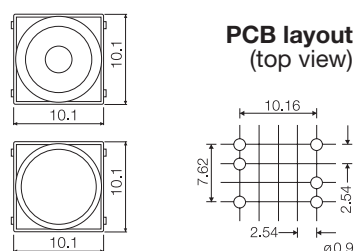

### Dimensions (SMD)

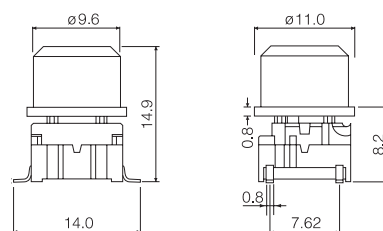

### PCB layout

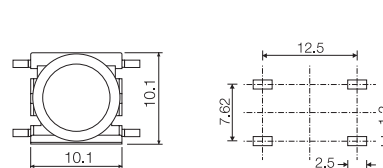

### How to order

**3 F**
**Switch**
**□ □**
**Mounting**
**T** through-hole  
**S** surface mount

**□ □**
**L 6** low temp.  
**H 9** high temp.

**1 D**
**Cap**

**□ □**
**00** blue  
**02** green  
**03** grey  
**04** yellow  
**06** white  
**08** red  
**09** black

**30** ultra blue  
**40** dusty blue  
**42** aqua blue  
**32** mint green  
**33** tele grey  
**34** melon  
**38** noble red

**50** metal dark blue  
**53** metal light grey  
**57** metal dark grey  
**58** metal bordeaux

**3 F**
**Switch**
**T**
**Mounting**
**T** through-hole

**□ □**
**L 6** low temp.  
**H 9** high temp.

**□ □ □ □**
**LED**
**00** blue  
**20** green  
**40** yellow  
**60** white  
**80** red  
**2040** green/yellow  
**8020** red/green  
**8040** red/yellow

**+**
**□ □**
**Cap 1D**

**Cap 1E**

**Cap 1F**

**□ □**
**11** transparent  
**16** frosted white

**□**
**Lens**
**00** blue  
**02** green  
**03** grey  
**04** yellow  
**04** white  
**08** red  
**09** black  
**1** transparent  
**2** green  
**4** yellow  
**6** frosted white  
**8** red

Keycaps shown on this page can also be used on  
**illumec™ switch 4F - see page 13**

**Ordering example:** 3FTL620 + 1E032

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® 3F + 1K/1KB/1KC

## Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C



| Dimensions 1K<br>(through-hole) | Dimensions 1KB<br>(w/LED)            | Dimensions 1KC<br>(w/LED)            | Dimensions 1K<br>(SMD) | Dimensions<br>(Bezel)<br>(Optional) |
|---------------------------------|--------------------------------------|--------------------------------------|------------------------|-------------------------------------|
|                                 |                                      |                                      |                        |                                     |
| <b>PCB layout</b><br>           | <b>PCB layout<br/>(top view)</b><br> | <b>PCB layout<br/>(top view)</b><br> | <b>PCB layout</b><br>  |                                     |

## How to order

|               |                 |                                               |   |            |                                                                               |   |              |                                           |
|---------------|-----------------|-----------------------------------------------|---|------------|-------------------------------------------------------------------------------|---|--------------|-------------------------------------------|
| <b>3 F</b>    |                 |                                               | + | <b>1 K</b> | <b>1 6</b>                                                                    | + | <b>2 K</b>   |                                           |
| <b>Switch</b> | <b>Mounting</b> | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>Cap</b> | 00 blue<br>02 green<br>03 grey<br>04 yellow<br>06 white<br>08 red<br>09 black |   | <b>Bezel</b> | 03 grey<br>06 white<br>08 red<br>09 black |

|               |                                                 |                                               |                                 |   |                          |   |              |                                           |
|---------------|-------------------------------------------------|-----------------------------------------------|---------------------------------|---|--------------------------|---|--------------|-------------------------------------------|
| <b>3 F</b>    | <b>T</b>                                        |                                               |                                 | + | <b>1 1 1 6</b>           | + | <b>2 K</b>   |                                           |
| <b>Switch</b> | <b>Mounting</b>                                 | <b>L 6</b> low temp.<br><b>H 9</b> high temp. | <b>LED</b>                      |   | <b>Cap</b> frosted white |   | <b>Bezel</b> | 03 grey<br>06 white<br>08 red<br>09 black |
|               | <b>T</b> through-hole<br><b>S</b> surface mount |                                               | 23 green<br>45 yellow<br>88 red |   |                          |   |              |                                           |
|               |                                                 |                                               |                                 |   | <b>1K</b>                |   |              |                                           |
|               |                                                 |                                               |                                 |   |                          |   |              |                                           |
|               |                                                 |                                               |                                 |   | <b>1KB</b>               |   |              |                                           |
|               |                                                 |                                               |                                 |   |                          |   |              |                                           |
|               |                                                 |                                               |                                 |   | <b>1KC</b>               |   |              |                                           |

The 1K caps consist of a transparent lid and a diffuser lens.  
It is possible to make your own customized legend by placing a foil  
between the lid and the lens.

Keycaps shown on this page can also be used on  
**illumec™ switch 4F - see page 13**

**Ordering example:** 3FTL688 + 1K1116

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec®


## 3F + 1WA/1WD/1WP

### Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




### Dimensions (through-hole) 1WA

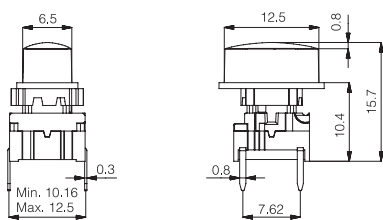


### PCB layout

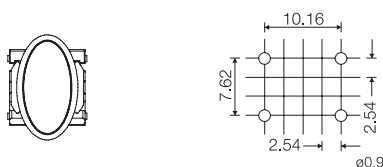


### Dimensions (w/LED) 1WD

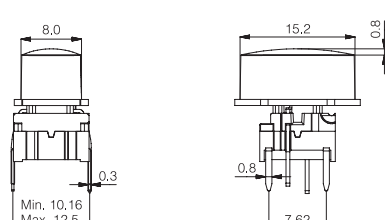


### PCB layout (top view)

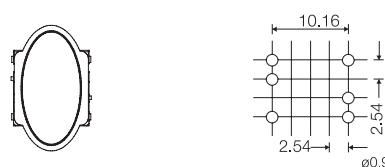


### Dimensions (SMD) 1WP

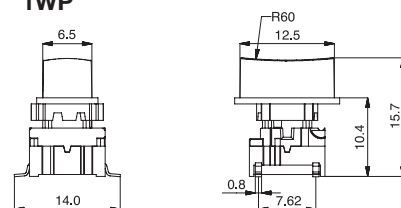

### PCB layout

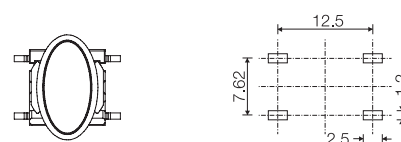

### 8 different position options



### How to order

|               |                                                 |                                               |   |            |                                                                                                                                                                                                         |
|---------------|-------------------------------------------------|-----------------------------------------------|---|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>3 F</b>    |                                                 |                                               | + |            |                                                                                                                                                                                                         |
| <b>Switch</b> | <b>Mounting</b>                                 | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>Cap</b> | <b>00</b> blue<br><b>03</b> grey<br><b>08</b> red<br><b>09</b> black<br><b>30</b> ultra blue<br><b>40</b> pigeon blue<br><b>42</b> aqua blue<br><b>53</b> metal light grey<br><b>57</b> metal dark grey |
|               | <b>T</b> through-hole<br><b>S</b> surface mount |                                               |   | <b>1WA</b> |                                                                                                                                                                                                         |
|               |                                                 |                                               |   | <b>1WD</b> |                                                                                                                                                                                                         |
|               |                                                 |                                               |   | <b>1WP</b> |                                                                                                                                                                                                         |

|               |                       |                                               |   |            |                         |
|---------------|-----------------------|-----------------------------------------------|---|------------|-------------------------|
| <b>3 F</b>    | <b>T</b>              |                                               | + |            |                         |
| <b>Switch</b> | <b>Mounting</b>       | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>Cap</b> | <b>16</b> frosted white |
|               | <b>T</b> through-hole |                                               |   | <b>1WA</b> |                         |
|               |                       |                                               |   | <b>1WD</b> |                         |
|               |                       |                                               |   | <b>1WP</b> |                         |

Keycaps shown on this page can also be used on  
illume™ switch 4F - see page 13

Ordering example: 3FTL6 + 1WA09 or 3FTL680 + 1WP16


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)




# multimec® 3F + 1T/1U/1V

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C

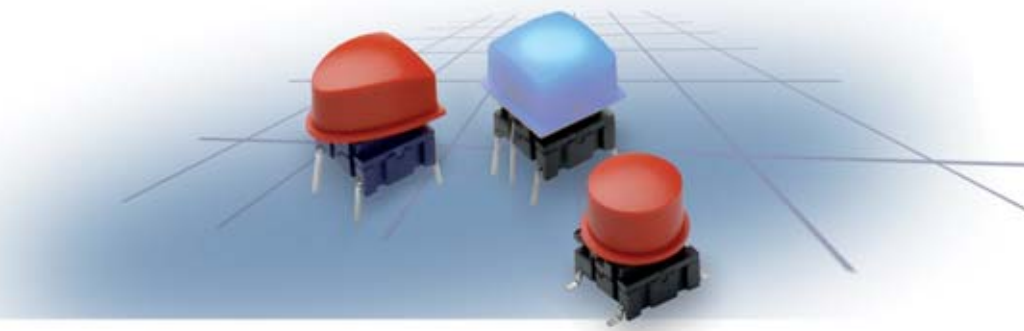


### Dimensions (through-hole)

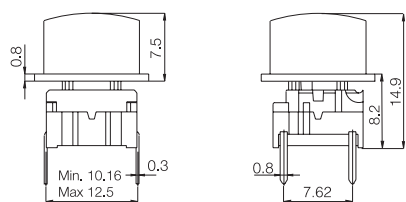


### PCB layout

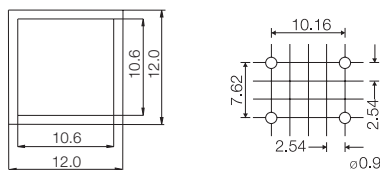


### Dimensions (w/LED)

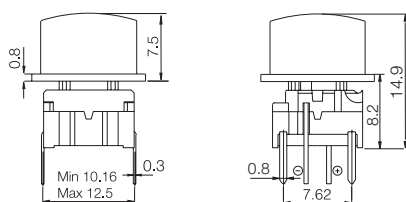


### PCB layout (top view)

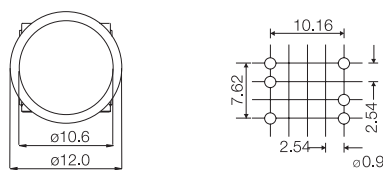

### Dimensions (SMD)

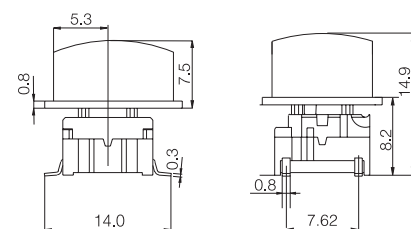

### PCB layout

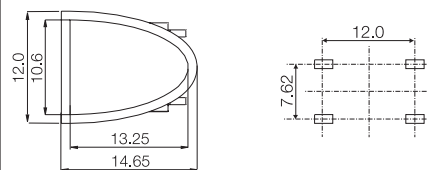

## How to order

**3 F**
**Switch**

**Mounting**  
**T** through-hole  
**S** surface mount

**L 6** low temp.  
**H 9** high temp.

**+**

**Cap**

**00** blue  
**03** grey  
**08** red  
**09** black

**3 F**
**Switch**
**T**
**Mounting**  
**T** through-hole

**L 6** low temp.  
**H 9** high temp.

**+**

**LED**  
**23** green  
**45** yellow  
**88** red

**Cap**

**1 6**

frosted white

Keycaps shown on this page can also be used on  
**illumec™ switch 4F - see page 13**

**Ordering example:** 3FTL645 + 1V16

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® 3F + 1X

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




### Dimensions (through-hole)

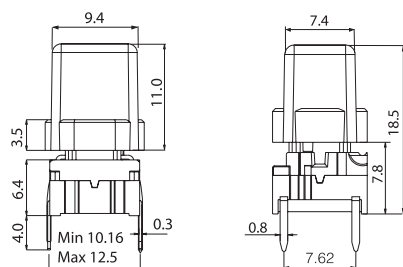


### PCB layout

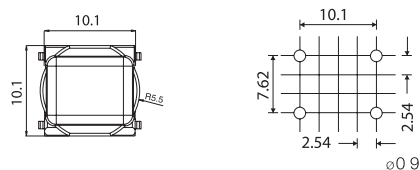


### Dimensions (w/LED)

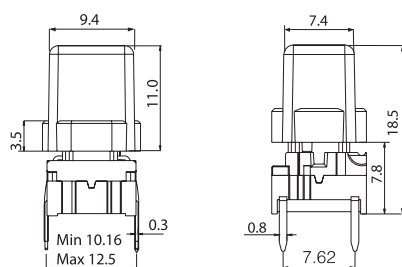


### PCB layout (top view)

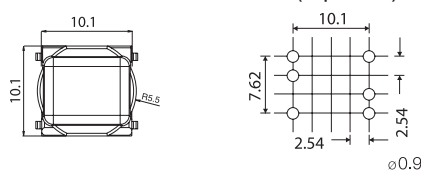

### Dimensions (SMD)

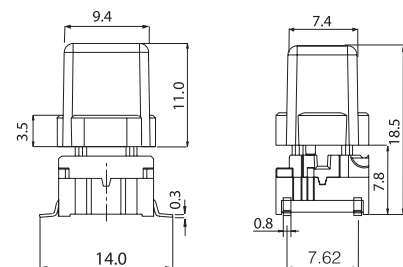

### PCB layout

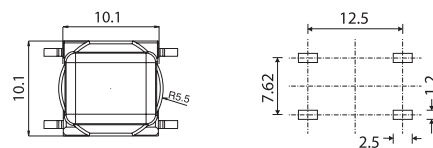

## How to order

**3 F**
**Switch**

**Mounting**
**T** through-hole  
**S** surface mount

**L 6** low temp.

**H 9** high temp.

**+**
**1 X**
**Cap**

**00** blue  
**02** green  
**03** grey  
**04** yellow  
**06** white  
**08** red  
**09** black

**30** ultra blue  
**40** dusty blue  
**42** aqua blue  
**32** mint green  
**33** tele grey  
**34** melon  
**38** noble red

**50** metal dark blue  
**53** metal light grey  
**57** metal dark grey  
**58** metal bordeaux

**3 F**
**Switch**

**Mounting**
**T** through-hole

**L 6** low temp.

**H 9** high temp.

**+**

**LED**
**00** blue  
**20** green  
**40** yellow  
**60** white  
**80** red  
**2040** green/yellow  
**8020** red/green  
**8040** red/yellow

**+**
**1 X**
**Cap**

**11** transparent  
**16** frosted white

Keycaps shown on this page can also be used on  
**illumec™ switch 4F** - see page 13

**Ordering example:** 3FTL6 + 1X09 or 3FTL680 + 1X11

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® 3F + 1S + 2S

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




### Dimensions (through-hole)

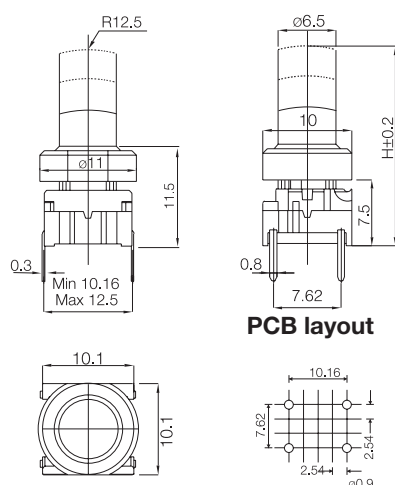


### Dimensions (w/LED)

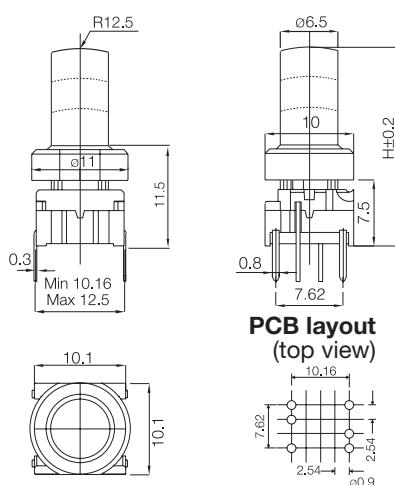

### Dimensions (SMD)

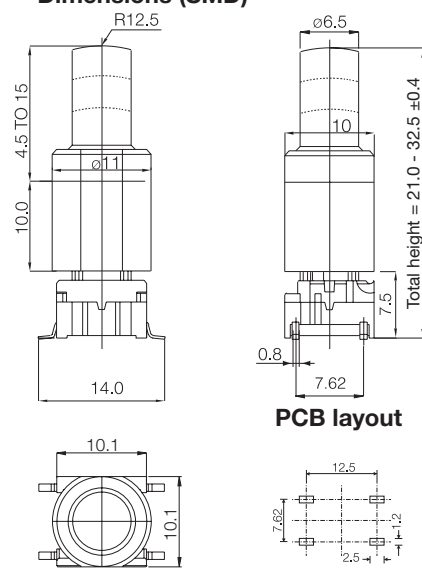

## How to order

|               |                                                 |                                               |   |                                                                                     |                                           |                                                                                                                                                                                                                           |
|---------------|-------------------------------------------------|-----------------------------------------------|---|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>3 F</b>    | <input type="checkbox"/>                        | <input type="checkbox"/>                      | + | <b>1 S 0 9 - . . .</b>                                                              | +                                         | <b>2 S 0 9 - . . .</b>                                                                                                                                                                                                    |
| <b>Switch</b> | <b>Mounting</b>                                 | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>Cap black</b>                                                                    | <b>Height</b>                             | <b>Extender black</b> <b>Height</b>                                                                                                                                                                                       |
|               | <b>T</b> through-hole<br><b>S</b> surface mount |                                               |   |  | <b>16.0</b><br><b>19.0</b><br><b>22.5</b> | <br><b>05.0</b> (Optional)<br><b>06.0</b> Adds 5-10mm to<br>total height<br><b>07.0</b><br><b>08.0</b><br><b>09.0</b><br><b>10.0</b> |

|               |                       |                                               |   |                                                                                                                                                                          |                                                                                                                                    |
|---------------|-----------------------|-----------------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>3 F</b>    | <b>T</b>              | <input type="checkbox"/>                      | + | <input type="checkbox"/>                                                                                                                                                 | <b>1 S 1 1 - . . .</b>                                                                                                             |
| <b>Switch</b> | <b>Mounting</b>       | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>LED</b>                                                                                                                                                               | <b>Cap Transparent</b> <b>Height</b>                                                                                               |
|               | <b>T</b> through-hole |                                               |   | <b>00</b> blue<br><b>20</b> green<br><b>40</b> yellow<br><b>60</b> white<br><b>80</b> red<br><b>2040</b> green/yellow<br><b>8020</b> red/green<br><b>8040</b> red/yellow | <br><b>16.0</b><br><b>19.0</b><br><b>22.5</b> |

### Customised Heights:

3F+1S is available in any height from 12.0 to 24 mm.  
3F+1S+2S is available in any height from 17.0 to 34 mm.  
Min. height for 1S11 is 16.0 and for 1S09 min height is 12.0 mm.  
Min. order qty. for custom heights is 2.000 pcs.  
For heights less than 12.0 mm, please refer to 3E switch range.

Keycaps shown on this page can also be used on  
**illumec™ switch 4F - see page 13**


**Ordering example:** 3FTL640 + 1S11-19.0

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

## Specifications switches: Specifications Sealing Boot:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C

- Operating temperature:  
-40/+85°C
- IP67 sealing
- sealing life time:  
2.000.000 operations
- material: silicone

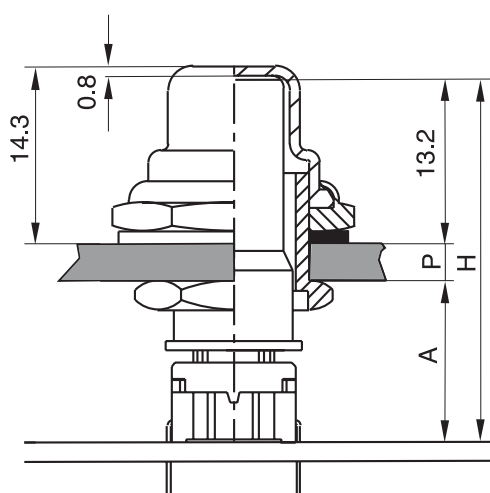

$$H = A + P + 13.2$$

This leaves nominal 0.3 mm clearance between the top of the cap and the inner side of the sealing boot to accomplish assembly tolerances. **A** can be chosen between 10 -13 mm, we recommend 10 mm to reduce building height and optimize cap guidance.

| A    | P   | CAP        | H    | BUSHING |
|------|-----|------------|------|---------|
| 10.0 | 1.0 | AQCXX-24.2 | 24.2 | AQN-0.5 |
| 10.0 | 2.0 | AQCXX-25.2 | 25.2 | AQN-0.5 |
| 10.0 | 3.0 | AQCXX-26.2 | 26.2 | AQN-2.5 |
| 10.0 | 4.0 | AQCXX-27.2 | 27.2 | AQN-2.5 |

Cap is available in black (09) or transparent (11).

The dimension H is the overall height of the switch+cap.

Bushing AQN-0.5 accepts panel thickness (P) 0.5-2.5 mm.

Bushing AQN-2.5 accepts panel thickness (P) 2.5-4.0 mm.

Panel cut out  $\varnothing$  12.0  $\pm$  0.2.

## How to order

|               |                                                 |                                               |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|---------------|-------------------------------------------------|-----------------------------------------------|---|-------------------------------------------------------------------------------------|--------------|--|---|---------------------------------------------------------------------------------------|------------------------------|--|---|---------------------------------------------------------------------------------------|
| <b>3 F</b>    |                                                 |                                               | + | <b>AQN</b>                                                                          | -            |  | + | <b>AQC</b>                                                                            | -                            |  | + | <b>AQB01</b>                                                                          |
| <b>Switch</b> | <b>Mounting</b>                                 | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |   | <b>Bushing</b>                                                                      | <b>Panel</b> |  |   | <b>Cap</b>                                                                            | <b>Overall Height</b>        |  |   | <b>Sealing boot, incl. sealing ring</b>                                               |
|               | <b>T</b> through-hole<br><b>S</b> surface mount |                                               |   |  | 0.5<br>2.5   |  |   |  | 24.2<br>25.2<br>26.2<br>27.2 |  |   |  |
|               |                                                 |                                               |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |

|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|---------------|-----------------------|-----------------------------------------------|--|---|-------------------------------------------------------------------------------------|--------------|--|---|---------------------------------------------------------------------------------------|------------------------------|--|---|---------------------------------------------------------------------------------------|
| <b>3 F</b>    | <b>T</b>              |                                               |  | + | <b>AQN</b>                                                                          | -            |  | + | <b>AQC</b>                                                                            | -                            |  | + | <b>AQB01</b>                                                                          |
| <b>Switch</b> | <b>Mounting</b>       | <b>L 6</b> low temp.<br><b>H 9</b> high temp. |  |   | <b>Bushing</b>                                                                      | <b>Panel</b> |  |   | <b>Cap</b>                                                                            | <b>Overall Height</b>        |  |   | <b>Sealing boot, incl. sealing ring</b>                                               |
|               | <b>T</b> through-hole |                                               |  |   |  | 0.5<br>2.5   |  |   |  | 24.2<br>25.2<br>26.2<br>27.2 |  |   |  |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |
|               |                       |                                               |  |   |                                                                                     |              |  |   |                                                                                       |                              |  |   |                                                                                       |

Keycaps shown on this page can also be used on  
illumec™ switch 4F - see page 13


**Ordering example:** AQB0109 + AQC09-27.2 + AQN-2.5 + 3FTL6

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)




All standard legends are white on black caps.  
The size of the legends listed may not correspond to the actual size. Please ask your local distributor, if you do not find what you need on the list. New legends may have been added after this catalogue was printed.  
Custom legends and other colour combinations are available, please contact your local distributor.

## Note!

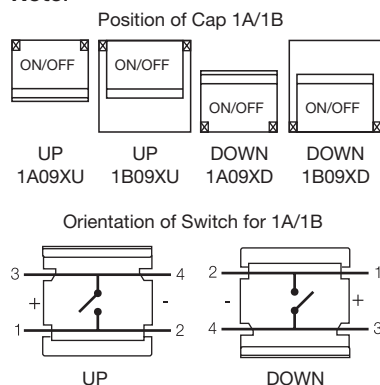

For 1A/1B the orientation shown above is standard.

**Please consider the switch orientation you require before specifying legend orientation.**

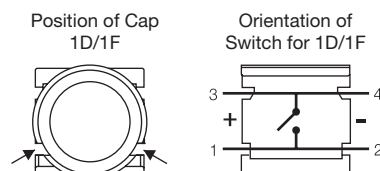

For the 1D and 1F caps the orientation shown above is standard.

**Please consider the switch orientation you require before specifying legend orientation.**

## Standard Keycap Legends

|        | Part no. |         |         |         |       |                         |          |        |
|--------|----------|---------|---------|---------|-------|-------------------------|----------|--------|
|        |          |         |         |         |       |                         |          |        |
| LEGEND | 1A09XU_  | 1A09XD_ | 1B09XU_ | 1B09XD_ | 1D09_ | Reverse Print<br>1F096_ | 1ZB09XD_ | 1ZC09_ |
| 0      | 000      | 000     | 000     | 000     | 000   | 000                     |          |        |
| 1      | 001      | 001     | 001     | 001     | 001   | 001                     |          |        |
| 2      | 002      | 002     | 002     | 002     | 002   | 002                     |          |        |
| 3      | 003      | 003     | 003     | 003     | 003   | 003                     |          |        |
| 4      | 004      | 004     | 004     | 004     | 004   | 004                     |          |        |
| 5      | 005      | 005     | 005     | 005     | 005   | 005                     |          |        |
| 6      | 006      | 006     | 006     | 006     | 006   | 006                     |          |        |
| 7      | 007      | 007     | 007     | 007     | 007   | 007                     |          |        |
| 8      | 008      | 008     | 008     | 008     | 008   | 008                     |          |        |
| 9      | 009      | 009     | 009     | 009     | 009   | 009                     |          |        |
| A      | 010      | 010     | 010     | 010     |       |                         |          |        |
| B      | 011      | 011     | 011     | 011     |       |                         |          |        |
| C      | 012      | 012     | 012     | 012     |       |                         |          |        |
| D      | 013      | 013     | 013     | 013     |       |                         |          |        |
| #      | 107      | 107     | 107     | 107     | 107   | 107                     |          |        |
| *      | 019      | 019     | 019     | 019     | 019   | 019                     |          |        |
| ⇧      | 016      | 016     | 016     | 016     |       |                         |          |        |
| →      | 033      | 033     | 033     | 033     | 033   |                         |          |        |
| ←      | 133      | 133     | 133     | 133     | 133   |                         |          |        |
| ↑      | 034      | 034     | 034     | 034     | 034   |                         |          |        |
| ↓      | 134      | 134     | 134     | 134     | 134   |                         |          |        |
| ↶      | 135      | 135     | 135     | 135     | 135   | 135                     |          |        |
| +      | 054      | 054     | 054     | 054     |       |                         |          |        |
| -      | 059      | 059     | 059     | 059     |       |                         |          |        |
| •      | 056      | 056     | 056     | 056     |       |                         |          |        |
| ▲      |          |         |         |         |       |                         | 136      |        |
| ⏻      | 123      | 123     | 123     | 123     | 123   | 123                     |          | 123*   |
| START  | 031      | 031     | 031     | 031     |       |                         |          |        |
| CLEAR  | 036      | 036     | 036     | 036     |       |                         |          |        |
| LOAD   | 037      | 037     | 037     | 037     |       |                         |          |        |
| RESET  | 038      | 038     | 038     | 038     |       |                         |          | 038    |
| CANCEL | 048      | 048     | 048     | 048     |       |                         |          |        |
| ENTER  |          |         |         |         |       |                         |          | 105    |
| OK     |          |         |         |         |       |                         |          | 118    |
| SET    |          |         |         |         |       |                         |          | 119    |
| MENU   |          |         |         |         |       |                         |          | 120    |
| FUNC   |          |         |         |         |       |                         |          | 121    |
| HOME   |          |         |         |         |       |                         |          | 122    |

\* 1ZC16 for illumination

# Applications with mec switches

## Studio Equipment



Navimec, 3A+1ZA

## Security Access Control



Navimec, 3A+1B+2A, 3A+1A

## Digital Microscope



3F+1D

## Barcode Reader



3C in-moulded

## Pump Control Unit



3E

## Space Shuttle Internal Communication



Unimec 15501+16300+16310

## Control for Video Camera in Police Cars



3A+1A, 1H

## Conference Systems



3F+1ZA, 1ZC 3A+1H, 1M

## Door Entry Control



3F+1T, 1U, 1V, 1F

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# Applications with mec switches

## Police Speed Control



3F+1D, 1T, 1V

## Control Panel for Boats



3F+1U

## Scooter for Disabled People



3F+1D

## Defibrillator



3C under foil

## Tree Felling Equipment



3E

## Flight Simulators



3F+1P

3F+1P,1D

## Military Handheld Computer



3C

## Car Operation Panel for Disabled People



3F+1ZA, 1ZC

Navimec, 3F+1ZC

## Mixing Console



3F+1K,1E


# multimec® 3F + 1GA/1GC

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




### Dimensions (through-hole)

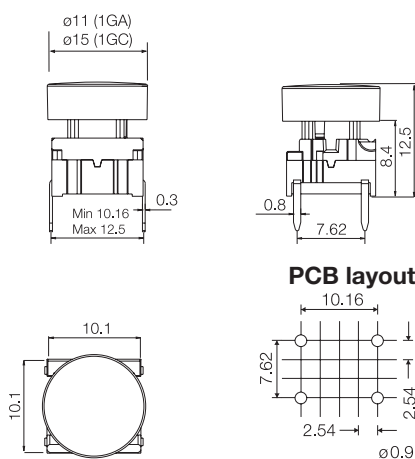

### Dimensions (w/extender)

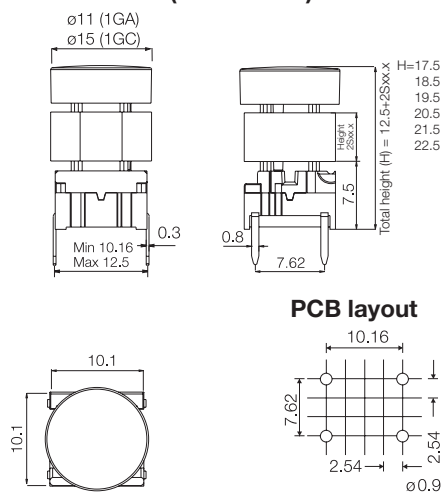

### Dimensions (SMD)

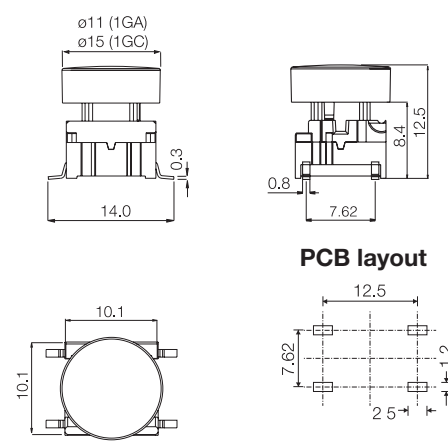

## How to order

**3 F**
**Switch**
☐
**Mounting**
**T** through-hole  
**S** surface mount

☐
**L 6** low temp.

**H 9** high temp.

**+**
**1 G A 0 9**
**Cap black**

**1 G C 0 9**
**Cap black**

**+**
**2 S 0 9 - . 0**
**Extender black**

(Optional)  
Adds 5-10 mm  
to total height.

**Height**
**05.0**
**06.0**
**07.0**
**08.0**
**09.0**
**10.0**

| Keycap  | Variable Extender | H (height) mm | Example |
|---------|-------------------|---------------|---------|
| 1GA/1GC |                   | 12.5          | H 1     |
| 1GA/1GC | 2S09-05.0         | 17.5          | H 2     |
|         | 2S09-06.0         | 18.5          |         |
|         | 2S09-07.0         | 19.5          |         |
|         | 2S09-08.0         | 20.5          |         |
|         | 2S09-09.0         | 21.5          |         |
|         | 2S09-10.0         | 22.5          | H 3     |

H = Overall height


Overall heights below 12.5 mm - Please see Multimec® versions 3C and 3E.

All 2S09 extenders are stackable giving the possibility to match most overall heights.

A = We recommend you to allocate enough space for travel of the foil and leave the area free from adhesive.

Switch travel = 1 mm.

H = We recommend you to calculate this dimension from the top of the PCB to the inner top of the panel.

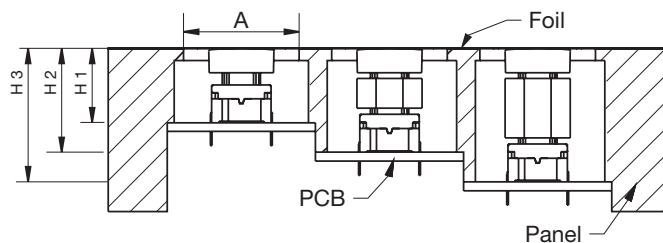
**Ordering example:** 3FTL6 + 1GA09 or 3FTL6 + 2S09-07.0 + 1GC09

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® 3C/3E

## Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  - low temp: -40/+115°C
  - high temp: -40/+160°C
- actuator:
  - in PPS: -40/+160°C
  - in polycarbonate: -40/+85°C



| Standard 3C               |                  | Variable heights 3E       |                  |
|---------------------------|------------------|---------------------------|------------------|
| Dimensions (through-hole) | Dimensions (SMD) | Dimensions (through-hole) | Dimensions (SMD) |
|                           |                  |                           |                  |
| PCB layout                | PCB layout       | PCB layout                | PCB layout       |
|                           |                  |                           |                  |

## How to order

**3 C**
**Switch**

**Mounting**
**T** through-hole  
**S** surface mount

**L 6** low temp. white  
**L 9** low temp. black  
**H 9** high temp.

**3 E**
**Switch**

**Mounting**
**T** through-hole  
**S** surface mount

**L** low temp.  
**H** high temp.

**9**

 Black  
 Actuator made of PPS

**Standard overall height**
**08.0**
**09.5**
**10.4**
**11.0**
**12.0**
**15.0**


## Custom heights:

3E is available in any height from 08.0 to 15.0mm.  
 Min. order qty. for custom heights is 2.000 pcs.

**3 E**
**Switch**

**Mounting**
**T** through-hole

**L** low temp.

**20** blue  
**23** grey  
**24** yellow  
**28** red  
**29** black  
 Actuator made of  
 polycarbonate

**Standard overall height**
**08.0**
**09.5**
**10.4**
**11.0**
**12.0**
**15.0**

Switch and 3E actuator can be delivered unassembled.

The actuators made of polycarbonate can also be used for high temperature switches, however they must be mounted after soldering and the temp. range will be reduced to 85°C.

**Ordering example:** 3CTL6 and 3ETL9-09.5 or 3ETL23-08.0


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

### Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range switch:  
low temp: -40/+115°C  
high temp: -40/+160 °C
- temperature range cap:  
-40/+160 °C




### Round ø5.2

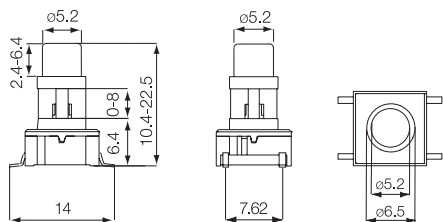


### Round ø7.8

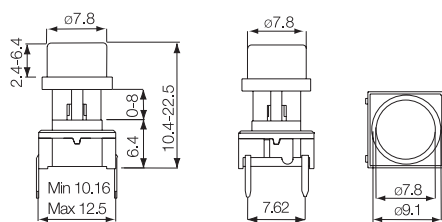



### Round ø11.6

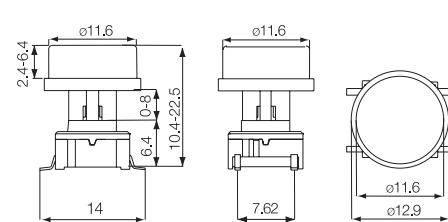

### PCB Layout (through-hole)




### PCB Layout (SMD)



### The Concept

- H** = Overall heights from 10.4-22.5  
**A** = Variable height from 2.4 to 6.4  
**A** cannot exceed **H** - 8.0  
**B** = Fixed recess 1.6  
**D** = Fixed switch 6.4  
**C** = Variable from 0-8.1  
**C** = **H-A-B-D**  
 All measurements in mm

### How to order



Switch

**3ETL**  
**3ESH**  
**3ETH**



Shape and Size

**A** 5.2 Round  
**E** 7.8 Round  
**K** 11.6 Round



Colour Codes

**60** blue  
**63** grey  
**64** yellow  
**68** red  
**69** black



Overall Height  
**H**

**A** 10.4  
**B** 11.0  
**C** 12.0  
**D** 12.5  
**E** 13.0  
**F** 14.0  
**G** 15.0  
**H** 16.0  
**J** 19.0  
**K** 22.5



Height above recess  
**A**

**A** 2.4  
**B** 3.0  
**C** 3.5  
**D** 4.0  
**E** 4.5  
**F** 5.0  
**G** 5.6  
**H** 6.4



Tape\*

**R**

### Cap alone:

Instead of part no. for switch please use 3E- and then same as above

### Examples Switch and Cap:

3ETLE64CC = Switch 3ETL, 7.8 Round Cap, Yellow, Overall Height 12.0, Height above recess 3.5, (Height under recess 0.5).

### Example Cap Alone:

3E-E63FF = Cap, 7.8 Round, Grey, Overall Height with switch 14.0, Height above recess 5.0, (Height under recess 1.0).

Min. order is 2.000 pcs. per shape, size and heights for parts mentioned above.

For heights not mentioned in the list a start-up fee will apply.

\*Only overall height up to 12.5mm can be supplied on tape.


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

### Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range switch:  
low temp: -40/+115°C  
high temp: -40/+160°C
- temperature range cap:  
-40/+160°C




#### Square 5.2

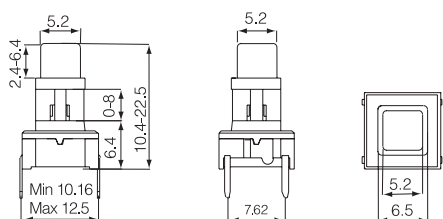


#### Square 7.8

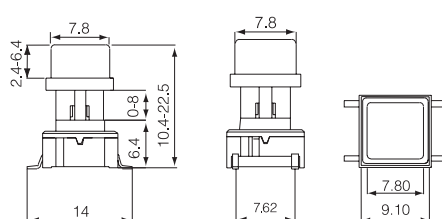



#### Square 11.6

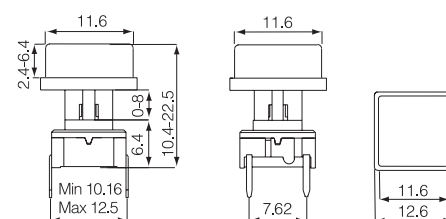

#### PCB Layout (through-hole)



#### PCB Layout (SMD)



### The Concept

- H** = Overall heights from 10.4 - 22.5  
**A** = Variable height from 2.4 to 6.4  
**A** cannot exceed **H** - 8.0  
**B** = Fixed recess 1.6  
**D** = Fixed switch 6.4  
**C** = Variable from 0-8.1  
**C** = **H** - **A** - **B** - **D**  
 All measurements in mm

### How to order


**Switch**

**3ETL**  
**3ESH**  
**3ETH**


**Shape and Size**

**B** 5.2 Square  
**F** 7.8 Square  
**L** 11.6 Square


**Colour Codes**

**60** blue  
**63** grey  
**64** yellow  
**68** red  
**69** black


**Overall Height**  
**H**

**A** 10.4  
**B** 11.0  
**C** 12.0  
**D** 12.5  
**E** 13.0  
**F** 14.0  
**G** 15.0  
**H** 16.0  
**J** 19.0  
**K** 22.5


**Height above recess**  
**A**

**A** 2.4  
**B** 3.0  
**C** 3.5  
**D** 4.0  
**E** 4.5  
**F** 5.0  
**G** 5.6  
**H** 6.4


**Tape\***

**R**

### Cap alone:

Instead of part no. for switch please use 3E- and then same as above

### Examples Switch and Cap:

3ESHB60AA = Switch 3ESH, 5.2 Square Cap, Blue, Overall Height 10.4, Height above recess 2.4, (Height under recess 0).

### Example Cap Alone:

3E-E63FF = Cap, 7.8 Square, Grey, Overall Height with switch 14.0, Height above recess 5.0, (Height under recess 1.0).

Min. order is 2.000 pcs. per shape, size and heights for parts mentioned above.

For heights not mentioned in the list a start-up fee will apply.

\*Only overall height up to 12.5 mm can be supplied on tape.


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

### Technical Data


- through-hole only
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C




### Dimensions 3CTRAS




PCB layout




### Dimensions 3ETRAS




PCB layout




### Dimensions 3FTRAS




PCB layout



### Dimensions 3FTRAS w/LED



PCB layout (top view)



### How to order

**3**

Switch  
3C  
3F

**T**

Mounting  
T through-hole

**L 6**

L 6 low temp.

**R A S**

Right angle support

3FTL6RAS - for caps 1D-1K-1P-1S see page 31

**3 E**

Switch

**T**

Mounting  
T through-hole

**L**

L low temp.

**9**

black  
20 blue  
23 grey  
24 yellow  
28 red  
29 black

Actuator made of PPS

Two digit colour code means  
actuators made of polycarbonate

Switch and 3E actuator can be  
delivered unassembled.

**-**

**. R A S**

Actuator height

1.6  
3.1  
4.0  
4.6  
5.6  
8.6

**3 F**

Switch

**T**

Mounting  
T through-hole

**L 6**

L 6 low temp.

**LED**

00 blue  
20 green  
40 yellow  
60 white  
80 red  
2040 green/yellow  
8020 red/green  
8040 red/yellow

**R A S**

Right angle support

3FTL6RAS w/LED can be used with the keycaps:  
1D, 1E, 1F, 1K, 1N, 1Q, 1R, 1S, 1T, 1U, 1V, 1WA, 1WD,  
1WP, 1X

Ask for drawings/dimensions for these keycaps with  
3FTL6RAS w/LED

Ordering example: 3FTL620RAS + 1Q096

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec®


## RAS + 1D/1K/1P/1S

### Technical Data


- through-hole only
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C




### Dimensions 1D

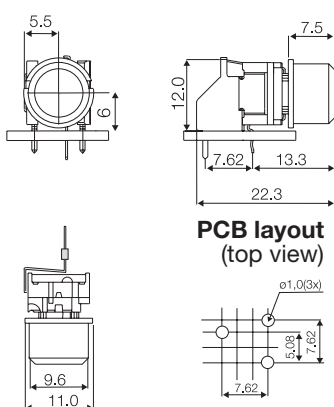


### Dimensions 1K

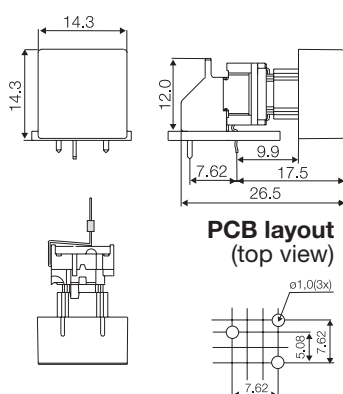

### Dimensions 1P

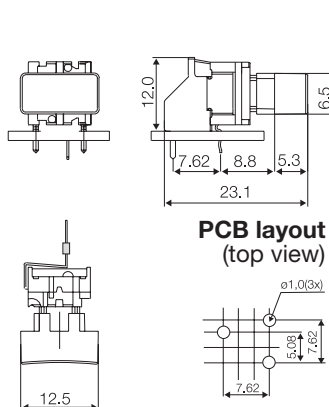

### Dimensions 1S

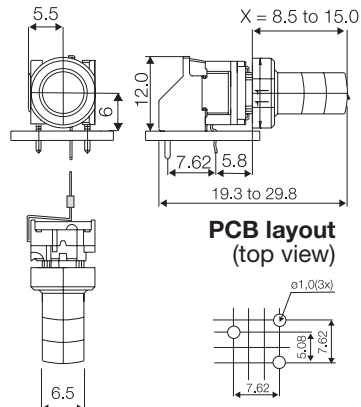

### How to order

|               |                       |                      |                            |            |                                                                                     |                  |                      |                            |
|---------------|-----------------------|----------------------|----------------------------|------------|-------------------------------------------------------------------------------------|------------------|----------------------|----------------------------|
| <b>3 F</b>    | <b>T</b>              | <b>L 6</b>           | <b>R A S</b> +             | <b>1 D</b> | <b>Cap</b>                                                                          | <b>00</b> blue   | <b>30</b> ultra blue | <b>50</b> metal dark blue  |
| <b>Switch</b> | <b>Mounting</b>       | <b>L 6</b> low temp. | <b>Right angle support</b> |            |  | <b>02</b> green  | <b>40</b> dusty blue | <b>53</b> metal light grey |
|               | <b>T</b> through-hole |                      |                            |            |                                                                                     | <b>03</b> grey   | <b>42</b> aqua blue  | <b>57</b> metal dark grey  |
|               |                       |                      |                            |            |                                                                                     | <b>04</b> yellow | <b>32</b> mint green | <b>58</b> metal bordeaux   |
|               |                       |                      |                            |            |                                                                                     | <b>06</b> white  | <b>33</b> tele grey  |                            |
|               |                       |                      |                            |            |                                                                                     | <b>08</b> red    | <b>34</b> melon      |                            |
|               |                       |                      |                            |            |                                                                                     | <b>09</b> black  | <b>38</b> noble red  |                            |

### 1 P

|                                                                                     |                 |
|-------------------------------------------------------------------------------------|-----------------|
| <b>Cap</b>                                                                          | <b>00</b> blue  |
|  | <b>03</b> grey  |
|                                                                                     | <b>08</b> red   |
|                                                                                     | <b>09</b> black |

### 1 K 1 6

|                                                                                     |                  |
|-------------------------------------------------------------------------------------|------------------|
| <b>Cap</b>                                                                          | <b>00</b> blue   |
|  | <b>02</b> green  |
|                                                                                     | <b>03</b> grey   |
|                                                                                     | <b>04</b> yellow |
|                                                                                     | <b>06</b> white  |
|                                                                                     | <b>08</b> red    |
|                                                                                     | <b>09</b> black  |

### 2 K

|                                                                                       |                 |
|---------------------------------------------------------------------------------------|-----------------|
| <b>Bezel</b>                                                                          | <b>03</b> grey  |
|  | <b>06</b> white |
|                                                                                       | <b>08</b> red   |
|                                                                                       | <b>09</b> black |

Other keycaps such as 1GA, 1GC, 1N, 1T, 1U, 1V, 1WA, 1WD, 1WP and 1X can be used on 3FTL6RAS. It may require reducing the size of the PCB to the front side of the switch body to avoid the cap touching the PCB. Ask for drawings/dimensions for these keycaps with 3FTL6RAS.

Please also see 3FTL6RAS with LED on page 30.

\*Any cap height X from 8.5 to 15.0 mm is available.  
Please order 1S09-H, where H = X+7.5 mm

Min. order quantity for custom heights is 2.000 pcs.








### 1 S 0 9 - .








|                                                                                     |          |            |
|-------------------------------------------------------------------------------------|----------|------------|
| <b>Cap black</b>                                                                    | <b>H</b> | <b>X *</b> |
|  | 16.0     | 8.5        |
|                                                                                     | 19.0     | 11.5       |
|                                                                                     | 22.5     | 15.0       |

**Ordering example:** 3FTL6RAS+1K0016 + 2K03





For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® basic switch modules


| Through-hole Versions                                                                                                                           |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 3A                                                                                                                                              | 3C                                                                                | 3E                                                                                | 3F                                                                                | 3F                                                                                 | 3F                                                                                  | 3F                                                                                  |
| For 1A/1B/1M/1ZA/1ZB                                                                                                                            | w/LED for 1C/1H                                                                   | For 3E actuators/Varimec                                                          | For 1D/1K/1N/1P/1S/1T/1U/1V/1WA/1WD/1WG/1WP/1X/1ZC/1GA/1GC                        | w/LED for 1D/1E/1F/1N/1Q/1R/1S/1X                                                  | w/LED for 1K/1KB/1KC/1T/1U/1V/1WA/1WD/1WP                                           |                                                                                     |
|                                                                 |  |  |  |  |  |  |
| Standard Versions                                                                                                                               |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| 3ATL6<br>3ATH9                                                                                                                                  | 3ATL600/20/40/80                                                                  | 3CTL6/3CTL9<br>3CTH9                                                              | 3ETLXX-H*<br>3ETHXX-H*                                                            | 3FTL6<br>3FTH9                                                                     | 3FTL600/20/40/60/80/<br>2040/8020/8040                                              | 3FTL623/45/88                                                                       |
| * 3E available in 6 standard heights: 08.0, 09.5, 10.4, 11.0, 12.0, 15.0 mm. Other heights between 08.0 and 15.0 mm are available upon request. |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Specials: Gold contacts, quiet version and actuation force other than 3.0N                                                                      |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |

| Surface Mount Versions                                                            |                                                                                    |                                                                                    |                                                                                    | illumec™ Through-hole Versions                                                      |                                                                                      | illumec™ Surface Mount Versions                                                      |                                                                                      |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 3A                                                                                | 3C                                                                                 | 3E                                                                                 | 3F                                                                                 | 4AT w/LEDs                                                                          | 4FT w/LEDs                                                                           | 4AS w/LEDs                                                                           | 4FS w/LEDs                                                                           |
| For 1A/1B/1M/1ZA/1ZB                                                              |                                                                                    | For 3E actuators/Varimec                                                           | For 1D/1K/1N/1P/1S/1T/1U/1V/1WA/1WD/1WP/1X/1ZC/1GA/1GC                             | For 1C/1H                                                                           | For 1D/1E/1F/1K/1KB/1KC/1N/1Q/1R/1S/1T/1U/1V/1WA/1WD/1WP/1X                          | For 1C/1H                                                                            | For 1D/1E/1F/1K/1KB/1KC/1N/1Q/1R/1S/1T/1U/1V/1WA/1WD/1WP/1X                          |
|  |  |  |  |  |  |  |  |
| Standard Versions                                                                 |                                                                                    |                                                                                    |                                                                                    | Standard Versions                                                                   |                                                                                      |                                                                                      |                                                                                      |
| 3ASH9/3ASH9R                                                                      | 3CSH9/3CSH9R                                                                       | 3ESH9/3ESH9R                                                                       | 3FSH9/3FSH9R                                                                       | 4ATH901/22/42/61/82/<br>2242/8222/8242                                              | 4FTH901/22/42/61/82/<br>2242/8222/8242                                               | 4ASH901/22/42/61/82/<br>2242/8222/8242                                               | 4FSH901/22/42/61/82/<br>2242/8222/8242                                               |

Co-planarity = ≤ 0.05

| Right Angle Versions                                                               |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 3C                                                                                 | 3E                                                                                  | 3F                                                                                  | 3F w/LED                                                                            |
|                                                                                    | For 3E actuators/Varimec                                                            | For 1D/1K/1N/1P/1S/1T/1U/1V/1W/1WA/1WD/1WP/1X/1ZC/1GA/1GC                           | For 1D/1E/1F/1N/1Q/1R/1S/1X                                                         |
|  |  |  |  |
| Standard Versions                                                                  |                                                                                     |                                                                                     |                                                                                     |
| 3CTL6RAS                                                                           | 3ETXX-X.XRAS                                                                        | 3FTL6RAS                                                                            | 3FTL600/20/40/60/80/<br>2040/8020/8040RAS                                           |

## multimec® Cross Section

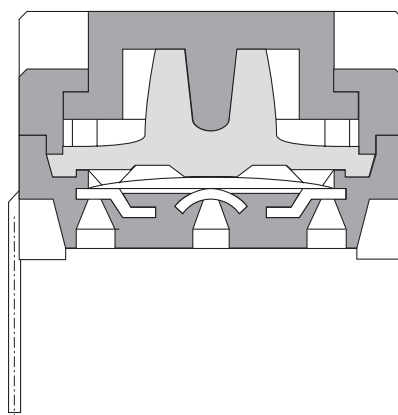


DIMENSIONS (mm) Unless otherwise specified, all tolerances ± 0.2


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® basic switches and tape & reel

## Recommended PCB layout

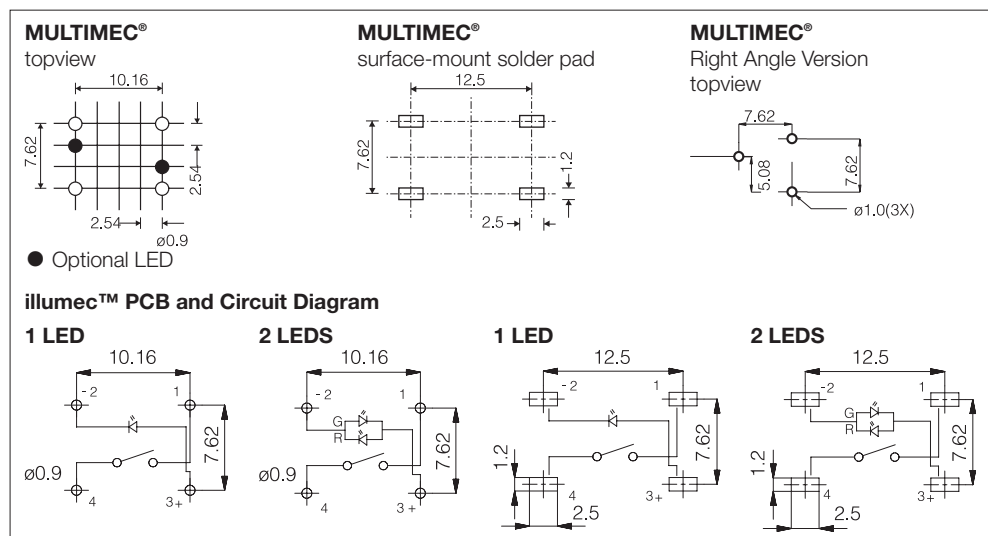

## Operating Force (typical example)

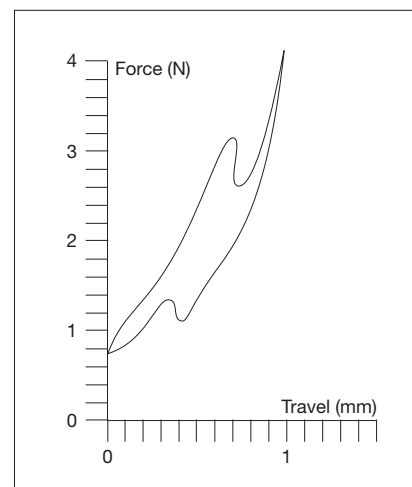

Tape and reel is available for the parts listed and has the following specifications:

|                               |                      |
|-------------------------------|----------------------|
| <b>Reel diameter</b>          | ø330mm               |
| <b>Tape width</b>             | 24mm                 |
| <b>Pitch</b>                  | see list             |
| <b>Tape and reel material</b> | antistatic or better |
| <b>Quantity per reel</b>      | see list             |

### 3A/3C/3E/3F multimec® tape & reel


| Part No.                                    | Ordering Code | Pitch | Quantity per reel |
|---------------------------------------------|---------------|-------|-------------------|
| 3ASH9                                       | 3ASH9R        | 16    | 500               |
| 3CSH9                                       | 3CSH9R        | 16    | 500               |
| 3ESH9                                       | 3ESH9R        | 16    | 500               |
| 3ESH9-08.0                                  | 3ESH9R08.0    | 20    | 250               |
| 3ESH9-09.5                                  | 3ESH9R09.5    | 20    | 250               |
| 3ESH9-10.4                                  | 3ESH9R10.4    | 20    | 250               |
| 3ESH9-11.0                                  | 3ESH9R11.0    | 20    | 250               |
| 3ESH9-12.0                                  | 3ESH9R12.0    | 20    | 250               |
| All varimec below R after the part no. 12.5 |               | 20    | 250               |
| 3FSH9                                       | 3FSH9R        | 20    | 250               |

### 4F illumec™ tape & reel


| Part No.  | Ordering Code | Pitch | Quantity per reel |
|-----------|---------------|-------|-------------------|
| 4FSH901   | 4FSH901R      | 20    | 250               |
| 4FSH922   | 4FSH922R      | 20    | 250               |
| 4FSH942   | 4FSH942R      | 20    | 250               |
| 4FSH961   | 4FSH961R      | 20    | 250               |
| 4FSH982   | 4FSH982R      | 20    | 250               |
| 4FSH92242 | 4FSH92242R    | 20    | 250               |
| 4FSH98222 | 4FSH98222R    | 20    | 250               |
| 4FSH98242 | 4FSH98242R    | 20    | 250               |

Specifications are according to EIA 600481-3 and IEC 60286-3


## Circuit Diagram

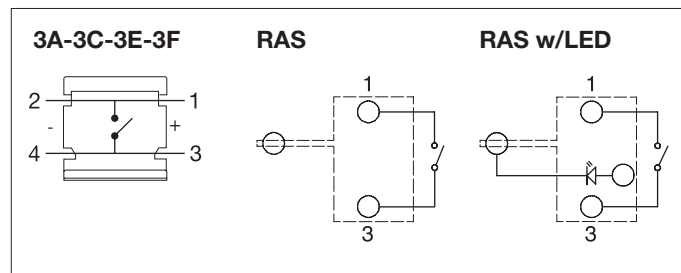

## How to Assemble

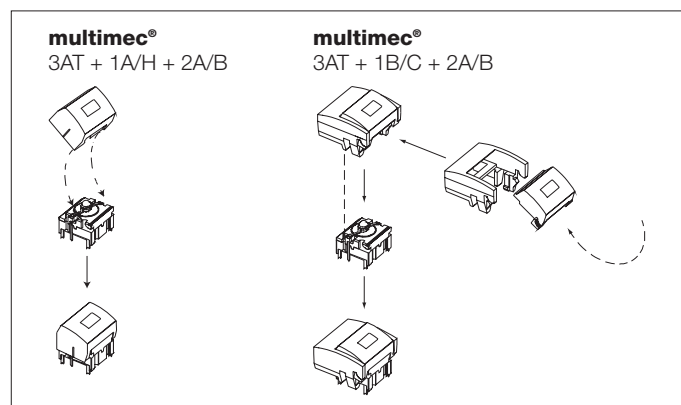

## Mounting Tool for Through-hole versions

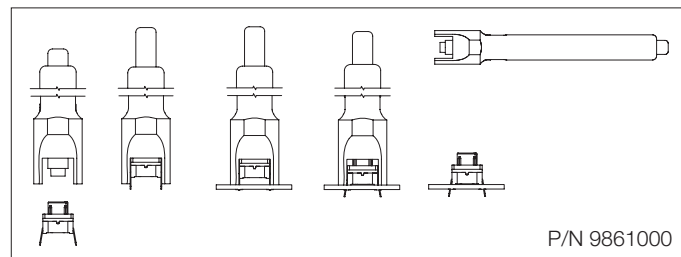


Specifications are subject to change without notice.


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

## Basic switch spacing

through-hole




surface-mount

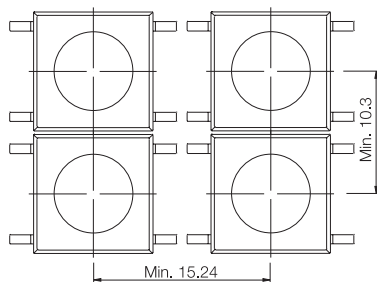


## Recommended switch/cap spacing


Switch spacing

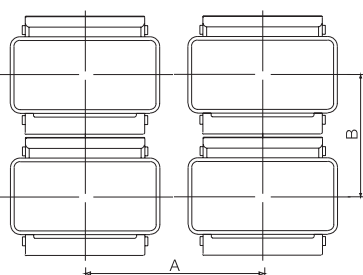

Cap dimension



Panel cut-out





Panel Cut-out

1N







1V

1T

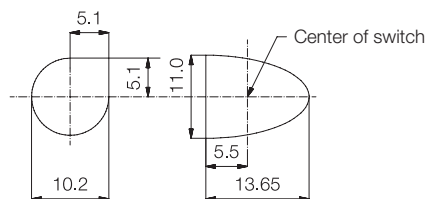

Spacing in mm

## Spacing examples

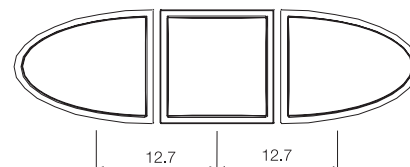multimec®  
3AT + 1B/C + 2A/Bmultimec®  
3AS + 1B + 2A/B  
4AS + 1B/1C + 2C/2Dmultimec®  
3AT + 1A/Hmultimec®  
3AT + 1Mmultimec®  
1N + 1N + 1Nmultimec®  
1V + 1T + 1V

| Cap series             | Recommended*<br>min. switch spacing AxB | Nominal cap dimension<br>W x H | Recommended<br>min. panel cut-out |
|------------------------|-----------------------------------------|--------------------------------|-----------------------------------|
| 1A                     | 12.7 x 10.16                            | 12.6 x 10.1                    | 13.0 x 10.5                       |
| 1B/1C+2A/2B            | 15.24 x 15.24                           | 15.1 x 15.1                    | 15.5 x 15.5                       |
| 1D/1E/1F               | 12.7 x 12.7                             | ø9.6                           | ø10.0                             |
| 1K                     | 15.24 x 15.24                           | 14.3 x 14.3                    | 14.7 x 14.7                       |
| 1M                     | 25.4 x 10.16                            | 25.0 x 10.1                    | 25.7 x 10.5                       |
| 1N                     | 12.7 x 12.7                             | ø9.8/□4.9                      | ø10.2/□5.1                        |
| 1P/1Q/1R               | 15.24 x 10.16                           | 6.5 x 12.5                     | 7.0 x 13.0, R Max. 1.0            |
| 1S                     | 12.7 x 10.16                            | ø6.5                           | ø7.0                              |
| 1T                     | 12.7 x 12.7                             | 10.6 x 10.6                    | 11.0 x 11.0                       |
| 1U                     | 12.7 x 12.7                             | ø10.6                          | ø11.0                             |
| 1V (pointing outwards) | 12.7 x 12.7                             | 10.6 x 13.25                   | 11.0 x 13.65                      |
| 1X                     | 12.7 x 12.7                             | 9.4 x 7.4                      | 9.8 x 7.9                         |

\*A dimension with surface mount version is min. 15.24. Depending on manufacturing technology it may be necessary either to reduce pad dimension, or to increase spacing.

In all applications the total assembly tolerance must be analysed by the user (board tolerance, front panel, assembly accuracy), to secure enough room for a free switch movement in the final product. The specifications on this page are to be considered as an aid only. MEC cannot be held responsible for the final assembly.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec<sup>®</sup>

## technical specifications

### RoHS Compatible

|                                             | 3A-3C-3E-3F<br>Low Temperature Versions                                                           |                        | 3A-3C-3E-3F<br>High Temperature Versions                                                  |                        | illumec™ 4A - 4F<br>High Temperature Versions                                             |                        |
|---------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------------------------------------------------|------------------------|
|                                             | Silver                                                                                            | Gold                   | Silver                                                                                    | Gold                   | Silver                                                                                    | Gold                   |
| Electrical Specifications                   |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Contact resistance                          | <30m Ω - typ. 10m Ω                                                                               |                        | <30m Ω - typ. 10m Ω                                                                       |                        | <30m Ω - typ. 10 m Ω                                                                      |                        |
| Insulation resistance                       | >10M Ω                                                                                            |                        | >10M Ω                                                                                    |                        | >10M Ω                                                                                    |                        |
| Recommended load                            | 0.5-50mA 24VDC                                                                                    | 0.5μ-50mA 24VDC        | 0.5-50mA 24VDC                                                                            | 0.5μ-50mA 24VDC        | 0.5-50mA 24VDC                                                                            | 0.5μ-50mA 24VDC        |
| Contact bounce                              | <2mS - typically 0.5mS                                                                            |                        | <2mS - typically 0.5mS                                                                    |                        | <2mS - typically 0.5mS                                                                    |                        |
| Mechanical Specifications                   |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Standard actuation force (switch)           | 3.0N typ.                                                                                         |                        | 3.0N typ.                                                                                 |                        | 3.0N typ.                                                                                 |                        |
| Max. actuation force without cap            | 100N for 10 sec.                                                                                  |                        | 100N for 10 sec.                                                                          |                        | 100N for 10 sec.                                                                          |                        |
| Key travel (switch)                         | 1 mm                                                                                              |                        | 1 mm                                                                                      |                        | 1 mm                                                                                      |                        |
| Life time (switch)                          | >10.000.000 cycles                                                                                |                        | >10.000.000 cycles                                                                        |                        | >10.000.000 cycles                                                                        |                        |
| Temperature Range                           |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Working temperature                         | Min. -40°C Max. +115°C                                                                            |                        | Min. -40°C Max. +160°C                                                                    |                        | Min. -30°C Max. +85°C*                                                                    |                        |
| Storage temperature                         | Min. -40°C Max. +115°C                                                                            |                        | Min. -40°C Max. +160°C                                                                    |                        | Min. -30°C Max. +85°C*                                                                    |                        |
| Soldering IEC 68-2-20                       | Wave - max. 260°C for max. 10 sec., please refer to usage guidelines.                             |                        | Infrared, vapour phase, wave - max. 240°C for max. 40 sec. or max. 260°C for max. 30 sec. |                        | Infrared, vapour phase, wave - max. 240°C for max. 40 sec. or max. 260°C for max. 30 sec. |                        |
|                                             | Soldering iron - max. 350°C for max. 3 sec.                                                       |                        | Soldering iron - max. 350°C for max. 3 sec.                                               |                        | Soldering iron - max. 350°C for max. 3 sec.                                               |                        |
|                                             | Flux tight.                                                                                       |                        | Flux tight.                                                                               |                        | Flux tight.                                                                               |                        |
| Environmental Endurance IEC 68-2-3          |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Temperature                                 | +40°C                                                                                             |                        | +40°C                                                                                     |                        | +40°C                                                                                     |                        |
| Humidity                                    | 93% RH                                                                                            |                        | 93% RH                                                                                    |                        | 93% RH                                                                                    |                        |
| Duration                                    | 56 Days                                                                                           |                        | 56 Days                                                                                   |                        | 56 Days                                                                                   |                        |
| Temperature Cycling IEC 68-2-14             |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Temperature limit                           | Min. -40°C - Max. +125°C                                                                          |                        | Min. -40°C - Max. +125°C                                                                  |                        | Min. -40°C - Max. +125°C                                                                  |                        |
| Number of cycles                            | 10                                                                                                |                        | 10                                                                                        |                        | 10                                                                                        |                        |
| Exposure time at each temperature           | 30 min.                                                                                           |                        | 30 min.                                                                                   |                        | 30 min.                                                                                   |                        |
| Recovery time before measurements           | 16 hrs.                                                                                           |                        | 16 hrs.                                                                                   |                        | 16 hrs.                                                                                   |                        |
| Sealing IEC 529                             | IP-67                                                                                             |                        | IP-67                                                                                     |                        | IP-67                                                                                     |                        |
| Cleaning                                    | Standard methods - see usage guidelines                                                           |                        | Standard methods - see usage guidelines                                                   |                        | Standard methods - see usage guidelines                                                   |                        |
| Vibration Test IEC 68-2-6                   |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Cycles                                      |                                                                                                   |                        |                                                                                           |                        | 10                                                                                        |                        |
| Cycles time                                 |                                                                                                   |                        |                                                                                           |                        | 2 hrs.                                                                                    |                        |
| Material Specifications - Switches          |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Housing                                     | PBT UL94VO                                                                                        |                        | PPS UL94VO                                                                                |                        | PPS UL94VO                                                                                |                        |
| Actuator                                    | PBT UL94VO                                                                                        |                        | PPS UL94VO                                                                                |                        | PPS UL94VO                                                                                |                        |
| Sealing + spring                            | Silicone rubber                                                                                   |                        | Silicone rubber                                                                           |                        | Silicone rubber                                                                           |                        |
| Contact spring                              | Stainless steel + 3μAg                                                                            | Stainless steel + 1μAu | Stainless steel + 3μAg                                                                    | Stainless steel + 1μAu | Stainless steel + 3μAg                                                                    | Stainless steel + 1μAu |
| Fixed contacts                              | SnCu + 2μNI + 3μAg                                                                                | SnCu + 2μNI + 1μAu     | SnCu + 2μNI + 3μAg                                                                        | SnCu + 2μNI + 1μAu     | SnCu + 2μNI + 3μAg                                                                        | SnCu + 2μNI + 1μAu     |
| Terminals                                   | SnCu + 2μNI + 3μSn100                                                                             | SnCu + 2μNI + 3μSn100  | SnCu + 2μNI + 3μSn100                                                                     | SnCu + 2μNI + 3μSn100  | SnCu + 2μNI + 3μSn100                                                                     | SnCu + 2μNI + 3μSn100  |
| Material Specifications - Caps & Bezels     |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| Material                                    | Parts                                                                                             |                        |                                                                                           | Temp limit             | UL rating                                                                                 |                        |
| ABS                                         | 1A, 1B, 1C, 1D, 1E, 1F, 1H, 1K, 1M, 1N, 1P, 1Q, 1R, 1T, 1U, 1V, 1WA, 1WD, 1WP, 1X, 1ZA, 1ZB, 1ZC. |                        |                                                                                           | Max. 65°C              | UL94HB                                                                                    |                        |
| Polycarbonate                               | All lenses, 3E coloured actuators                                                                 |                        |                                                                                           | Max. 85°C              | UL94V1                                                                                    |                        |
| LCP                                         | Black actuator of 3E                                                                              |                        |                                                                                           | Max. 160°C             | UL94VO                                                                                    |                        |
| PPS                                         | 1S, 2S                                                                                            |                        |                                                                                           | Max. 160°C             | UL94VO                                                                                    |                        |
| Polyamide                                   | Actuator of Varimec™, 1GA/1GC                                                                     |                        |                                                                                           | Max. 160°C             | UL94VO                                                                                    |                        |
| Legends Adhesion                            |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |
| ISO Class: 1/ASTM Class: 4B DIN EN ISO 2409 |                                                                                                   |                        |                                                                                           |                        |                                                                                           |                        |

\* LED max. working temperature

Specifications are subject to change without notice.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

## For 3A switches

## 3AXXX (for 1C/1H)

## 2BXXX

| Colour                                       |                                                         | B          | G                   | Y    | R    | G                   | Y    | R    |  |
|----------------------------------------------|---------------------------------------------------------|------------|---------------------|------|------|---------------------|------|------|--|
| Colour Codes                                 |                                                         | 00         | 20                  | 40   | 80   | 20                  | 40   | 80   |  |
| Absolute Maximum Ratings (Ta=25°C)           |                                                         |            |                     |      |      |                     |      |      |  |
| Power                                        | mW                                                      | 105        | 100                 | 60   | 100  | 75                  | 60   | 60   |  |
| Current forward                              | mA                                                      | 30         | 30                  | 20   | 30   | 20                  | 20   | 20   |  |
| Forward peak current                         | mA                                                      | 150        | 120                 | 80   | 120  | 60**                | 60** | 60** |  |
| Voltage reverse                              | V                                                       | 5          | 5                   | 5    | 5    | 3                   | 3    | 3    |  |
| Operating temperature                        | °C                                                      | -40 - +85  | -55 - +100          |      |      | -25 - +85           |      |      |  |
| Storage temperature                          | °C                                                      | -40 - +85  | -55 - +100          |      |      | -30 - +100          |      |      |  |
| Soldering temperature                        | °C                                                      | 260/5 sec. | 260 for max. 3 sec. |      |      | 260 for max. 5 sec. |      |      |  |
| Electrical-Optical Characteristics (Ta=25°C) |                                                         |            |                     |      |      |                     |      |      |  |
| Voltage forward                              | Typ. V                                                  | 3.8        | 2.1*                | 2.1* | 2.0* | 2.1                 | 2.1  | 2.0  |  |
|                                              | Max. V                                                  | 4.5        | 2.8*                | 2.8* | 2.8* | 3.0                 | 3.0  | 3.0  |  |
| Current reverse (VR = 5V)                    | µA                                                      | 10         | 100                 | 100  | 100  | 10                  | 10   | 10   |  |
| Wave length                                  | nm                                                      | 466        | 565                 | 585  | 630  | 563                 | 585  | 650  |  |
| Spread                                       | Δnm                                                     | 30         | 30                  | 35   | 40   | 40                  | 40   | 40   |  |
| Spread angle                                 | degree                                                  | 40         | 90                  | 90   | 90   | 45                  | 45   | 45   |  |
| Luminous Intensity                           | Min. mcd                                                | 4          | 0.7                 | 1.7  | 1.1  | 9.0                 | 5.6  | 5.6  |  |
|                                              | Typ. mcd                                                | 10         | 2.5                 | 5.6  | 3.7  | 25                  | 16   | 16   |  |
| Orientation                                  | The longer pin is the anode, the shorter is the cathode |            |                     |      |      |                     |      |      |  |

\*/F = 20mA, \*\*Pulse width 1ms Duty cycle 1:5

## For 3F switches

## 3FXXX (for 1E-1F-1N-1Q-1R-1S-1X)

## 3FXXX (for 1K-1T-1U-1V-1W-1WD)

| Colour                                       |                                                                                                                                        | B                   | G    | Y    | R    | G/Y                 | R/G     | R/Y     | G                   | Y       | R       |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|------|------|---------------------|---------|---------|---------------------|---------|---------|
| Colour Codes                                 |                                                                                                                                        | 00                  | 20   | 40   | 80   | 2040                | 8020    | 8040    | 23                  | 45      | 88      |
| Absolute Maximum Ratings (Ta=25°C)           |                                                                                                                                        |                     |      |      |      |                     |         |         |                     |         |         |
| Power                                        | mW                                                                                                                                     | 105                 | 70   | 60   | 60   | 120                 | 120     | 120     | 150                 | 130     | 300     |
| Current forward                              | mA                                                                                                                                     | 30                  | 20   | 20   | 20   | 25                  | 25      | 25      | 40                  | 40      | 90      |
| Forward peak current                         | mA                                                                                                                                     | 200                 | 60** | 60** | 60** | 150                 | 150     | 150     | 500                 | 500     | 1000    |
| Voltage reverse                              | V                                                                                                                                      | 5                   | 3    | 3    | 3    | 5                   | 5       | 5       | 12                  | 12      | 5       |
| Operating temperature                        | °C                                                                                                                                     | -25 - +85           |      |      |      | -40 - +85           |         |         | -55 - +100          |         |         |
| Storage temperature                          | °C                                                                                                                                     | -30 - +100          |      |      |      | -40 - +85           |         |         | -55 - +100          |         |         |
| Soldering temperature                        | °C                                                                                                                                     | 260 for max. 5 sec. |      |      |      | 260 for max. 2 sec. |         |         | 300 for max. 3 sec. |         |         |
| Electrical-Optical Characteristics (Ta=25°C) |                                                                                                                                        |                     |      |      |      |                     |         |         |                     |         |         |
| Voltage Forward                              | Typ. V                                                                                                                                 | 2.1                 | 2.1  | 2.1  | 2.0  | 2.1                 | 2.1     | 2.1     | 2.1*                | 2.3***  | 2.4***  |
|                                              | Max. V                                                                                                                                 | 2.8                 | 3.0  | 3.0  | 3.0  | 2.8                 | 2.8     | 2.8     | 2.5*                | 2.5***  | 3.8***  |
| Current reverse (VR = 5V)                    | µA                                                                                                                                     | 2                   | 10   | 10   | 10   | 2                   | 2       | 2       | 10                  | 10      | 10      |
| Wave length                                  | nm                                                                                                                                     | 460                 | 563  | 585  | 650  | 565/590             | 625/565 | 625/590 | 570                 | 587     | 635     |
| Spread                                       | Δnm                                                                                                                                    | 40                  | 40   | 40   | 40   | 35                  | 35      | 35      | 25                  | 45      | 45      |
| Spread angle                                 | degree                                                                                                                                 | 20                  | 45   | 45   | 45   | 60                  | 60      | 60      | 80                  | 90      | 55      |
| Luminous Intensity                           | Min. mcd                                                                                                                               | 20                  | 9.0  | 5.6  | 5.6  | 8                   | 8       | 8       | 71****              | 71****  | 100**** |
|                                              | Typ. mcd                                                                                                                               | 25                  | 25   | 16   | 16   | 25                  | 25      | 25      | 112****             | 112**** | 160**** |
| Orientation                                  | The longer pin is the anode, the shorter is the cathode. For bicolor LEDs the anode for the first colour (ex. 2080) is the longer pin. |                     |      |      |      |                     |         |         |                     |         |         |

\*\*\*F = 50mA, \*\*\*\*Luminous Flux mlm

## For 4A/4F switches

## illumeC™ LEDs specifications

| Colour                                       |          | B                    | G    | Y    | W    | R    |
|----------------------------------------------|----------|----------------------|------|------|------|------|
| Colour Codes                                 |          | 01                   | 22   | 42   | 61   | 82   |
| Absolute Maximum Ratings (Ta=25°C)           |          |                      |      |      |      |      |
| Power                                        | mW       | 60                   | 65   | 65   | 80   | 65   |
| Current forward                              | mA       | 20                   | 25   | 25   | 15   | 25   |
| Forward peak current                         | mA       | 150                  | 150  | 100  | 200  | 100  |
| Voltage reverse                              | V        | 5                    | 12   | 12   | 5    | 12   |
| Operating temperature                        | °C       | -30 - +85            |      |      |      |      |
| Storage temperature                          | °C       | -30 - +85            |      |      |      |      |
| Soldering temperature                        | °C       | 245 for max. 10 sec. |      |      |      |      |
| Electrical-Optical Characteristics (Ta=25°C) |          |                      |      |      |      |      |
| Voltage forward                              | Typ. V   | 3.35                 | 2.2  | 2    | 3.05 | 2    |
|                                              | Max. V   | 3.5                  | 2.5  | 2.5  | 3.2  | 2.5  |
| Current reverse (VR = 5V)                    | µA       | 0.01                 | 0.02 | 0.01 | 0.01 | 0.01 |
| Wave length                                  | nm       | 470                  | 570  | 588  | n.a. | 633  |
| Spread                                       | Δnm      | n.a.                 | 30   | 16   | n.a. | 16   |
| Spread angle                                 | degree   | 145                  | 160  | 160  | 138  | 160  |
| Luminous Intensity                           | Min. mcd | 30                   | 28   | 112  | 28   | 112  |
|                                              | Typ. mcd | 35                   | 70   | 150  | 35   | 150  |
| Optical Intensity                            | Lm/w     | 4                    |      |      | 2.5  |      |

B= Blue, G= Green, Y= Yellow, R= Red, W= White, G/Y= Green/Yellow, R/G= Red/Green, R/Y= Red/Yellow

Specifications are subject to change without notice.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® Solid Colours

|                           |                                                                                                         |                                                                                                          |                                                                                                         |                                                                                                           |                                                                                                            |                                                                                                          |                                                                                                            |
|---------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| No.<br>Colour<br>RAL Code | <br>00<br>blue<br>5012 | <br>02<br>green<br>6018 | <br>03<br>grey<br>7004 | <br>04<br>yellow<br>1023 | <br>06<br>white<br>9010 | <br>08<br>red<br>3000 | <br>09<br>black<br>9004 |
|---------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|

|                           |                                                                                                               |                                                                                                               |                                                                                                              |                                                                                                          |                                                                                                                |                                                                                                                 |                                                                                                                |
|---------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| No.<br>Colour<br>RAL Code | <br>30<br>ultra blue<br>5002 | <br>32<br>mint green<br>6029 | <br>33<br>tele grey<br>7046 | <br>34<br>melon<br>1028 | <br>38<br>noble red<br>3002 | <br>40<br>dusty blue<br>5014 | <br>42<br>aqua blue<br>5021 |
|---------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|

## Metallic Colors

|                           |                                                                                                                     |                                                                                                                      |                                                                                                                     |                                                                                                                    |
|---------------------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| No.<br>Colour<br>RAL Code | <br>50<br>dark blue<br>No RAL Code | <br>53<br>light grey<br>No RAL Code | <br>57<br>dark grey<br>No RAL Code | <br>58<br>bordeaux<br>No RAL Code |
|---------------------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|

| Cap         |                                                                                     | 00 | 02 | 03 | 04 | 06 | 08 | 09 | 30 | 32 | 33 | 34 | 38 | 40 | 42 | 50 | 53 | 57 | 58 |
|-------------|-------------------------------------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 1A          |    | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  |
| 1B          |  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  |
| 1C          |  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1D          |  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  |
| 1E          |  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1F          |  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1H          |  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1K          |  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1M          |  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1N          |  | X  |    | X  | X  |    | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1P          |  | X  | X  | X  | X  | X  | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1Q          |  | X  |    | X  |    |    | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1R          |  | X  |    | X  |    |    | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1S          |  |    |    |    |    |    |    | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1T          |  | X  |    | X  |    |    | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1U          |  | X  |    | X  |    |    | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1V          |  | X  |    | X  |    |    | X  | X  |    |    |    |    |    |    |    |    |    |    |    |
| 1WA/1WD/1WP |  | X  |    | X  |    |    | X  | X  | X  |    |    |    |    | X  | X  |    | X  | X  |    |
| 1X          |  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  |
| 1ZA         |  |    |    | X  |    | X  |    | X  | X  |    |    |    |    | X  | X  | X  | X  | X  | X  |
| 1ZB         |  |    |    | X  |    | X  |    | X  | X  |    |    |    |    | X  | X  | X  | X  | X  | X  |
| 1ZC         |  |    |    | X  |    | X  |    | X  | X  |    |    |    |    | X  | X  | X  | X  | X  | X  |

The RAL Codes mentioned are the codes nearest to the solid colours in the multimec® range.



For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

### Technical Data



- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
  - low temp: -40/+75°C
  - high temp: -40/+160°C
- through-hole version





### Dimensions





### PCB layout





### Dimensions (w/LED)





### PCB layout (top view)



### Dimensions (w/2 LEDs)



### PCB layout (top view)



### How to order

1 5

+

1 6 2 7 0

1 6 3 0 0

+

1 6 3 2 4



### Switch

- 15501 mom. silver
- 15551 alt. silver
- 15502 mom. gold
- 15552 alt. gold
- 15500 silent silver
- 15401 mom. silver high temp.
- 15402 mom. gold high temp.
- 15420 silent gold high temp.
- 15451 alt. silver high temp.

### Extender



### Cap



- 00 blue
- 01 brown
- 02 green
- 03 grey
- 04 yellow
- 05 golden
- 06 white
- 07 orange
- 08 red
- 09 black
- 30 ultra blue
- 40 dusty blue
- 42 aqua blue
- 32 mint green
- 33 tele grey
- 34 melon
- 38 noble red
- 50 metal dark blue
- 53 metal light grey
- 57 metal dark grey
- 58 metal bordeaux

### Bezel



- 01 brown
- 03 grey
- 06 white
- 09 black



1 5

1 6 2 7 0

1 6 3 0 0

1 6 3 2 7

+

1 6 3 2 7

1 6 9 2 2

### Switch

### Extender



### Cap



### 16325



### Lens



- 02 green
- 04 yellow
- 08 red

### LED



- 02 green
- 04 yellow
- 08 red

### 16326



### Lens 16327

2 required

### LED 16922


2 required

Ordering example: 15501 + 16270 + 1630008 + 1632509 + 1632708 + 1692208

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

### Technical Data

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:  
low temp: -40/+75°C  
high temp: -40/+160°C
- through-hole version

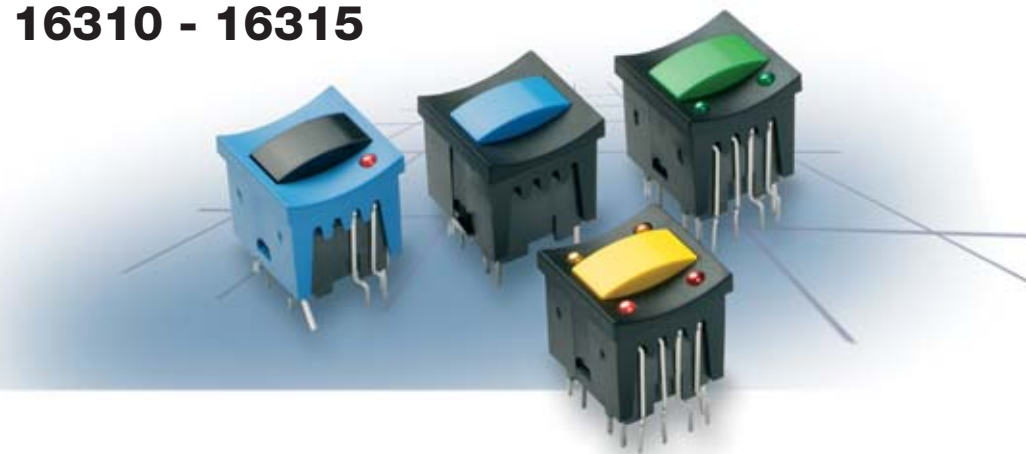

| Dimensions (through-hole) | Dimensions (w/LED) | Dimensions (w/LED) | Dimensions (w/4 LEDs) |
|---------------------------|--------------------|--------------------|-----------------------|
| <br>                      | <br>               | <br>               | <br>                  |

### How to order



1 5

#### Switch

15501 mom. silver  
15551 alt. silver  
15502 mom. gold  
15552 alt. gold  
15500 silent silver  
15401 mom. silver high temp.  
15402 mom. gold high temp.  
15420 silent gold high temp.  
15451 alt. silver high temp.

+

1 6 3 0 0

#### Cap

00 blue  
01 brown  
02 green  
03 grey  
04 yellow  
05 golden  
06 white  
07 orange  
08 red  
09 black

+

1 6 3 1 0

#### Bezel

00 blue  
01 brown  
02 green  
03 grey  
04 yellow  
05 golden  
06 white  
07 orange  
08 red  
09 black

#### For 16300 and 16310 only

30 ultra blue  
40 dusty blue  
42 aqua blue  
32 mint green  
33 tele grey  
34 melon  
38 noble red  
50 metal dark blue  
53 metal light grey  
57 metal dark grey  
58 metal bordeaux



1 5

#### Switch

+

1 6 3 0 0

#### Cap



+

#### Bezel 16311



#### Bezel 16312



#### Bezel 16314



#### Bezel 16315



+

1 6 9 2 1

LED 16921 02 green  
04 yellow  
08 red

+

1 6 9 2 0

LED 16920 02 green  
04 yellow  
08 red

LED 16920 1 required LED 16921 1 required

LED 16920 2 required LED 16921 2 required

Ordering example: 15501 + 1630003 + 1631408 + 1692008 + 1692108


For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

### Technical Data


- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
  - low temp: -40/+75°C
  - high temp: -40/+160°C
- through-hole version




### Dimensions 16300

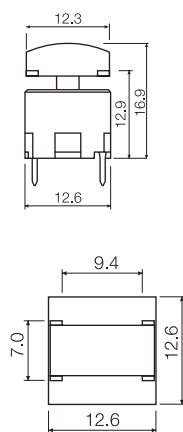


### PCB layout




### Dimensions 16700

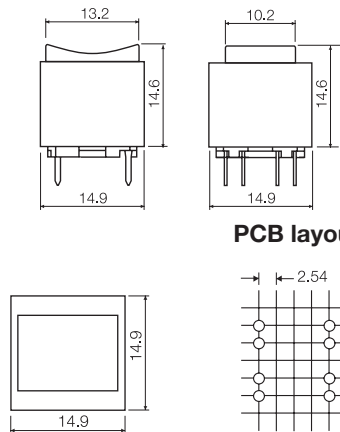

### PCB layout



### Dimensions 16800

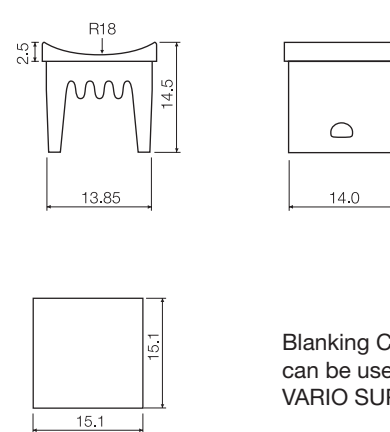

Blanking Cap  
can be used with  
VARIO SUPPORT

### How to order



1 5

+

1 6 3 0 0

### Cap



### Switch

15501 mom. silver  
15551 alt. silver  
15502 mom. gold  
15552 alt. gold  
15500 silent silver  
15401 mom. silver high temp.  
15402 mom. gold high temp.  
15420 silent gold high temp.  
15451 alt. silver high temp.

00 blue  
01 brown  
02 green  
03 grey  
04 yellow  
05 golden  
06 white  
07 orange  
08 red  
09 black

30 ultra blue  
40 dusty blue  
42 aqua blue  
32 mint green  
33 tele grey  
34 melon  
38 noble red

50 metal dark blue  
53 metal light grey  
57 metal dark grey  
58 metal bordeaux



1 5

+

1 6 7 0 0

### Cap



### Switch

00 blue  
02 green  
03 grey  
04 yellow

06 white  
08 red  
09 black

1 6 8 0 0

### Blanking Cap



00 blue  
01 brown  
02 green  
03 grey  
04 yellow  
05 golden


06 white  
07 orange  
08 red  
09 black

11 transparent  
12 transparent green  
14 transparent yellow  
18 transparent red

Ordering example: 15551 + 1670009

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

**For all types of UNIMEC™ switches with bezels - 16310 - 16315 and 16324 - 16326**

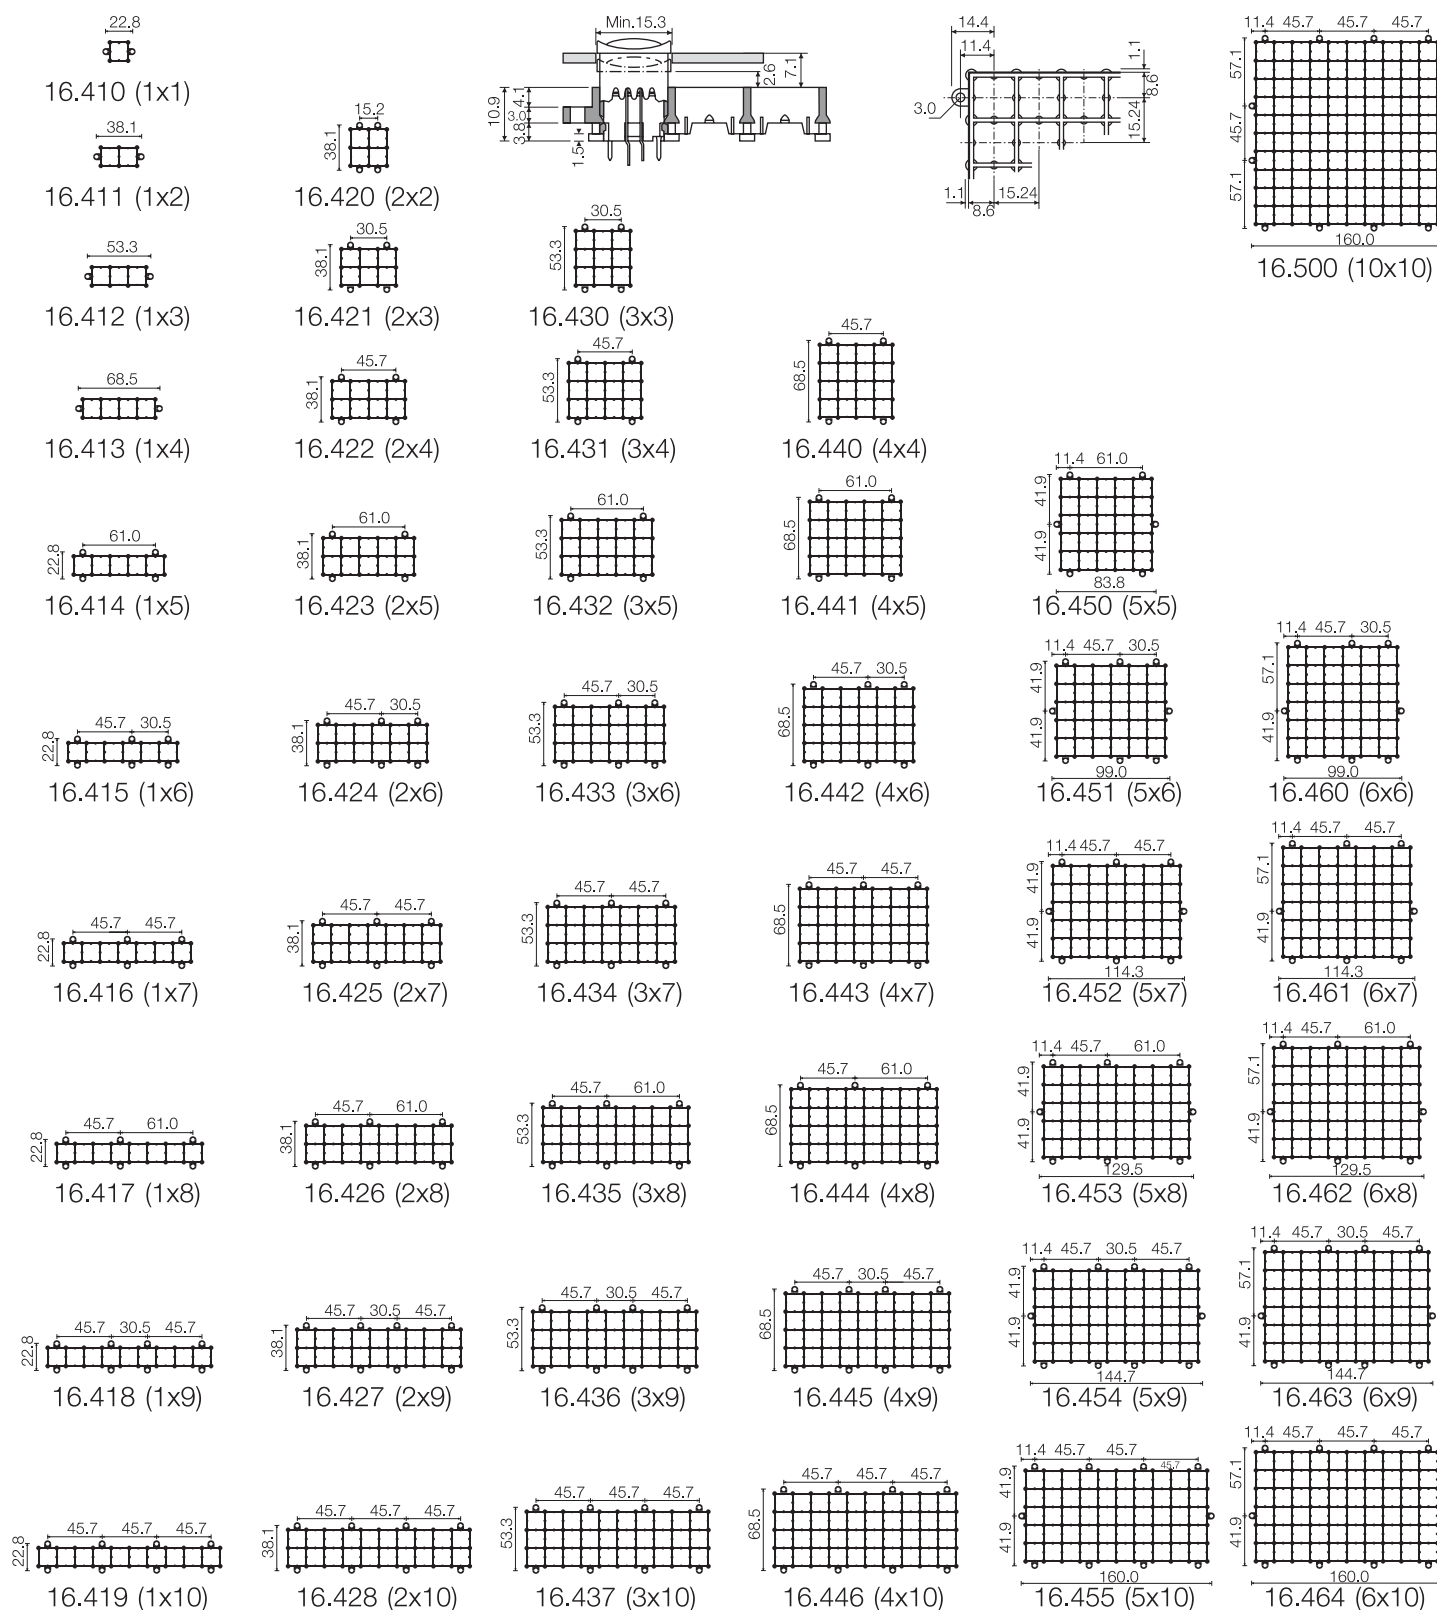


For updates of products and/or changes of specifications please see **www.mec.dk**




All standard legends are white on black caps.  
The size of the legends listed may not correspond to the actual size. Please ask your local distributor, if you do not find what you need on the list. New legends may have been added after this catalogue was printed.  
Custom legends and other colour combinations are available, please contact your local distributor.

## Standard Keycap Legends


Part no.



Part no.












Part no.



| LEGEND | 18_ | 18_ | LEGEND | 18_ | 18_ | LEGEND | 18_ | 18_ |
|--------|-----|-----|--------|-----|-----|--------|-----|-----|
| 0      | 000 | 200 | A      | 010 | 210 | ON/OFF | 017 | 217 |
| 1      | 001 | 201 | B      | 011 | 211 | STOP   | 018 | 218 |
| 2      | 002 | 202 | C      | 012 | 212 | START  | 031 | 231 |
| 3      | 003 | 203 | D      | 013 | 213 | CLEAR  | 036 | 236 |
| 4      | 004 | 204 | E      | 014 | 214 | LOAD   | 037 | 237 |
| 5      | 005 | 205 | F      | 015 | 215 | RESET  | 038 | 238 |
| 6      | 006 | 206 | G      | 063 | 263 | CR     | 043 | 243 |
| 7      | 007 | 207 | H      | 064 | 264 | MANUAL | 044 | 244 |
| 8      | 008 | 208 | I      | 065 | 265 | END    | 047 | 247 |
| 9      | 009 | 209 | J      | 066 | 266 | CANCEL | 048 | 248 |
| 10     | 020 | 220 | K      | 067 | 267 | CTRL   | 050 | 250 |
| 11     | 021 | 221 | L      | 068 | 268 | ESC    | 051 | 251 |
| 12     | 022 | 222 | M      | 069 | 269 | DSP    | 053 | 253 |
| 13     | 023 | 223 | N      | 070 | 270 | ENTER  | 105 | 305 |
| 14     | 024 | 224 | P      | 072 | 272 | SHIFT  | 106 | 306 |
| 15     | 025 | 225 | S      | 075 | 275 | ON     | 116 | 316 |
| 16     | 026 | 226 | T      | 076 | 276 | OFF    | 117 | 317 |
|        |     |     | U      | 077 | 277 |        |     |     |
|        |     |     | V      | 078 | 278 |        |     |     |
|        |     |     | W      | 079 | 279 |        |     |     |
|        |     |     | #      | 107 | 307 |        |     |     |
|        |     |     | *      | 019 | 219 |        |     |     |
|        |     |     | ☐      | 016 | 216 |        |     |     |
|        |     |     | →      | 033 | 233 |        |     |     |
|        |     |     | ←      | 133 | 333 |        |     |     |
|        |     |     | ↑      | 034 | 234 |        |     |     |
|        |     |     | ↓      | 134 | 334 |        |     |     |
|        |     |     | ↶      | 135 | 335 |        |     |     |
|        |     |     | ↷      | 115 | 315 |        |     |     |
|        |     |     | ↔      | 041 | 241 |        |     |     |
|        |     |     | +      | 054 | 254 |        |     |     |
|        |     |     | —      | 059 | 259 |        |     |     |
|        |     |     | •      | 056 | 256 |        |     |     |
|        |     |     | :      | 055 | 255 |        |     |     |
|        |     |     |        |     |     |        |     |     |

### Selection guide
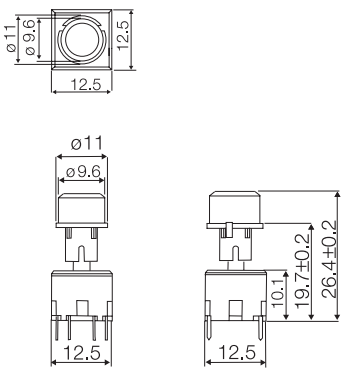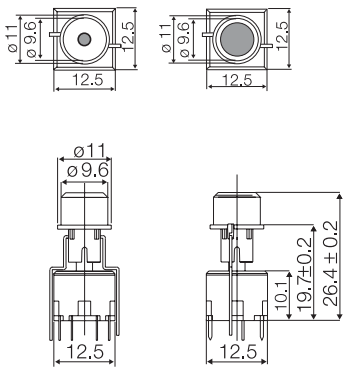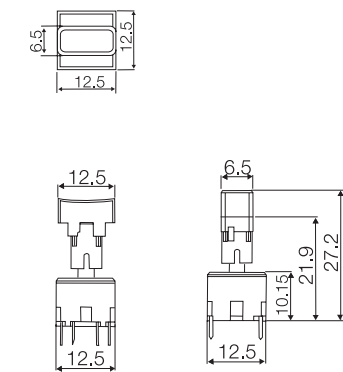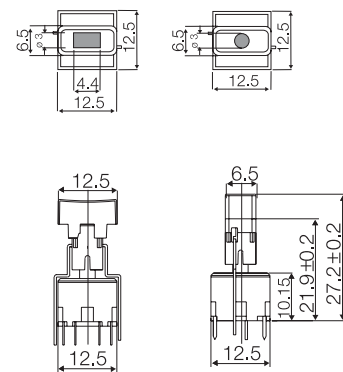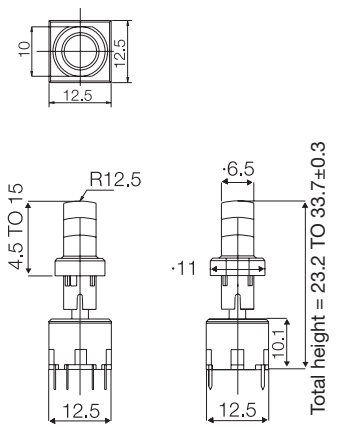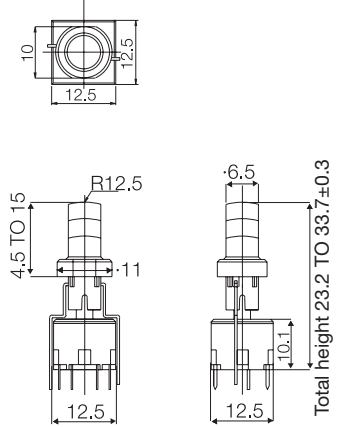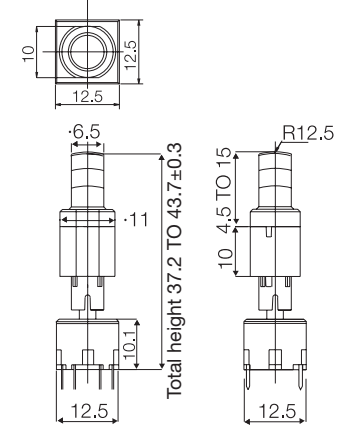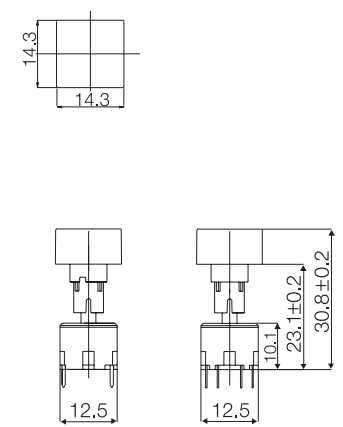
|                                                                                                                                                                 |                                                                                                                                                                           |                                                                                                                                                  |                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  A 16250 extender is needed when mounting multimec® keycaps on unimec™ switches |                                                                                                                                                                           |                                                                                                                                                  |                                                                                                                                                                                               |
| <b>Cap</b><br> 1D                                                              |  1E  1F |  1P                                                             |  1Q  1R                 |
| <b>Dimensions</b><br>                                                           |                                                                                          |                                                                |                                                                                                            |
| <b>LED</b>                                                                                                                                                      | <b>16923XX</b><br> 00 blue<br>20 green<br>40 yellow<br>80 red                           |                                                                                                                                                  | <b>16923XX</b><br> 00 blue<br>20 green<br>40 yellow<br>80 red                                             |
| <b>Cap</b><br> 1S                                                            |  1S illuminated                                                                        |  1S + 2S                                                     |  1K  1K illuminated |
| <b>Dimensions</b><br>                                                         |                                                                                        |                                                              |                                                                                                          |
| <b>LED</b>                                                                                                                                                      | <b>16923XX</b><br> 00 blue<br>20 green<br>40 yellow<br>80 red                          | <b>16923XX</b><br> 00 blue<br>20 green<br>40 yellow<br>80 red | <b>16924XX</b><br> 23 green<br>45 yellow<br>88 red                                                       |


For specific dimensions, color codes, how to order and other information please refer to the pages with the keycaps on multimec® switches. For technical information on the unimec™ basic switches please see technical specifications or go to our website [www.mec.dk](http://www.mec.dk) where you will find a page for each option.

The multimec® keycaps 1N, 1T, 1U, 1V, 1WA, 1WD, 1WP and 1X can also be used on unimec™ switches. Please ask for technical drawings on dimensions.


# unimec™ basic switch modules

## Basic module applies to all versions

### Low temp.

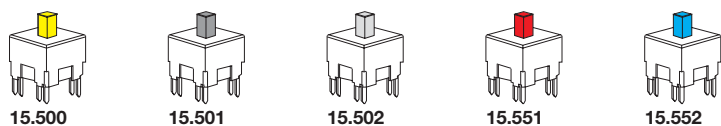

### High temp.

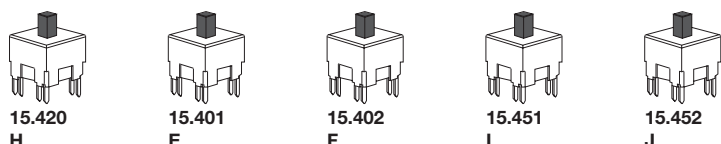

### Part no:



### Temperature:


5: low temp.  
4: high temp.

### Switch function:

0: momentary  
5: alternate

### Terminal


1: silver  
2: gold  
0: quiet version, silver

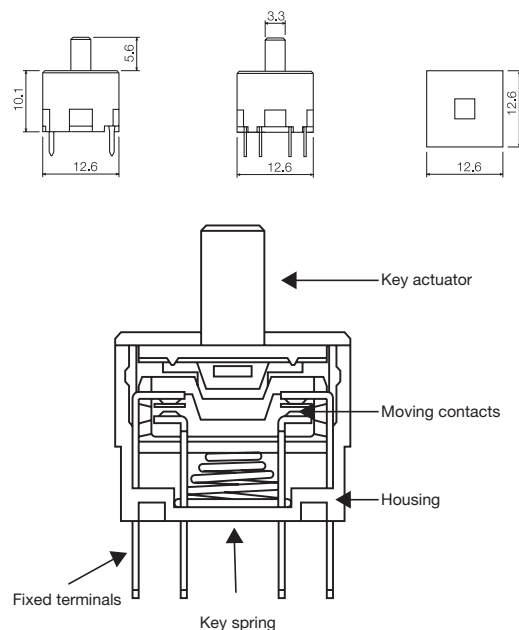

| PCB Mounting Hole Dimensions<br>Basic Switch | Circuit diagram<br>(topview) | PCB Mounting Hole Dimensions<br>(w/Extender 16250) | Functional diagram |
|----------------------------------------------|------------------------------|----------------------------------------------------|--------------------|
|                                              |                              |                                                    |                    |
|                                              | Without LED                  | With LED 16923 and 16924                           | — up<br>--- down   |


## Wiring Diagram

Select the contact function you desire - and design your PC board accordingly

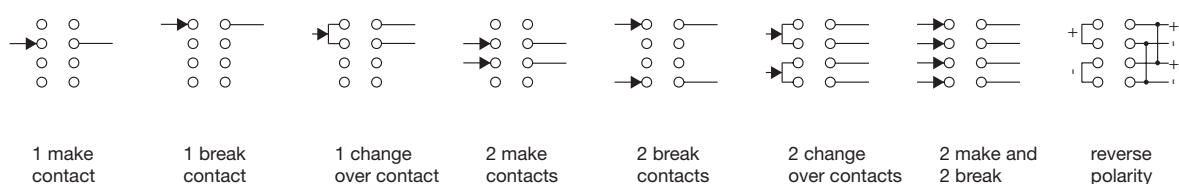


## How to assemble


unimec™  
15XXX + 16300 +  
16310



unimec™  
15XXX + 16270 +  
16300 + 16324



## Operating Force (Typical example)



For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

## RoHS Compatible

|                                                 | RB<br>Low Temperature Versions                                      |                             | RA<br>High Temperature Versions                          |                             |
|-------------------------------------------------|---------------------------------------------------------------------|-----------------------------|----------------------------------------------------------|-----------------------------|
|                                                 | Silver                                                              | Gold                        | Silver                                                   | Gold                        |
| Electrical Specifications                       |                                                                     |                             |                                                          |                             |
| Contact resistance                              | Max. 100 m Ω (initially)                                            |                             | Max. 100 m Ω (initially)                                 |                             |
| Insulation resistance                           | >10 M Ω                                                             |                             | >10 M Ω                                                  |                             |
| Recommended load                                | Min. 0.5 mA                                                         | Min. 0.5μ A                 | Min. 0.5 mA                                              | Min. 0.5μ A                 |
|                                                 | Max. 250 mA - 120 V - 9W AC - 6W DC                                 |                             | Max. 250 mA - 120 V - 9W AC - 6W DC                      |                             |
| Max. current in non switching state             | 0.5 A                                                               |                             | 0.5 A                                                    |                             |
| Contact bounce                                  | Max. 10 ms                                                          |                             | Max. 10 ms                                               |                             |
| Dielectric strength between adjacent contacts   | 1000 V for 2 min.                                                   |                             | 1000 V for 2 min.                                        |                             |
| Insulation resistance between adjacent contacts | 5 X 10 <sup>13</sup> Ω                                              |                             | 5 X 10 <sup>13</sup> Ω                                   |                             |
| Capacitance between adjacent contacts           | 0.5 pF                                                              |                             | 0.5 pF                                                   |                             |
| Mechanical Specifications                       |                                                                     |                             |                                                          |                             |
| Standard actuation force (switch)               | typ 2.5N                                                            |                             | typ 2.5N                                                 |                             |
| Max. actuation force without cap                | 100N for 10 sec.                                                    |                             | 100N for 10 sec.                                         |                             |
| Key travel (switch)                             | 1.8 mm                                                              |                             | 1.8 mm                                                   |                             |
| Life time                                       | Momentary 1.500.000 cycles                                          |                             | Momentary >10.000.000 cycles                             |                             |
|                                                 | Alternate 500.000 cycles                                            |                             | Alternate 5.000.000 cycles                               |                             |
| Temperature Range                               |                                                                     |                             |                                                          |                             |
| Working temperature                             | Min. -40°C Max. +75°C                                               |                             | Min. -40°C Max. +160°C                                   |                             |
| Storage temperature                             | Min. -65°C Max. +85°C                                               |                             | Min. -65°C Max. +160°C                                   |                             |
| Soldering IEC 68-2-20                           |                                                                     |                             |                                                          |                             |
|                                                 | Wave - max 260°C for max. 10 sec., please refer to usage guidelines |                             |                                                          |                             |
|                                                 | Soldering iron - max. 350°C for max. 3 sec. Flux tight.             |                             |                                                          |                             |
| Environmental Endurance IEC 68-2-3              |                                                                     |                             |                                                          |                             |
| Temperature                                     | +40°C                                                               |                             | +40°C                                                    |                             |
| Humidity                                        | 93% RH                                                              |                             | 93% RH                                                   |                             |
| Duration                                        | 56 Days                                                             |                             | 56 Days                                                  |                             |
| Sealing IEC 529                                 | IP-54                                                               |                             | IP-54                                                    |                             |
| Cleaning                                        | Standard methods such as water and soap (not immersed)              |                             | Standard methods such as water and soap (not immersed)   |                             |
| Material Specifications - Switches              |                                                                     |                             |                                                          |                             |
| Housing and actuator                            | Glass fiber filled Polycarbonate UL94V1                             |                             | LCP UL94V0                                               |                             |
| Switch spring                                   | Stainless steel                                                     |                             | Stainless steel                                          |                             |
| Key spring                                      | Stainless steel                                                     |                             | Stainless steel                                          |                             |
| Latch pin                                       | Stainless steel                                                     |                             | Stainless steel                                          |                             |
| Fixed contact                                   | SnCu + 2μNi + 3μAg                                                  | SnCu + 2μNi + 3μAu          | SnCu + 2μNi + 3μAg                                       | SnCu + 2μNi + 3μAu          |
| Moving contact                                  | Stainless steel + 3μAg                                              | Stainless steel + 3μAg+1μAu | Stainless steel +3μAg                                    | Stainless steel + 3μAg+1μAu |
| Terminals                                       |                                                                     |                             |                                                          |                             |
| Contact lubricant                               | SnCu + 2μNi + 3μSn100                                               |                             | SnCu + 2μNi + 3μSn100                                    |                             |
| Material Specifications - All Caps & Bezels     |                                                                     |                             |                                                          |                             |
|                                                 | Special protective lubricant Klüber Barrierta I EL Fluid            |                             | Special protective lubricant Klüber Barrierta I EL Fluid |                             |
| Material Specifications - All Caps & Bezels     | ABS (standard) UL94HB                                               |                             | ABS (standard) UL94HB                                    |                             |
| Temperature limit                               | Max. +65°C                                                          |                             | Max. +65°C                                               |                             |
| Tampon Printing                                 | According to ISO Class: 1/ASTM Class.: 4B                           |                             | According to ISO Class: 1/ASTM Class.: 4B                |                             |

## unimec™ LEDs

| Part Nos.                            |                                                          | 16920/16921          |     |     | 16922                |     |     | 16923                |      |      | 16924                |         |         |
|--------------------------------------|----------------------------------------------------------|----------------------|-----|-----|----------------------|-----|-----|----------------------|------|------|----------------------|---------|---------|
| Colour (G= Green, Y= Yellow, R= Red) |                                                          | G                    | Y   | R   | G                    | Y   | R   | G                    | Y    | R    | G                    | Y       | R       |
| Colour Codes                         |                                                          | 02                   | 04  | 08  | 02                   | 04  | 08  | 20                   | 40   | 80   | 23                   | 45      | 88      |
| Absolute Maximum Ratings             |                                                          | (Ta=25°C)            |     |     |                      |     |     |                      |      |      |                      |         |         |
| Power                                | mW                                                       | 100                  | 100 | 100 | 135                  | 135 | 135 | 70                   | 60   | 60   | 150                  | 130     | 300     |
| Current forward                      | mA                                                       | 30                   | 30  | 30  | 30                   | 30  | 30  | 20                   | 20   | 20   | 40                   | 40      | 90      |
| Forward peak current                 | mA                                                       | 50                   | 50  | 50  | 90                   | 90  | 90  | 60**                 | 60** | 60** | 500                  | 500     | 1000    |
| Voltage reverse                      | V                                                        | 5                    | 5   | 5   | 5                    | 5   | 5   | 3                    | 3    | 3    | 12                   | 12      | 5       |
| Operating temperature                | °C                                                       | -25 - +100           |     |     | -55 - +100           |     |     | -25 - +85            |      |      | -55 - +100           |         |         |
| Storage temperature                  | °C                                                       | -25 - +100           |     |     | -55 - +100           |     |     | -30 - +100           |      |      | -55 - +100           |         |         |
| Soldering temperature                | °C                                                       | +245 for max. 3 sec. |     |     | +300 for max. 3 sec. |     |     | +260 for max. 5 sec. |      |      | +300 for max. 3 sec. |         |         |
| Electrical-Optical Characteristics   |                                                          | (Ta=25°C)            |     |     |                      |     |     |                      |      |      |                      |         |         |
| Voltage Forward                      | Typ. V                                                   | 2.0                  | 2.0 | 2.0 | 2.1                  | 2.2 | 2.3 | 2.1                  | 2.1  | 2.0  | 2.1*                 | 2.3***  | 2.4***  |
|                                      | Max. V                                                   | 3.0                  | 3.0 | 3.0 | 3.0                  | 3.0 | 3.0 | 3.0                  | 3.0  | 3.0  | 2.5*                 | 2.5***  | 3.8***  |
| Current reverse                      | µA                                                       | 100                  | 100 | 100 | 100                  | 100 | 100 | 10                   | 10   | 10   | 10                   | 10      | 10      |
| Wave length                          | nm                                                       | 560                  | 590 | 660 | 565                  | 585 | 635 | 563                  | 585  | 650  | 570                  | 587     | 635     |
| Spread                               | Ønm                                                      | 10                   | 10  | 10  | 10                   | 10  | 10  | 40                   | 40   | 40   | 25                   | 45      | 45      |
| Spread angle                         | degree                                                   | 20                   | 20  | 20  | 45                   | 45  | 45  | 45                   | 45   | 45   | 80                   | 90      | 55      |
| Luminous Intensity                   | Min. mcd                                                 | 1                    | 1   | 0.8 | 1.5                  | 2.5 | 2.5 | 9.0                  | 5.6  | 5.6  | 71****               | 71****  | 100**** |
|                                      | Typ. mcd                                                 | 2                    | 3   | 1.6 | 2.5                  | 3.0 | 5.0 | 25                   | 16   | 16   | 112****              | 112**** | 160**** |
| Orientation                          | The longer pin is the anode, the shorter is the cathode. |                      |     |     |                      |     |     |                      |      |      |                      |         |         |

\*If = 20mA, \*\*Pulse width 1ms Duty cycle 1:5, \*\*\*If = 50mA, \*\*\*\*Luminous Flux mlm

Specifications are subject to change without notice.

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# mec Usage Guidelines

## How to get the best results with mec switches

These guidelines are offered to users of mec switches as an aid to ensure successful and reliable switch operation.

### Temperature

Both Unimec™ and Multimec® switches are produced in standard and high temperature versions. Please see the technical specifications for details on operating and storage temperatures and soldering guidelines to make sure you select the best switch for your application. When wave soldering is taking place, mec strongly recommend that the temperature profile is analyzed and compared with the temperature rating of the switch. In case of doubt always select the high temperature versions Unimec™ 154XX and Multimec® 3XXHX. It is also important to monitor the accumulated heat build up from both the pre-heat zones and the solder zone.

Most standard accessories for both Unimec™ and Multimec® switches are made from ABS plastic with a maximum operating temperature of 65°C. It is strongly recommended that accessories are mounted after soldering of the switch. If this is not possible care must be taken not to overheat the accessories during the soldering process. Actuators for the 3EXX9, the 1S09 and Varimec™ caps are, however, made of high temperature materials and will meet the same temperature specifications as the high temperature switches. For accessories made from other plastic materials please see Multimec and Unimec technical specifications.

LEDs have their own temperature specifications. When fitted in a high temperature switch the LED will determine the max. operating temperature, i.e. 3FTH923 has an upper temperature limit of 85°C – not 160°C! This also applies to the 4A and 4F switches.

### Mounting and Dismounting

If switches are to be mounted in rows it is essential that the recommendations regarding spacing are followed. PC board thickness should be 1.2 to 1.6 mm and terminal hole diameter should be 0.9 mm.

All Unimec™ and Multimec® caps and bezels are easily snapped onto the switch modules and can be changed at a later time with the exception of the Unimec™ 16.700 cap. The same applies to the 3E caps/actuators. Once these caps are installed they are not designed to be removed. To do so may cause damage to the switch and the PC board if not done very carefully. If the 16.300 or 16.700 cap must be removed from a Unimec™ alternate action switch, make sure that the switch actuator is in the released, upper position before attempting to remove the cap. This will prevent possible damage to the internal latching pin.

Care must be taken when inserting the 3FT switch and LED assembly into the PC board. Do not press direct on the LED. This will force the LED down into the actuator and risks to cause the switch contacts to remain in the closed position. To correct the fault, the LED must be raised slightly and centered in the actuator to assure unrestricted movement of the actuator. A mounting tool is available for Multimec® switches.

### Soldering and Cleaning Unimec™

Most assembly and field problems experienced by users of unsealed switches are caused by the contamination of the contacts during soldering and cleaning.

Contact contamination may be recognized by an increase in contact resistance and possible intermittent operation of the switch, especially in low power applications. Care must be taken not to submerge the switch in cleaning agents or spray the switch during cleaning. The switch must be protected at all times to prevent contamination by flux or cleaning liquids.

For Unimec™ alternate versions we recommend to leave the actuator in the released upper position during soldering. This makes the switch more resistant to overheating.

### Soldering and Cleaning Multimec®

Multimec® switches are fully sealed to IP67 specifications to prevent solder flux and aqueous or solvent based cleaning solutions from entering the switch and contaminating the contacts. The switches can be placed on the PC board with other components and wave soldered. Multimec® offers a high level of sealing, however, with aqueous solvent solutions care must be taken to avoid the worst case situation with water jets, complete immersion into a liquid with a temperature below the board or surface tension reducing additives. Recommended cleaning methods are demineralized water. Any surface tensions reducing agents, such as soap, must not be used as they risk causing a potential leakage of the switch.

### Soldering - Through Hole Versions

Hand soldering: Max 350°C for max. 3 sec., this applies for both low temperature and high temperature versions.

Wave soldering: Heat built up in the switch during pre-heating and soldering must not exceed the maximum operating temperature of the switch. If, for some reason, a high pre-heating temperature is required, mec recommend the high temperature switches. In any case peak temperature must not exceed 260°C, and soldering time is max. 10 sec.

### Soldering - Surface Mount Versions

For all methods – infrared, convection and vapour phase. The upper limit 260°C/30 sec. must be observed. The soldering temperature profile must have moderate temperature gradients.

### RoHS Compliance

As of 1 July 2006 mec has completed the conversion to RoHS compliance. A separate part number system assures that there will not be any risk for mixing products in the supply chain. For more info please see our homepage [www.mec.dk](http://www.mec.dk)

### General Temperature Limits:

|                  |             |
|------------------|-------------|
| Low Temperature  | 115°C       |
| High Temperature | 160°C       |
| LEDs             | 85/100°C    |
| Accessories      | 65/85/160°C |

### Packaging

Unimec™ and Multimec® switches are packed in rigid tubes of 50 pieces each.

A box contains 1.000 pcs.

The surface mount versions of Multimec® switches with a height up to 12.5 mm can also be delivered on tape/reel. Each reel contains 250/500 pcs.

**We welcome any custom requirement.**



- Please consult factory with your custom requirement.**

mec

# switches

## MANUFACTURER

### **mec a/s**

Industriparken 23  
DK-2750 Ballerup  
Denmark

Phone: (+45) 44 97 33 66

Fax: (+45) 44 68 15 14

E-mail: [danmec@mec.dk](mailto:danmec@mec.dk)

Web: [www.mec.dk](http://www.mec.dk)

[www.essens.info](http://www.essens.info)

DISTRIBUTOR



Made in Denmark © mec a/s 2006